
FUNtasia AUDIO

FUN Rack

English User Manual

Eight effects. One sound of your own.

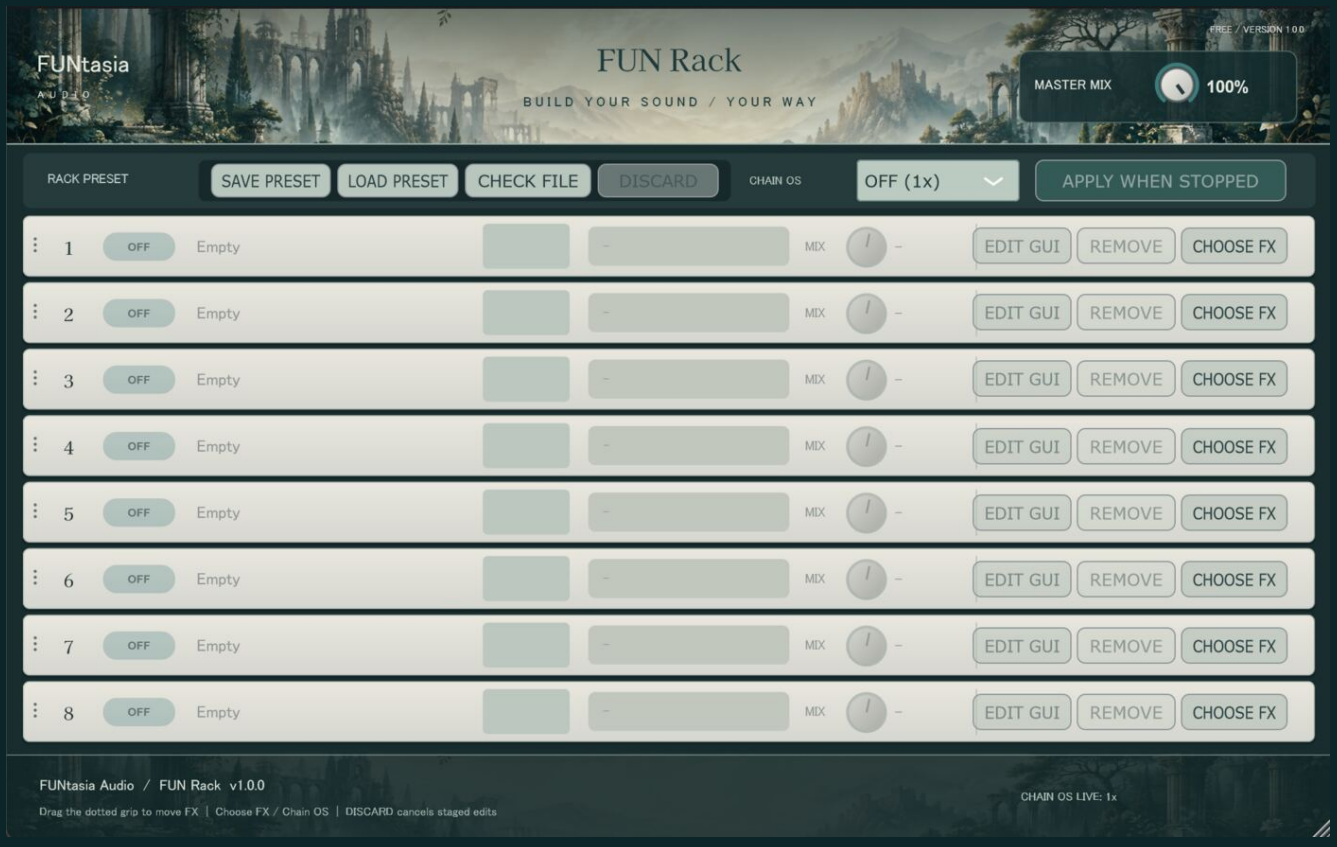

BUILD YOUR SOUND / YOUR WAY

Eight-slot serial VST3 effects rack | FREE edition

ENGLISH EDITION

01 GETTING STARTED

Meet FUN Rack and build your first chain

FUN Rack hosts up to eight VST3 audio effects in a top-to-bottom serial chain. Combine focused tools to create your own processing setup. Each slot has its own MIX, and MASTER MIX controls the entire rack.

Signal flow

FUN Rack / AUDIO PATH

INPUT → SLOT 1 → SLOT 2 → ... → SLOT 8 → MASTER MIX → OUTPUT

Quick start

01 INSERT	Insert FUN Rack on a stereo audio track in your DAW.
02 CHOOSE	Click CHOOSE FX on an empty slot and select a VST3 effect.
03 APPLY	When required, stop DAW playback and click APPLY WHEN STOPPED to commit the change.
04 BALANCE	Adjust each slot's MIX, then use MASTER MIX to blend the complete chain with the input.

A useful distinction

Selecting an effect may only stage a structural edit. If the chain does not change immediately, look for PENDING and use APPLY WHEN STOPPED.

02 THE EIGHT SLOTS

A serial chain that reads from top to bottom

Slot controls

CONTROL	WHAT IT DOES
1–8	Slot numbers. Processing follows ascending slot order.
OFF / LIVE / MISS	OFF: empty; LIVE: running; MISS: the referenced VST3 cannot be found.
CHOOSE FX	Select a VST3 effect for an empty slot.
REPLACE	Stage a replacement of the current child effect.
EDIT GUI	Open the child effect's own editor in a separate window.
REMOVE	Stage removal of the effect from this slot.
MIX	Set this slot's local dry/wet balance from 0–100%.
DOTTED GRIP	Drag the grip on the far left to reorder slots.
PENDING	A structural change is waiting to be committed.

Before moving effects

Close a child EDIT GUI window before moving or replacing that effect. DISCARD cancels structural edits that have not yet been applied.

03 MIX & OVERSAMPLING

The difference between slot MIX and MASTER MIX

MASTER MIX: the whole rack

MASTER MIX in the upper-right corner linearly blends the original input with the output of all eight slots. It defaults to 100%. The dry branch is delayed to align with the rack's reported processing latency.

0%	Original input only (dry)
50%	50% original + 50% processed chain
100%	Processed chain only (wet; default)

$$\text{OUTPUT} = (1 - \text{MIX}) \times \text{DRY} + \text{MIX} \times \text{WET}$$

CHAIN OS: whole-chain oversampling

CHAIN OS can run the hosted processing chain at a higher internal sample rate. Changing modes is a structural operation and requires safe preparation while the DAW is stopped.

OFF (1x)	No oversampling; default.
2x	Process at twice the host sample rate.
4x	Process at four times the host sample rate.
8x	Process at eight times the host sample rate.

Latency and CPU

Higher CHAIN OS settings can increase CPU usage and latency. Sound quality and compatibility also depend on each hosted effect. Check the reported plug-in latency and PDC in your DAW.

04 PRESETS & SAFE APPLY

Saving chains and committing changes safely

Toolbar actions

BUTTON	ACTION
SAVE PRESET	Save the current rack state as a .frackpreset file.
LOAD PRESET	Choose a .frackpreset in the preset browser and stage its restoration.
CHECK FILE	Check preset container structure and checksum without loading it.
DISCARD	Discard pending structural edits.
APPLY WHEN STOPPED	Confirm a stop and commit pending edits at a safe point.

Reliable apply workflow

1. Choose, replace, remove, reorder, or change CHAIN OS.
2. Stop playback in your DAW and click APPLY WHEN STOPPED.
3. Confirm that PENDING clears and the expected slot shows LIVE.

Preset portability

A successful CHECK FILE confirms the preset container, not that every child VST3 is installed or compatible. Install required child effects on other computers. The DAW also stores the rack's plug-in state with a saved project.

05 HELP & CREDITS

Troubleshooting, scope and font attribution

Troubleshooting

Q. I chose an effect, but the sound did not change.

A. Look for PENDING. Stop playback, press APPLY, and verify that the slot becomes LIVE.

Q. EDIT GUI does not open.

A. Confirm that the slot is LIVE. If it shows MISS, check the child's VST3 installation and select it again with REPLACE.

Q. Timing or CPU usage changed.

A. Review CHAIN OS and the child effects' own latency. Check PDC and audio settings in the DAW.

Q. I cannot open a preset.

A. Verify the .frackpreset extension and use CHECK FILE to detect corruption. Child plug-in compatibility must be checked separately.

What's included in FREE v1.0.0

Eight serial slots, stereo audio, nested VST3 effects, per-slot MIX, MASTER MIX, CHAIN OS (1x / 2x / 4x / 8x), and preset save/load. Free-form parallel routing and MIDI input are not part of this version.

Typography and license

FUN Rack uses Kaisei Opti Regular for its title and slot numbers. Copyright 2020 The Kaisei Project Authors. Used and distributed under the SIL Open Font License 1.1. The complete license is included as LICENSES/KaiseiOpti-OFL.txt.