Class 5: Visualization

AUTHOR
C.K

Plotting in R

```
plot(cars)
```

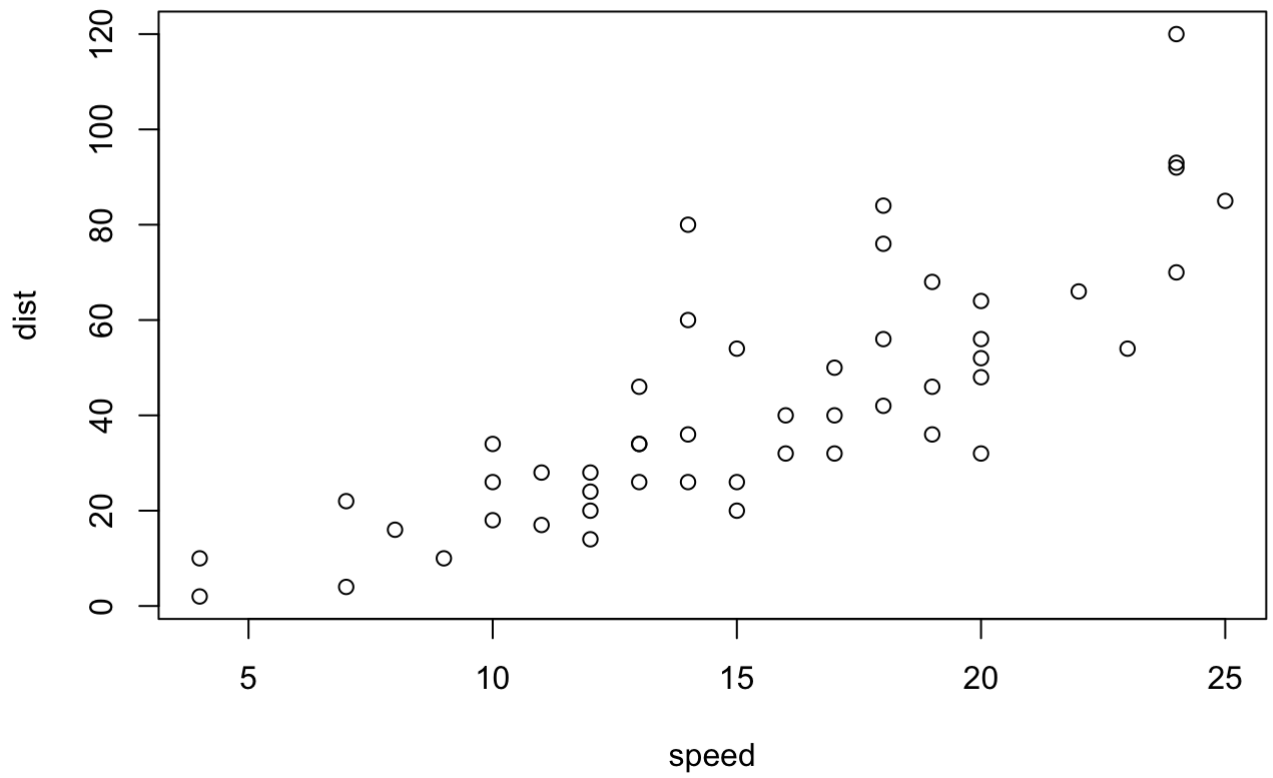


```
library(ggplot2)
ggplot(cars)
```

```
#install.packages("ggplot2")
```

#ggPlot ggplot(input data)+aesthetics() +geom_point() geom_smoot() put a line through it

```
ggplot(data=cars)+aes(x=speed,y=dist)+geom_point()+geom_smooth()
```

```
`geom_smooth()` using method = 'loess' and formula = 'y ~ x'
```

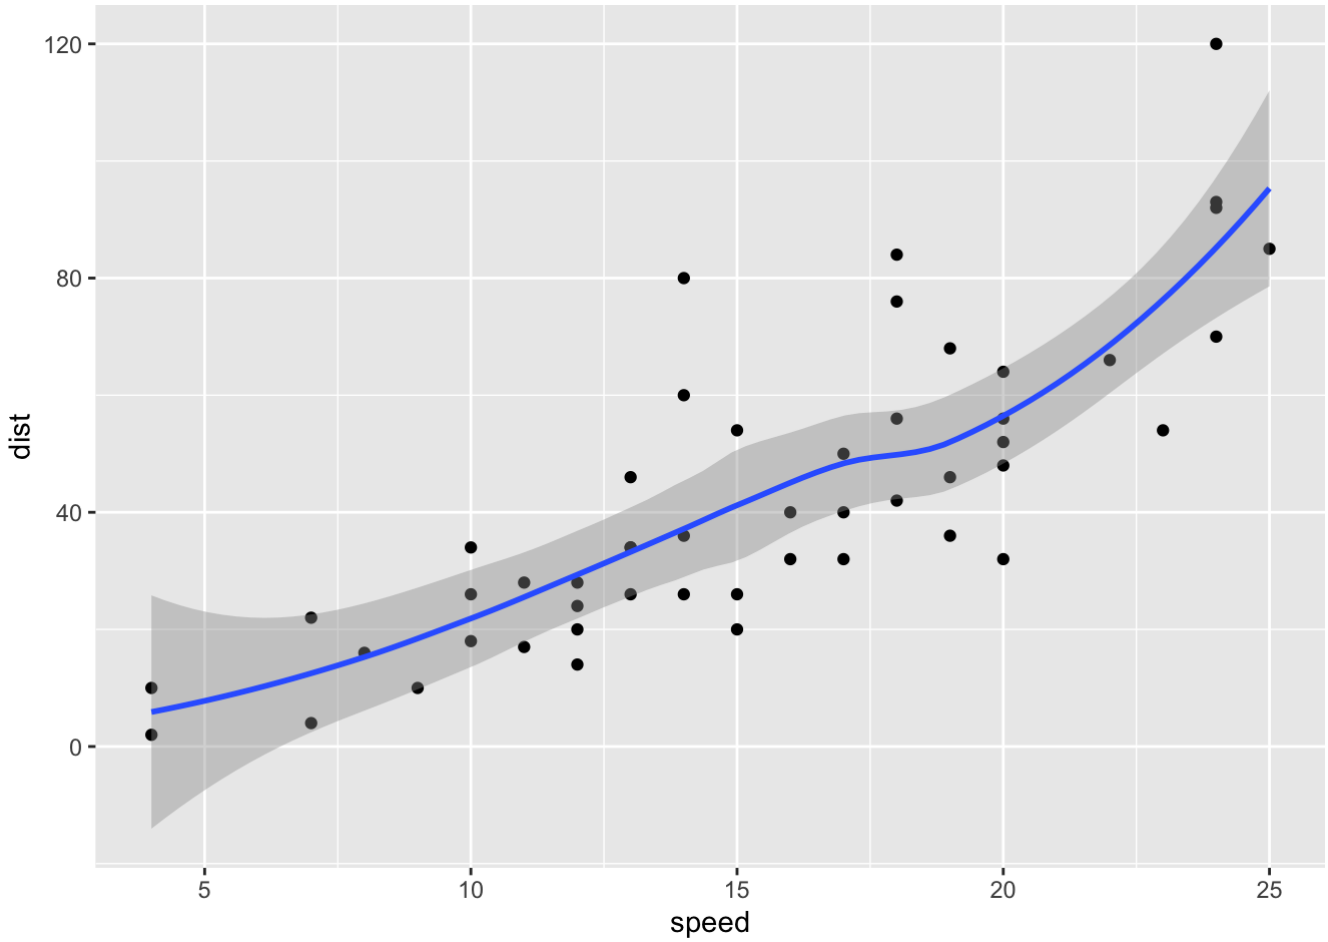


```
## different layers added on top of another
ggplot(cars) +
  aes(x=speed, y=dist) +
  geom_point() +
  geom_smooth(method="lm", se=FALSE)
```

```
`geom_smooth()` using formula = 'y ~ x'
```

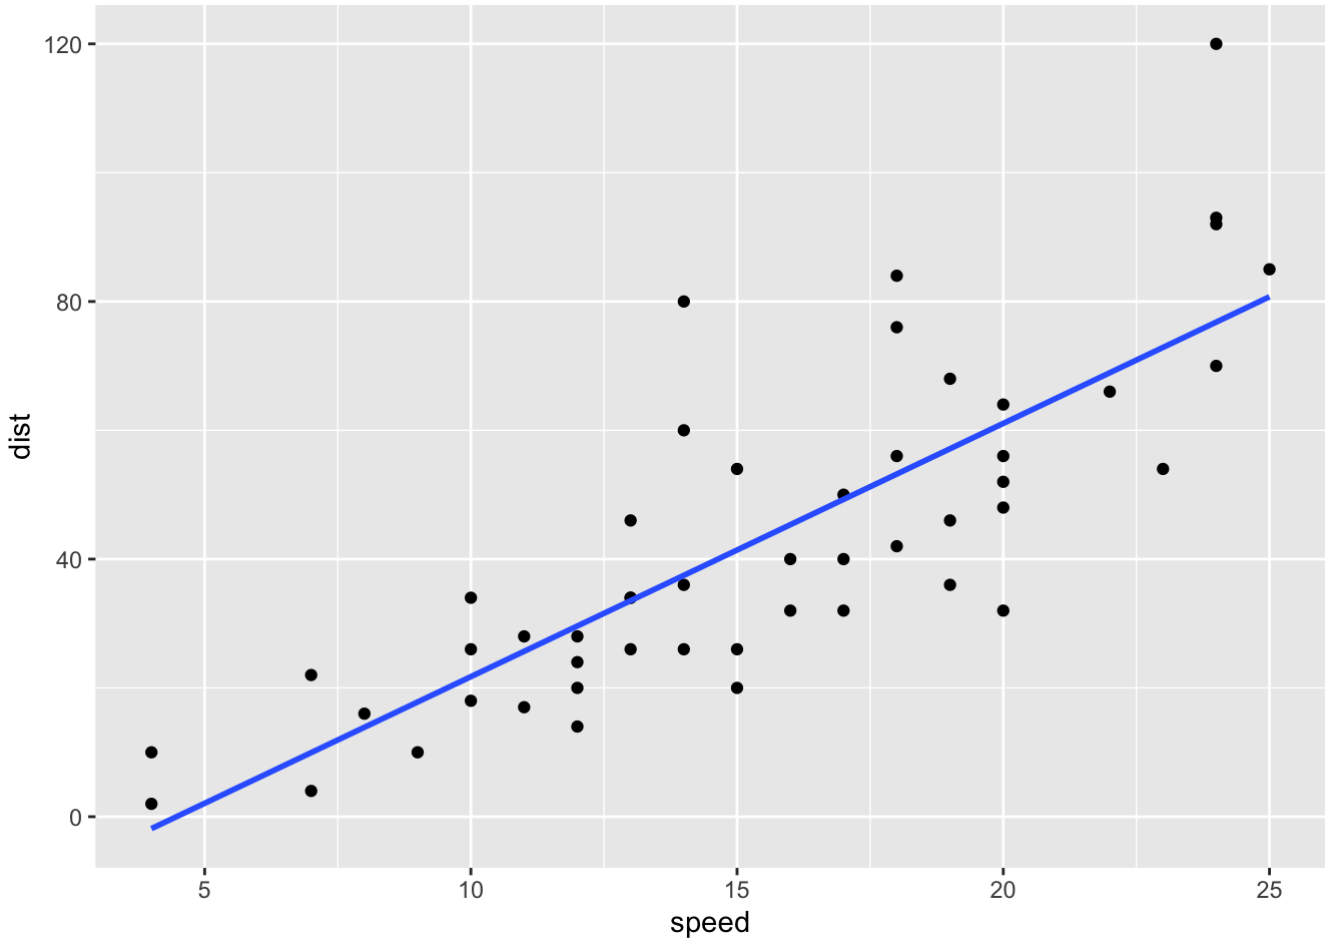


```
#bb=ggplot(cars) +
  #aes(x=speed, y=dist)+geom_point()
bb=ggplot(cars,aes(x=speed, y=dist))+geom_point()
# lm is the linear model
bb+geom_smooth(method = "lm",se=FALSE)
```

```
`geom_smooth()` using formula = 'y ~ x'
```

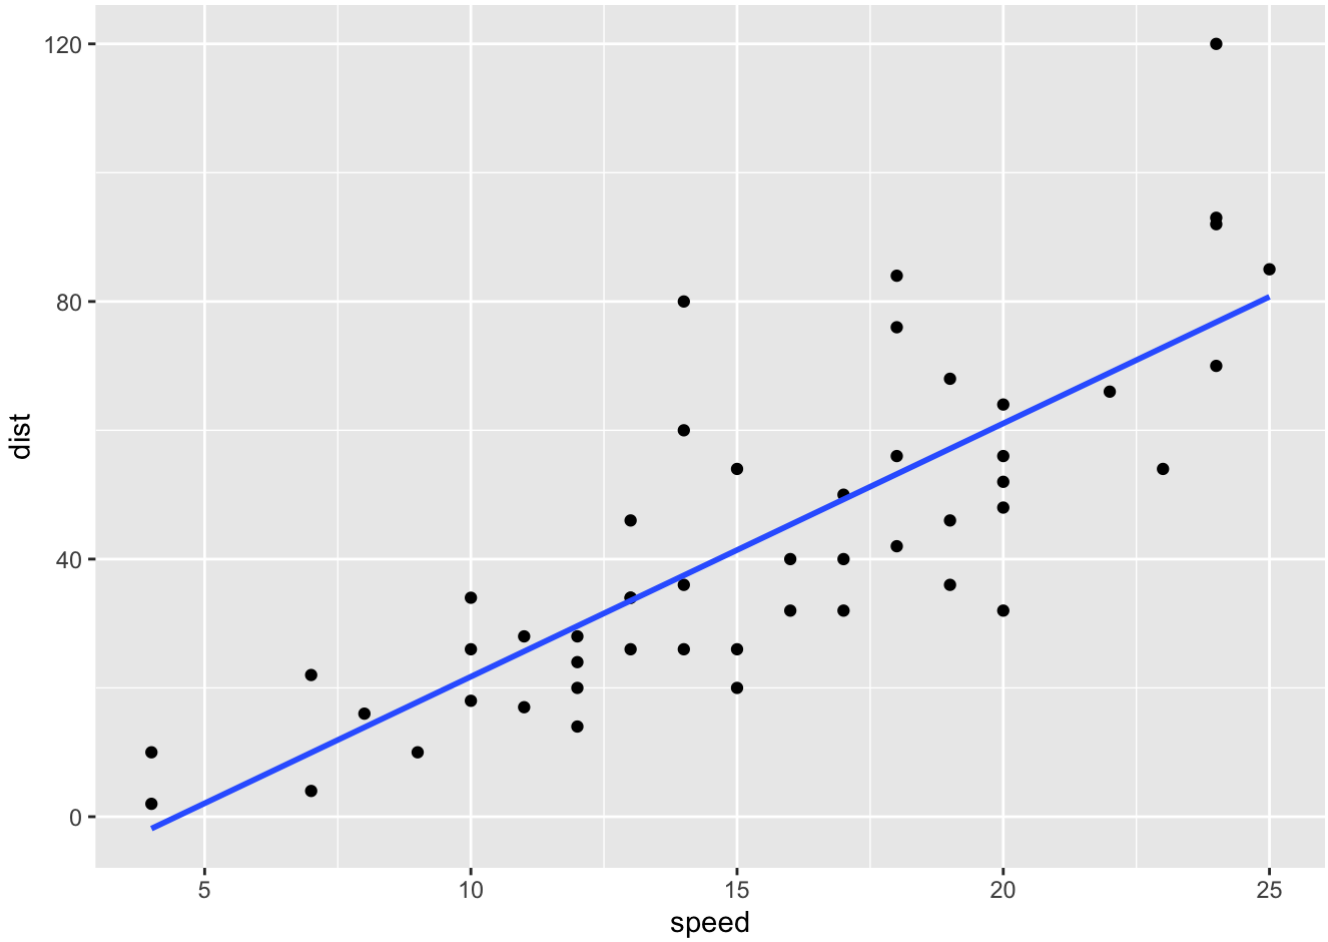


```
url <- "https://bioboot.github.io/bimm143_S20/class-material/up_down_expression.txt"
genes <- read.delim(url)
head(genes)
```

```
        Gene Condition1 Condition2      State
1      A4GNT -3.6808610 -3.4401355 unchanging
2       AAAS  4.5479580  4.3864126 unchanging
3      AASDH  3.7190695  3.4787276 unchanging
4       AATF  5.0784720  5.0151916 unchanging
5       AATK  0.4711421  0.5598642 unchanging
6 AB015752.4 -3.6808610 -3.5921390 unchanging
```

```
nrow(genes)
```

```
[1] 5196
```

```
colnames(genes)
```

```
[1] "Gene"       "Condition1" "Condition2" "State"
```

```
ncol(genes)
```

```
[1] 4
```

```
table(genes$State)
```

```
      down unchanging         up
        72       4997        127
```

```
round( table(genes$State)/nrow(genes) * 100, 2 )
```

```
      down unchanging         up
      1.39      96.17       2.44
```

```
## check the aesthetic parameters to have different size, shape, colors for each individu
ggplot(genes) +
    aes(x=Condition1, y=Condition2) +
    geom_point()+labs(title="Some Plot")
```

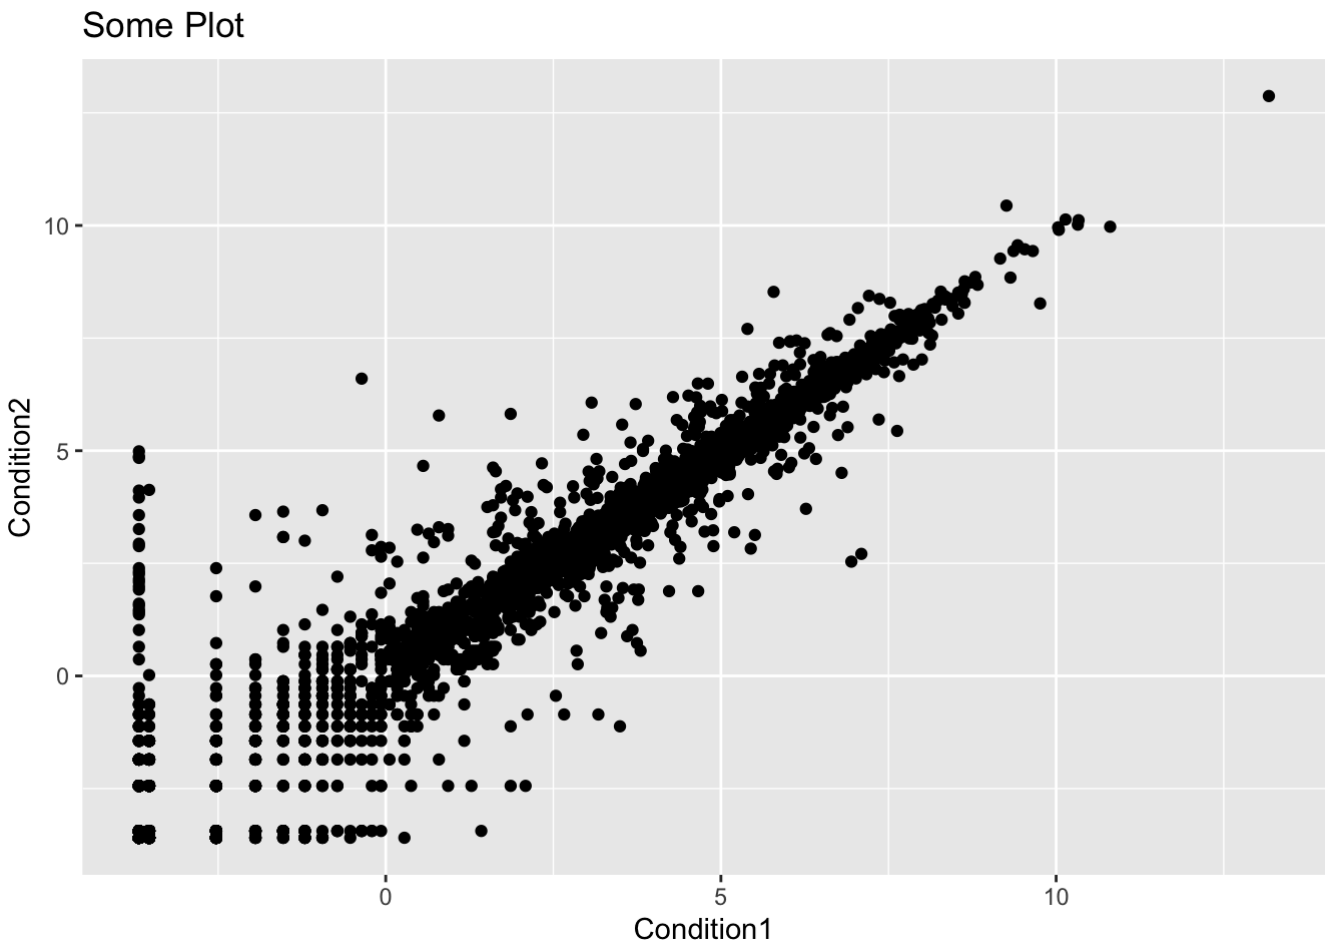


```
p <- ggplot(genes) +
    aes(x=Condition1, y=Condition2, col=State) +
```

```
    geom_point()
p
```

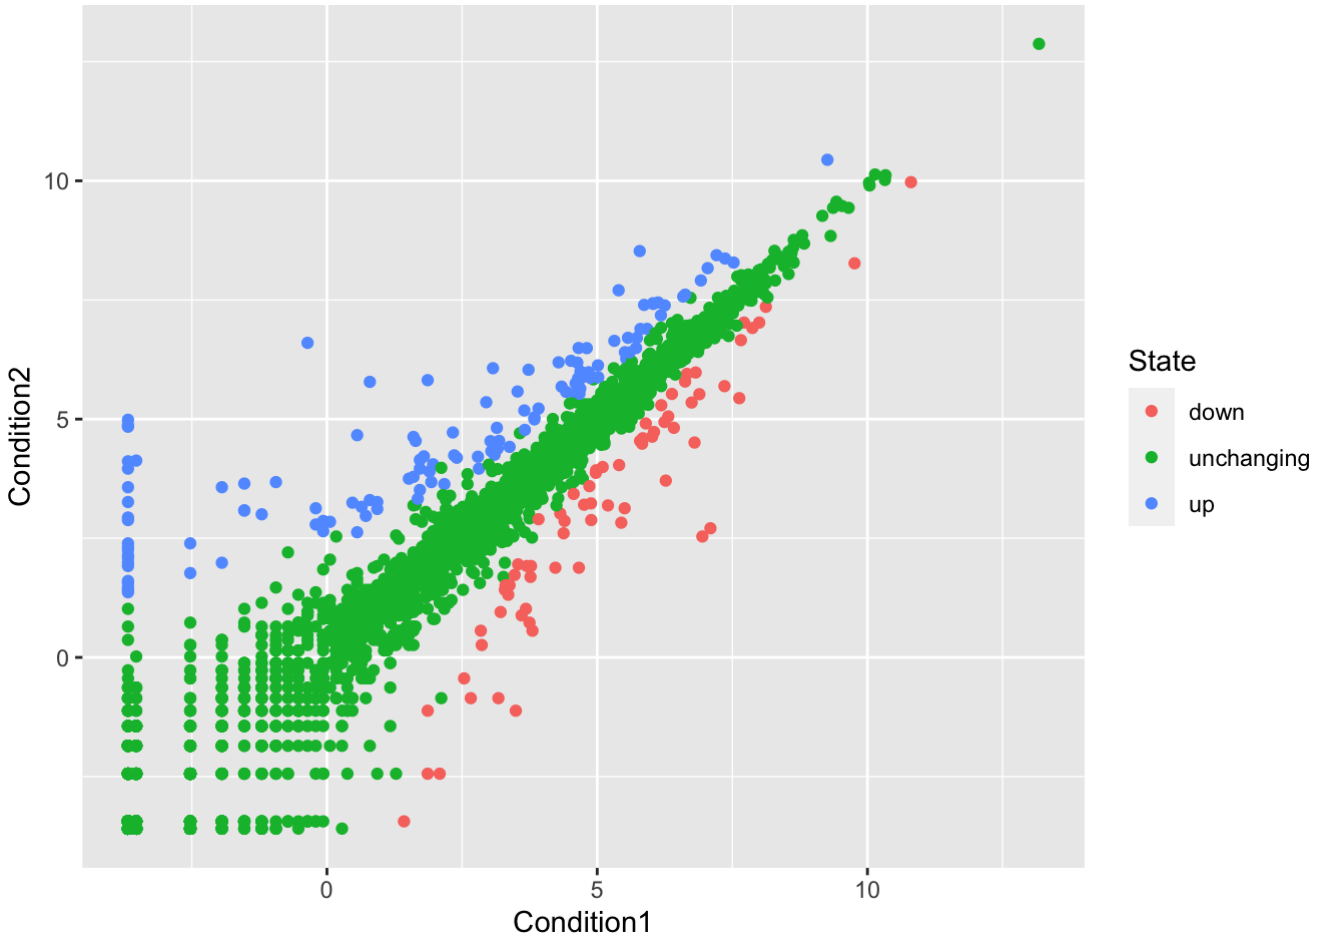


```
p + scale_colour_manual( values=c("blue","gray","red") )
```

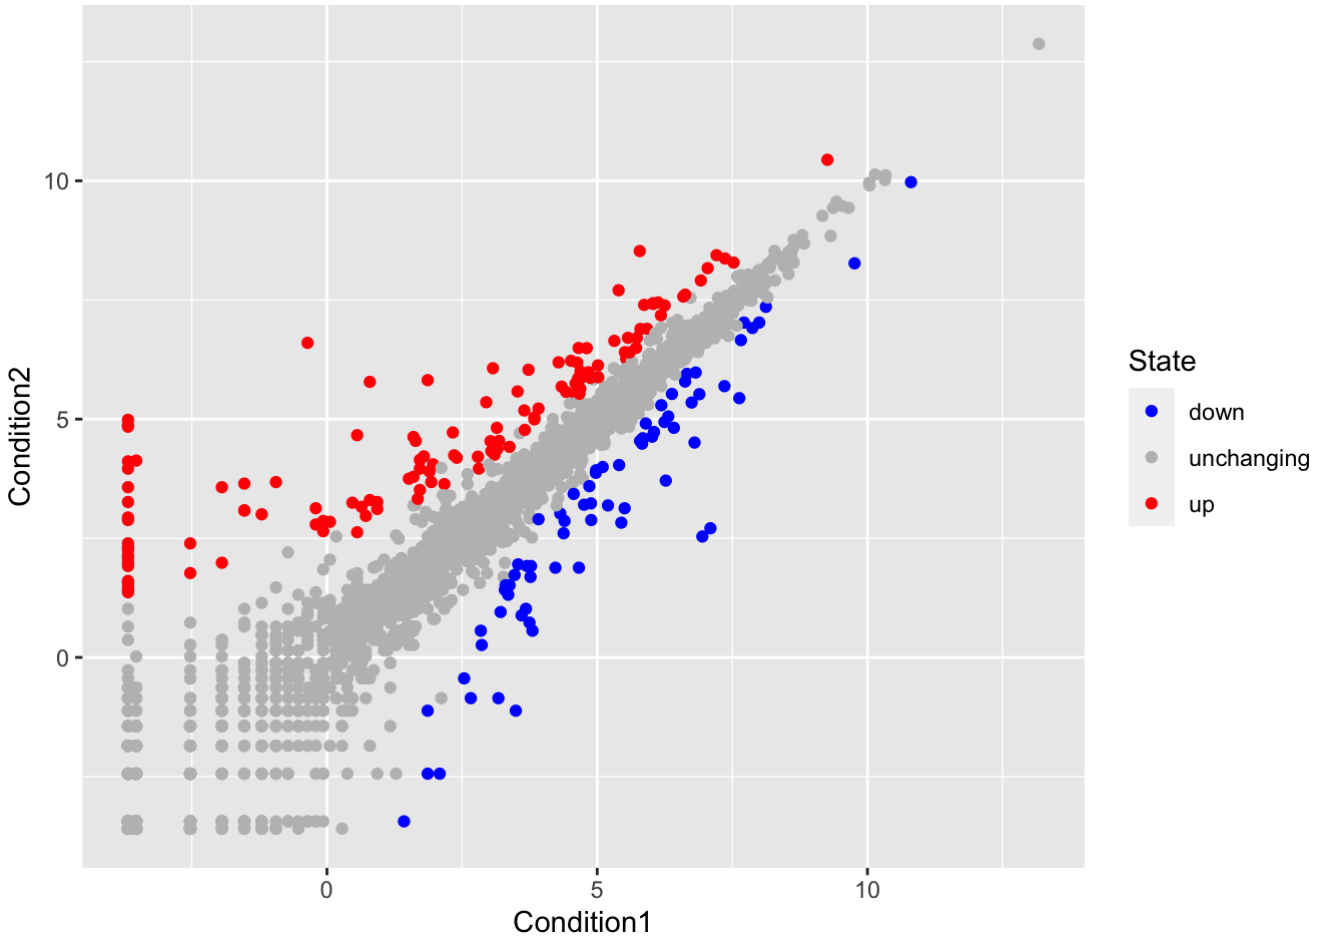


```
p + scale_colour_manual(values=c("blue","gray","red")) +
    labs(title="Gene Expresion Changes Upon Drug Treatment",
         x="Control (no drug) ",
         y="Drug Treatment")
```

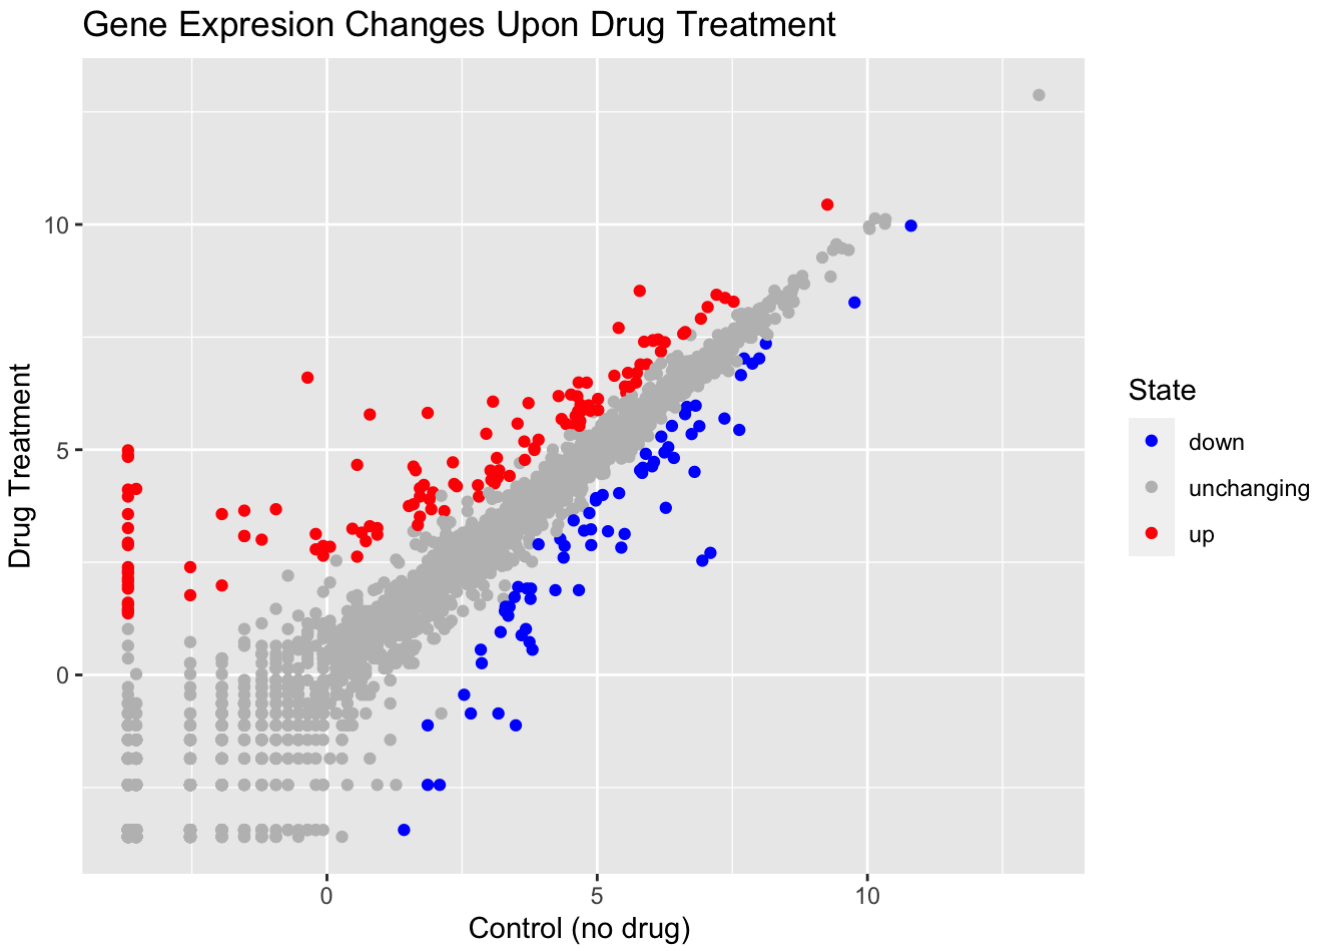


```
# File location online
url <- "https://raw.githubusercontent.com/jennybc/gapminder/master/inst/extdata/gapminder

gapminder <- read.delim(url)

library(dplyr)
```

```
Attaching package: 'dplyr'

The following objects are masked from 'package:stats':

    filter, lag

The following objects are masked from 'package:base':

    intersect, setdiff, setequal, union
```

```
gapminder_2007 <- gapminder %>% filter(year==2007)
```

```
ggplot(gapminder_2007) +
  aes(x=gdpPercap, y=lifeExp) +
```

```
  geom_point()
```

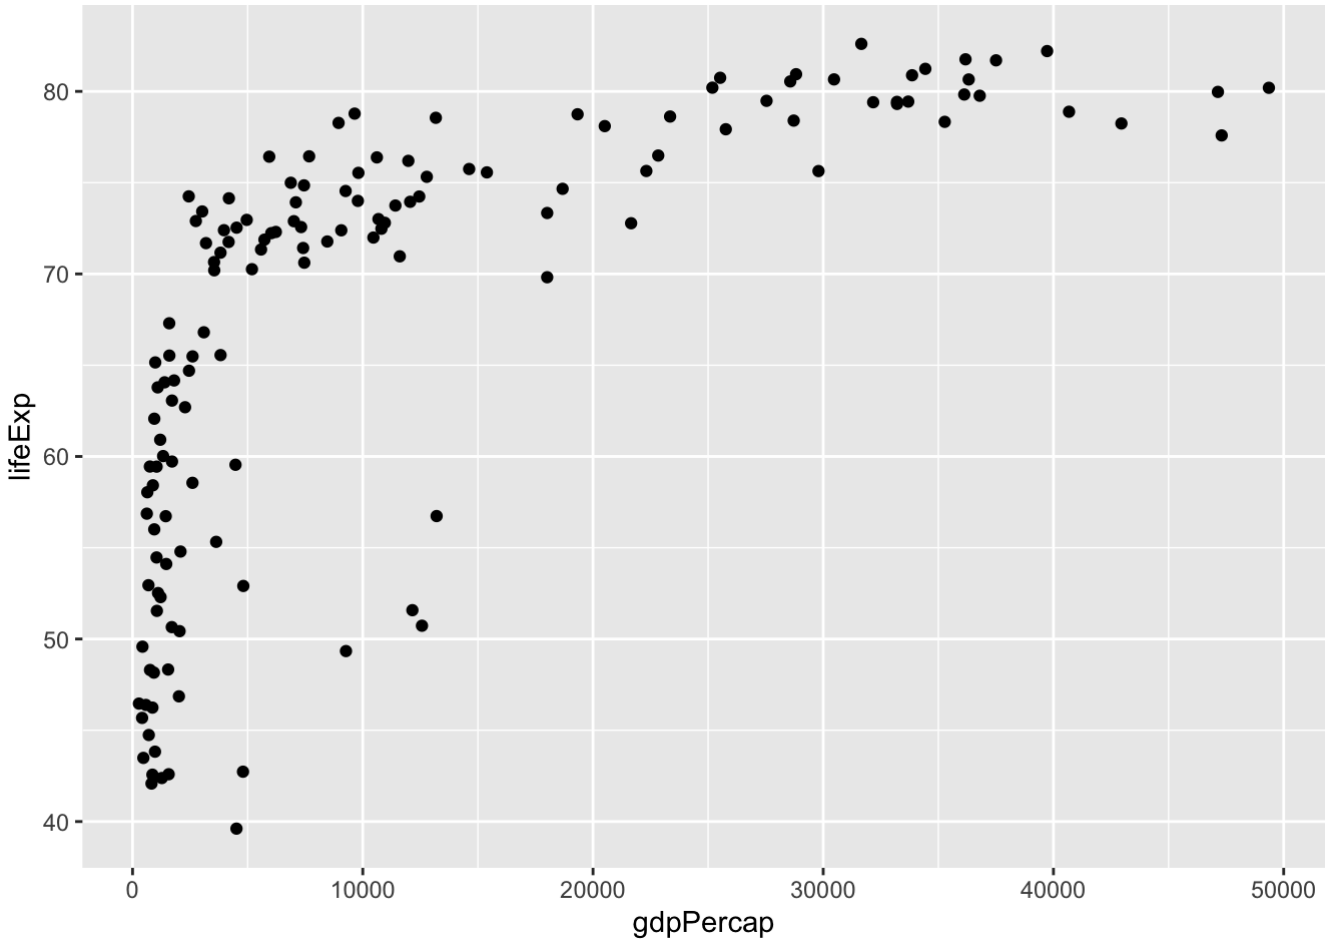


```
ggplot(gapminder_2007) +
  aes(x=gdpPercap, y=lifeExp) +
  geom_point(alpha=0.5)
```

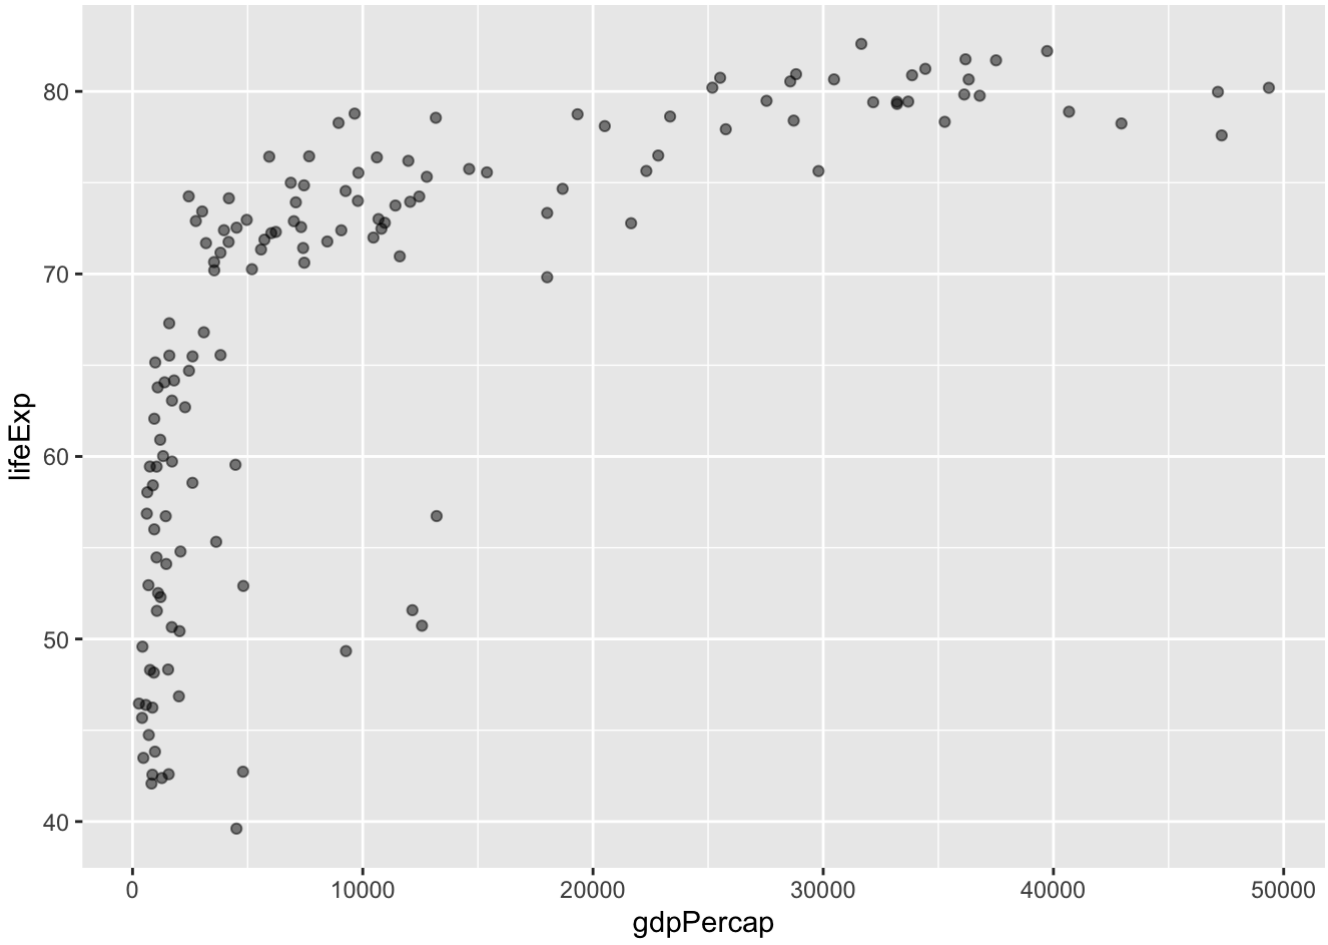


```
ggplot(gapminder_2007) +
  aes(x=gdpPercap, y=lifeExp, color=continent, size=pop) +
  geom_point(alpha=0.5)
```

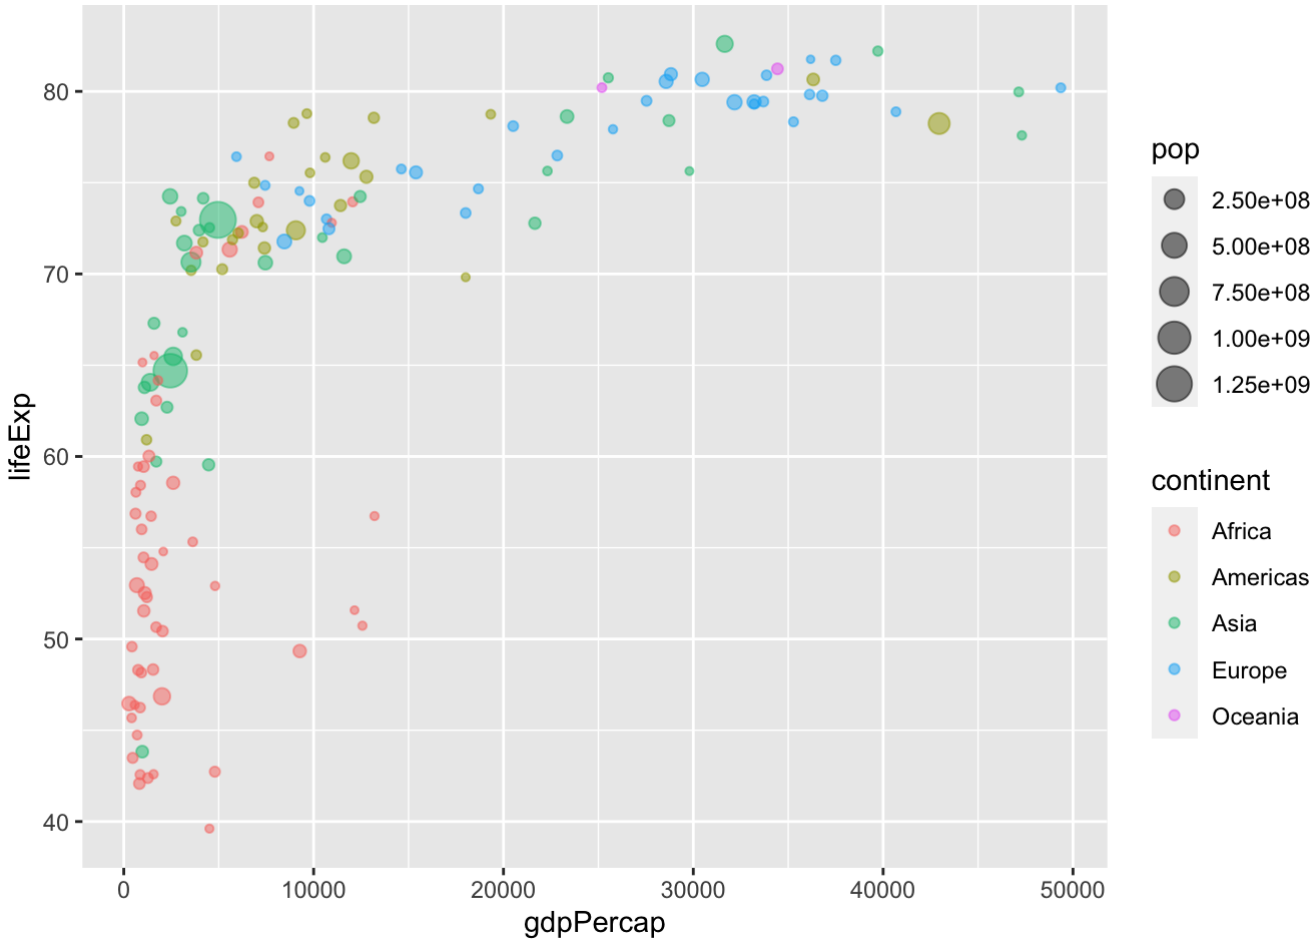


```
ggplot(gapminder_2007) +
  aes(x = gdpPercap, y = lifeExp, color = pop) +
  geom_point(alpha=0.8)
```

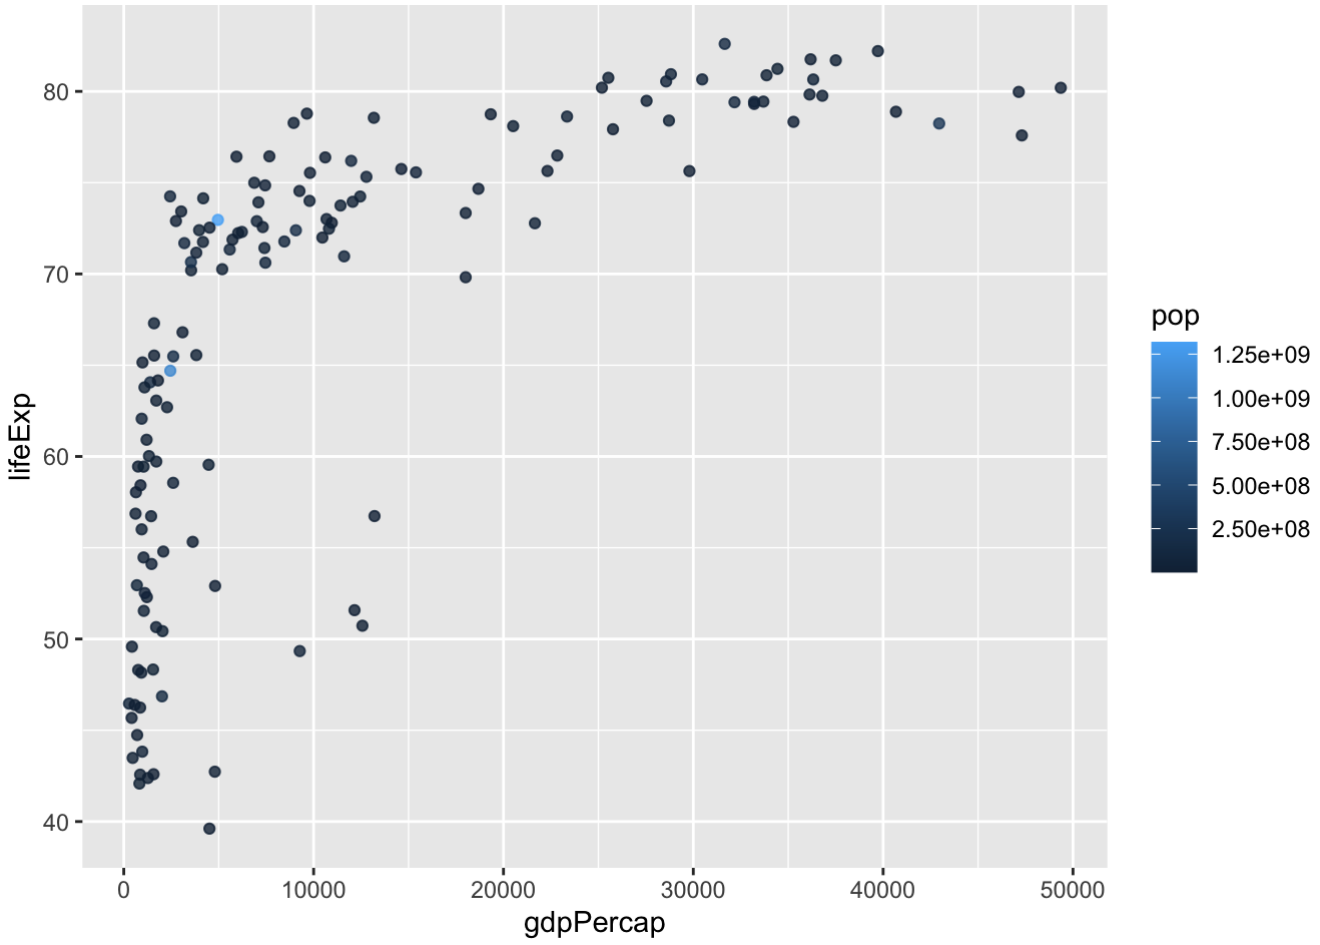


```
ggplot(gapminder_2007) +
  aes(x = gdpPercap, y = lifeExp, size = pop) +
  geom_point(alpha=0.5)
```

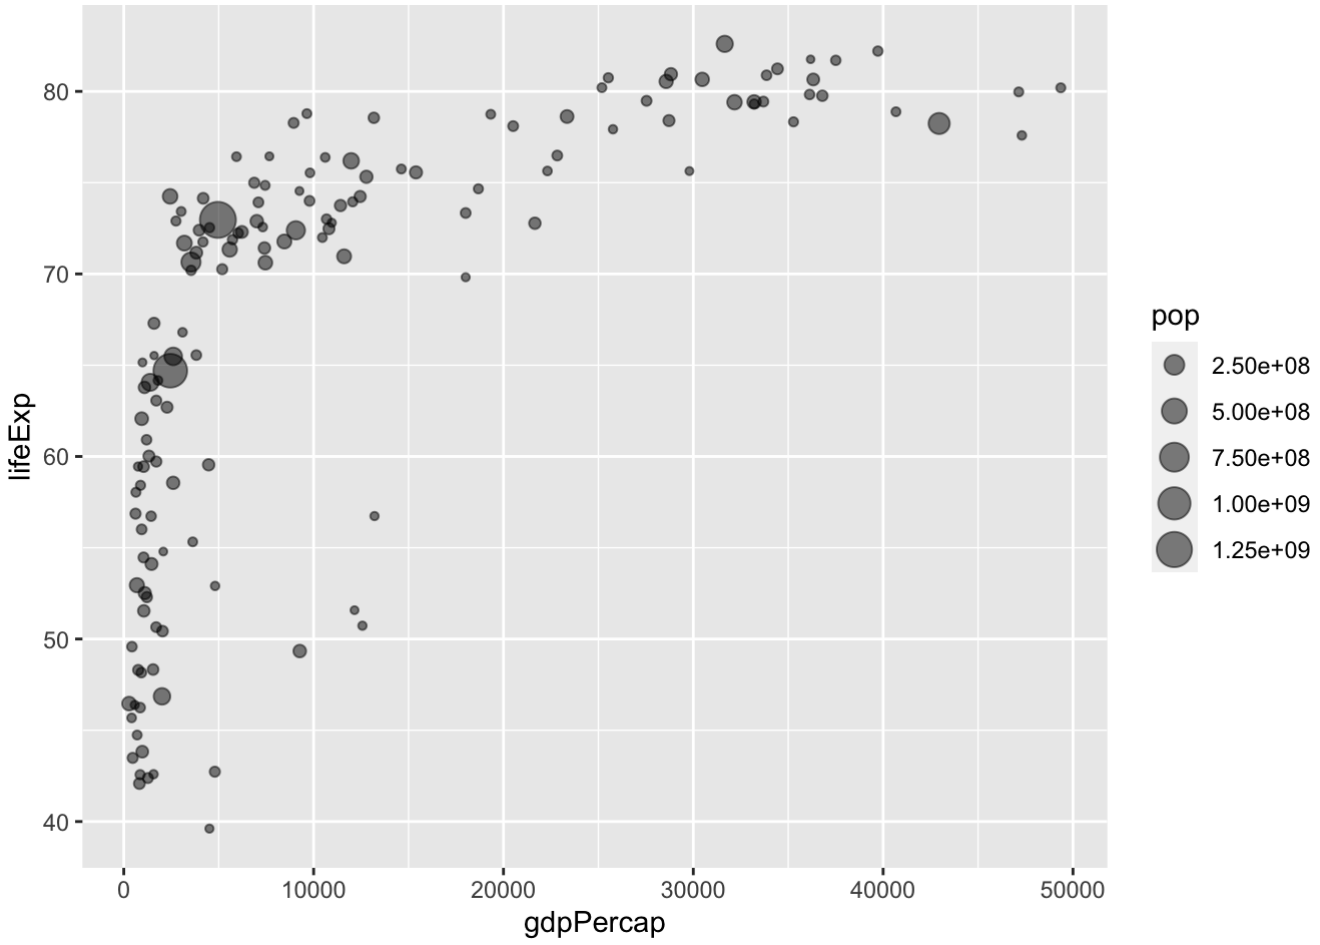


```
ggplot(gapminder_2007) +
  geom_point(aes(x = gdpPercap, y = lifeExp,
                 size = pop), alpha=0.5) +
  scale_size_area(max_size = 10)
```

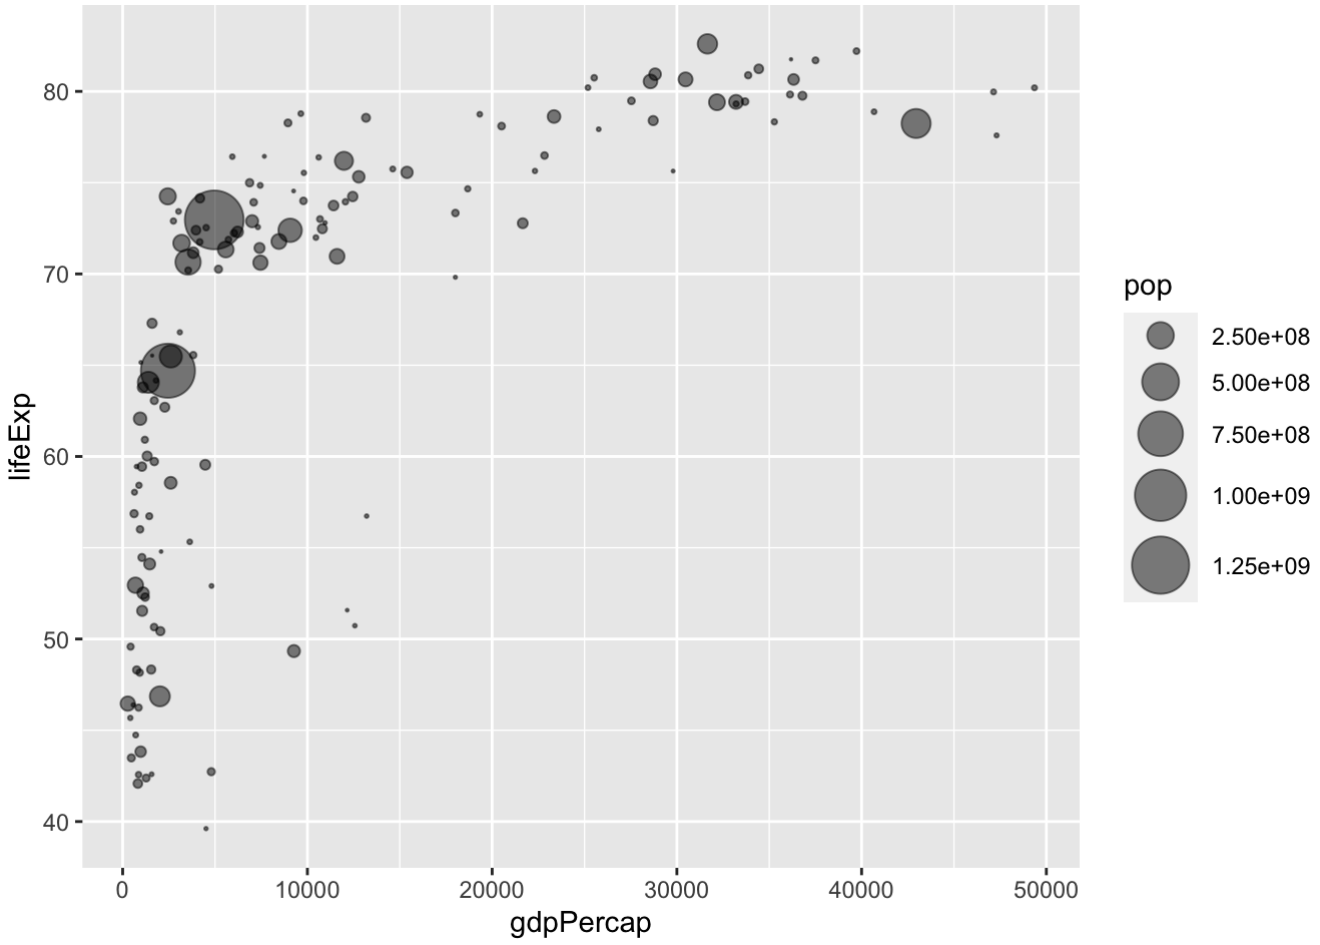


```
gapminder_1957 <- gapminder %>% filter(year==1957)

ggplot(gapminder_1957) +
  aes(x = gdpPercap, y = lifeExp, color=continent,
                size = pop) +
  geom_point(alpha=0.7) +
  scale_size_area(max_size = 10)
```

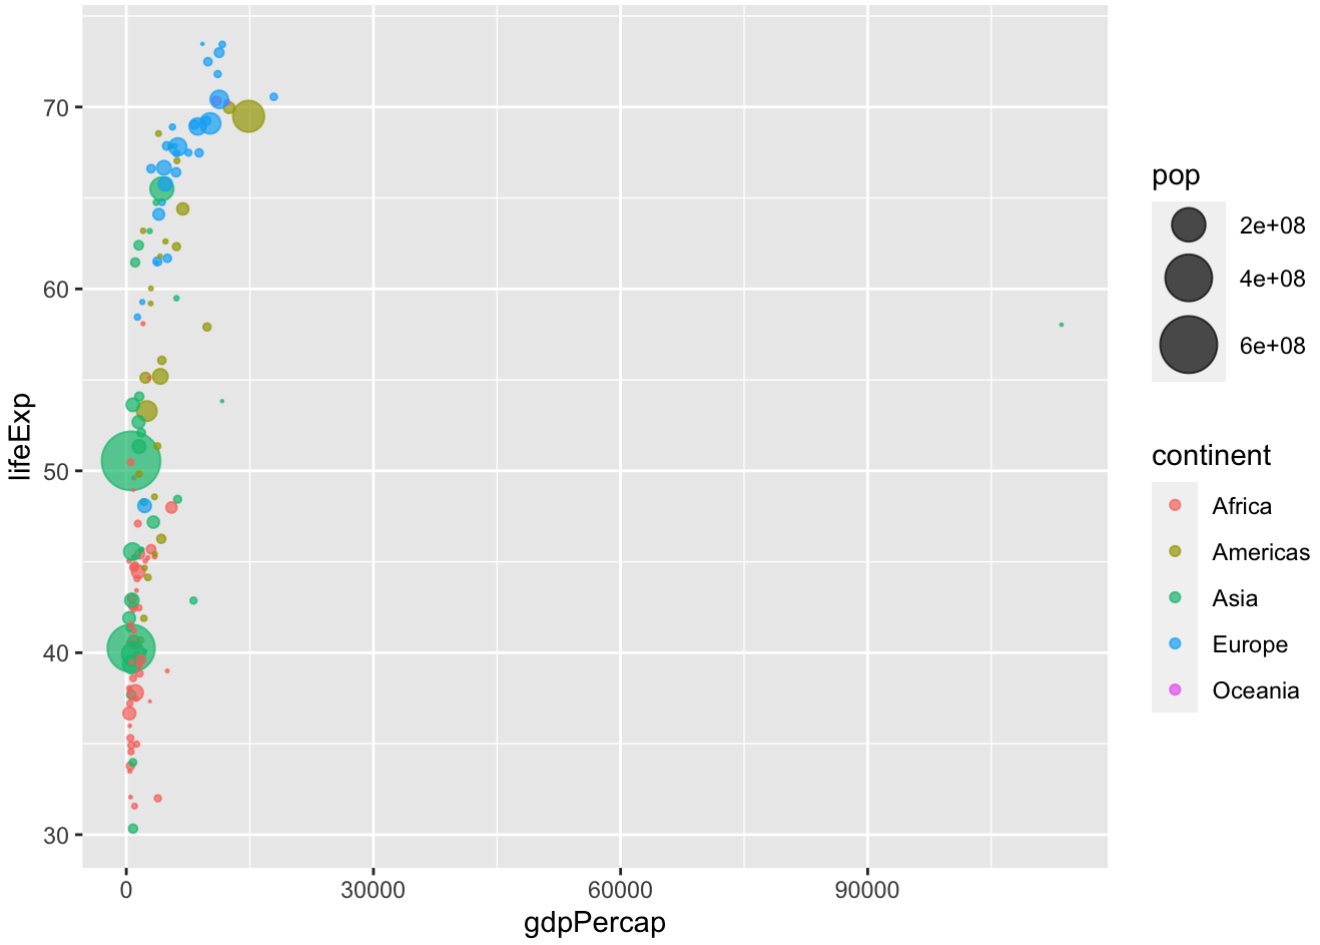


```
gapminder_1957 <- gapminder %>% filter(year==1957 | year==2007)

ggplot(gapminder_1957) +
  geom_point(aes(x = gdpPercap, y = lifeExp, color=continent,
                 size = pop), alpha=0.7) +
  scale_size_area(max_size = 10) +
  facet_wrap(~year)
```

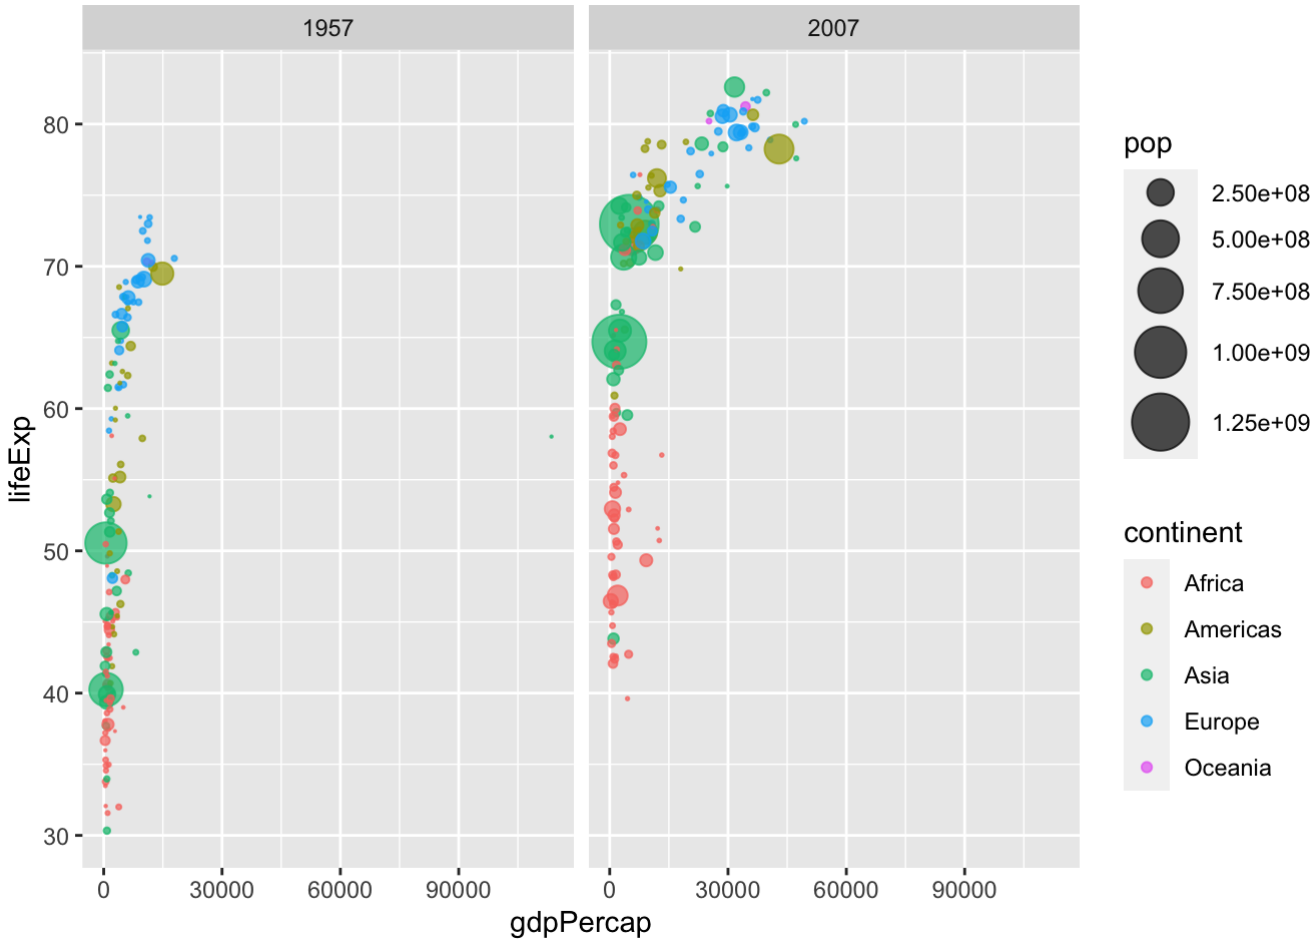
1957
2007
lifeExp
80
70
60
50
40
30
0
30000
60000
90000
gdpPercap
pop
2.50e+08
5.00e+08
7.50e+08
1.00e+09
1.25e+09
continent
Africa
Americas
Asia
Europe
Oceania