

#### **Features**

On-Resistance: 0.8Ω (TYP)
-3dB Bandwidth: 80MHz

Single-Supply Operation: +1.8V ~ +5.5V

· Break-Before-Make Switching

Rail-to-Rail Operation

· Low Static Power

- · TTL/CMOS Compatible
- Operating Temperature: -40°C ~ +125°C
- · Small Package:

GS3005 Available in TDFN-3x3-10L and MSOP-10

**Packages** 

#### **General Description**

The GS3005 is low on-resistance  $(0.8\Omega)$ , fast single-pole double-throw (SPDT) CMOS switch with operation range +1.8V ~ +5.5V. The GS3005 is designed for low operating voltage, high current switching of signal gating, chopping, modulation or demodulation (modem), and speaker output for cell phone applications.

The device contains a break-before-make (BBM) feature. The control input, IN, tolerates input drive signals up to 5.5V, independent of supply voltage.

All devices are specified for the temperature range of -40  $^{\circ}$ C to +125  $^{\circ}$ C. The GS3005 Dual is available in Green TDFN-3X3-10L and MSOP-10 packages.

### **Applications**

- · Battery-Operated Equipment
- Wearable Devices
- · Computer Peripherals

- Portable Systems
- Cell Phones
- · PDAs

### Pin Configuration

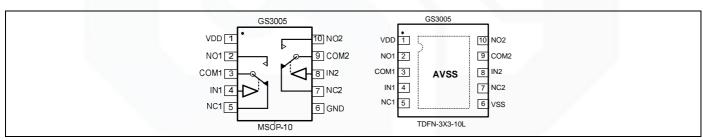


Figure 1. Pin Assignment Diagram







### **Absolute Maximum Ratings**

Condition	Min	Max		
Power Supply Voltage (V <sub>DD</sub> to Vss)	-0.5V	+7.5V		
Analog Input Voltage (NC NO or COM)	Vss-0.5V	V <sub>DD</sub> +0.5V		
PDB Input Voltage	Vss-0.5V	+7V		
Operating Temperature Range	-40°C	+125°C		
Junction Temperature	+10	+160°C		
Storage Temperature Range	-55°C	+150°C		
Lead Temperature (soldering, 10sec)	+20	+260°C		
Package Thermal Resistance (T <sub>A</sub> =+25 ℃)				
MSOP-10, $\theta_{JA}$	216	216°C/W		
ESD Susceptibility				
НВМ	3500V			
MM	30	300V		

**Note**: Stress greater than those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions outside those indicated in the operational sections of this specification are not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

### Package/Ordering Information

MODEL	CHANNEL	ORDER NUMBER	PACKAGE DESCRIPTION	PACKAGE OPTION	MARKING INFORMATION
CCOOLE	Dural	GS3005-FR	TDFN-3X3-10L	Tape and Reel,3000	GS3005
GS3005 Dua	Dual	GS3005-MR	MSOP-10	Tape and Reel,3000	GS3005







#### **Electrical Characteristics**

(At Vs = +5V, and TA = +25°C, unless otherwise noted.)

DADAMETED	SYMBOL	CONDITIONS					
PARAMETER	STMBOL			MIN	MAX	UNITS	
ANALOG SWITCH							
Analog Signal Range	$V_{NO}$ , $V_{NC}$ , $V_{COM}$			0	Vs	V	
On-Resistance	R <sub>ON</sub>	$Vs = 4.5V$ , $V_{NO}$ or $V_{NC} = 3.5V$ , $I_{COM} = -10$ mA, Test Circuit 1	0.8			Ω	
OFRESISIANCE		$Vs = 2.7V$ , $V_{NO}$ or $V_{NC} = 1.5V$ , $I_{COM} = -10$ mA, Test Circuit 1	1.9			Ω	
On Designation on Martin Polymona Channella	AB	$Vs = 4.5V$ , $V_{NO}$ or $V_{NC} = 3.5V$ , $I_{COM} = -10$ mA, Test Circuit 1			0.47	Ω	
On-Resistance Match Between Channels	ΔR <sub>ON</sub>	$Vs = 2.7V$ , $V_{NO}$ or $V_{NC} = 1.5V$ , $I_{COM} = -10$ mA, Test Circuit 1	0.45		0.5	Ω	
On Designation on Floringes		$Vs = 4.5V, V_{NO} \text{ or } V_{NC} = 1.0V, 2.0V, 3.5V,$ $I_{COM} = \text{-}10\text{mA}, \text{ Test Circuit 1}$			0.3	Ω	
On-Resistance Flatness	R <sub>FLAT(ON)</sub>	$Vs = 2.7V, V_{NO} \text{ or } V_{NC} = 1.0V, 1.5V, 2.0V,$ $I_{COM} = -10\text{mA}, \text{ Test Circuit 1}$	0.2		0.35	Ω	
Source OFF Leakage Current	I <sub>NC(OFF)</sub> ,I <sub>NO(OFF)</sub>	$V_S = 5.5V$ , $V_{NO}$ or $V_{NC} = 1.0V$ , 4.5V, $V_{COM} = 4.5V$ , 1.0V			1	μΑ	
Channel ON Leakage Current	I <sub>NC(ON)</sub> ,I <sub>NO(ON)</sub> ,I <sub>COM(ON)</sub>	$V_S = 5.5V$ , $V_{COM} = 1.0V$ , 4.5V $V_{NO}$ or $V_{NC} = 1.0V$ , 4.5V, or floating			1	μΑ	
DIGITAL INPUTS							
Input High Voltage	V	Vs = 5V		1.5		V	
Input High Voltage	$V_{INH}$	Vs = 3V		0.9		٧	
Input Low Voltage	$V_{INL}$	Vs = 5V			0.55	٧	
input Low Voltage	V INL	Vs = 3V			0.45	٧	
Input Leakage Current	I <sub>IN</sub>	Vs = 5.5V, V <sub>IN</sub> = 0V or 5.5V			1	μΑ	





### **Electrical Characteristics**

(At Vs = +5V, and TA = +25°C, unless otherwise noted.)


PARAMETER	SYMBOL	CONDITIONS					
FARAMETER	SIMBOL			TYP	MIN	MAX	UNITS
DYNAMIC CHARACTERISTICS							
Turn-On Time	T <sub>ON</sub>	$Vs = 5V$ , $V_{NO}$ or $V_{NC} = 3V$ , $V_{IN\_H} = R_L = 300\Omega$ , $C_L = 35pF$ , Test Circu		20			ns
		$V_S = 3V, V_{NO} \text{ or } V_{NC} = 1.5V, V_{IN\_H} = 1.5V, V_{IN\_L} = 0V,$ $R_L = 300\Omega, C_L = 35pF, Test Circuit 2$		28			ns
Turn-Off Time	-	$V_S=5V,V_{NO}orV_{NC}=3V,V_{IN\_H}=1.5V,V_{IN\_L}=0V,$ $R_L=300\Omega,C_L=35pF,TestCircuit2$		23			ns
	T <sub>OFF</sub>	$V_S = 3V, V_{NO} \text{ or } V_{NC} = 1.5V, V_{IN\_H} = 1.5V, V_{IN\_L} = 0V,$ $R_L = 300\Omega, C_L = 35 pF, Test Circuit 2$		22			ns
Break-Before-Make Time Delay		$Vs = 5V, V_{NO1} \text{ or } V_{NC1} = V_{NO2} \text{ or } V_{NC2} = 3V,$ $R_L = 300\Omega, C_L = 35pF, \text{ Test Circuit 3}$		23			ns
	Т <sub>ввм</sub>	$Vs = 3V$ , $V_{NO1}$ or $V_{NC1} = V_{NO2}$ or $V_{NC1}$ $= 300\Omega$ , $C_L = 35pF$ , Test Circu		27			ns
0.	T <sub>SKEW</sub>	$V_S = 5V, R_S = 39\Omega, C_L = 50pF, T$	est Circuit 4	9			ns
Skew		$V_S = 3V$ , $R_S = 39\Omega$ , $C_L = 50pF$ , Test Circuit 4		9			ns
0"1 1"	O <sub>ISO</sub>	$R_L = 50\Omega$ , Signal = 0dBm,	f=10MHz	-40			db
Off Isolation		C <sub>L</sub> = 5pF, Test Circuit 5	f=1MHz	-60			db
-3dB Bandwidth	BW	$R_L = 50\Omega$ , Signal = 0dBm, $C_L = 5pF$ , Test Circuit 6		80			MHz
Source OFF Capacitance	C <sub>NC(OFF)</sub> ,C <sub>NO(OFF)</sub>	f=1MHz		20			pF
Channel ON Capacitance	C <sub>NC(ON)</sub> ,C <sub>NO(ON)</sub> ,C <sub>COM(ON)</sub>	f=1MHz		73			pF
POWER REQUIREMENTS							
Power Supply Range	Vs				1.8	5.5	V
Power Supply Current	Is	V <sub>IN</sub> = 0V or Vs				1	μA








## **Typical Performance characteristics**

At  $T_A$ =+25°C, and  $V_S$ =+5V, unless otherwise noted.

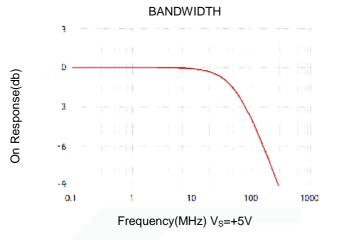

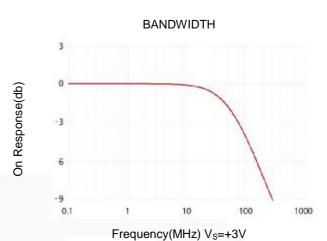




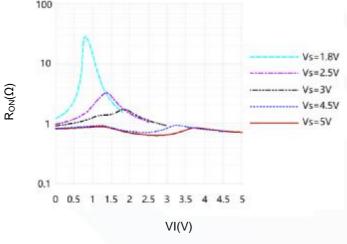







#### **Parameter Measurement Information**

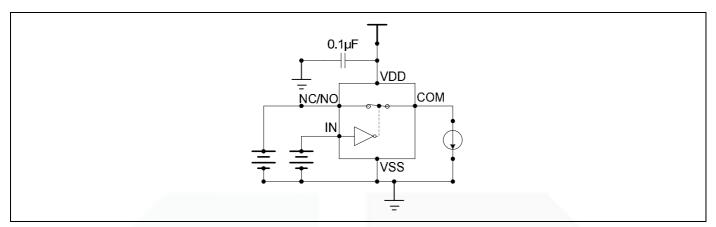

Test Circuit 1. On-Resistance

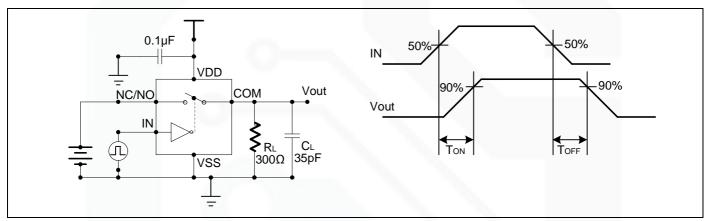

Test Circuit 2. Switching Times

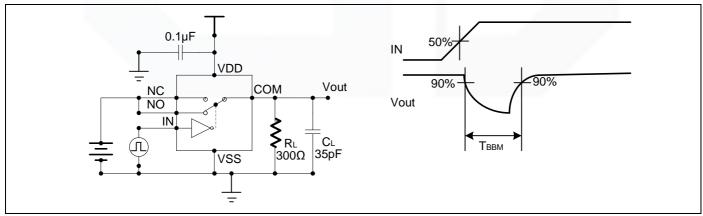


Test Circuit 3. Break-Before-Make Time Delay









#### **Parameter Measurement Information**

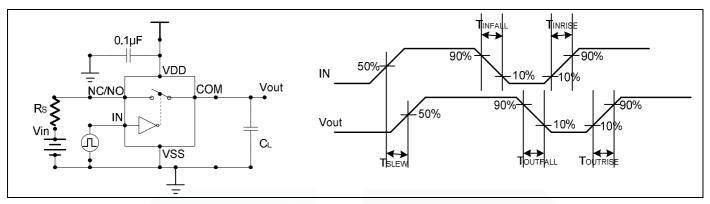

Test Circuit 4. Output Signal Skew

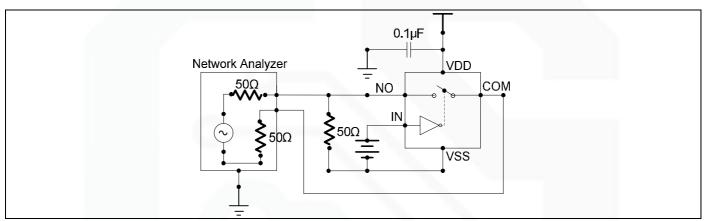

Test Circuit 5. Off Isolation

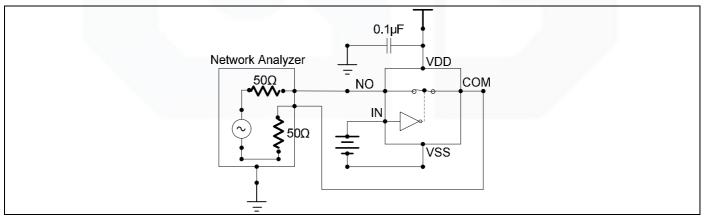

Test Circuit 6. -3dB Bandwidth










# Package Information

### MSOP-10

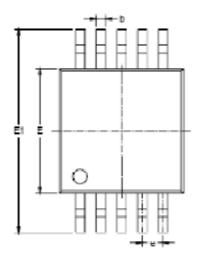






Symbol	Dimensions In Millimeters		Dimensions In Inches		
	MIN	MAX	MIN	MAX	
A	0.820	1.100	0.032	0.043	
A1	0.020	0.150	0.001	0.005	
A2	0.750	0.950	0.030	0.037	
b	0.180	0.280	0.007	0.011	
С	0.090	0.230	0.004	0.009	
D	2.900	3.100	0.114	0.122	
E	2.000	3.100	0.114	0.122	
E1	4.750	5.050	0.187	0.199	
ė	0.500 BSC		0.020 BSC		
L	0.400	0.800	0.016	0.031	
9	0,*	6°	D <sub>e</sub>	6°	



TDFN-3X3-10L

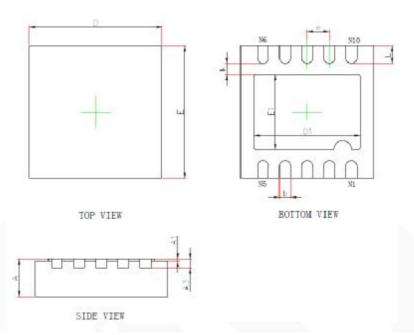

Symbol	Dimensions I	n Millimeters	Dimensions In Inches		
Symbol	Min.	Max.	Min.	Max.	
Α	0.700/0.800	0.800/0.900	0.028/0.031	0.031/0.035	
A1	0.000	0.050	0.000	0.002	
A3	0.203	REF.	0.008REF.		
D	2.924	3.076	0.115	0.121	
E	2.924	3.076	0.115	0.121	
D1	2.300	2.500	0.091	0.098	
E1	1.600	1.800	0.063	0.071	
k	0.200MIN.		0.008MIN.		
b	0.200	0.300	0.008	0.012	
е	0.500TYP.		0.020TYP.		
L	0.324	0.476	0.013	0.019	