

---

# SIGNAL PROCESSING FUNDAMENTALS Through NCERT

---

G. V. V. Sharma



Copyright ©2024 by G. V. V. Sharma.

<https://creativecommons.org/licenses/by-sa/3.0/>

and

<https://www.gnu.org/licenses/fdl-1.3.en.html>

# Contents

Introduction	iii
<b>1 Analog</b>	<b>1</b>
1.1 Harmonics . . . . .	1
1.2 Filters . . . . .	17
<b>2 Discrete</b>	<b>23</b>
2.1 Z-transform . . . . .	23
2.2 Sequences . . . . .	33
<b>3 Contour Integration</b>	<b>61</b>
<b>4 Laplace Transform</b>	<b>67</b>
<b>A Convolution</b>	<b>73</b>
<b>B Z-transform</b>	<b>75</b>



# Introduction

This book introduces some concepts in signal processing through maths and physics problems in NCERT textbooks.



# Chapter 1

## Analog

### 1.1. Harmonics

1.1.1 Suppose that the electric field amplitude of an electromagnetic wave is  $E_0 = 120\text{N/C}$  and that its frequency is  $f = 50.0\text{ MHz}$ .

- (a) Determine,  $B_0, \omega, k$  and  $\lambda$
- (b) Find expressions for  $\mathbf{E}$  and  $\mathbf{B}$

**Solution:**

Table 1.1: Input Parameters

Symbol	Description	value
$f$	frequency of source	50.0 MHz
$E_0$	Electric field amplitude	120 N/C
$c$	speed of light	$3 \times 10^8$ m/s
$\mathbf{e}_2, \mathbf{e}_3$	Standard Basis vectors	N/A

Table 1.2: Formulae and Output

Symbol	Description	Formula	Value
<b>E</b>	Electric field vector	$E_0 \sin(kx - 2\pi ft) \mathbf{e}_2$	$120 \sin[1.05x - 3.14 \times 10^8 t] \mathbf{e}_2$
<b>B</b>	Magnetic field vector	$B_0 \sin(kx - 2\pi ft) \mathbf{e}_3$	$(4 \times 10^{-7}) \sin[1.05x - 3.14 \times 10^8 t] \mathbf{e}_3$
$B_0$	Magnetic field strength	$\frac{E_0}{c}$	400nT
$\omega$	Angular frequency	$2\pi f$	$3.14 \times 10^8 \text{m/s}$
$k$	Propagation constant	$\frac{2\pi f}{c}$	1.05rad/s
$\lambda$	Wavelength	$\frac{c}{f}$	6.0m





Figure 1.1.1: Graphs of  $\mathbf{E}$  and  $\mathbf{B}$

1.1.2 A charged particle oscillates about its mean equilibrium position with a frequency of  $10^9 \text{ Hz}$ . What is the frequency of the electromagnetic waves produced by the oscillator?

**Solution:**

Symbol	Value	Description
$y(t)$	$\cos(2\pi f_c t)$	Wave equation of electro-magnetic wave
$f_c$	$10^9$	Frequency of electromagnetic wave
$t$	seconds	Time

Table 1.1.2: Variable description

1.1.3 Given below are some functions of  $x$  and  $t$  to represent the displacement (transverse or longitudinal) of an elastic wave. State which of these represents (i) travelling wave, (ii) a stationary wave or (iii) none at all:

(a)  $y = 2 \cos(3x) \sin(10t)$

(b)  $y = 2\sqrt{x - vt}$

(c)  $y = 3 \sin(5x - 0.5t) + 4 \cos(5x - 0.5t)$

(d)  $y = \cos x \sin t + \cos 2x \sin 2t$

**Solution:**

TRAVELLING WAVE	STATIONARY WAVE
$y(x, t) = A \sin(kx \pm \omega t)$	$y(x, t) = A \sin kx \cos \omega t$
PARAMETERS	DEFINITION
$A$	Amplitude
$\omega$	Angular Velocity
$x$	Position
$k$	Wavenumber

Table 1.1.3: Travelling wave *vs* Stationary wave



Figure 1.1.2:  $y(t) = \cos(2\pi \times 10^9 t)$

Let us assume an equation:

$$y = A(x) \cos(\omega t + \phi(x)) \quad (1.1)$$

Fig. 1.1.3 and Fig. 1.1.3 are self explanatory for stationary and travelling waves. Fig. 1.1.3 and Fig. 1.1.3 are neither stationary nor travelling waves.

STATIONARY WAVE CONDITION	TRAVELLING WAVE CONDITION
(1) $A(x)$ should be a function of position $x$ , and it can be expressed as $A(x) = A_0 \cos(\omega t + \alpha)$ where $A_0$ is a constant, $k$ is the wavenumber, $x$ is the position and $\alpha$ is a phase constant.	(1) $A(x)$ should be a constant, and it can be expressed as $A(x) = A_0$ where $A_0$ is a constant number.
(2) $\phi(x)$ can be expressed as $\phi(x) = c$ where $c$ is a constant.	(2) $\phi(x)$ represents a linear expression in $x$ , and it can be expressed as $\phi(x) = kx + \theta$ where $k$ is the wavenumber and $\theta$ is the phase constant.

Table 1.1.3: Travelling wave *vs* Stationary wave

1.1.4 For the travelling harmonic wave  $y(x, t) = 2.0 \cos 2\pi(10t - 0.0080x + 0.35)$  where  $x$  and  $y$  are in  $cm$  and  $t$  in  $s$ . Calculate the phase difference between oscillatory motion of two points separated by a distance of

- (a)  $4m$
- (b)  $0.5m$
- (c)  $\lambda/2$
- (d)  $3\lambda/4$

**Solution:**

$$(\Delta\theta) = (2\pi ft - kx_1 + \phi) - (2\pi ft - kx_2 + \phi) \quad (1.2)$$

$$= k(x_2 - x_1) \quad (1.3)$$

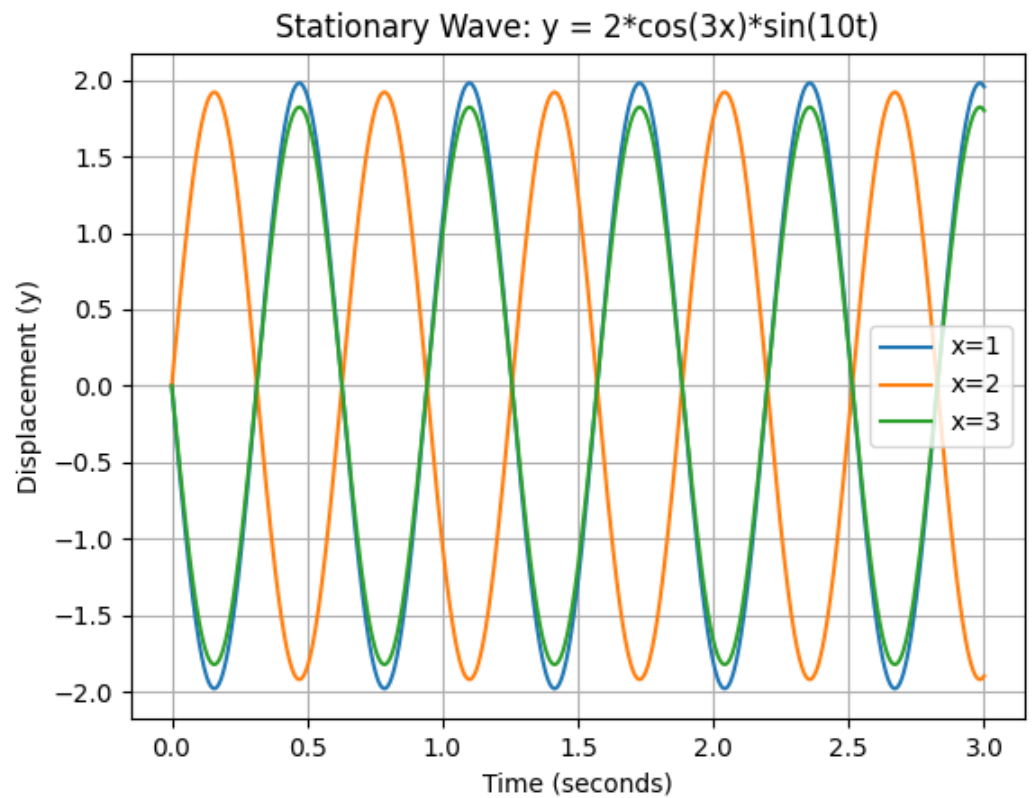


Figure 1.1.3: DIPLACEMENT *vs* TIME-graph1

1.1.5 (a) The peak voltage of an AC supply is 300 V. What is the rms voltage?

(b) The rms value of current in an AC circuit is 10 A. What is the peak current?

**Solution:**

Parameter	Description	Value
$y(x_i, t)$	equation of harmonic wave	$A \cos(2\pi ft - kx_i + \phi)$
$k$	angular wave number	$2\pi$ (0.008)
$\lambda = \frac{2\pi}{k}$	wavelength	125 cm
$f$	frequency	10
$A$	amplitude	2.0
$\phi$	phase constant	$2\pi$ (0.35)
$\theta_i$	phase of $i^{th}$ harmonic wave	$(2\pi ft - kx + \phi)$
$x_i$	position of $i^{th}$ harmonic wave	
$t$	time	
$x_2 - x_1$	path difference	400 cm
		50 cm
		$\frac{\lambda}{2}$
		$\frac{3\lambda}{4}$

Table 1.1.4: Given parameters list

Parameter	Description	subquestion	Value
$\Delta\theta$	$\theta_1 - \theta_2$	(a)	$6.4\pi$ radians
		(b)	$0.8\pi$ radians
		(c)	$\pi$ radians
		(d)	$\frac{3\pi}{2}$ radians

Table 1.1.4: Phase differences

parameter	value	description
$V(t)$	$V_0 \cdot \sin(2\pi ft + \phi)$	voltage in terms of time
$I(t)$	$I_0 \cdot \sin(2\pi ft + \phi)$	current in terms of time
$V_0$	300 V	peak voltage
$V_{\text{rms}}$	$\sqrt{\frac{1}{T} \int_0^T [V(t)]^2 dt}$	rms value of Voltage
$I_{\text{rms}}$	10 A	rms value of current
$I_0$	$\sqrt{2} \times I_{\text{rms}}$	peak current
$f$	50 Hz	frequency of the sinusoidal wave
$T$	0.02 s	time period of sinusoidal wave

Table 1.1.5: Input Parameter Table



Figure 1.1.3: DIPLACEMENT *vs* TIME-graph2

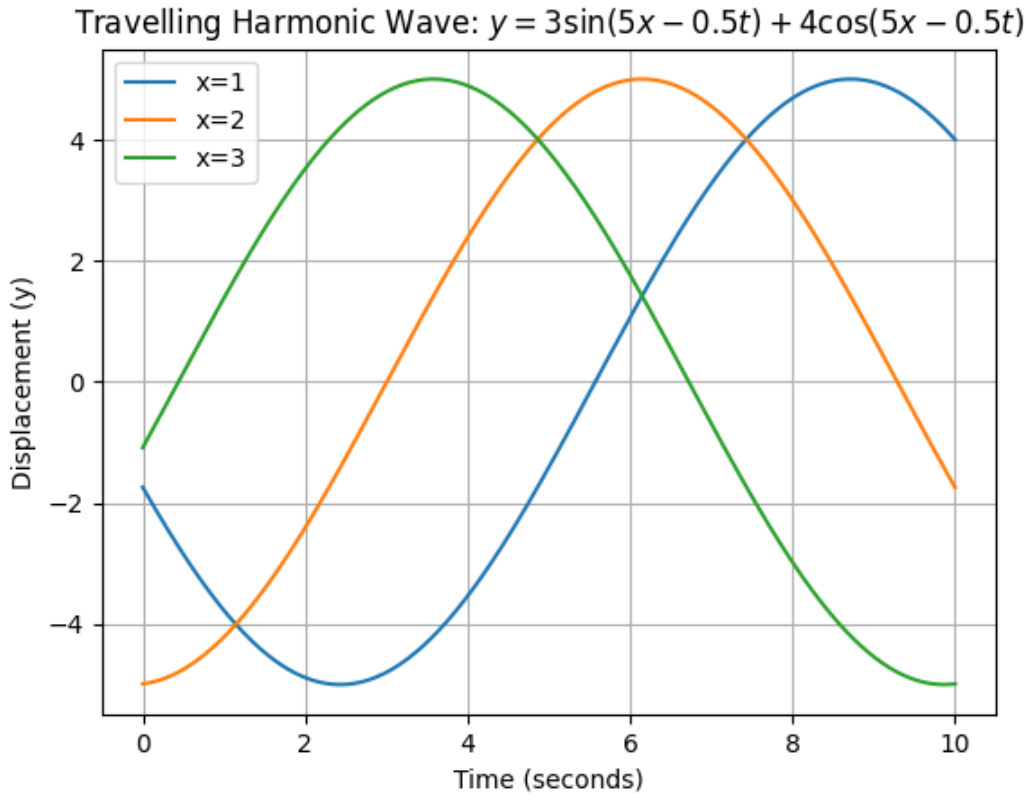


Figure 1.1.3: DIPLACEMENT *vs* TIME-graph3

(a)

$$V_{\text{rms}}^2 = \frac{1}{T} \int_0^T [V(t)]^2 dt \quad (1.4)$$

$$= f \int_0^{\frac{1}{f}} V_0^2 \cdot \sin^2(2\pi ft + \phi) dt \quad (1.5)$$

$$= \frac{1}{2} V_0^2 \left( 1 - \frac{1}{f} \int_0^{\frac{1}{f}} \cos(4\pi ft + 2\phi) dt \right) \quad (1.6)$$

$$= \frac{1}{2} V_0^2 \left( 1 - \frac{1}{f} \left[ \frac{\sin(4\pi ft + 2\phi)}{4\pi f} \right]_0^{\frac{1}{f}} \right) \quad (1.7)$$

$$= \frac{1}{2} V_0^2 \left( 1 - \frac{1}{f} \cdot \frac{\sin(4\pi + 2\phi) - \sin(0 + 2\phi)}{4\pi f} \right) \quad (1.8)$$

$$V_{\text{rms}} = \frac{V_0}{\sqrt{2}} \quad 10 \quad (1.9)$$





Figure 1.1.3: DIPLACEMENT *vs* TIME-graph4

To find the RMS voltage ( $V_{\text{rms}}$ ) when the peak voltage ( $V_0$ ) is 300V, you can use equation (1.9)

$$V_{\text{rms}} = \frac{300V}{\sqrt{2}} \approx 212.13V \quad (1.10)$$

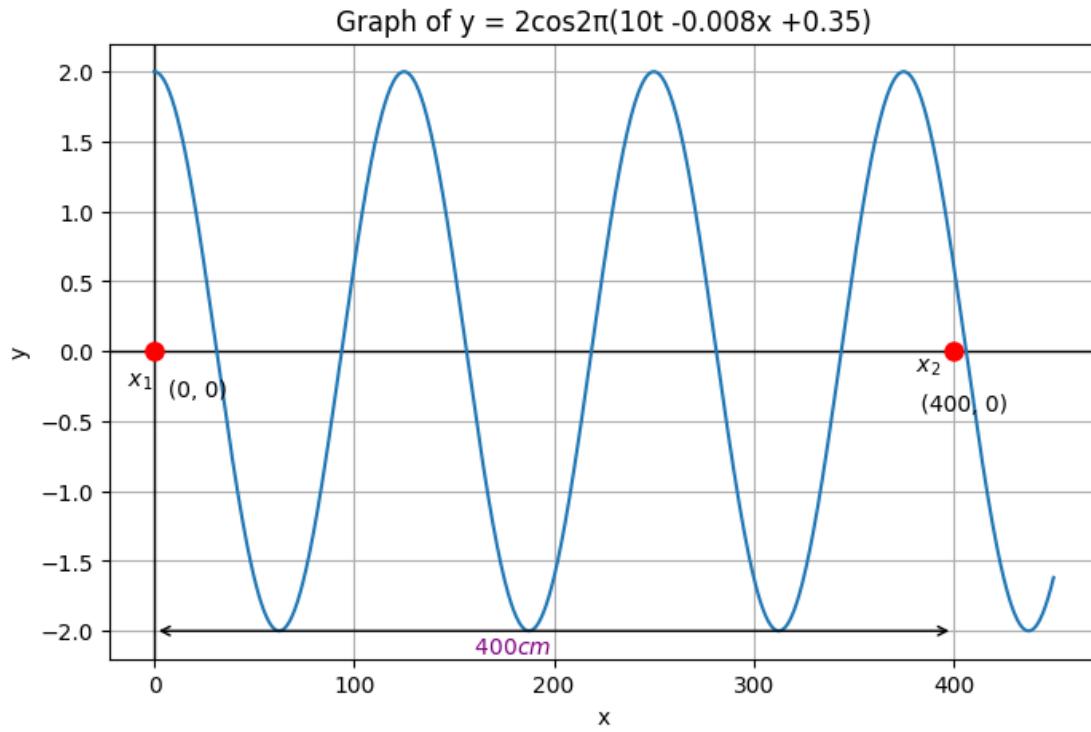


Figure 1.1.4:

(b)

$$I_{\text{rms}}^2 = \frac{1}{T} \int_0^T [I(t)]^2 dt \quad (1.11)$$

$$= f \int_0^{\frac{1}{f}} I_0^2 \cdot \sin^2(2\pi ft + \phi) dt \quad (1.12)$$

$$= \frac{1}{2} I_0^2 \left( 1 - \frac{1}{f} \left[ \frac{\sin(4\pi ft + 2\phi)}{4\pi f} \right]_0^{\frac{1}{f}} \right) \quad (1.13)$$

$$= \frac{1}{2} I_0^2 \left( 1 - \frac{1}{f} \cdot \frac{\sin(4\pi + 2\phi) - \sin(0 + 2\phi)}{4\pi f} \right) \quad (1.14)$$

$$I_{\text{rms}} = \frac{I_0}{\sqrt{2}} \quad (1.15)$$



Figure 1.1.4:

To find the peak current ( $I_0$ ) when the RMS current ( $I_{\text{rms}}$ ) is given, you can use equation (1.15)

$$I_0 \approx 10 \text{ A} \times 1.414 \approx 14.14 \text{ A} \quad (1.16)$$



Figure 1.1.4:

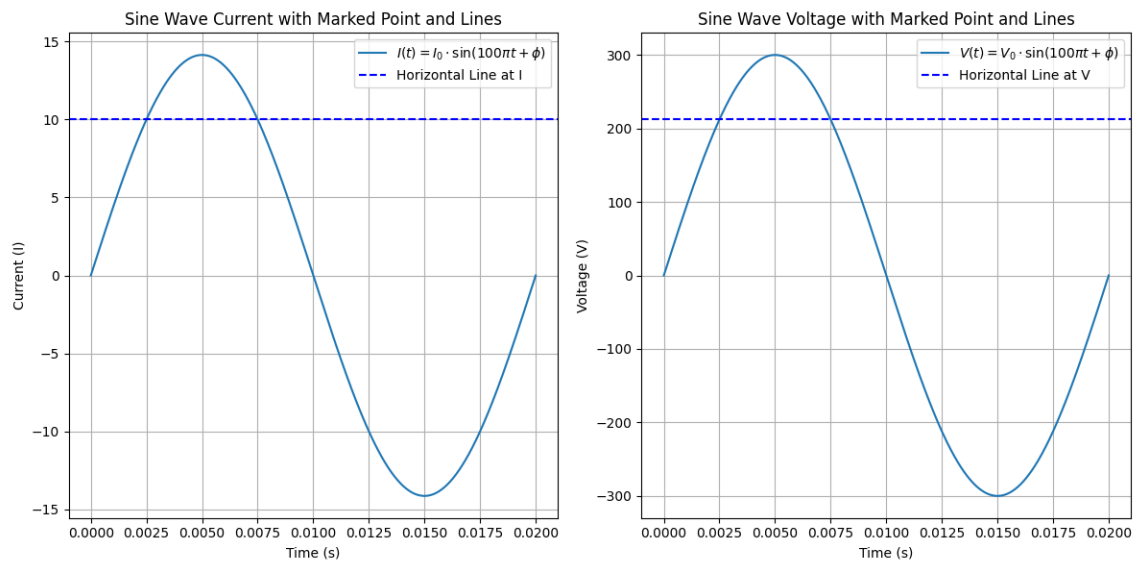




Figure 1.1.4:

1.1.6 In Young's double-slit experiment using monochromatic light of wavelength  $\lambda$ , the intensity of light at a point on the screen where path difference is  $\lambda$ , is  $K$  units. What is the intensity of light at a point where path difference is  $\lambda/3$ ?

**Solution:**

From Table 1.1.6:

$$y(t) = A \sin(2\pi ft - kx_1) + A \sin(2\pi ft - kx_2) \quad (1.17)$$

$$y(t) = 2A \cos\left(\frac{k\Delta x}{2}\right) \sin\left(2\pi ft - \frac{k(x_1 + x_2)}{2}\right) \quad (1.18)$$

Parameter	Description	Value
$y_i(t)$	Equation of light from $S_{i^{\text{th}}}$	$A \sin(\omega t - kx_i)$
$k$	Wave number	$\frac{2\pi}{\lambda}$
$I$	Intensity of wave	$\propto A^2$
$\Delta x = x_1 - x_2$	Path difference	$\lambda$
		$\frac{\lambda}{3}$
$K$	Intensity of light at $\Delta x = \lambda$	
$A$	Amplitude of wave from source	
$r$	constant	$r \geq 0$

Table 1.1.6: Parameters

From Table 1.1.6 and equation (1.18):

$$\therefore I \propto 4A^2 \cos^2 \left( \frac{k\Delta x}{2} \right) \quad (1.19)$$

From Table 1.1.6 and equation (1.19):

$$\frac{K}{I_r} = \frac{4A^2 \cos^2 \left( \frac{2\pi}{2} \right)}{4A^2 \cos^2 \left( \frac{\pi}{3} \right)} \implies I_r = \frac{K}{4} \quad (1.20)$$

Hence, the Intensity of light at a point where path difference is  $\frac{\lambda}{3}$  is  $\frac{K}{4}$  units.

Parameter	Description	Value
$I_r$	Net Intensity of light at $\Delta x = \frac{\lambda}{3}$	$\frac{K}{4}$

Table 1.1.6:

Assuming  $\Delta x = r\lambda$ ,

From equation (1.19):

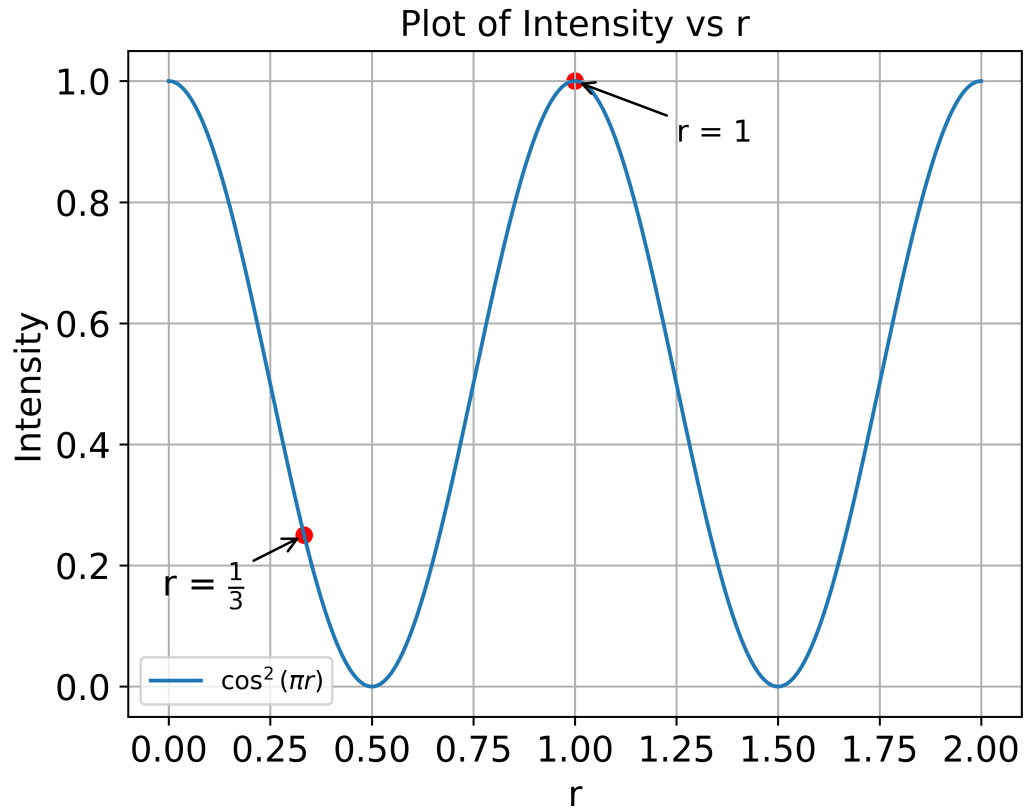


Figure 1.1.6:

## 1.2. Filters

1.2.1 Obtain the resonant frequency and Q-factor of a series LCR circuit with  $L = 3.0 H$ ,  $C = 27 \mu F$ , and  $R = 7.4 \Omega$ . It is desired to improve the sharpness of the resonance of the circuit by reducing its ‘full width at half maximum’ by a factor of 2. Suggest a

suitable way.

**Solution:** Given parameters are:

Symbol	Value	Description
$L$	3.0 H	Inductance
$C$	27 $\mu\text{F}$	Capacitance
R	7.4 $\Omega$	Resistance
Q		Quality Factor: ratio of voltage across inductor or capacitor to that across the resistor at resonance
$\omega_0$	$\frac{1}{\sqrt{LC}}$	Angular Resonant Frequency

Table 1.11: Given Parameters



Figure 1.12: LCR Circuit

(a) Frequency Response of the Circuit

From Kirchhoff's Voltage Law (KVL):

$$V(t) = V_R + V_L + V_C \quad (1.21)$$



Using reactances from Fig. 1.13,

$$V(s) = RI(s) + sLI(s) + \frac{1}{sC}I(s) \quad (1.22)$$

$$= I(s) \left( R + Ls + \frac{1}{sC} \right) \quad (1.23)$$

$$\Rightarrow I(s) = \frac{V(s)}{\left( R + Ls + \frac{1}{sC} \right)} \quad (1.24)$$

At resonance, the circuit becomes purely resistive. The reactances of capacitor

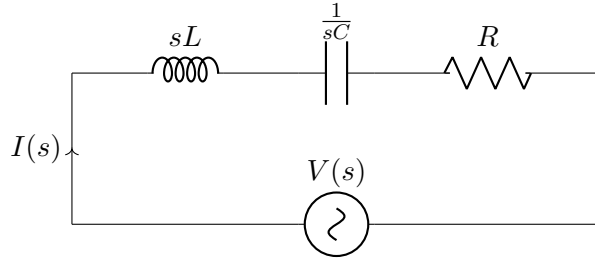


Figure 1.13: LCR Circuit

and inductor cancel out as follows:

$$Ls + \frac{1}{sC} = 0 \quad (1.25)$$

$$\Rightarrow s = j \frac{1}{\sqrt{LC}} \quad (1.26)$$

$s$  can be expressed in terms of angular resonance frequency as

$$s = j\omega_0 \quad (1.27)$$

Comparing (1.26) and (1.27), we get

$$\omega_0 = \frac{1}{\sqrt{LC}} \quad (1.28)$$

(b) Quality Factor

i. Using voltage across inductor,

$$Q = \left( \frac{V_L}{V_R} \right)_{\omega_0} = \frac{|sLI(s)|}{|RI(s)|} \quad (1.29)$$

$$= \frac{1}{\sqrt{LC}} \frac{L}{R} \quad (1.30)$$

$$= \frac{1}{R} \sqrt{\frac{L}{C}} \quad (1.31)$$

ii. Using voltage across capacitor,

$$Q = \left( \frac{V_C}{V_R} \right)_{\omega_0} = \frac{\left| \frac{I(s)}{sC} \right|}{|RI(s)|} \quad (1.32)$$

$$= \frac{\sqrt{LC}}{RC} \quad (1.33)$$

$$= \frac{1}{R} \sqrt{\frac{L}{C}} \quad (1.34)$$

(c) Plot of Impedance vs Angular Frequency

Impedance is defined as

$$H(s) = \frac{V(s)}{I(s)} \quad (1.35)$$

Using (1.24),

$$H(s) = R + sL + \frac{1}{sC} \quad (1.36)$$

$$\Rightarrow H(j\omega) = R + j\omega L + \frac{1}{j\omega C} \quad (1.37)$$

$$\Rightarrow |H(j\omega)| = \sqrt{R^2 + \left( \omega L - \frac{1}{\omega C} \right)^2} \quad (1.38)$$



Figure 1.14: Impedance vs  $\omega$  (using values in Table 1.11)



## Chapter 2

## Discrete

### 2.1. Z-transform

2.1.1 Show that

$$\frac{1 \times 2^2 + 2 \times 3^2 + \cdots + n \times (n+1)^2}{1^2 \times 2 + 2^2 \times 3 + \cdots + n^2 \times (n+1)} = \frac{3n+5}{3n+1}$$

**Solution:**

Parameter	Description	Value
$n$	Integer	.... -2,-1,0,1, 2, ...
$x_1(n)$	General term of Numerator	$(n^3 + 5n^2 + 8n + 4) \cdot u(n)$
$x_2(n)$	General Term of Denominator	$(n^3 + 4n^2 + 5n + 2) \cdot u(n)$
$y_1(n)$	Sum of terms of numerator	?
$y_2(n)$	Sum of terms of denominator	?
$U(z)$	z-transform of $u(n)$	$\frac{1}{1-z^{-1}}, \{z \in \mathbb{C} :  z  > 1\}$
ROC	Region of convergence	$\{z :  \sum_{n=-\infty}^{\infty} x(n)z^{-n}  < \infty\}$

Table 1: Parameter Table

#### 1. Analysis of Numerator:

$$X_1(z) = \sum_{n=-\infty}^{\infty} x_1(n) z^{-n} \quad (2.1)$$

$$= \sum_{n=-\infty}^{\infty} (n^3 + 5n^2 + 8n + 4) u(n) z^{-n} \quad (2.2)$$

Using results of equations (B.3.2) to (B.3.5) we get:

$$\therefore X_1(z) = \frac{4 + 2z^{-1}}{(1 - z^{-1})^4}, |z| > 1 \quad (2.3)$$

From (A.3.2)

$$y_1(n) = x_1(n) * u(n) \quad (2.4)$$

$$Y_1(z) = X_1(z) U(z) \quad (2.5)$$

$$= \frac{4 + 2z^{-1}}{(1 - z^{-1})^5}, |z| > 1 \quad (2.6)$$

Using partial fractions:

$$\begin{aligned} Y_1(z) &= \frac{22z^{-1}}{(1 - z^{-1})} + \frac{48z^{-2}}{(1 - z^{-1})^2} + \frac{52z^{-3}}{(1 - z^{-1})^3}, \\ &+ \frac{28z^{-4}}{(1 - z^{-1})^4} + \frac{6z^{-5}}{(1 - z^{-1})^5} + 4, |z| > 1 \end{aligned} \quad (2.7)$$

Substituting results of equation (B.4.6) to (B.4.9) in equation (2.7):

$$y_1(n) = \frac{3n^4 + 26n^3 + 81n^2 + 106n + 48}{12} u(n) \quad (2.8)$$

$$= \frac{(3n + 8)(n + 1)(n + 2)(n + 3)}{12} u(n) \quad (2.9)$$

## 2. Analysis of Denominator:

$$X_2(z) = \sum_{n=-\infty}^{\infty} x_2(n) z^{-n} \quad (2.10)$$

$$= \sum_{n=-\infty}^{\infty} (n^3 + 4n^2 + 5n + 2) u(n) z^{-n} \quad (2.11)$$

Using results of equation (B.3.2) to (B.3.5) we get:

$$\therefore X_2(z) = \frac{2 + 4z^{-1}}{(1 - z^{-1})^4}, |z| > 1 \quad (2.12)$$

From (A.3.2)

$$y_2(n) = x_2(n) * u(n) \quad (2.13)$$

$$Y_2(z) = X_2(z) U(z) \quad (2.14)$$

$$= \frac{2 + 4z^{-1}}{(1 - z^{-1})^5}, |z| > 1 \quad (2.15)$$

Using partial fractions:

$$\begin{aligned} Y_2(z) &= \frac{14z^{-1}}{(1 - z^{-1})} + \frac{36z^{-2}}{(1 - z^{-1})^2} + \frac{44z^{-3}}{(1 - z^{-1})^3} \\ &\quad + \frac{26z^{-4}}{(1 - z^{-1})^4} + \frac{6z^{-5}}{(1 - z^{-1})^5} + 2, |z| > 1 \end{aligned} \quad (2.16)$$

Substituting results of equation (B.4.6) to (B.4.9) in equation (2.16):

$$y_2(n) = \frac{3n^4 + 22n^3 + 57n^2 + 62n + 24}{12} u(n) \quad (2.17)$$

$$= \frac{(3n + 4)(n + 1)(n + 2)(n + 3)}{12} u(n) \quad (2.18)$$

As the sequence start from  $n = 0$  , in RHS of question  $n$  should be replaced by  $n + 1$ :

$$\frac{y_1(n)}{y_2(n)} = \frac{3n + 8}{3n + 4} \quad (2.19)$$

Hence Prooved.



Figure 2.1: Stem Plot of  $x_1(n)$





Figure 2.2: Stem Plot of  $x_2(n)$



Figure 2.3: Stem Plot of  $y_1(n)$



Figure 2.4: Stem Plot of  $y_2(n)$

2.1.2 Write the five terms at  $n = 1, 2, 3, 4, 5$  of the sequence and obtain the Z-transform of the series

$$x(n) = -1, \quad n = 0 \quad (2.20)$$

$$= \frac{x(n-1)}{n}, \quad n > 0 \quad (2.21)$$

$$= 0, \quad n < 0 \quad (2.22)$$

**Solution:**

$$x(1) = \frac{x(0)}{1} = -1 \quad (2.23)$$

$$x(2) = \frac{x(1)}{2} = -\frac{1}{2} \quad (2.24)$$

$$x(3) = \frac{x(2)}{3} = -\frac{1}{(2)(3)} = -\frac{1}{6} \quad (2.25)$$

$$x(4) = \frac{x(3)}{4} = -\frac{1}{(2)(3)(4)} = -\frac{1}{24} \quad (2.26)$$

$$x(5) = \frac{x(4)}{5} = -\frac{1}{(2)(3)(4)(5)} = -\frac{1}{120} \quad (2.27)$$

$$x(n) = \frac{-1}{n!} (u(n)) \quad (2.28)$$

$$x(n) \xleftrightarrow{\mathcal{Z}} X(z) \quad (2.29)$$

$$X(z) = \sum_{n=-\infty}^{\infty} x(n) z^{-n} \quad (2.30)$$

using (2.28),

$$= \sum_{n=-\infty}^{\infty} \frac{-1}{n!} u(n) z^{-n} \quad (2.31)$$

$$= \sum_{n=0}^{\infty} \frac{-1}{n!} z^{-n} \quad (2.32)$$

$$= -e^{z^{-1}} \quad \{z \in \mathbb{C} : z \neq 0\} \quad (2.33)$$

Symbol	Value	Description
$x(n)$	$\frac{-1}{n!}$	general term of the series
$X(z)$	$-e^{z^{-1}}$	Z-transform of x(n)
$u(n)$		unit step function

Table 2.2: Parameters



Figure 2.5: Plot of  $x(n)$  vs  $n$

2.1.3 Subba Rao started work in 1995 at an annual salary of Rs. 5000 and received an increment of Rs. 200 each year. In which year did his income reach Rs. 7000?

**Solution:**

Parameter	Value	Description
$x(0)$	5000	Initial Income
$d$	200	Annual Increment (Common Difference)
$x(n)$	$(x(0) + nd)u(n)$	$n^{th}$ term of the AP

Table 2.3: Input Parameters

From the values given in Table 2.3:

$$7000 = 5000 + 200n \quad (2.34)$$

$$\Rightarrow 2000 = 200n \quad (2.35)$$

$$\therefore n = 10 \quad (2.36)$$

Let Z-transform of  $x(n)$  be  $X(z)$ .

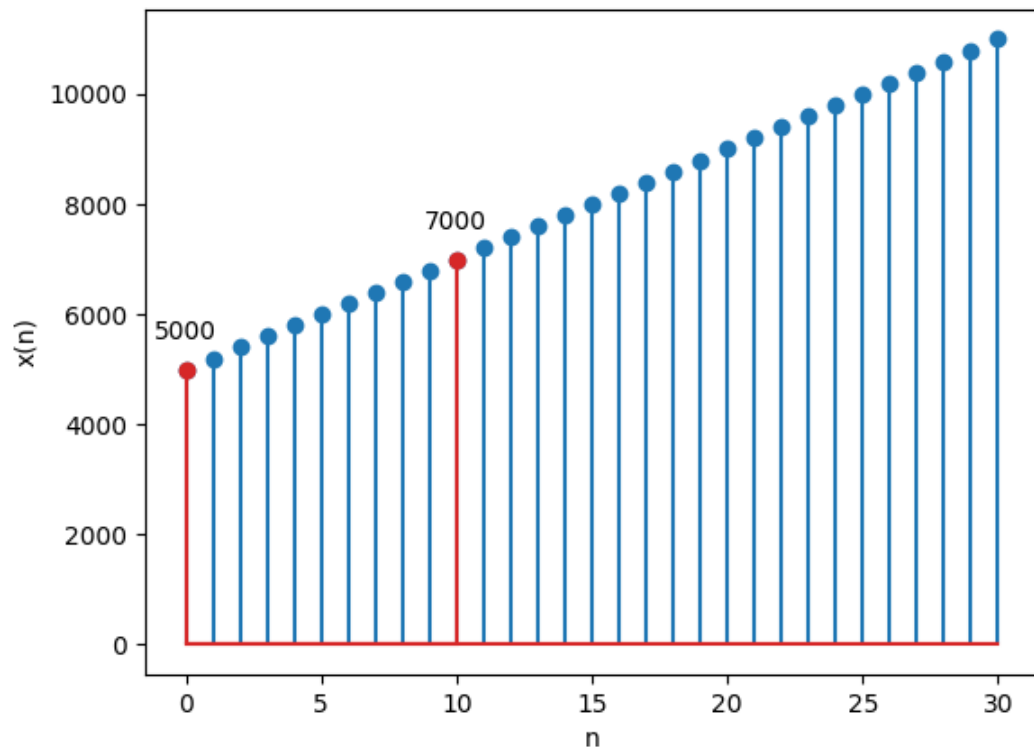


Figure 2.6: Plot of  $x(n)$  vs  $n$ . See Table 2.3 for details.

$$X(z) = \frac{x(0)}{1 - z^{-1}} + \frac{dz^{-1}}{(1 - z^{-1})^2} \quad |z| > 1 \quad (2.37)$$

Using the values from Table 2.3:

$$X(z) = \frac{5000}{1 - z^{-1}} + \frac{200z^{-1}}{(1 - z^{-1})^2} \quad |z| > 1 \quad (2.38)$$

## 2.2. Sequences

2.2.1 Find the number of terms in each of the following APs.

(a) 7, 13, 19, ... 205

(b) 18,  $15\frac{1}{2}$ , 13, ... -47

**Solution:** The number of terms in the AP  $x(n)$  is given by:

Parameter	Used to denote	Values
$x_i(n)$	$n^{th}$ term of $i^{th}$ series ( $i = (1, 2)$ )	$(x_i(0) + nd_i) u(n)$
$x_i(0)$	First term of $i^{th}$ AP	$x_1(0) = 7$ $x_2(0) = 18$
$d_i$	Common difference of $i^{th}$ AP	$d_1 = 6$ $d_2 = -2.5$

Table 2.4: Parameter Table

$$\frac{x(n) - x(0)}{d} + 1 \quad (2.39)$$

$$X_i(z) = \frac{x_i(0)}{1 - z^{-1}} + d_i \frac{z^{-1}}{(1 - z^{-1})^2}, \text{ for } i=1,2 \quad (2.40)$$

$$\text{ROC} : |z| > 1 \text{ as it is an AP} \quad (2.41)$$

(a)

$$x_1(n) = (7 + (n)6)u(n) \quad (2.42)$$

Using the values in Table 2.4 and equation (2.39),

$$k_1 = \frac{205 - 7}{6} + 1 = 34 \quad (2.43)$$

Using the values in Table 2.4 and equation (2.40) :

$$X_1(z) = \frac{7 - z^{-1}}{(1 - z^{-1})^2} \quad (2.44)$$

ROC is  $|z| > 1$

(b)

$$x_2(n) = (18 + n(-2.5))u(n) \quad (2.45)$$

Using the values in Table 2.4 and equation (2.39),

$$k_2 = \frac{-47 - 18}{-2.5} + 1 = 27 \quad (2.46)$$



Using the values in Table 2.4 and equation (2.40) :

$$X_2(z) = \frac{18 - (20.5)z^{-1}}{(1 - z^{-1})^2} \quad (2.47)$$

ROC is  $|z| > 1$ .

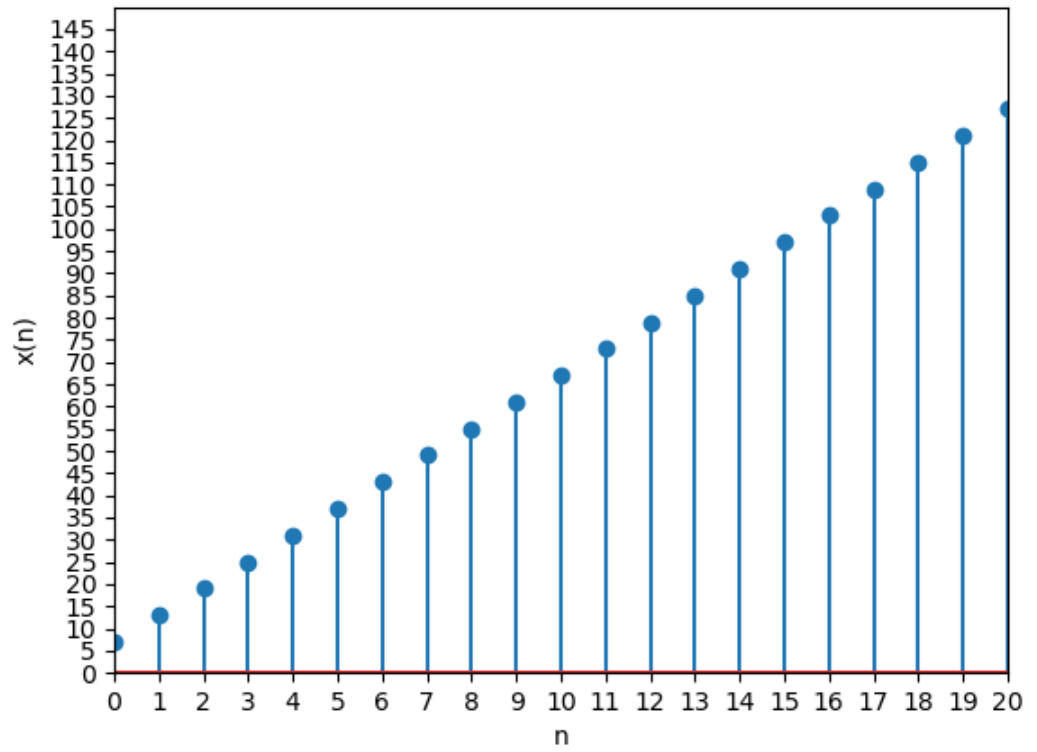


Figure 2.7: Plot of  $x_1(n)$

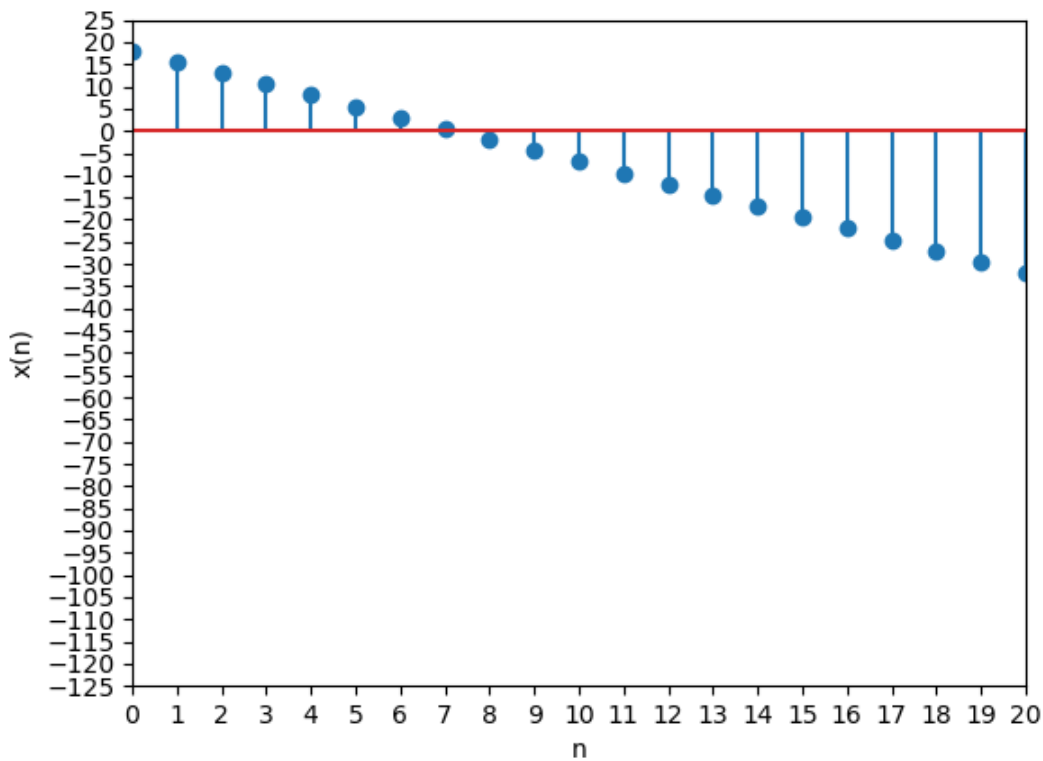


Figure 2.8: Plot of  $x_2(n)$

2.2.2 For what value of  $n$ , are the  $n$ th terms of two A.Ps: 63, 65, 67, ... and 3, 10, 17, ... equal?

**Solution:**

$$x_i(n) = x(0)u(n) + dnu(n) \quad (2.48)$$

$$X(z) = \frac{x(0)}{1 - z^{-1}} + \frac{dz^{-1}}{(1 - z^{-1})^2} \quad |z| > 1 \quad (2.49)$$

Parameter	Sub-question	Description	Value
$x_i(0)$	$x_1(0)$	1 <sup>st</sup> term of 1 <sup>st</sup> A.P.	63
	$x_2(0)$	1 <sup>st</sup> term of 2 <sup>nd</sup> A.P.	3
$d_i$	$d_1$	Common difference of 1 <sup>st</sup> A.P.	2
	$d_2$	Common difference of 2 <sup>nd</sup> A.P.	7

Table 2.5: input values

(a)

$$x_1(n) = 63u(n) + 2nu(n) \quad (2.50)$$

$$X_1(z) = \frac{63}{1-z^{-1}} + \frac{2z^{-1}}{(1-z^{-1})^2} \quad |z| > 1 \quad (2.51)$$

(b)

$$x_2(n) = 3u(n) + 7nu(n) \quad (2.52)$$

$$X_2(z) = \frac{3}{1-z^{-1}} + \frac{7z^{-1}}{(1-z^{-1})^2} \quad |z| > 1 \quad (2.53)$$

(c) given,

$$x_1(n) = x_2(n) \quad (2.54)$$

$$\therefore 63 + 2n = 7n + 3 \quad (2.55)$$

$$\implies n = 12 \quad (2.56)$$

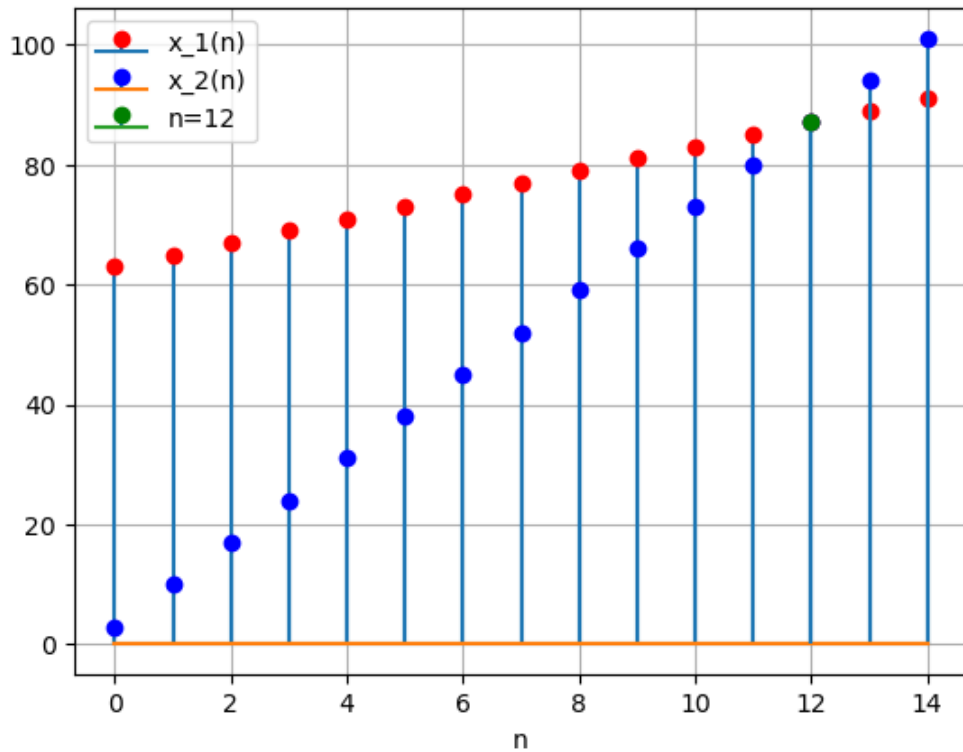


Figure 2.9: Graphs of  $x_1(n)$  and  $x_2(n)$  and both are equal at  $n = 12$

2.2.3 Two APs have the same common difference. The difference between their 100th terms is 100, what is the difference between their 1000th terms?

**Solution:**

$$x(n) = \{x(0) + nd\}u(n) \quad (2.57)$$

$$x(99) - y(99) = 100 \quad (2.58)$$

$$\implies (x(0) + 99d) - (y(0) + 99d) = 100 \quad (2.59)$$

$$\implies x(0) - y(0) = 100 \quad (2.60)$$

$$x(n) - y(n) = (x(0) + nd) - (y(0) + nd) \quad (2.61)$$

$$= x(0) - y(0) \quad (2.62)$$

$$= 100 \quad (2.63)$$

$$\implies x(999) - y(999) = 100 \quad (2.64)$$

Variable	Description	Value
$x(n)$	$n^{th}$ term of X	none
$y(n)$	$n^{th}$ term of Y	none
$d$	common difference between the terms of AP	none
$x(99) - y(99)$	difference of $99^{th}$ terms of X and Y	100

Table 2.6: input parameters

Let

$$x(n) = \{101, 106, 111, \dots\} \quad (2.65)$$

$$y(n) = \{1, 6, 11, \dots\} \quad (2.66)$$

2.2.4 Check whether -150 is a term of the AP: 11,8,5,2,....

**Solution:**

$$x(n) = x(0) + nd \quad (2.67)$$

$$n = \frac{x(n) - x(0)}{d} \quad (2.68)$$



Figure 2.10:

$$x(n) - x(0) \equiv 0 \pmod{d} \quad (2.69)$$

On substituting values

$$-161 \equiv 2 \pmod{-3} \quad (2.70)$$

Thus -150 is not a term of the given AP.

$$\boxed{x(n) = (11 - 3n) \times u(n)} \quad (2.71)$$

$$X(z) = \frac{11}{1 - z^{-1}} - \frac{3z^{-1}}{(1 - z^{-1})^2} \quad |z| > 1 \quad (2.72)$$

Variable	Description	Value
$x(0)$	First term of AP	11
$d$	Common difference	-3
$x(n)$	General term of given AP	None

Table 2.7: Input parameters

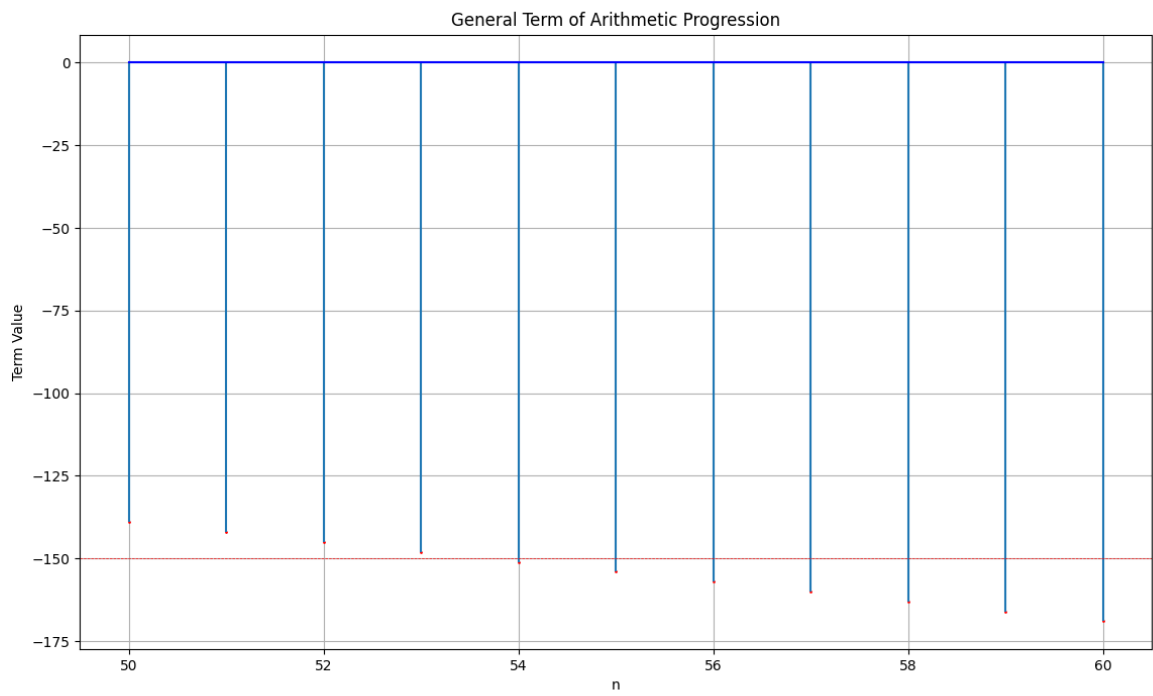


Figure 2.11: Representation of  $x(n)$



2.2.5 Write the first five terms of the sequence  $a_n = \frac{n(n^2+5)}{4}$ .

**Solution:**

$$x(n) = \left( \frac{n^3 + 3n^2 + 8n + 6}{4} \right) u(n) \quad (2.73)$$

$$n^k u(n) \xleftrightarrow{\mathcal{Z}} (-1)^k z^k \frac{d^k}{dz^k} U(z) \quad (2.74)$$

$$nu(n) \xleftrightarrow{\mathcal{Z}} \frac{z^{-1}}{(1 - z^{-1})^2} \quad |z| > 1 \quad (2.75)$$

$$n^2 u(n) \xleftrightarrow{\mathcal{Z}} \frac{(z^{-1})(1 + z^{-1})}{(1 - z^{-1})^3} \quad |z| > 1 \quad (2.76)$$

$$n^3 u(n) \xleftrightarrow{\mathcal{Z}} \frac{(z^{-1})(1 + 4z^{-1} + z^{-2})}{(1 - z^{-1})^4} \quad |z| > 1 \quad (2.77)$$

Referencing the equations from (2.75), (2.76), and (2.77).

$$x(n) \xleftrightarrow{\mathcal{Z}} \frac{(z^{-1})(1 + 4z^{-1} + z^{-2})}{4(1 - z^{-1})^4} + \frac{3(z^{-1})(1 + z^{-1})}{4(1 - z^{-1})^3} + \frac{2z^{-1}}{(1 - z^{-1})^2} + \frac{3}{2(1 - z^{-1})} \quad |z| > 1 \quad (2.78)$$

$$x(n) \xleftrightarrow{\mathcal{Z}} \frac{3}{2(1 - z^{-1})^3} + \frac{3z^{-2}}{2(1 - z^{-1})^4} \quad |z| > 1 \quad (2.79)$$

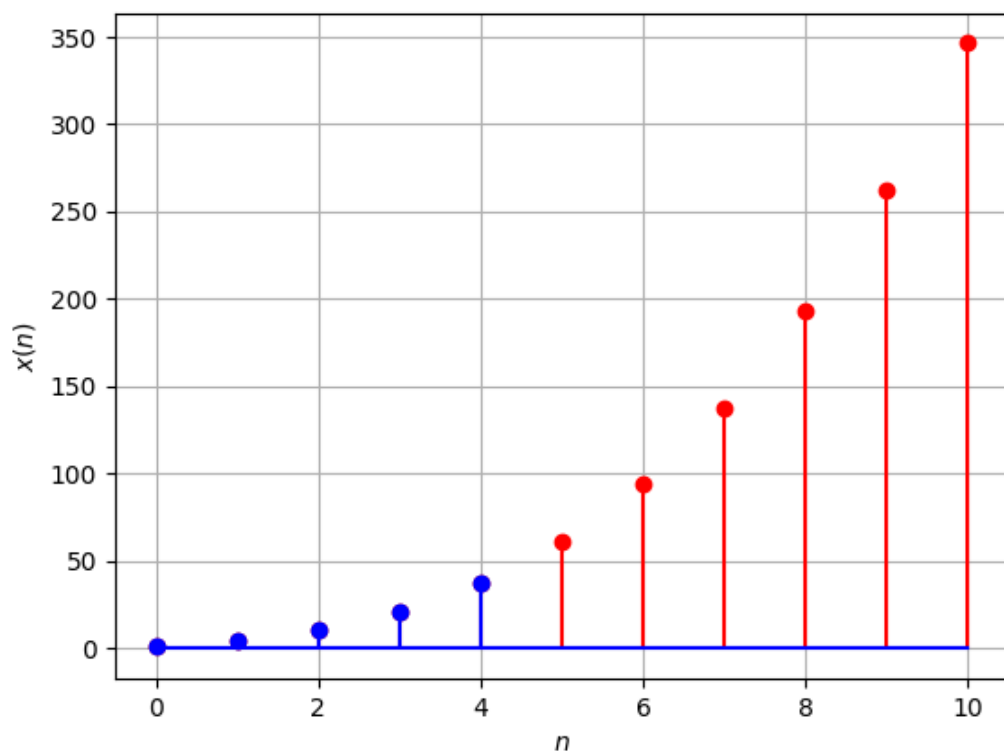


Figure 2.12: Plot of equation(2.73)

2.2.6 (a) 30th term of the AP: 10, 7, 4, ... is

(b) 11th term of the AP:  $-3, -\frac{1}{2}, 2, \dots$  is

**Solution:**

$$x_i(n) = [x_i(0) + nd_i] u(n) \quad (2.80)$$

Parameter	value	Description
$x_i(0)$	10	First term
	-3	
$d_i$	-3	Common difference
	$\frac{5}{2}$	
$x_1(29)$	?	30th term
$x_2(10)$	?	11th term

Table 2.8: Input Parameters

(a) From (2.80) Table 2.8 :

$$x_1(n) = [10 - 3n] u(n) \tag{2.81}$$

$$x_1(29) = -77 \tag{2.82}$$

$$X_1(z) = \frac{10 - 13z^{-1}}{(1 - z^{-1})^2} \quad |z| > 1 \tag{2.83}$$

(b) From (2.80) and Table 2.8 :

$$x_2(n) = \left[-3 + \frac{5}{2}n\right] u(n) \tag{2.84}$$

$$x_2(10) = 432 \tag{2.85}$$

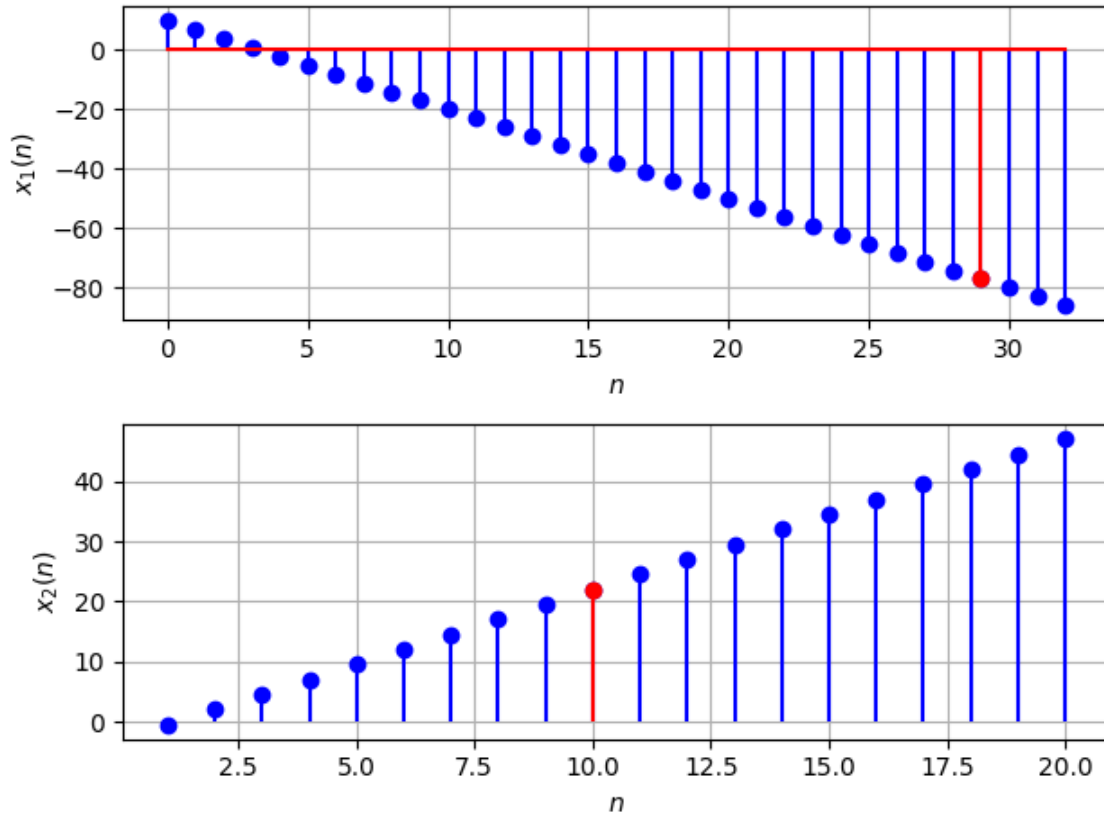


Figure 2.13: stem plots of  $x_1(n)$  and  $x_2(n)$

2.2.7 Write the first five terms of the sequence whose  $n$ th term is  $\frac{2n-3}{6}$  and obtain the Z transform of the series **Solution:**

$$x(n) = \frac{2n-1}{6} (u(n)) \quad (2.87)$$

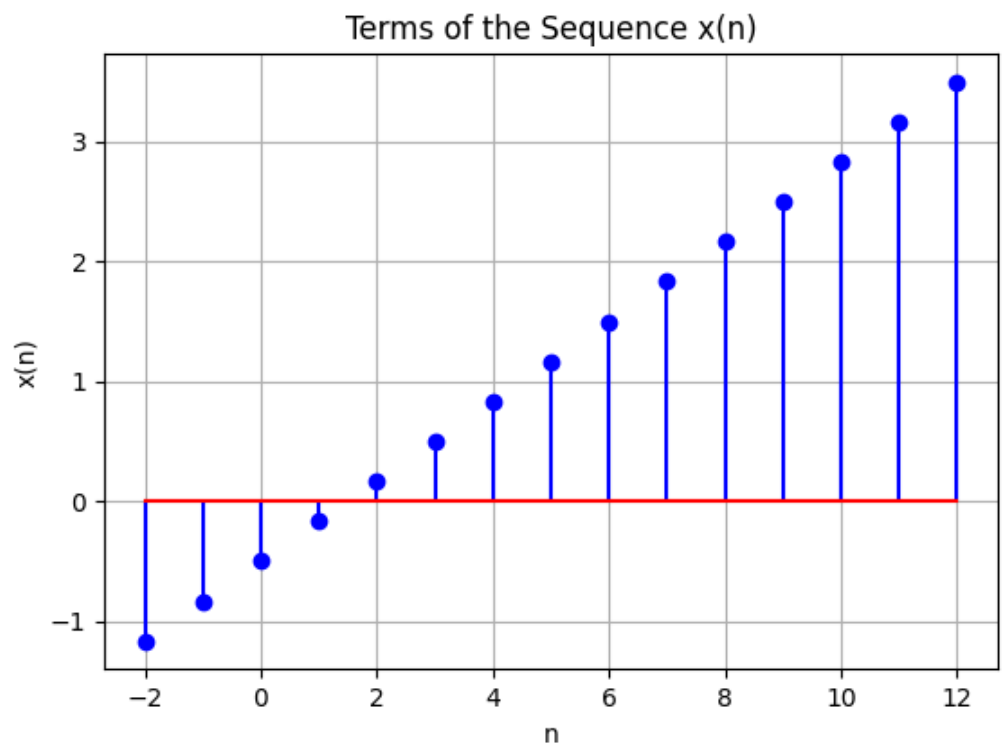


Figure 2.14: Plot of  $x(n)$  vs  $n$

$$X(z) = \frac{3z^{-1} - 1}{6(1 - z^{-1})^2} \quad |z| > 1 \quad (2.88)$$

2.2.8 For what values of  $x$ , the numbers  $-\frac{2}{7}, x, -\frac{7}{2}$  are in G.P ?

**Solution:** Let  $r$  be the common ratio

Variable	Description	Value
$x(0)$	First term of the GP	$-\left(\frac{2}{7}\right)$
$x(1)$	Second term of the GP	$x$
$x(2)$	Third term of the GP	$-\left(\frac{7}{2}\right)$
$r$	Common ratio of the GP	
$x(n)$	General term	$x(0) r^n u(n)$

Table 2.9: Variables Used

From Table 2.9:

$$\Rightarrow \frac{x}{\left(-\frac{2}{7}\right)} = \frac{\left(-\frac{7}{2}\right)}{x} = r \quad (2.89)$$

$$x^2 = \left(-\frac{2}{7}\right) \cdot \left(-\frac{7}{2}\right) \quad (2.90)$$

$$x = \pm 1 \quad (2.91)$$

$$\Rightarrow r = \pm \frac{7}{2} \quad (2.92)$$

The signal corresponding to this is

$$x(n) = \left(-\frac{2}{7}\right) \left(\pm \frac{7}{2}\right)^n u(n) \quad (2.93)$$

Applying z-Transform :

$$\Rightarrow X_1(z) = \left(\frac{1}{7}\right) \left(\frac{4}{7z^{-1} + 2}\right) \quad |z| > \frac{7}{2} \quad (2.94)$$

$$\Rightarrow X_2(z) = \left(\frac{1}{7}\right) \left(\frac{4}{7z^{-1} - 2}\right) \quad |z| > \frac{7}{2} \quad (2.95)$$

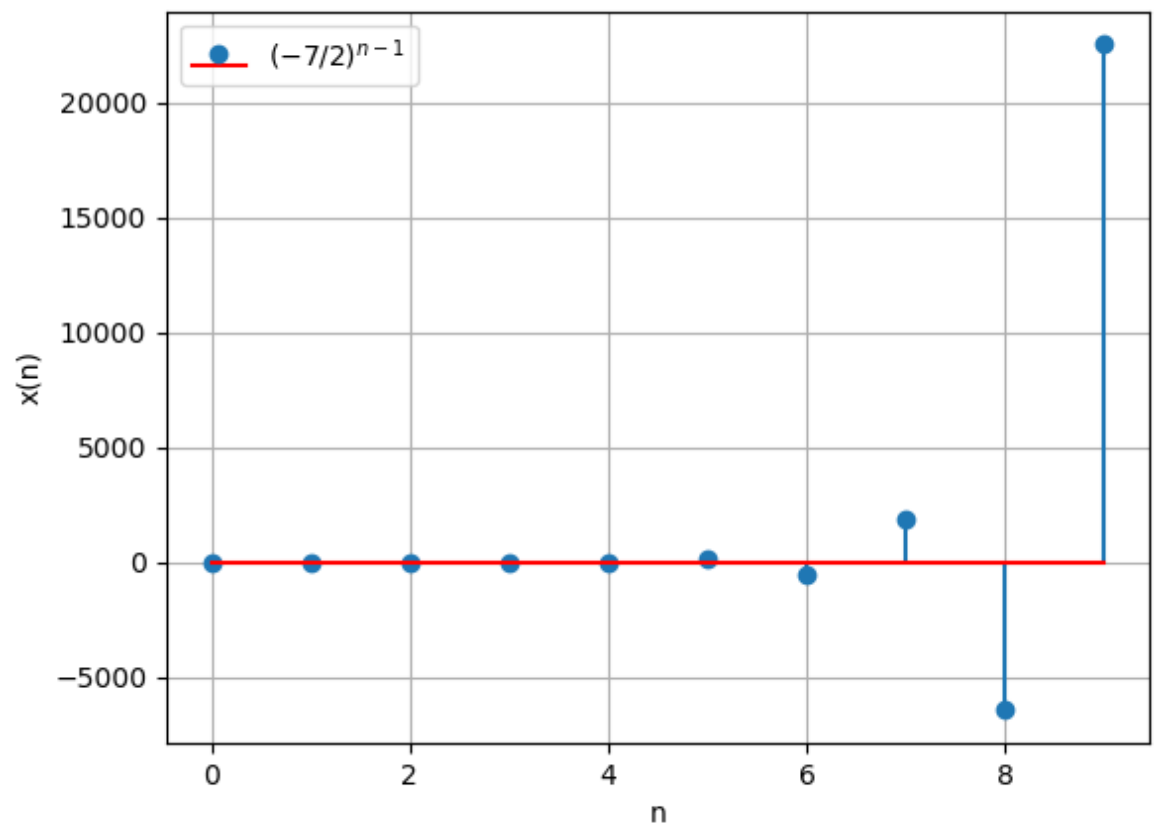


Figure 2.15: Stem Plot of  $x_1(n)$

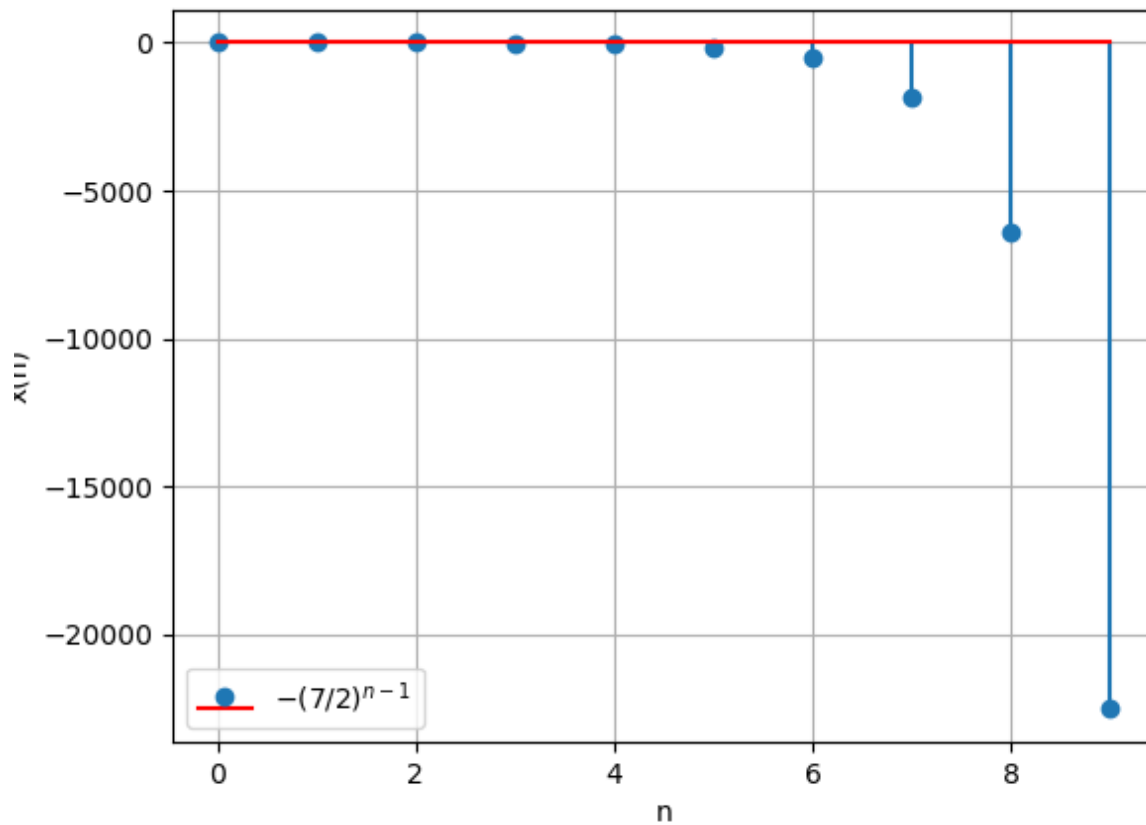


Figure 2.16: Stem Plot of  $x_2(n)$

2.2.9 Find the 20<sup>th</sup> and  $n^{\text{th}}$  terms of the G.P  $\frac{5}{2}, \frac{5}{4}, \frac{5}{8}, \dots$

**Solution:**

From Table 2.10: Z-Transform of  $x(n)$ :

$$\Rightarrow X(z) = \frac{5}{2} \left( \frac{1}{1 - \frac{z^{-1}}{2}} \right); \left\{ z \in \mathbb{C} : |z| > \frac{1}{2} \right\} \quad (2.96)$$



Parameter	Description	Value
$x(0)$	First Term	$\frac{5}{2}$
$r = \frac{x(1)}{x(0)}$	Common Ratio	$\frac{1}{2}$
$x(n)$	$n^{th}$ Term	$\frac{5}{2} \left(\frac{1}{2}\right)^n \cdot u(n)$
$x(19)$	$20^{th}$ Term	$\frac{5}{2} \left(\frac{1}{2}\right)^{19}$
$u(n)$	Unit step function	

Table 2.10: Parameters

2.2.10 Which term of the following sequences:

(a)  $2, 2\sqrt{2}, 4, \dots$  is 128      (b)  $\sqrt{3}, 3, 3\sqrt{3}, \dots$  is 729

(c)  $\frac{1}{3}, \frac{1}{9}, \frac{1}{27}, \dots$  is  $\frac{1}{19683}$

**Solution:** For a general GP series and  $k > 0$ ,

$$x(k) = x(0) r^k \quad (2.97)$$

$$\therefore k = \log_r \frac{x(k)}{x(0)} \quad (2.98)$$

And the Z-transform  $X(z)$ :

$$X(z) = \frac{x(0)}{1 - rz^{-1}} \quad |z| > |r| \quad (2.99)$$

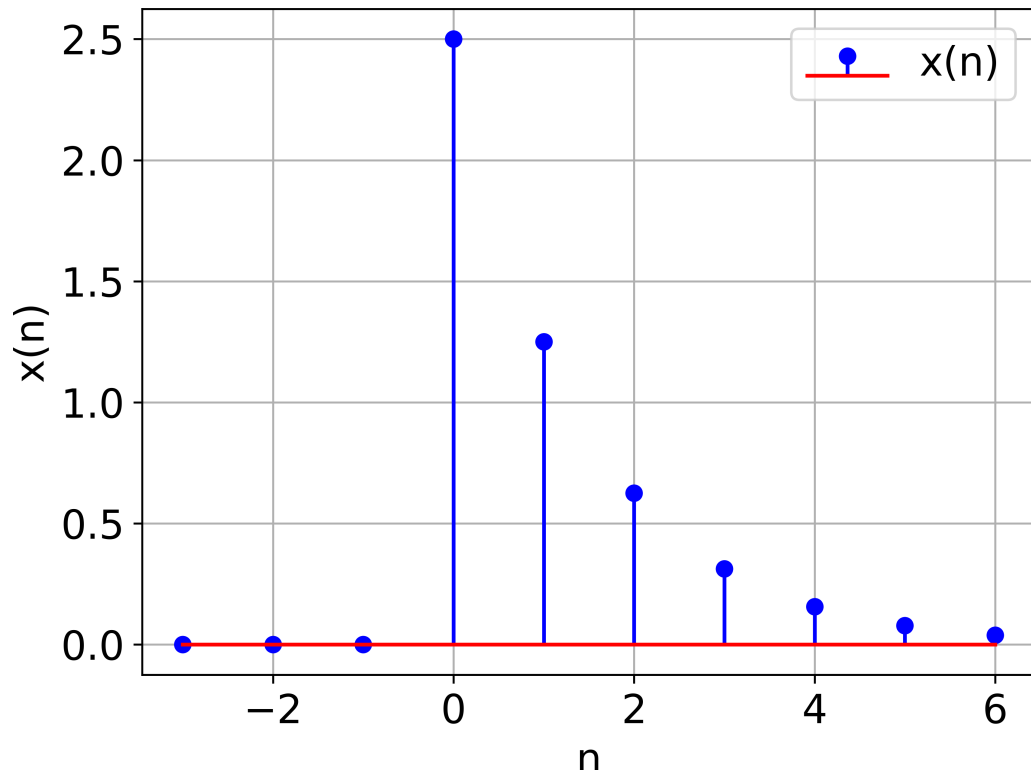


Figure 2.17:

(a) By Table 2.11, (2.98) and Table 2.11:

$$x_1(n) = x_1(0) r_1^n u(n) \quad (2.100)$$

$$k_1 = \log_{r_1} \frac{128}{x_1(0)} \quad (2.101)$$

$$\therefore k_1 = 12 \quad (2.102)$$

$$X_1(z) = \frac{2}{1 - \sqrt{2}z^{-1}} \quad |z| > \sqrt{2} \quad (2.103)$$

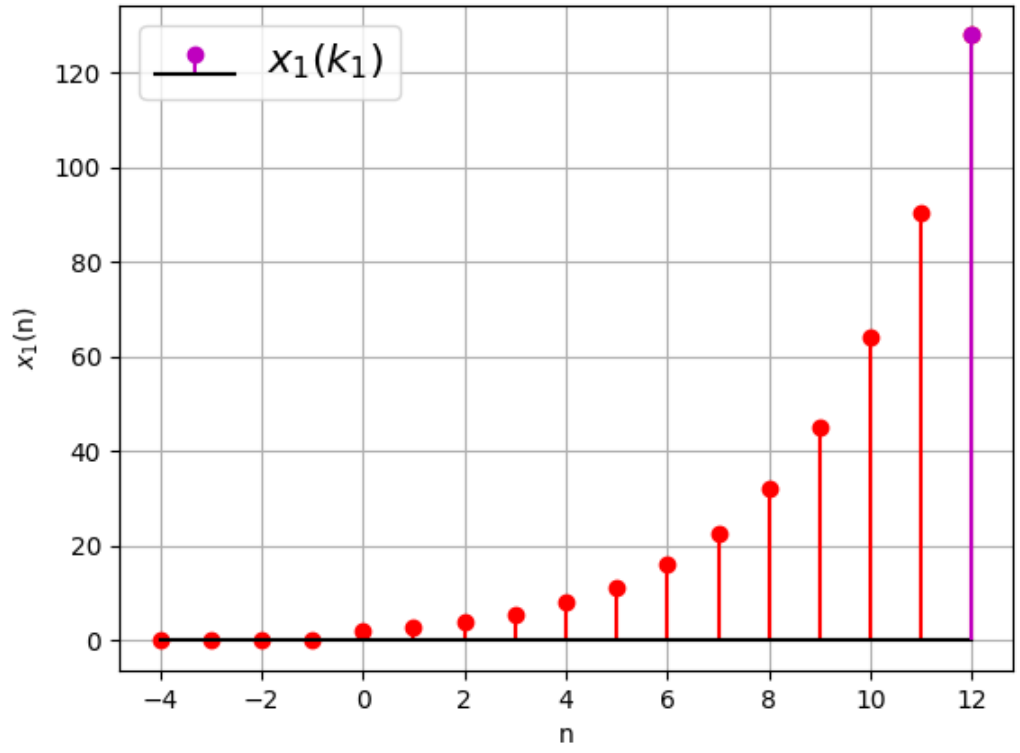


Figure 1: Plot of  $x_1(n)$  vs  $n$ . See Table 2.11

(b) By (2.98), (2.99) and Table 2.11:

$$x_2(n) = x_2(0) r_2^n u(n) \quad (2.104)$$

$$k_2 = \log_{r_2} \frac{729}{x_2(0)} \quad (2.105)$$

$$\therefore k_2 = 11 \quad (2.106)$$

$$X_2(z) = \frac{\sqrt{3}}{1 - \sqrt{3}z^{-1}} \quad |z| > \sqrt{3} \quad (2.107)$$

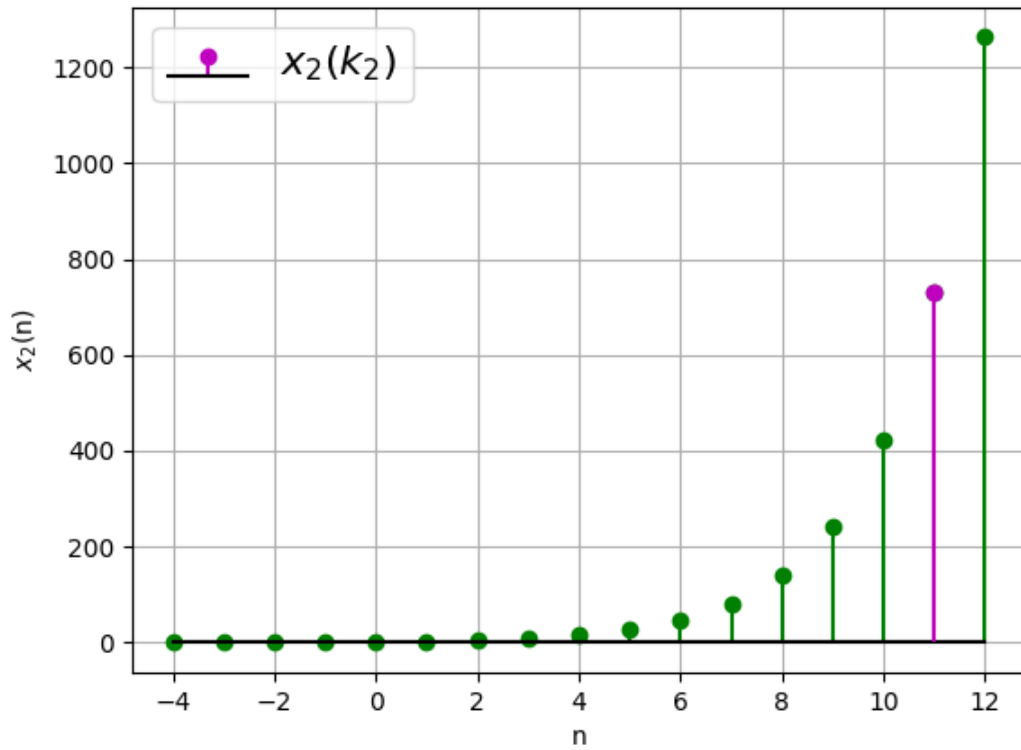


Figure 2: Plot of  $x_2(n)$  vs  $n$ . See Table 2.11

(c) By (2.98), (2.99) and Table 2.11:

$$x_3(n) = x_3(0) r_3^n u(n) \quad (2.108)$$

$$k_3 = \log_{r_3} \frac{1}{19683x_3(0)} \quad (2.109)$$

$$\therefore k_3 = 8 \quad (2.110)$$

$$X_3(z) = \frac{1}{3 - z^{-1}} \quad |z| > \frac{1}{3} \quad (2.111)$$

Find the 20<sup>th</sup> and  $n^{\text{th}}$  terms of the G.P  $\frac{5}{2}, \frac{5}{4}, \frac{5}{8}, \dots$

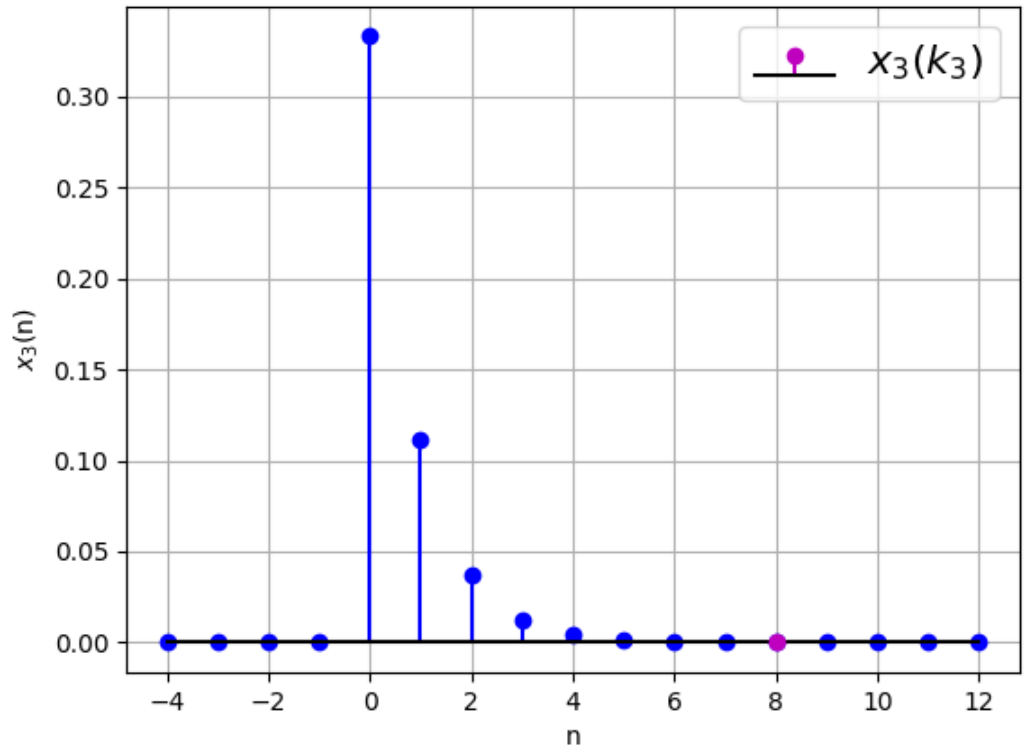


Figure 3: Plot of  $x_3(n)$  vs  $n$ . See Table 2.11

Parameter	Description	Value
$r_i$	Common ratio of G.P (a),(b),(c)	$\sqrt{2}, \sqrt{3}, \frac{1}{3}$
$x_i(0)$	Initial Values	$2, \sqrt{3}, \frac{1}{3}$
$x_i(k_i)$	Given Values	$128, 729, \frac{1}{19683}$
$k_i$	Desired index	12, 11, 8
$x_i(n)$	Series	$x_i(0) r_i^n u(n)$
$X_i(z)$	Z-Transform of $x_i(n)$	$\frac{x_i(0)}{1-rz^{-1}}$

Table 2.11: Table of parameters

2.2.11 The number of bacteria in a certain culture doubles every hour. If there were 30 bacteria present in the culture originally, how many bacteria will be present at the end of  $2^{nd}$  hour,  $4^{th}$  hour and  $n^{th}$  hour?

**Solution:** From Table 2.12:

Parameter	Value	Description
$x(0)$	30	Initial no. of bacteria
$r$	2	Ratio of no. of bacteria at end of hour to start of hour (Common Ratio)
$x(n)$	$r^n x(0)u(n)$	$n^{th}$ term of the GP

Table 2.12: Input Parameters

$$x(2) = 120 \quad (2.112)$$

$$x(4) = 480 \quad (2.113)$$

$$x(n) = 30(2^n)u(n) \quad (2.114)$$

$$X(z) = \frac{30z^{-1}}{1 - 2z^{-1}} \quad |z| > 2 \quad (2.115)$$

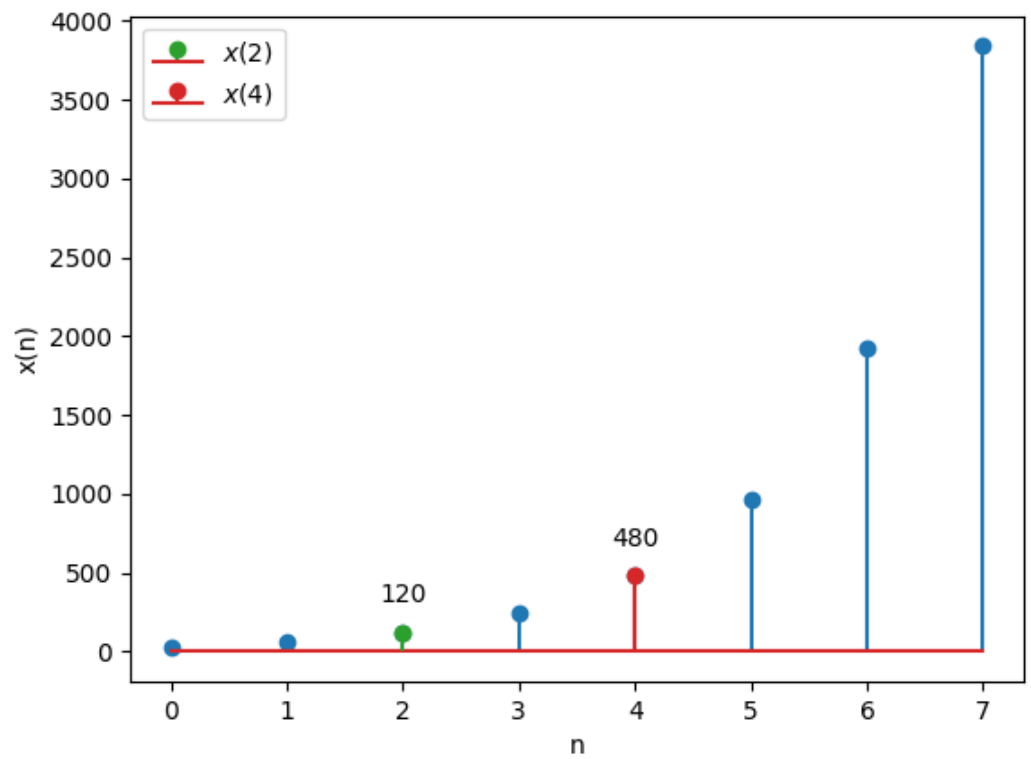


Figure 2.21: Plot of  $x(n)$  vs  $n$ . See Table 2.12 for details.

2.2.12 Ramkali saved Rs 5 in the first week of a year and then increased her weekly savings by Rs 1.75. If in the  $n$ th week, her weekly savings become Rs 20.75, find  $n$ .

**Solution:**

Parameter	Value	Description
$x(0)$	5	First term of AP
$d$	1.75	Common difference of AP
$x(n)$	20.75	$n^{th}$ term of AP

Table 2.13: Parameter List

$$x(n) = x(0) + (n)(d) \quad (2.116)$$

$$20.75 = 5 + (n)(1.75) \quad (2.117)$$

$$\implies 15.75 = (n)(1.75) \quad (2.118)$$

$$\implies n = \frac{15.75}{1.75} \quad (2.119)$$

$$\implies n = 9 \quad (2.120)$$

$$x(n) = 5u(n) + 1.75nu(n) \quad (2.121)$$

The Z-transform of a sequence  $x(n)$  is given by:

$$X(z) = \frac{5z^{-1}}{1 - z^{-1}} + \frac{1.75z^{-1}}{(1 - z^{-1})^2}; |z| > 1 \quad (2.122)$$



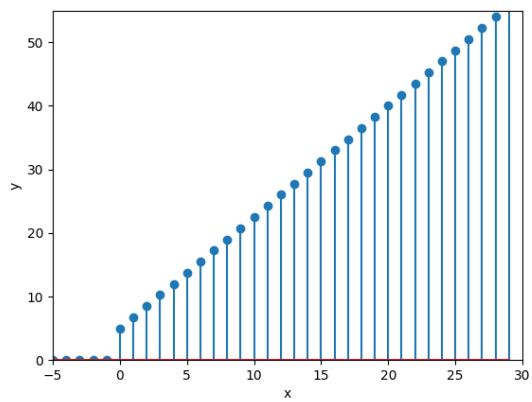


Figure 2.22: Plot of  $x(n) = 5 + 1.75n$



## Chapter 3

# Contour Integration

3.1 Find the sum of the first 15 multiples of 8.

**Solution:**

PARAMETER	VALUE	DESCRIPTION
$x(0)$	8	First term
$d$	8	common difference
$x(n)$	$[8 + 8n]u(n)$	General term of the series

Table 3.1: Parameter Table1

For an  $AP$ ,

$$X(z) = \frac{x(0)}{1 - z^{-1}} + \frac{dz^{-1}}{(1 - z^{-1})^2} \quad (3.1)$$

$$\Rightarrow X(z) = \frac{8}{1 - z^{-1}} + \frac{8z^{-1}}{(1 - z^{-1})^2} \quad (3.2)$$

$$= \frac{8}{(1 - z^{-1})^2}, \quad |z| > 1 \quad (3.3)$$

$$y(n) = x(n) * u(n) \quad (3.4)$$

$$\Rightarrow Y(z) = X(z)U(z) \quad (3.5)$$

$$Y(z) = \left( \frac{8}{(1 - z^{-1})^2} \right) \left( \frac{1}{1 - z^{-1}} \right) \quad (3.6)$$

$$= \frac{8}{(1 - z^{-1})^3}, \quad |z| > 1 \quad (3.7)$$

Using Contour Integration to find the inverse  $Z$ -transform,

$$y(14) = \frac{1}{2\pi j} \oint_C Y(z) z^{13} dz \quad (3.8)$$

$$= \frac{1}{2\pi j} \oint_C \frac{8z^{13}}{(1 - z^{-1})^3} dz \quad (3.9)$$

We can observe that the pole is repeated 3 times and thus  $m = 3$ ,

$$R = \frac{1}{(m-1)!} \lim_{z \rightarrow a} \frac{d^{m-1}}{dz^{m-1}} ((z-a)^m f(z)) \quad (3.10)$$

$$= \frac{1}{(2)!} \lim_{z \rightarrow 1} \frac{d^2}{dz^2} \left( (z-1)^3 \frac{8z^{16}}{(z-1)^3} \right) \quad (3.11)$$

$$= 4 \lim_{z \rightarrow 1} \frac{d^2}{dz^2} (z^{16}) \quad (3.12)$$

$$= 960 \quad (3.13)$$

$$\therefore \boxed{y(14) = 960} \quad (3.14)$$



Figure 3.1: Plot of  $x(n)$  vs  $n$

3.2 If the sum of  $n$  terms of an A.P. is  $3n^2 + 5n$  and its  $m^{th}$  term is 164, find the value of  $m$ .

**Solution:**

$$Y(z) = \sum_{n=0}^{\infty} y(n) z^{-n} \quad (3.15)$$

$$= \frac{2(4 - z^{-1})}{(1 - z^{-1})^3}, \quad |z| > 1 \quad (3.16)$$

$$U(z) = \frac{1}{1 - z^{-1}}, \quad |z| > 1 \quad (3.17)$$

$$X(z) = \frac{Y(z)}{U(z)} \quad (3.18)$$

$$= 2 \left( \frac{1}{1 - z^{-1}} \right) + 6 \left( \frac{1}{(1 - z^{-1})^2} \right) \quad (3.19)$$

$$= \frac{8z^2 - 2z}{(z - 1)^2} \quad (3.20)$$

Using Contour Integration to find the inverse Z-transform,

$$x(n) = \frac{1}{2\pi j} \oint_C X(z) z^{n-1} dz \quad (3.21)$$

$$= \frac{1}{2\pi j} \oint_C \frac{(8z^{n+1} - 2z^n) dz}{(z - 1)^2} \quad (3.22)$$

$$= \frac{1}{(m-1)!} \lim_{z \rightarrow a} \frac{d^{m-1}}{dz^{m-1}} ((z - a)^m f(z)) \quad (3.23)$$

$$= \lim_{z \rightarrow 1} \frac{d}{dz} \left( (z - 1)^2 \frac{8z^{n+1} - 2z^n}{(z - 1)^2} \right) \quad (3.24)$$

$$= \lim_{z \rightarrow 1} (8(n+1)z^n - 2nz^{n-1}) \quad (3.25)$$

$$\implies x(n) = (6n + 8)(u(n)) \quad (3.26)$$

$$164 = (6m + 8)(u(m)) \quad (3.27)$$

$$\implies m = 26 \quad (3.28)$$

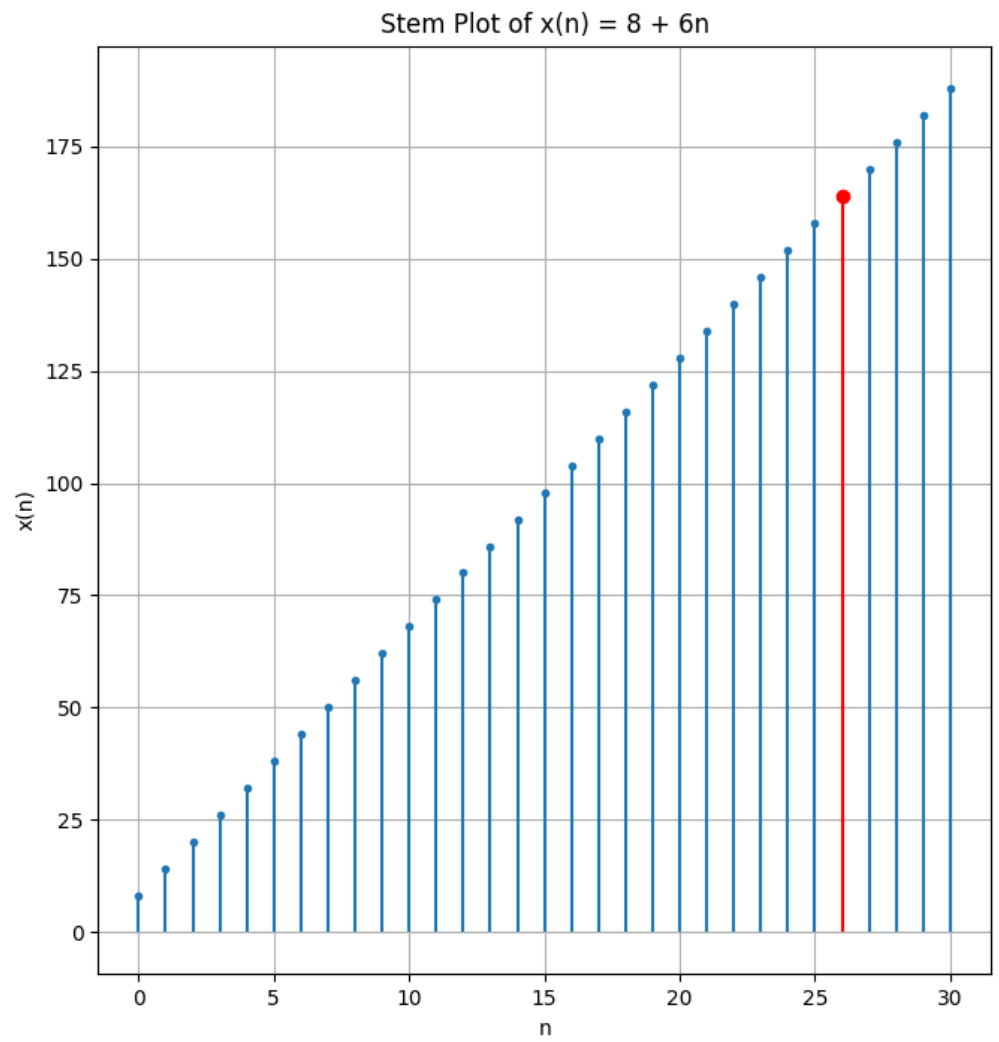


Figure 3.2: Plot of  $x(n)$  vs  $n$

Symbol	Remarks
$y(n) = (3n^2 + 11n + 8)(u(n))$	Sum of $n$ terms
$x(m-1)$	164
$y(n)$	$x(n) * u(n)$

Table 3.2: Parameters

3.3 Show that  $a_0, a_1, a_2, \dots, a_n, \dots$  form an AP where an is defined as below :

(a)  $a_n = (3 + 4n)$

(b)  $a_n = (9 - 5n)$

Also find the sum of the first 15 terms in each case. **Solution:**

Parameter	Description	Value
$x_i(n)$	$i^{th}$ Discrete signal	$(3 + 4n)u(n)$
		$(9 - 5n)u(n)$
$x_i(0)$	First term of $i^{th}$ AP	3
		9
$d_i$	common difference of $i^{th}$ AP	4
		-5

Table 3.3: Given parameters



(a) From equation (B.10.6)

$$X(z) = \frac{3}{1 - z^{-1}} + \frac{4.z^{-1}}{(1 - z^{-1})^2}; |z| > 1 \quad (3.29)$$

$$\therefore y(n) = x(n) * u(n) \quad (3.30)$$

$$Y(z) = X(z)U(z) \quad (3.31)$$

$$= \left[ \frac{3}{(1 - z^{-1})^2} + \frac{4z^{-1}}{(1 - z^{-1})^3} \right] \quad (3.32)$$

Using contour integration for inverse Z transformation,

$$y(14) = \frac{1}{2\pi j} \int Y(z)z^{13}dz \quad (3.33)$$

$$= \frac{1}{2\pi j} \int \frac{3.z^{15}}{(z - 1)^2}dz + \frac{1}{2\pi j} \int \frac{4.z^{15}}{(z - 1)^3}dz \quad (3.34)$$

$$\therefore R = \frac{1}{(m - 1)!} \lim_{z \rightarrow a} \frac{d^{m-1}}{dz^{m-1}} ((z - a)^m f(z)) \quad (3.35)$$

$$R_1 = \frac{1}{1!} \lim_{z \rightarrow 1} \frac{d}{dz} \left( (z - 1)^2 \cdot \frac{3.z^{15}}{(z - 1)^2} \right) \quad (3.36)$$

$$= 45 \quad (3.37)$$

$$R_2 = \frac{1}{2!} \lim_{z \rightarrow 1} \frac{d^2}{dz^2} \left( (z - 1)^3 \cdot \frac{4.z^{15}}{(z - 1)^3} \right) \quad (3.38)$$

$$= 420 \quad (3.39)$$

$$\implies y(14) = R_1 + R_2 \quad (3.40)$$

$$= 465 \quad (3.41)$$

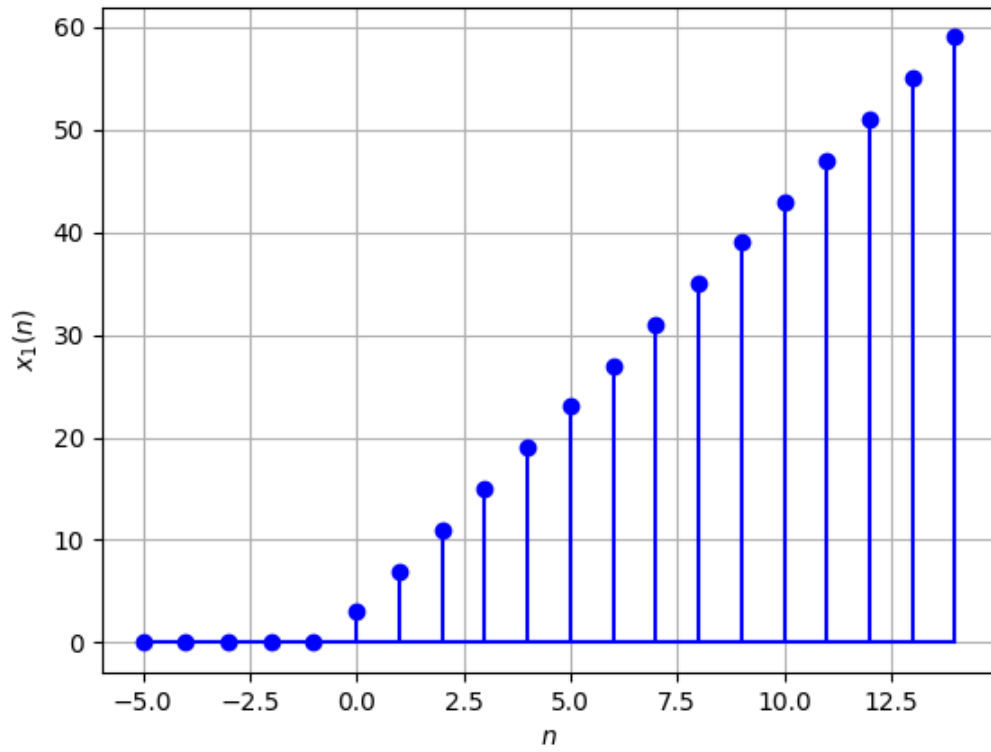


Figure 3.3:  $x_1(n) = (3 + 4n)u(n)$

(b) From equation (B.10.6)

$$X(z) = \frac{9}{1 - z^{-1}} - \frac{5z^{-1}}{(1 - z^{-1})^2}; |z| > 1 \quad (3.42)$$

$$\therefore y(n) = x(n) * u(n) \quad (3.43)$$

$$Y(z) = X(z)U(z) \quad (3.44)$$

$$= \left[ \frac{9}{(1 - z^{-1})^2} - \frac{5z^{-1}}{(1 - z^{-1})^3} \right] \quad (3.45)$$

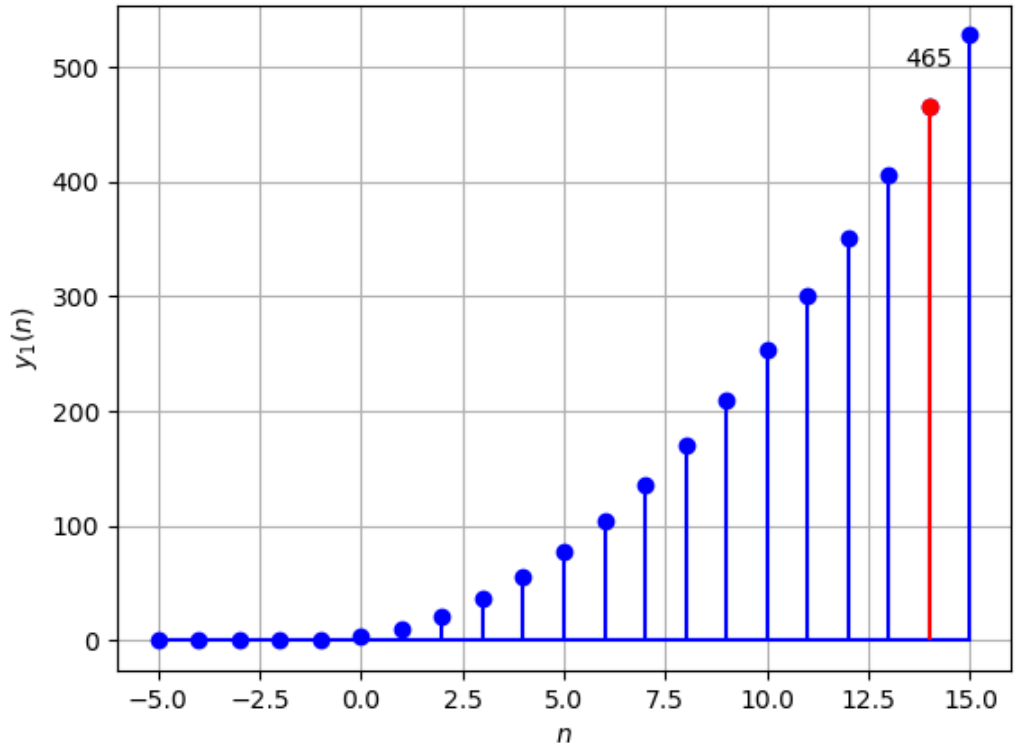


Figure 3.4:  $x_1(n) = (2n^2 + 5n + 3)u(n)$

Using contour integration for inverse Z transformation,

$$y(14) = \frac{1}{2\pi j} \int Y(z)z^{13}dz \quad (3.46)$$

$$= \frac{1}{2\pi j} \int \frac{9.z^{15}}{(z-1)^2}dz - \frac{1}{2\pi j} \int \frac{5.z^{15}}{(z-1)^3}dz \quad (3.47)$$

$$\therefore R = \frac{1}{(m-1)!} \lim_{z \rightarrow a} \frac{d^{m-1}}{dz^{m-1}} ((z-a)^m f(z)) \quad (3.48)$$

$$R_1 = \frac{1}{1!} \lim_{z \rightarrow 1} \frac{d}{dz} \left( (z-1)^2 \cdot \frac{9.z^{15}}{(z-1)^2} \right) \quad (3.49)$$

$$= 135 \quad (3.50)$$

$$R_2 = \frac{1}{2!} \lim_{z \rightarrow 1} \frac{d^2}{dz^2} \left( (z-1)^3 \cdot \frac{5.z^{15}}{(z-1)^3} \right) \quad (3.51)$$

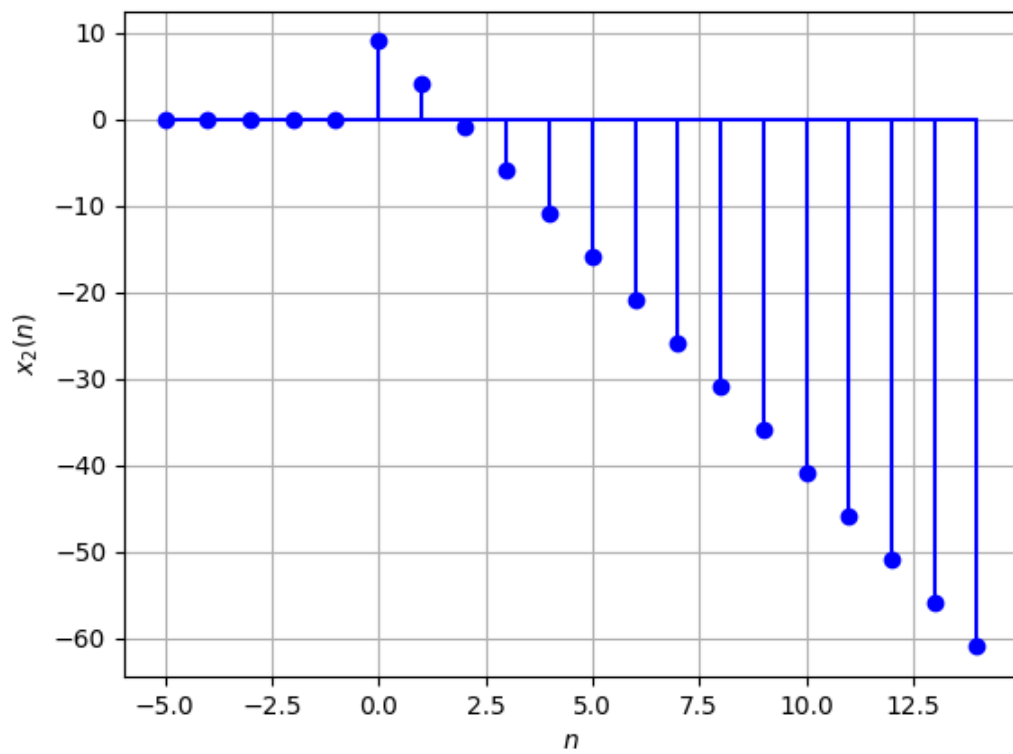


Figure 3.5:  $x_2(n) = (9 - 5n)u(n)$

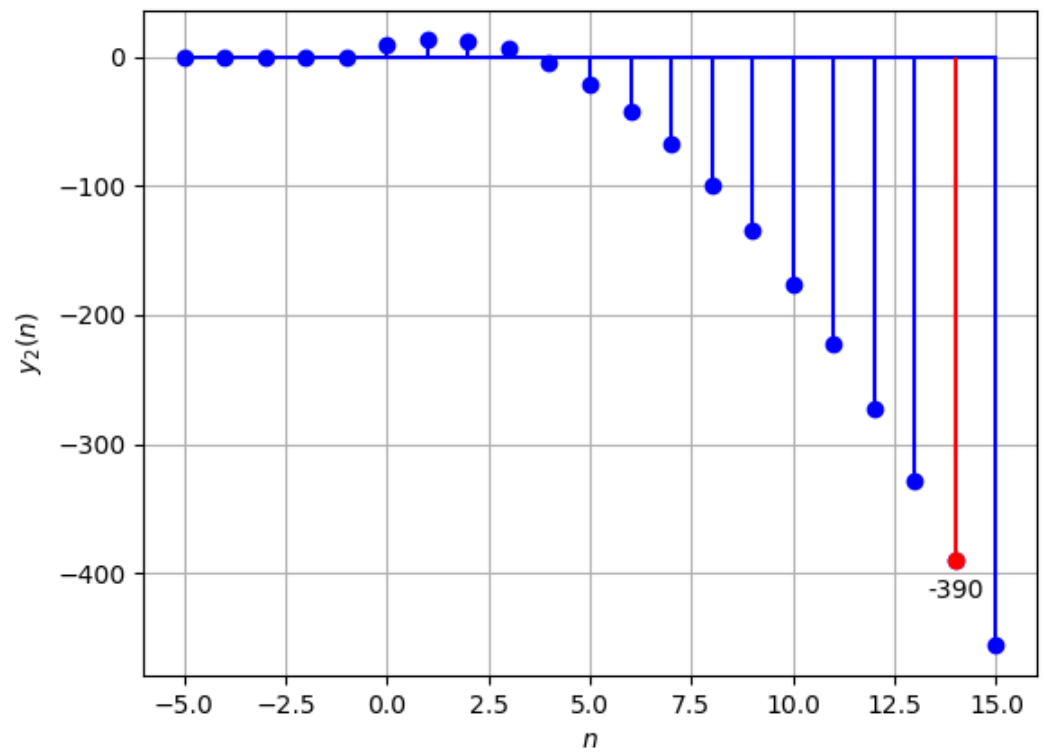


Figure 3.6:  $x_2(n) = (-5n^2 + 13n + 18)u(n)$



## Chapter 4

# Laplace Transform

4.0.1 You are riding in an automobile of mass 3000 kg. Assuming that you are examining the oscillation characteristics of its suspension system. The suspension sags 15 cm when the entire automobile is placed on it. Also, the amplitude of oscillation decreases by 50% during one complete oscillation. Estimate the values of

- (a) The spring constant  $K$
- (b) The damping constant  $b$  for the spring and shock absorber system of one wheel, assuming that each wheel supports 750 kg.

**Solution:** The parameters are :

Parameter	Value(SI)	Description
$x_0$	0.15	Initial spring compression
$m$	750	Mass
$g$	9.8	Gravitational acc
$k$	$mg/x_0$	Spring constant
$b$		Damping constant

Table 4.1: Input Parameters

Parameter	Value(SI)	Description
$x$		Spring Extension
$F_1$	$kx$	Spring Force
$F_2$	$b\frac{dx}{dt}$	Damping Force
$s$		Complex Frequency
$s_1, s_2$		Values of s

Table 4.2: Intermediate Parameters

Initially the automobile is in rest, so we can use,

$$mg = kx_0 \quad (4.1)$$

$$\implies k = \frac{mg}{x_0} \quad (4.2)$$

Now, as the oscillation begins, from the FBD, we have net force on the mass as,

$$F = F_1 + F_2 + mg u(t) \quad (4.3)$$

$$\implies -m \frac{d^2 x(t)}{dt^2} = kx(t) + b \frac{dx(t)}{dt} + mg u(t) \quad (4.4)$$

$$\implies \frac{d^2 x(t)}{dt^2} + \left(\frac{b}{m}\right) \frac{dx(t)}{dt} + \left(\frac{k}{m}\right) x(t) = -gu(t) \quad (4.5)$$

Now, taking the Laplace transform on both sides,

$$s^2 X(s) + \frac{b}{m} s X(s) + \frac{k}{m} X(s) = -\frac{g}{s} \quad (4.6)$$

$$\implies X(s) = -\frac{g}{s \left( s^2 + \frac{b}{m} s + \frac{k}{m} \right)} \quad (4.7)$$

$$\implies X(s) = -\frac{g}{s(s - s_1)(s - s_2)} \quad (4.8)$$





Figure 4.1: FBD of the damped oscillation system

Where

$$s_1 = -\frac{b}{2m} + \sqrt{\left(\frac{b}{2m}\right)^2 - \frac{k}{m}} \quad (4.9)$$

$$s_2 = -\frac{b}{2m} - \sqrt{\left(\frac{b}{2m}\right)^2 - \frac{k}{m}} \quad (4.10)$$

From (4.8) we get,

$$\begin{aligned} \Rightarrow X(s) &= \frac{g}{(s_1 - s_2)} \left[ \frac{1}{s_2(s - s_2)} - \frac{1}{s_1(s - s_1)} \right] \\ &+ \frac{g}{s_1 s_2} \left( \frac{1}{s} \right) \end{aligned} \quad (4.11)$$

Now again taking the inverse Laplace transform we have,

$$x(t) = \frac{g}{s_1 s_2} u(t) + \frac{g}{(s_1 - s_2)} \left[ \frac{1}{s_2} e^{s_2 t} - \frac{1}{s_1} e^{s_1 t} \right] u(t) \quad (4.12)$$

$$\begin{aligned} \Rightarrow x(t) &= \sqrt{\left(\frac{mg}{k}\right)^2 + \left(\frac{gb}{2mk}\right)^2} e^{-bt/2m} u(t) \\ &\sin \left( \sqrt{\frac{k}{m} - \left(\frac{b}{2m}\right)^2} t + \tan^{-1} \left( \frac{2mg\sqrt{\frac{k}{m} - \left(\frac{b}{2m}\right)^2}}{gb} \right) \right) \\ &+ \frac{mg}{k} u(t) \end{aligned} \quad (4.13)$$

(Substituting the values of  $s_1$  and  $s_2$  from (4.9) and (4.10))

From (4.13) we have the amplitude after one time period  $T$ ,

$$\begin{aligned} \frac{1}{2} \sqrt{\left(\frac{mg}{k}\right)^2 + \left(\frac{gb}{2mk}\right)^2} &= \\ \sqrt{\left(\frac{mg}{k}\right)^2 + \left(\frac{gb}{2mk}\right)^2} e^{-bT/2m} \end{aligned} \quad (4.14)$$

$$\Rightarrow e^{\pi b/\sqrt{mk}} = 2 \quad (4.15)$$

$$\Rightarrow b = \frac{\sqrt{mk} \ln 2}{\pi} \quad (4.16)$$



Figure 4.2: Displacement Vs. Time Graph



# Appendix A

## Convolution

A.1 The convolution sum is defined as

$$y(n) = x(n) * h(n) = \sum_{k=-\infty}^{\infty} x(k) h(n-k) \quad (\text{A.1.1})$$

A.2 The unit step function is defined as

$$u(n) = \begin{cases} 1 & n \geq 0 \\ 0 & \text{otherwise} \end{cases} \quad (\text{A.2.1})$$

A.3 If

$$x(n) = 0, \quad n < 0, \quad (\text{A.3.1})$$

from (A.1.1),

$$x(n) * u(n) = \sum_{k=0}^n x(k) \quad (\text{A.3.2})$$



## Appendix B

### Z-transform

B.1 The Z-transform of  $p(n)$  is defined as

$$P(z) = \sum_{n=-\infty}^{\infty} p(n)z^{-n} \quad (\text{B.1.1})$$

B.2 If

$$p(n) = p_1(n) * p_2(n), \quad (\text{B.2.1})$$

$$P(z) = P_1(z)P_2(z) \quad (\text{B.2.2})$$

B.3

$$nx(n) \xleftrightarrow{\mathcal{Z}} -zX'(z) \quad (\text{B.3.1})$$

From (B.3.1)

$$\implies nu(n) \xleftrightarrow{\mathcal{Z}} \frac{z^{-1}}{(1-z^{-1})^2}, |z| > 1 \quad (\text{B.3.2})$$

$$\implies n^2u(n) \xleftrightarrow{\mathcal{Z}} \frac{z^{-1}(z^{-1}+1)}{(1-z^{-1})^3}, |z| > 1 \quad (\text{B.3.3})$$

$$\implies n^3u(n) \xleftrightarrow{\mathcal{Z}} \frac{z^{-1}(1+4z^{-1}+z^{-2})}{(1-z^{-1})^4}, |z| > 1 \quad (\text{B.3.4})$$

$$\implies n^4u(n) \xleftrightarrow{\mathcal{Z}} \frac{z^{-1}(1+11z^{-1}+11z^{-2}+z^{-3})}{(1-z^{-1})^5} \quad (\text{B.3.5})$$

where  $|z| > 1$

B.4

$$x(n-k) \xleftrightarrow{\mathcal{Z}} z^{-k}X(z) \quad (\text{B.4.1})$$

Using (B.4.1):

$$nu(n-1) \xleftrightarrow{\mathcal{Z}} z \frac{2z^{-2}}{(1-z^{-1})^2} \quad (\text{B.4.2})$$

Now ,

$$\frac{(n-1)}{2}u(n-2) \xleftrightarrow{\mathcal{Z}} \frac{z^{-2}}{(1-z^{-1})^2} \quad (\text{B.4.3})$$

$$\frac{(n-1)(n-2)}{6}u(n-3) \xleftrightarrow{\mathcal{Z}} \frac{z^{-3}}{(1-z^{-1})^3} \quad (\text{B.4.4})$$

$\vdots$

$$\frac{(n-1)(n-2)\dots(n-k+1)}{(k-1)!}u(n-k) \xleftrightarrow{\mathcal{Z}} \frac{z^{-k}}{(1-z^{-1})^k} \quad (\text{B.4.5})$$



$$\Rightarrow Z^{-1} \left[ \frac{z^{-2}}{(1 - z^{-1})^2} \right] = (n - 1) u(n - 1) \quad (\text{B.4.6})$$

$$\Rightarrow Z^{-1} \left[ \frac{z^{-3}}{(1 - z^{-1})^3} \right] = \frac{(n - 1)(n - 2)}{2} u(n - 1) \quad (\text{B.4.7})$$

$$\Rightarrow Z^{-1} \left[ \frac{z^{-4}}{(1 - z^{-1})^4} \right] = \frac{(n - 1)(n - 2)(n - 3)}{6} u(n - 1) \quad (\text{B.4.8})$$

$$\Rightarrow Z^{-1} \left[ \frac{z^{-5}}{(1 - z^{-1})^5} \right] = \frac{(n - 1)(n - 2)(n - 3)(n - 4)}{24} u(n - 1) \quad (\text{B.4.9})$$

$$u(n - 1)$$

B.5 For a Geometric progression

$$x(n) = x(0) r^n u(n), \quad (\text{B.5.1})$$

$$\Rightarrow X(z) = \sum_{n=-\infty}^{\infty} x(n) z^{-n} = \sum_{n=0}^{\infty} x(0) r^n z^{-n} \quad (\text{B.5.2})$$

$$= \sum_{n=0}^{\infty} x(0) (rz^{-1})^n \quad (\text{B.5.3})$$

$$= \frac{x(0)}{1 - rz^{-1}}, \quad |z| > |r| \quad (\text{B.5.4})$$

B.6 Substituting  $r = 1$  in (B.5.4),

$$u(n) \xleftrightarrow{Z} U(z) = \frac{1}{1 - z^{-1}}, \quad |z| > 1 \quad (\text{B.6.1})$$

B.7 From (B.3.1) and (B.6.1),

$$nu(n) \xleftrightarrow{Z} \frac{z^{-1}}{(1 - z^{-1})^2}, \quad |z| > 1 \quad (\text{B.7.1})$$

B.8 For an AP,

$$x(n) = [x(0) + nd] u(n) = x(0)u(n) + dnu(n) \quad (\text{B.8.1})$$

$$\Rightarrow X(z) = \frac{x(0)}{1 - z^{-1}} + \frac{dz^{-1}}{(1 - z^{-1})^2}, \quad |z| > 1 \quad (\text{B.8.2})$$

upon substituting from (B.6.1) and (B.7.1).

B.9 From (A.3.2), the sum to  $n$  terms of a GP can be expressed as

$$y(n) = x(n) * u(n) \quad (\text{B.9.1})$$

where  $x(n)$  is defined in (B.5.1). From (B.2.2), (B.5.4) and (B.6.1),

$$Y(z) = X(z) U(z) \quad (\text{B.9.2})$$

$$= \left( \frac{x(0)}{1 - rz^{-1}} \right) \left( \frac{1}{1 - z^{-1}} \right) \quad |z| > |r| \cap |z| > |1| \quad (\text{B.9.3})$$

$$= \frac{x(0)}{(1 - rz^{-1})(1 - z^{-1})} \quad |z| > |r| \quad (\text{B.9.4})$$

which can be expressed as

$$Y(z) = \frac{x(0)}{r - 1} \left( \frac{r}{1 - rz^{-1}} - \frac{1}{1 - z^{-1}} \right) \quad (\text{B.9.5})$$

using partial fractions. Again, from (B.5.4) and (B.6.1), the inverse of the above can be expressed as

$$y(n) = x(0) \left( \frac{r^{n+1} - 1}{r - 1} \right) u(n) \quad (\text{B.9.6})$$

B.10 For the AP  $x(n)$ , the sum of first  $n + 1$  terms can be expressed as

$$y(n) = \sum_{k=0}^n x(k) \quad (\text{B.10.1})$$

$$\Rightarrow y(n) = \sum_{k=-\infty}^{\infty} x(k)u(n-k) \quad (\text{B.10.2})$$

$$= x(n) * u(n) \quad (\text{B.10.3})$$

Taking the Z-transform on both sides, and substituting (B.8.2) and (B.6.1),

$$Y(z) = X(z)U(z) \quad (\text{B.10.4})$$

$$\Rightarrow Y(z) = \left( \frac{x(0)}{1-z^{-1}} + \frac{dz^{-1}}{(1-z^{-1})^2} \right) \frac{1}{1-z^{-1}} \quad |z| > 1 \quad (\text{B.10.5})$$

$$= \frac{x(0)}{(1-z^{-1})^2} + \frac{dz^{-1}}{(1-z^{-1})^3}, \quad |z| > 1 \quad (\text{B.10.6})$$

B.11 From (B.4.1) and (B.7.1),

$$(n+1)u(n) \xleftrightarrow{\mathcal{Z}} \frac{1}{(1-z^{-1})^2}, \quad |z| > 1, \quad (\text{B.11.1})$$

From (B.11.1) and (B.3.1),

$$n(n+1)u(n) \xleftrightarrow{\mathcal{Z}} \frac{z^{-1}}{(1-z^{-1})^3}, \quad |z| > 1, \quad (\text{B.11.2})$$

B.12 Taking the inverse Z-transform of (B.10.6),

$$y(n) = x(0) [(n+1)u(n)] + \frac{d}{2} [n(n+1)u(n)] \quad (\text{B.12.1})$$

$$= \frac{n+1}{2} \{2x(0) + nd\} u(n) \quad (\text{B.12.2})$$

