

CS1010E Lecture 2

Control Structures: Selection

Henry Chia (hchia@comp.nus.edu.sg)

Semester 1 2016 / 2017

- Algorithm – set of instructions that manipulates data to solve an algorithmic problem.
- Control structures (sequence, selection, and repetition) provide the flow of control in an algorithm
- Characteristics of an algorithm:
 - Each step of an algorithm is **exact**
 - An algorithm must **terminate**
 - An algorithm must be **effective**
 - An algorithm must be **general**

1 / 24

3 / 24


Lecture Outline

- Algorithmic problem solving
- Control structures
- Boolean values, variables and expressions
- Relational and Logical Operators
- Selection statements
- Nested selection statements

2 / 24

Control Structures – Sequence


- A **sequence** structure contains steps that are performed one after another
- Example: To pass this course, you have to read the module, and then take the exam



4 / 24

Control Structures – Selection


- A **selection** structure contains one set of steps that is performed if a *condition* is true, and possibly another set of steps that is performed if a *condition* is false
- Example: If you are not exempted from the module, then you need to read the module and take the exam



5 / 24

Declaring Boolean Variables

declaration

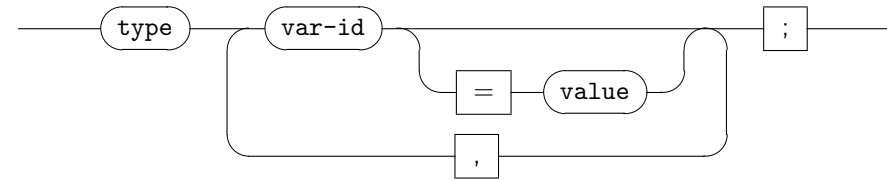


- **type:** `bool`
- **value:** `true`, `false`
 - To specify `true` and `false` within the program, use `#include <stdbool.h>`
- Boolean variable identifiers should suggest a true/false outcome, e.g. `overWeight`, `underWeight`, but not `weight`
- Example: `bool overWeight=true;`

7 / 24

Control Structures – Repetition


- A **repetition** structure contains a set of steps that is repeated as long as a *condition* is true
- Example: One who reads the module, takes the exam but fail will need to repeat again

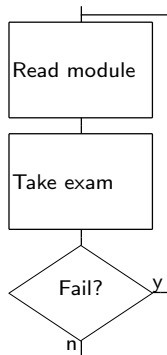

6 / 24

Boolean Assignment, Input and Output


assignmentStatement



- Example:
`overWeight = false;`
- C associates `true` with integer 1, and `false` with integer 0
 - To output a boolean expression, use the `%d` for the placeholder; 0 or 1 is displayed
`printf("Is overweight? %d\n", overWeight);`
 - Likewise, input 0 or 1 when reading a boolean value
`scanf("%d", &overWeight);`

8 / 24

Boolean Expression – Condition

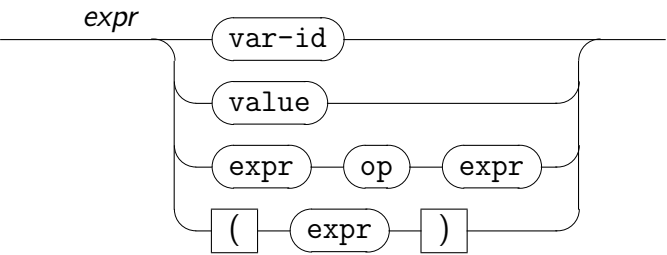

- A condition is an expression that evaluates to **true/false**
- Two types of operations that evaluates to **true/false**
 - Relational operations that operates on two arithmetic expressions
 - Logical (Boolean) operations that operates on two conditions

Logical Operators

- Logical (Boolean) operators compare conditions
- Three logical operators: **and** (&&), **or** (||), **not** (!)

A	B	A && B	A B	!A	!B
false	false	false	false	true	true
false	true	false	true	true	false
true	false	false	true	false	true
true	true	true	true	false	false

- A && B is true only if both A and B are true
- A || B is false only if both A and B are false
- !A is true only if A is false
- Example: (bmi >= 18.5) && (bmi <= 24.9)
- How about this? (18.5 <= bmi <= 24.9)

Relational Operators

- Relational operators compare two arithmetic expressions:


Relational Op	Interpretation
<	less than
<=	less than or equal to
>	greater than
>=	greater than or equal to
==	equal to
!=	not equal to
- E.g. conditions using relational operators:
 - x == y
 - (mass/(ht*ht)) > 24.9

Logical Operators: Short-Circuit


- When expressions with logical operators are executed, C will only evaluate as much of the expression as necessary to evaluate it
 - If A is false, then the expression A && B is also false, and there is no need to evaluate B
 - If A is true, then the expression A || B is also true, and there is no need to evaluate A

Statement and Statement Block

statement



stmtBlock

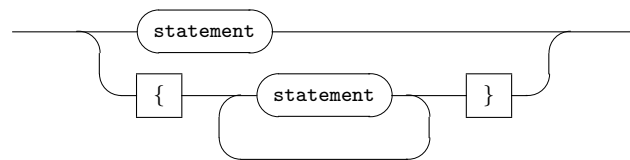

- Control Statements
 - Selection
 - `if..else`
 - Repetition
 - `do..while`
 - `while`
 - `for`
- Statement Block – one statement or group of statements

13 / 24

Example: Maximum of two numbers

- Using one `if..else` construct
- Easier to understand


```
/* This program determines the maximum of two input numbers. */
#include <stdio.h>

int main(void) {
    int x=0, y=0;

    printf("Enter two numbers: ");
    scanf("%d%d", &x, &y);

    if (x > y) {
        printf("Maximum is %d\n", x);
    } else {
        printf("Maximum is %d\n", y);
    }


    return 0;
}
```



15 / 24

Selection: if..else Statement

ifElseStatement



```
if (condition) {
    statement;
    ...
} else {
    statement;
    ...
}
```

- Executes the *if* statement block when the *condition* is true; otherwise the *else* statement block is executed
- *Else* statement block is optional
- Curly braces may be omitted (but encouraged) for statement block consisting of one statement

14 / 24

Example: Maximum of two numbers

- Using two `if` constructs
- Requires two conditions


```
/* This program determines the maximum of two input numbers. */
#include <stdio.h>

int main(void) {
    int x=0, y=0;

    printf("Enter two numbers: ");
    scanf("%d%d", &x, &y);

    if (x > y) {
        printf("Maximum is %d\n", x);
    }
    if (y >= x) { /* if (y > x) ??? */
        printf("Maximum is %d\n", y);
    }

    return 0;
}
```

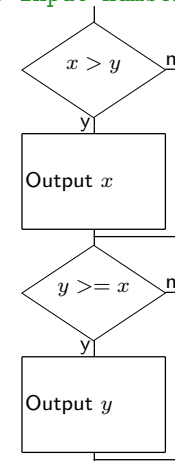

16 / 24

Exercise: Maximum of two numbers


- Using only one `if` construct

```
/*  
 This program determines the maximum of two input numbers.  
*/  
#include <stdio.h>  
  
int main(void) {  
    int x=0, y=0;  
  
    printf("Enter two numbers: ");  
    scanf("%d%d", &x, &y);
```

Example: BMI

- Using the logical `||` operator in the condition
- Condition is expressed in the opposite sense

```
/*  
 This program classifies a BMI input as Normal/Abnormal.  
*/  
#include <stdio.h>  
  
int main(void) {  
    double bmi=0.0;  
  
    printf("Enter bmi: ");  
    scanf("%lf", &bmi);  
  
    if (bmi < 18.5 || bmi > 24.9) {  
        printf("Abnormal\n");  
    } else {  
        printf("Normal\n");  
    }  
  
    return 0;  
}
```

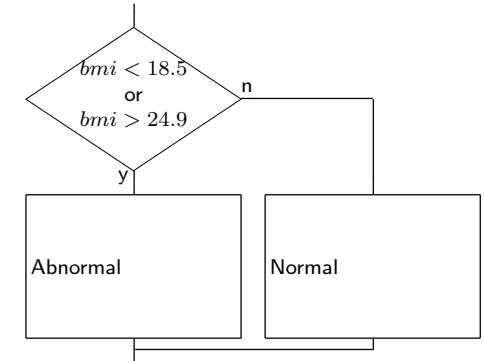


17 / 24

19 / 24

Example: BMI

- Using the logical `&&` operator in the condition


```
/*  
 This program classifies a BMI input as Normal/Abnormal.  
*/  
#include <stdio.h>  
  
int main(void) {  
    double bmi=0.0;  
  
    printf("Enter bmi: ");  
    scanf("%lf", &bmi);  
  
    if (bmi >= 18.5 && bmi <= 24.9) {  
        printf("Normal\n");  
    } else {  
        printf("Abnormal\n");  
    }  
  
    return 0;  
}
```

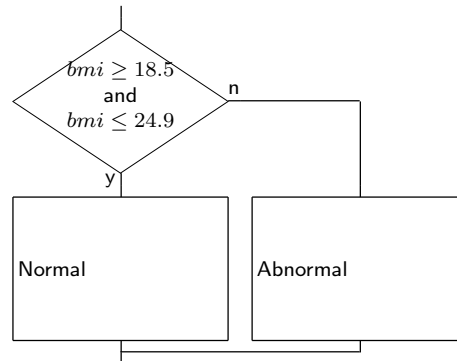

Nesting if..else Statements

- Nested `ifs` represent `&&`

```
/*  
 This program classifies a BMI input as Normal/Abnormal.  
*/  
#include <stdio.h>  
  
int main(void) {  
    double bmi=0.0;  
  
    printf("Enter bmi: ");  
    scanf("%lf", &bmi);  
  
    if (bmi >= 18.5) {  
        if (bmi <= 24.9) {  
            printf("Normal\n");  
        } else {  
            printf("Abnormal\n");  
        }  
    } else {  
        printf("Abnormal\n");  
    }  
  
    return 0;  
}
```

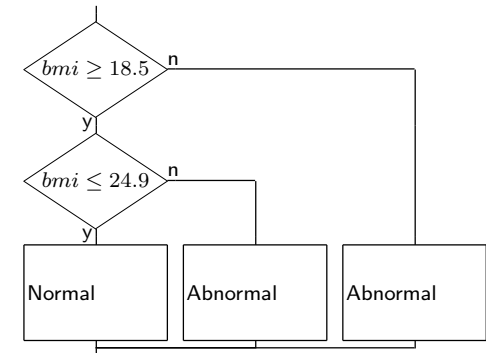

18 / 24

20 / 24

Nesting if..else Statements

- Resolving case-by-case starting with the lowest BMI values


```
/*
  This program classifies a BMI input as Normal/Underweight/Overweight.
*/
#include <stdio.h>

int main(void) {
    double bmi=0.0;

    printf("Enter bmi: ");
    scanf("%lf", &bmi);

    if (bmi < 18.5) {
        printf("Underweight\n");
    } else {
        if (bmi <= 24.9) {
            printf("Normal\n");
        } else {
            printf("Overweight\n");
        }
    }

    return 0;
}
```

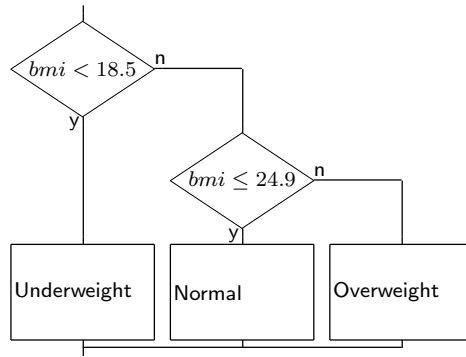

21 / 24

Nesting if..else Statements

- Still correct, but difficult to understand


```
/*
  This program classifies a BMI input as Normal/Underweight/Overweight.
*/
#include <stdio.h>

int main(void) {
    double bmi=0.0;

    printf("Enter bmi: ");
    scanf("%lf", &bmi);

    if (bmi <= 24.9) {
        if (bmi < 18.5) {
            printf("Underweight\n");
        } else {
            printf("Normal\n");
        }
    } else {
        printf("Overweight\n");
    }

    return 0;
}
```

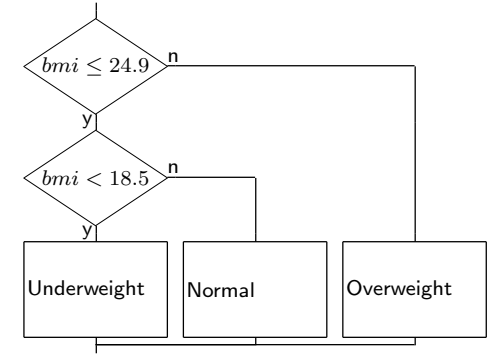

23 / 24

Nesting if..else Statements

- Resolving case-by-case starting with the highest BMI values


```
/*
  This program classifies a BMI input as Normal/Underweight/Overweight.
*/
#include <stdio.h>

int main(void) {
    double bmi=0.0;

    printf("Enter bmi: ");
    scanf("%lf", &bmi);

    if (bmi > 24.9) {
        printf("Overweight\n");
    } else {
        if (bmi >= 18.5) {
            printf("Normal\n");
        } else {
            printf("Underweight\n");
        }
    }

    return 0;
}
```

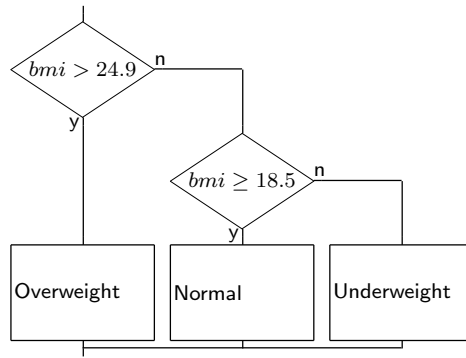

22 / 24

Lecture Summary

- Characteristics of an algorithm
- Control structures: sequence, selection and repetition
- Conditions involving relational and logical operators
- Selection
 - if..else statement
 - Nested if..else statements
- Lay out nested if..else constructs in an easy to understand fashion, typically resolving case-by-case starting from one end of the range of possible values, and working towards the other end

24 / 24