
'oxone


Blocking numbers on Voxone

You can either do this from the app or the admin portal on a per user basis, or you can block them from calling a specific queue or IVR.

For the latter, log in to the admin portal and navigate to PBX service then select the queueing system you want to apply the block to, then select Advanced Settings and click on Configure Call Routing:

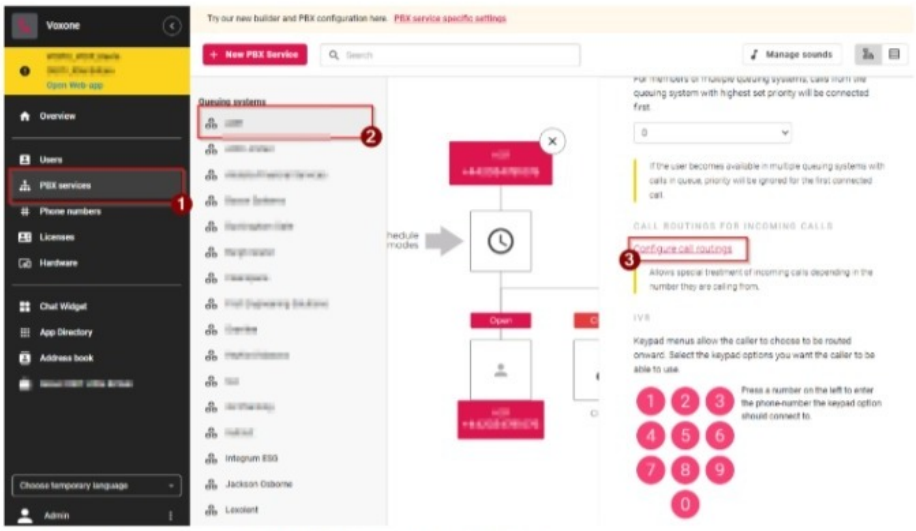


Input the number you want to block and press the + button:

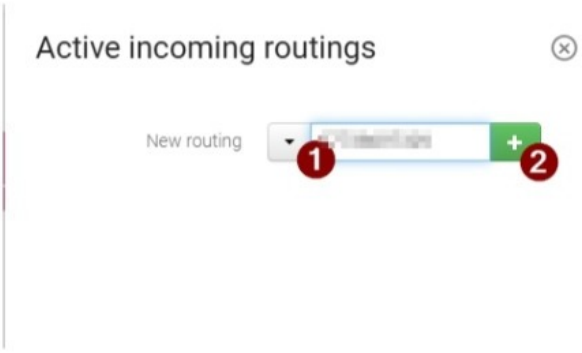


By default the number will now be sent to a blocking tone when it calls that queue.

Note that this won't stop it from being able to call specific DDIs, you can achieve this either from the desktop app under Settings -> Telephony and Audio -> Advanced Telephony -> Call Routing -> Incoming calls:

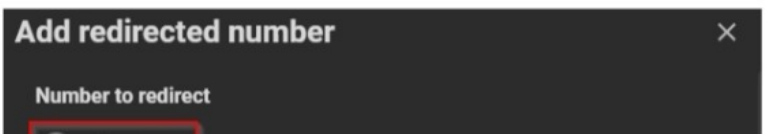


S01 | Supplier screenshot | segment 2

Screenshot_14-10-2026_102315_pages.voip-unlimited.net.jpeg

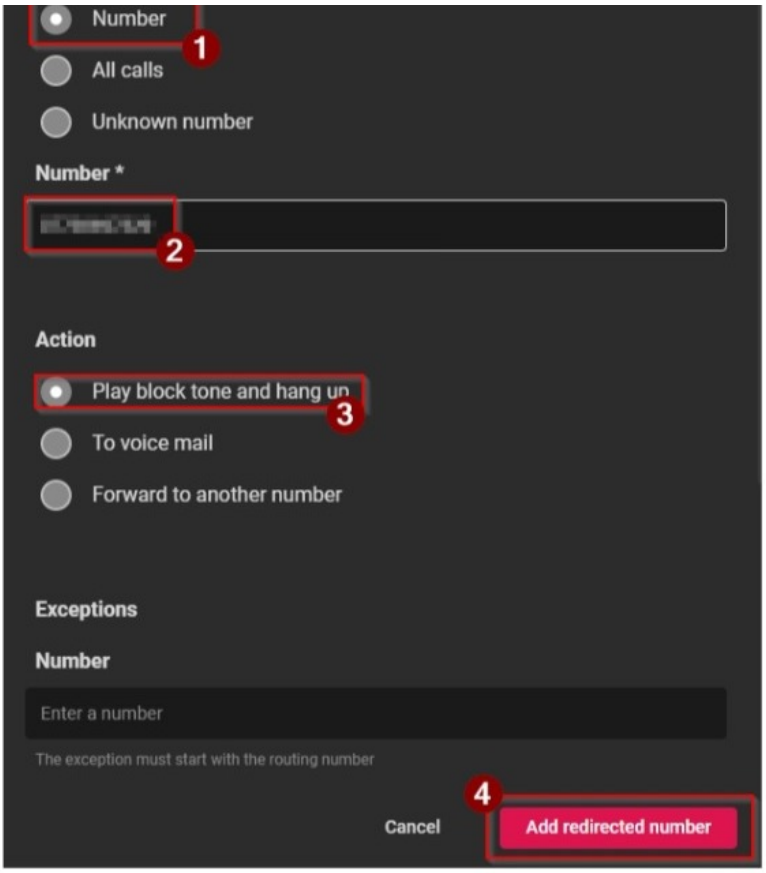

Or in the admin portal under users -> Call routing -> New Call Routing in the same way as you would for a queue.

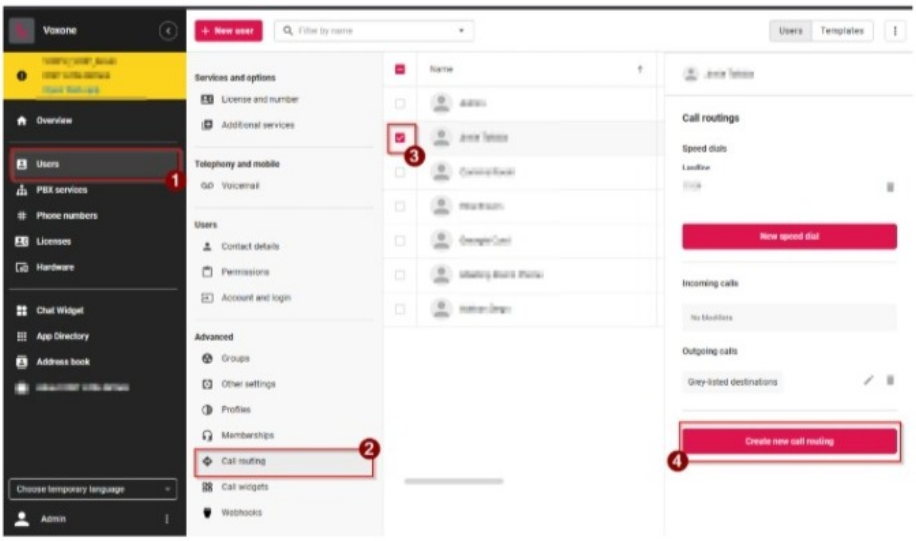

Was this article helpful? Yes No


S01 | Supplier screenshot | segment 3

Screenshot_14-10-2026_102315_pages.voip-unlimited.net.jpeg

'oxone

Voxone Tutorial - Statistics

If you have CC Pro and permissions for statistics you can access the feature in the Admin portal by clicking **Statistics** on the left hand side of the page. In the new view, you have two options to choose from: **Show statistics** and **Generate report**.

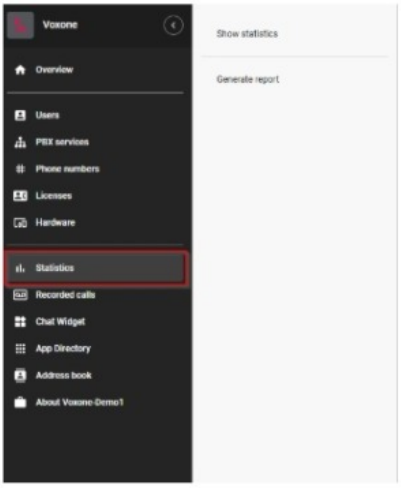




Show statistics

You are automatically redirected to the tab **Show statistics**. Here you can view and download call statistics of a certain queue or users. Just simply select the time range you want to see, as well as the queues or users, then click *Generate*. Then the system will notify you that the information is being gathered, and once that is done, you will be redirected to a view where you can see *Amount analysis*, *Time analysis* or then *Export queue data* (here you can download either CSV or excel files of the retrieved data).

Generate report

Here you can select to generate automated reports similar to the ones you can get from **Show statistics**. There reports are recurring according to your wishes - so simply select the attributes for the reports and click *Create report*. Once done, you will see the created report in the view on the bottom of the page, under *Handle your saved reports*. Here you can manage the reports you have saved, for example deactivate or delete them.

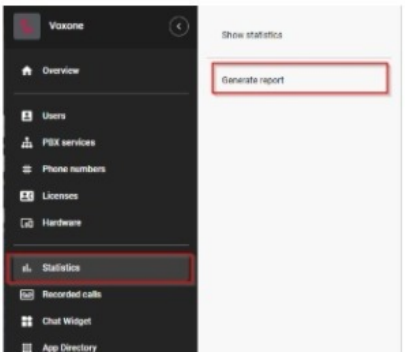



S02 | Supplier screenshot | segment 2

Screenshot_14-10-2026_102325_pages.voip-unlimited.net.jpeg



If you were to download the statistics as excel or look at the graph and filter on agents, the agents would be specified with their landline number and not their name or mobile number. This also means that the statistics won't reflect if incoming calls came in on the landline or mobile number of a user.

Was this article helpful? Yes No

'oxone


Assigning profiles to DSS keys on Voxone

Voxone admins have the ability to assign user profiles to DSS keys on auto-provisioned handsets. For instance, you can set a DSS key on a handset that has a button that end users can press to set themselves to the 'lunch' profile.


This is achieved by creating a group that contains the desired profile and assigning it as the users 'BLF Group'

Adding a profile to a group

To create a group with a profile, log in to the Voxone admin portal navigate to **Users -> Groups** on the left hand side, then, on the top right, click the **Manage Groups** button:

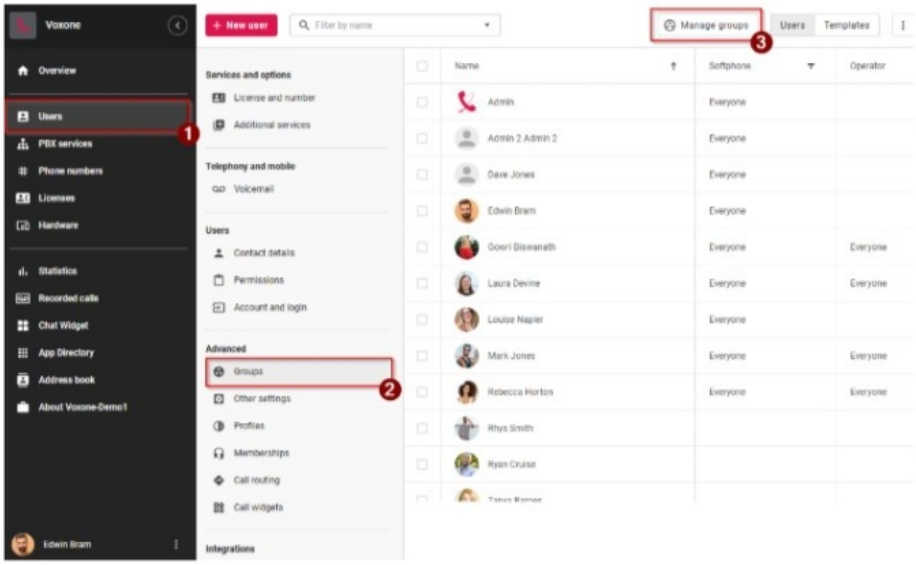

You can either select an existing group to edit or create a new group, in this instance we'll go ahead and create a new group:

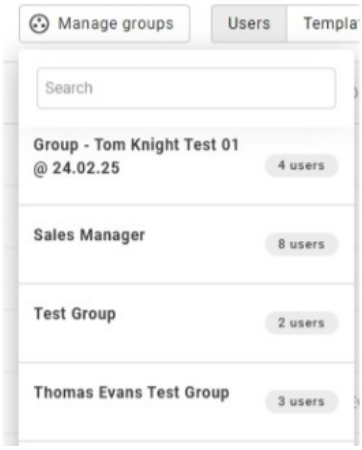


S03 | Supplier screenshot | segment 2


Screenshot_14-10-2026_102334_pages.voip-unlimited.net.jpeg




Give the group a name and click **create group**

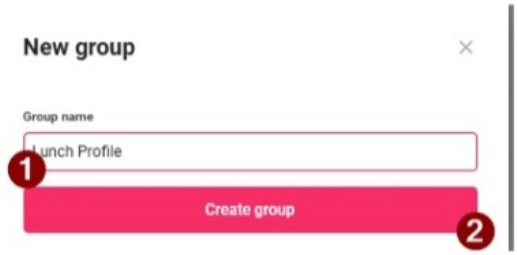

In the **add members** section, click the drop down and select **Profiles**

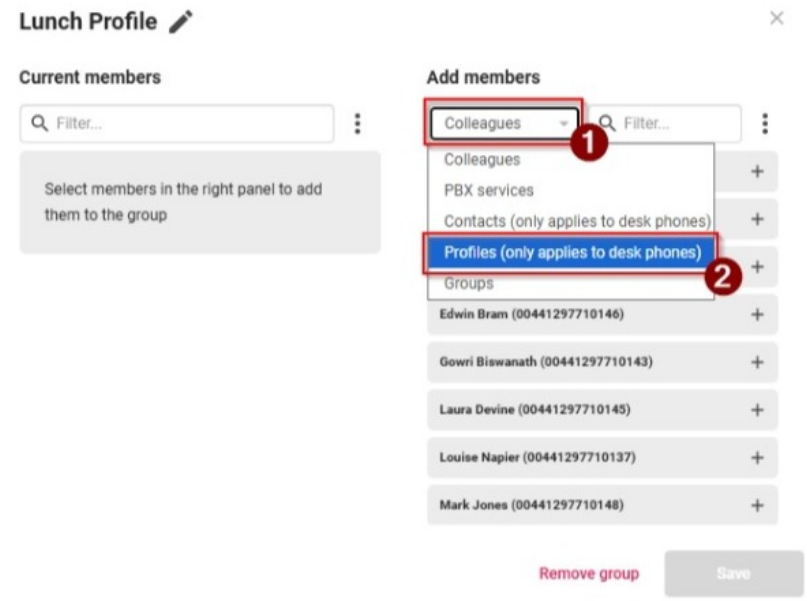

Find the profile you would like to add, then either click the **+** button or drag it over to the left-hand pane.

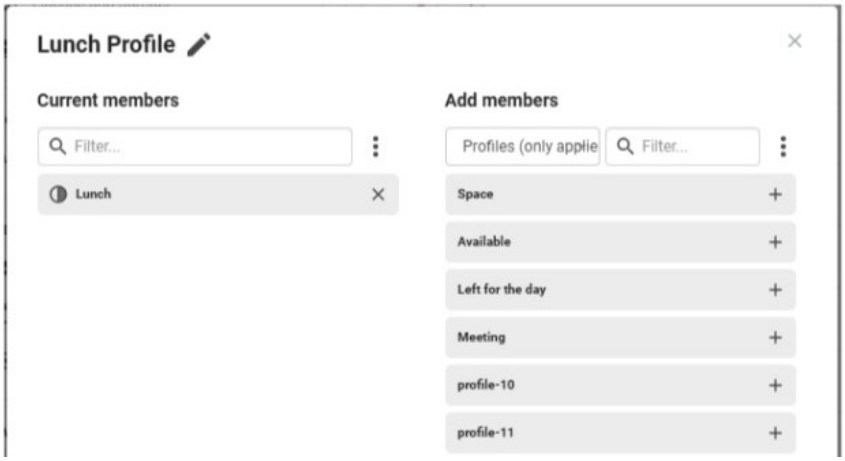

S03 | Supplier screenshot | segment 3


Screenshot_14-10-2026_102334_pages.voip-unlimited.net.jpeg



N.B. Note that only the first few profiles have names, the rest are identified by their speed dials.

The 'Available' profile starts at speed dial 0, meaning that if you create an 11th profile, it will be known as profile-10.

You can find the speed dial associated with a profile on the admin portal by navigating to **Users -> Profiles,** selecting the user, and looking at the relevant profile in the fly out on the right:

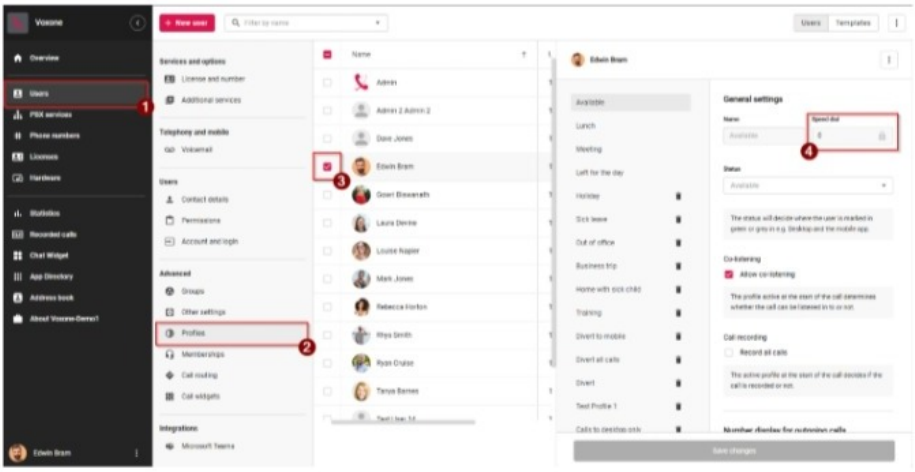


Assigning the group to the user

To assign the group you have just created to a users DSS keys, you will need to set it as the **Landline phone (BLF)** group for that user.

Head over to **Users -> Groups** in the admin portal and select the user you wish to assign the group to.


In the fly out on the right, drop down the **Landline phone (BLF)** box and click **Save**

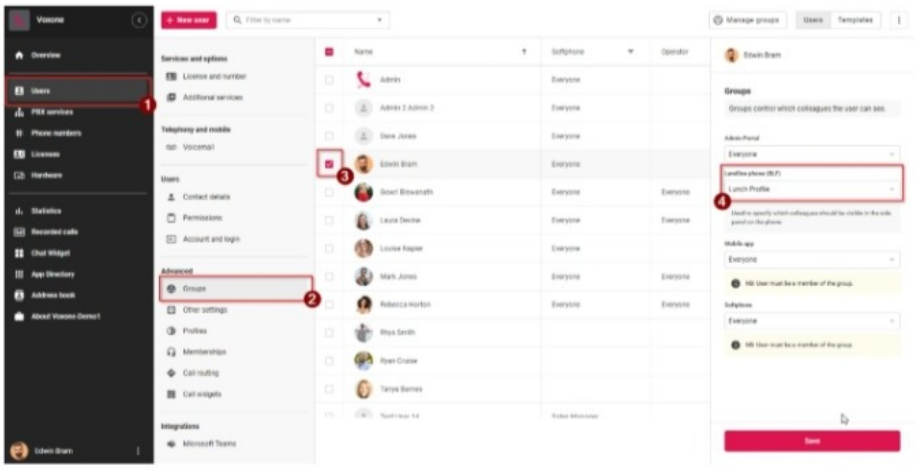

The next time the handset provisions, the DSS key will show the name of the group and pressing it will set the user to the desired profile

S03 | Supplier screenshot | segment 4

Screenshot_14-10-2026_102334_pages.voip-unlimited.net.jpeg

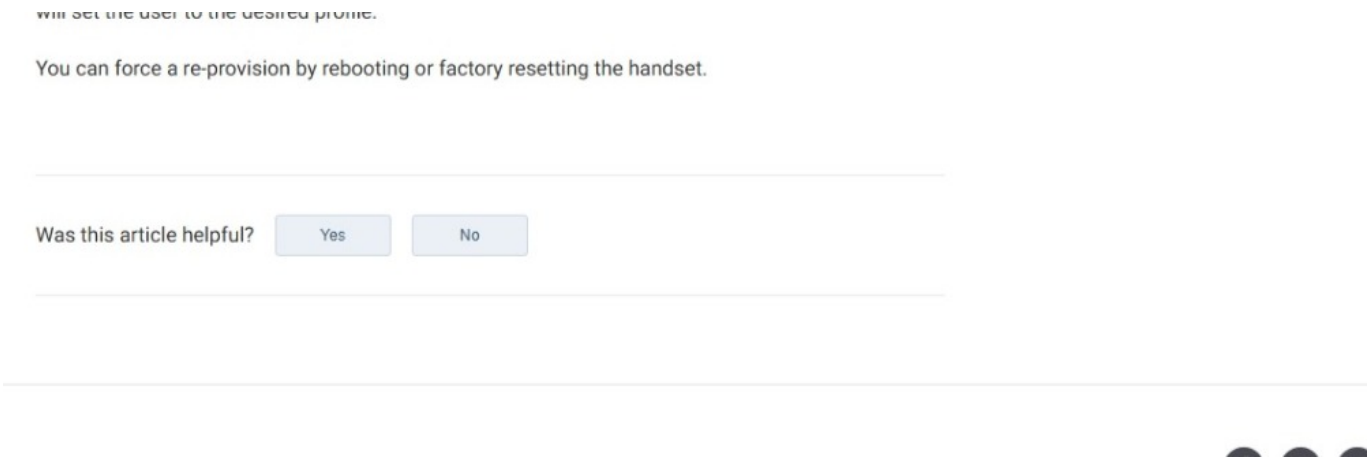


'oxone

Accessing Insights on Voxone


Enabling tracking for users

Each user that you wish to be tracked will first need the 'Stats Tracked User' additional service added to their user account.


From the Voxone admin portal, navigate to Users -> Additional Services, then tick the user(s) that you wish to add to the stats and select edit next to 'Stats Tracked User' in the fly-out on the right:

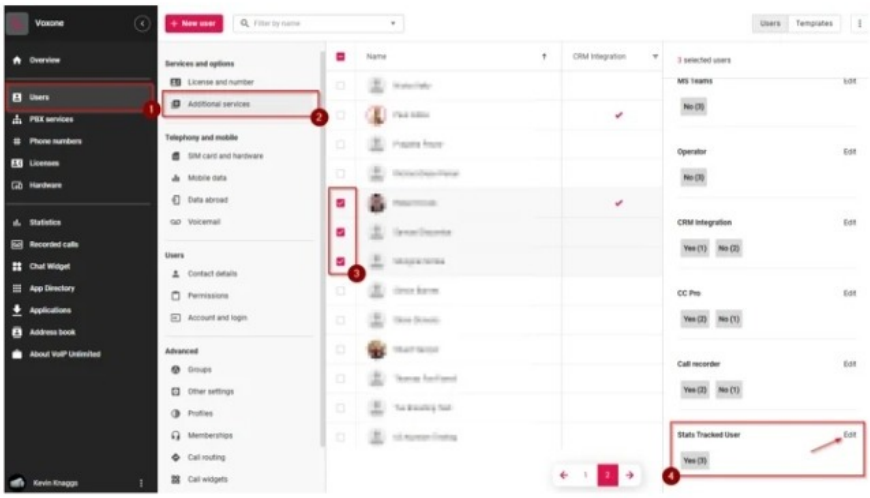

Select 'Yes' then next:

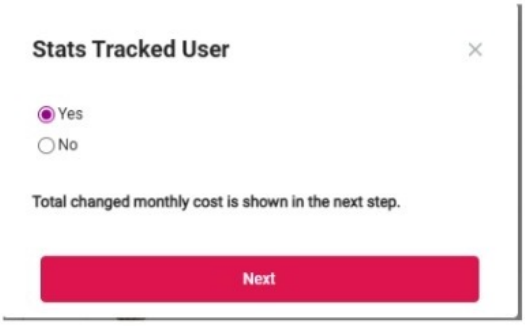


Tick to agree to the terms, then click confirm

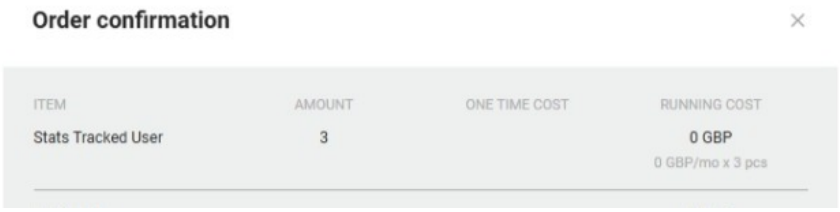

S04 | Supplier screenshot | segment 2

Screenshot_14-10-2026_102347_pages.voip-unlimited.net.jpeg

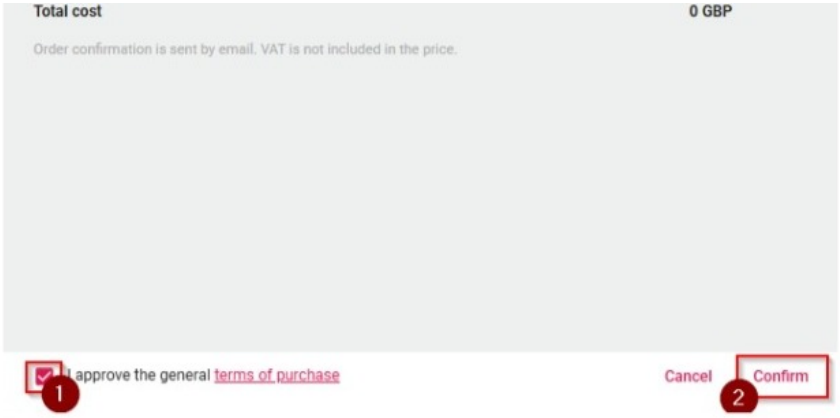

Creating the API token

To access Insights, you will first need to create an API token from within the Desktop or Web Clients.

You can do this by going to **Settings -> My Account -> Username and Password**

Under **Integration**, select **Manage Tokens**

Click **Create New token**

S04 | Supplier screenshot | segment 3

Screenshot_14-10-2026_102347_pages.voip-unlimited.net.jpeg

Select **Statistics**, optionally give the token a name, then click **Create Token**


Copy and make a note of the API token, you will not be able to see again once you've clicked OK

If you then head over to https://stats.telavox.com/dashboard, you will be prompted to enter your token.

From there you should be able to access the insights page

S04 | Supplier screenshot | segment 4

Screenshot_14-10-2026_102347_pages.voip-unlimited.net.jpeg

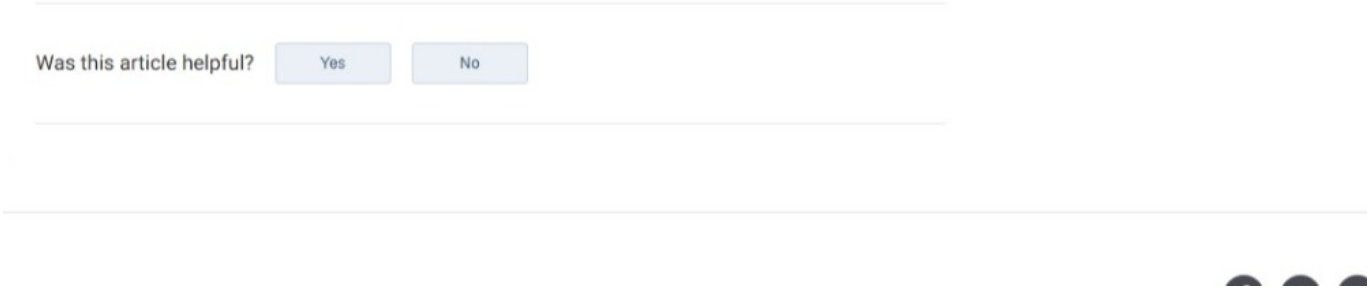

'oxone

Voxone Tutorial - Mass Edit Contacts

You can mass edit contacts from the Admin portal via the Address Book - in other words, upload an excel file in CSV or VCF format and import contact details from it. A CSV file that you want to upload should look something like this:



You can add different columns to your liking so that you get the contact details you need.

A template is available here.

NOTE:

If you have a number value, you must set the format as plain text by highlighting the cells with numbers, then **Choose Format > Number > Plain Text**.

When you are done, you need to export the file as a .CSV file (File > Save As > CSV UTF-8).

To access the mass edit feature in the Admin portal, select Address Book **> Mass edit contacts** in the front page of the Admin portal. You can see some instructions behind the links in *See instructions for CSV-files* and *Instruction VCF-files*, but here you have instructions on adding a CSV file to the system.

1. Click *Select file* and select the CSV file you want to upload the contact details from
2. A new view opens where you will choose the details to be uploaded
3. Make sure you have:
   I. selected all the columns you want to import under *Columns to be imported.*
   II. changed the drop-down menus on the columns to match their content.
   III. selected if you want the contacts to be personal or shared.



4. Click import
5. Now it is done! The system will notify you with a notification *Contact successfully uploaded* once the file has been read and uploaded to Voxone. Depending on whether you chose to upload these contact details for your personal address book or as shared ones, you can view them in **Administration > Address book > Shared contacts** or **Private contacts**.

Was this article helpful? Yes No

Screenshot_14-10-2026_102510_pages.voip-unlimited.net.jpeg

'oxone

Voxone Tutorial - Creating new sounds for your PBX Services

You can record new messages for your PBX, which will be played to the people that call you. These messages include welcome messages or messages played to the caller every thirty seconds while they are queuing, for example.

Log in to the Admin portal and navigate to **PBX Services > Manage sound** to add a new recorded message. Once you have clicked **Create a new audio** in **Manage sounds**, you see the following:



Here you need to name your recording. You can also select if you want to add some description to it, e.g. a transcript. Then you can choose how you want to add the recording:

1. *Call me and record the audio on my fixed phone* = This means that after clicking *Create sound*, the system will call your Voxone handset / softphone. Answer the call and listen to the instructions on what to do. When you have finished the call, the recording will automatically be added to the PBX soundbank.
2. *Call me and record the audio on my mobile phone (requires a validated number)*= This means that after clicking *Create sound*, the system will call your mobile phone. Answer the call and listen to the instructions on what to do. When you have finished the call, the recording will automatically be added to the PBX soundbank.
3. *Upload an audio file*: You can upload it directly to the system if you already have a recording ready. Please note that we support only the most common audio formats, such as MP3, WAV, WMA, RAW, and so on.

You can also select to skip adding the audio for now to have the recording as a placeholder.

When the recording has been added, it is shown on the list in **PBX Services > Manage sound**. There, you can also select it to be played in a particular phase of a call. Here is an example of a welcome message added to a queue:



Was this article helpful? Yes No

Screenshot_14-10-2026_102517_pages.voip-unlimited.net.jpeg

'oxone

Voxone Tutorial - Creating PBX Services



As an administrator, you can create and modify your company's PBX services in the Voxone admin portal, in the **PBX services** tab. On the left side of the page, you see all your PBX services, and you have the possibility to manage the related sounds.

Here's how to create a new PBX service. First, click on the plus-sign in the bottom-right corner and select the type of PBX service you want to use. This helps you select the correct PBX service by showing a description for each of them. Click on the preferred service, name it, and select a number from the drop-down menu.

In a nutshell, there are few things you need to remember when setting up a new PBX service:

1. Adding opening hours.
2. Activating correct settings to the queue.
3. Selecting what happens to the incoming calls.

Below are more detailed explanations of each PBX Service.

IVR

An IVR lets your customers select which queue to redirect calls to. When setting up this PBX service, you need to remember the following:

1. Add a recording where you notify the caller of the different redirect options.
2. Select the actual PBX services for each keypad options. To add the recording to the IVR, click the dial pad icon beneath the "Open" tag. A window will open where you select Add sound, select the sound from the drop-down list, and click Save changes.

Now the recording is added to the IVR.

Next, modify the IVR settings by clicking the same dial pad icon as before.

S07 | Supplier screenshot | segment 2

Screenshot_14-10-2026_102517_pages.voip-unlimited.net.jpeg

You can now select the preferred keypad options and the time-out for the caller (the amount of time the caller needs to make a choice). Once you have clicked save, selected touch-tone options will appear for the IVR. By selecting a touch-tone option, you can select what happens to the call when a caller selects that number. Remember to modify the time-out action the same way.



Queuing system

A queue is the most-used PBX service where users take the calls determined by the set call strategy. To edit the settings of the queue, click the tile below Open. Add new members by clicking **Add members**, and then select the members from the list and press **Add**.

In **Treatment of calls to the queuing system**, you can select the calling strategy (how calls are assigned to the queue members) and the call length (the length of the call attempts).

If needed, you can also set up a maximum wait time, after which the call will be redirected to a different number.

The **For callers** section contains settings related to messages played for callers. You can select if you want to play a welcome message, what kind of a waiting sound the queue has, and if you want to play extra queue sounds or messages in it.

For members of the queuing system has settings related to the queue members, such as number presentation. You can choose to have the callers' numbers presented when they call to the queue, and if you wish, add a suffix to it. This way, the caller's number will be preceded by the number combination you have set. You can also select so that the queue members see the queue's number when a customer calls the queue. In this section, you can also add a wrap-up time for the queue members to have a short break in between calls.

The caller's wait time can also be selected to be shown to the queue members.


In **Advanced settings**, you can change the queue's name and allow the users to show the queue number when calling. You can also configure new call routings for specific numbers and add simple IVRs to the queue.

Shared voicemail

Shared voicemail is a voicemail box that can be added to your PBX services. By doing so, your customers can leave you a message directly in the PBX service. By clicking the recording tile, you can choose, for example, if you want a recording to be played for the caller when they leave a message or if you want to receive SMS notifications or emails from new messages.

S07 | Supplier screenshot | segment 3

Screenshot_14-10-2026_102517_pages.voip-unlimited.net.jpeg

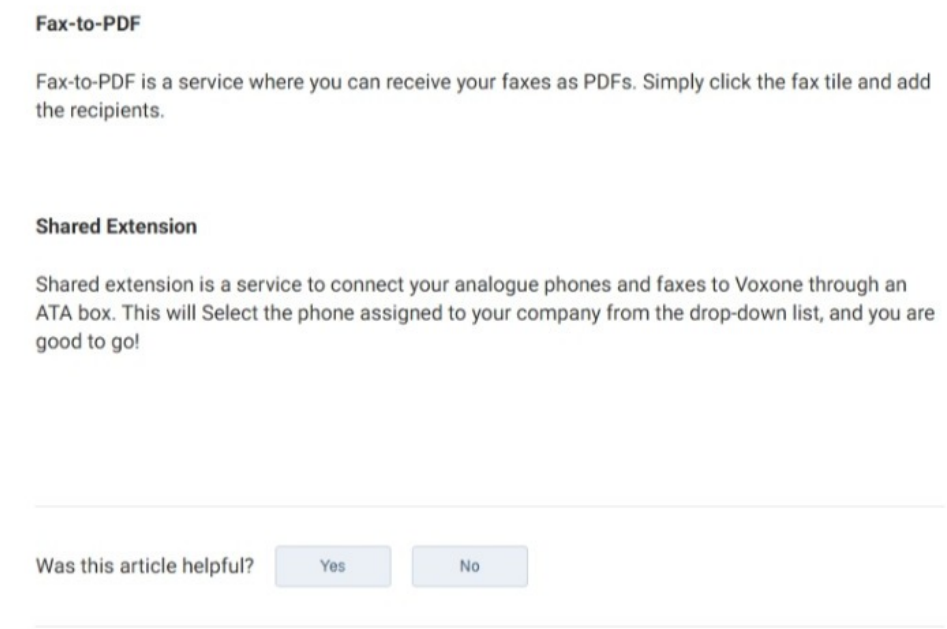

'oxone

Voxone Tutorial - Colleagues and Contacts on Voxone Mobile

Save to local address book on your mobile

With the Voxone mobile app, you can ensure that your **colleagues** and **personal** or **shared** contacts from Voxone are automatically saved as contacts on your mobile phone.

This is done via the **Voxone app on mobile** under **Settings** (cogwheel) **> General > Colleagues and contacts > Save to local address book**. There you can select which category of contacts from Voxone you want to automatically save to your mobile phone. The options you have are **Colleague, Personal** or **Shared**. You can also choose more than one option.



The advantage of having colleagues saved as contacts on the mobile phone itself is that you can clearly see which colleague is calling you. Regardless of if they are using their landline or mobile number. It is not only their name that is saved in the contact but also additional contact information for example their picture, department and e-mail address!

Save contact lookup from calls

You also have the option to select **Save contact lookups from calls** which are located right below **Save to local address book**.

If this setting is enabled, the contact lookup that the **Voxone app** does when you receive an incoming call automatically creates a temporary contact on your phone for the calling number. As long as the contact is saved on your phone, you will be able to see the name of the person or company who called instead of seeing a number.

For this setting, you can choose between the following options:



Was this article helpful? Yes No

'oxone

Voxone Tutorial - Address Book

In this article

1. Mass edit contacts
2. Mass importing contacts



The **Address book** can be found via the (left) main menu of the Voxone Admin Portal.

It's a good way to get an easy overview of all users on the customer page together with e-mail addresses and phone numbers, but more importantly you can administer a few things via this page that can only be done here.

mceclip0.png

The different tabs are:

Colleagues

Here you can see a full list of users on the customer page together with their contact information and calendars. You can administer the user's contact info from this menu but most importantly you can choose whether a user should be visible or not in our apps. If you want to hide a user simply set the **Hidden number** option to **Yes** and they will then be moved to the **Hidden contacts** tab.

Shared contacts

Here you can see and add external contacts that should be visible for all users on the customer page. These will then be visible in our apps. If at any point you have a shared contact that you

S09 | Supplier screenshot | segment 2

Screenshot_14-10-2026_102529_pages.voip-unlimited.net.jpeg

would like to make private, you can set the **Shared** option to **No.**



Private contacts

Here you can see and add private contacts that should only be visible for the current user account. These will then be visible in our apps. To make these public, similarly to above, you can set the **Shared** value to **Yes.**

Hidden contacts

Here you can see and administer all contacts that are hidden with the Hidden number option in the user's contact information. If you change the **Hidden number** option to **No** the contact will be moved to the **Colleagues** tab. If there are no hidden contacts, this tab will not be visible.

Mass edit contacts

Here you can mass edit external contacts, allowing you to either upload multiple contacts via a CSV or VCF-file. You can also use this tab to delete groups of external contacts.

Mass importing contacts


Voxone does not have specific formatting requirements for importing a CSV file. When importing a file, we will use the first row as identifying columns to match up the information found in your rows.

As a worked example, we will import the following file:

Prior to being imported into Voxone, you will be given the import and confirmation window. By default, you will need to select the most relevant field for each column.

S09 | Supplier screenshot | segment 4

Screenshot_14-10-2026_102529_pages.voip-unlimited.net.jpeg

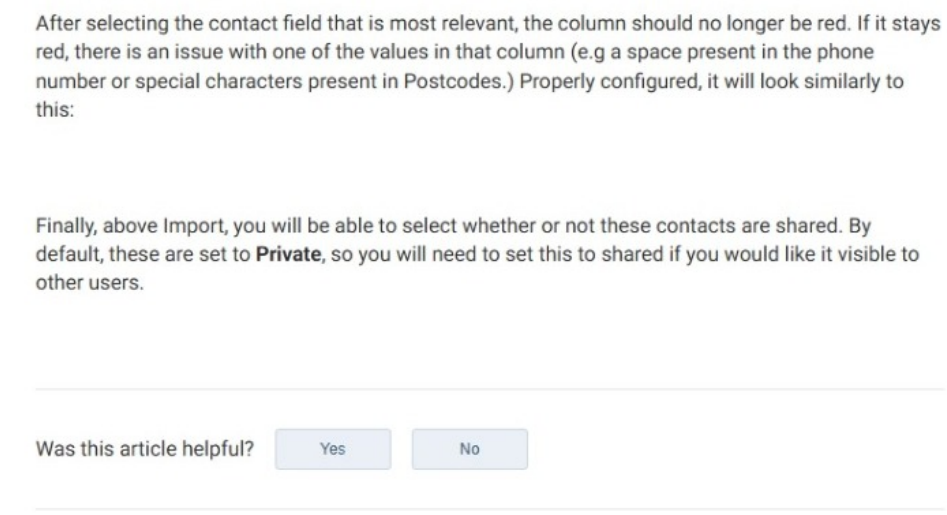

S10 | Supplier screenshot | segment 1

Screenshot_14-10-2026_102535_pages.voip-unlimited.net.jpeg

'oxone


Voxone Tutorial - Adding new terminals (Handsest)



Adding supported handsets on Voxone is achieved through the "Hardware" section. This will show you which handsets are allocated, any notes currently applied to handsets, and gives you the ability to add new handsets to the system. To begin configuring a handset, press "Add hardware, and the "Add your own terminal" button.



From here, you will be asked about the model of the handset. This list covers all handsets that can currently be provisioned and configured automatically. Handsets that are not on the list, while unsupported for dynamic management, can still be added to a user outside of this menu by manually configuring the handset via it's web interface, as we are able to supply the username/password of the user you are trying to configure.



S10 | Supplier screenshot | segment 2

Screenshot_14-10-2026_102535_pages.voip-unlimited.net.jpeg

You will also be asked if device changes are administrator-only, or if the user can also make changes. This includes adding notes to their installation, and removing the handset if they choose to be mobile / application based.



Finally, you will be asked to assign this to a user. This is an optional feature however, and you can simply leave this free on the system until a user is created or until the handset is needed. An optional description field is also present, which can help to identify the handset (e.g. Upstairs meeting phone).

In some cases, you will have access to your hardware before you have access to your users. As such, you may need to assign a handset to a user you've just created. If this is the case, simply click on the hardware you're looking to assign and there will be a drop-down menu labelled "User or Shared Extension". Simply find your user and press "Save" at the bottom.

If a handset is supported but fails to be added to Voxone, the MAC address may still be on another company's enterprise provisioning solution. You will need to get in touch with your provider to get this removed.

S10 | Supplier screenshot | segment 3

Screenshot_14-10-2026_102535_pages.voip-unlimited.net.jpeg



S11 | Supplier screenshot | segment 1

Screenshot_14-10-2026_102542_pages.voip-unlimited.net.jpeg

'oxone

Voxone Tutorial - Setting User Permissions



Permissions on Voxone are closely tied with groups, in that a user with access to a certain set of groups can also administrate them if need be.


Selecting an admin user will allow you to set the following permissions:

- Administration - This will give users admin rights. By default, these are admin rights over all users but a drop-down option will appear to reduce the amount of control to a certain BLF profile. This is helpful for a team leader who only needs to administrate the Sales group's Sales Call queue.
- Co-Monitoring - This will give users the ability to listen in to calls by dialing into an active session. A sound will be played to advise the active party that this is taking place. Similarly to Administration, this can be set to a particular group as to separate users by the previously setup groups.
- Statistics - With the CC pro feature enabled, this gives admins the ability to generate statistics and reports. By default this is set to everyone, but these can be set to a particular group so only a support team leader can generate support statistics, for example.

If call recordings are enabled, this will allow you to select whether users can both listen to call recordings, and listen to their own recordings. This is useful for training purposes to listen back to users own recordings without giving access to all users across a particular group.

S11 | Supplier screenshot | segment 2

Screenshot_14-10-2026_102542_pages.voip-unlimited.net.jpeg

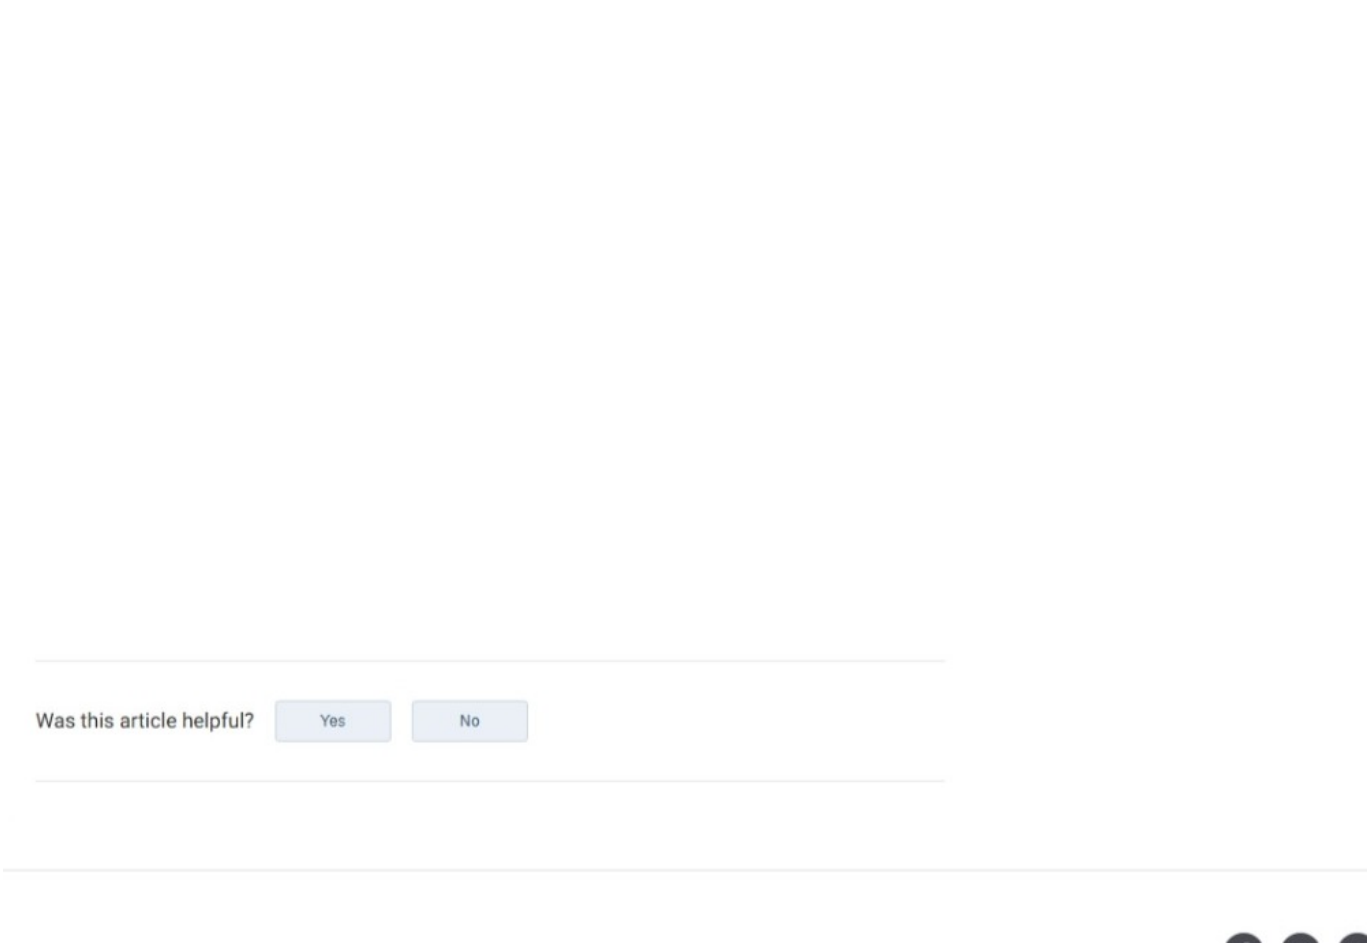


S12 | Supplier screenshot | segment 1

Screenshot_14-10-2026_102548_pages.voip-unlimited.net.jpeg

'oxone

Voxone Tutorial - Creating and Editing Contacts

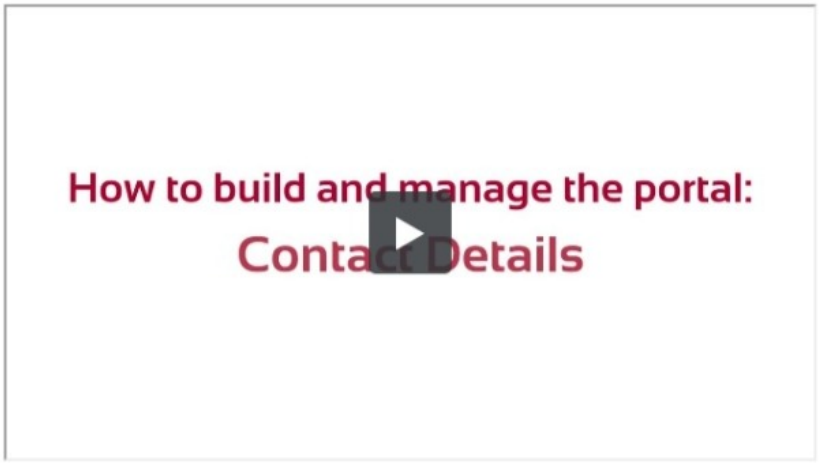

The "Contact details" tab will provide you a list of users, and the ability to modify any information for them.



This is useful for grouping users by department, as well as providing additional details such as personal IDs, additional contact phone numbers, or broader details such as city or country. Departments and keywords are particularly useful, as they can be queried in the search bar in the web, desktop, and mobile apps.

S12 | Supplier screenshot | segment 2

Screenshot_14-10-2026_102548_pages.voip-unlimited.net.jpeg



You can manage contacts from the Voxone Desktop app or the Voxone mobile app.

Creating new contacts can be done from the contacts section by clicking the 3 dots next to the search box and clicking 'Create New Contact'



This will bring up a new pane on the right where you will be able to enter the contact details. Note that all of these fields are searchable from the search bar, and you can even enter keywords for specific contacts.

Lastly, scroll down to the bottom of the page and click 'save' to save the contact.

Once you have saved the contact you can then edit them, first find them by searching for them in the search bar.

S12 | Supplier screenshot | segment 3

Screenshot_14-10-2026_102548_pages.voip-unlimited.net.jpeg

Then in the right hand pane, Click the edit button. Note that you can also now select the 'Shared with Colleagues' button to share them with the rest of your organisation.

This will allow you to edit the contacts details, once you're done, scroll to the bottom of the page and click 'Save' to save the contact. If you wish to delete the contact entirely, you can click delete here instead.

Contacts can also be created and deleted in the Voxone Admin portal by navigating to the address book on the left hand side. You can also mass edit or upload contacts here via CSV, which we will cover in another tutorial.

Was this article helpful? Yes No

S13 | Supplier screenshot | segment 1

Screenshot_14-10-2026_102555_pages.voip-unlimited.net.jpeg

'oxone

Voxone Tutorial - Managing user groups



Groups play in really closely with physical handsets, as they configure BLF for the user. It is also important to configure this correctly as creating a group with improper permissions can result in lack of visibility to certain items in the mobile / desktop app (such as shared voicemails, and access to Call Queues).

In the top-right, select "Manage Groups" and then the Create a new group button. This will open a window for a new name.



After selecting a name,it will allow you to add members and services to this group. By default, it will show you which members need adding to this group. By using the + button, you are able to move them from the right panel to the left. You are also able to drag these around as necessary.



S13 | Supplier screenshot | segment 2

Screenshot_14-10-2026_102555_pages.voip-unlimited.net.jpeg

The "Colleagues" section on the right is a drop-down menu, that contains the following options:

- PBX Services - This will give users visibility of the services added to this group. For example, a user that requires access to a call queue to see who is ringing / on the phone will need their PBX service added to their group. Similarly, if a group of users need to access a shared voicemail to see who left a message, this can be configured here.



- BLF Contacts - This will populate your handsets DSS keys (also known as speed-dial) with the contacts you select, if there is space available. If a handset does not have enough space to populate all contacts on their DSS keys, then it will populate from the top of the "current members" list, down.

- BLF Profiles - This will populate your handsets DSS keys with the profiles you select, if there is space available. This will allow you to rapidly switch between being available for calls, unavailable for lunch, or in meetings at the press of a button.

S13 | Supplier screenshot | segment 3

Screenshot_14-10-2026_102555_pages.voip-unlimited.net.jpeg

After filling the relevant sections, saving this profile will allow you to select this group for users. You have granular control on which device uses which group.

- Landline Phone (BLF) - This will be the DSS keys on your physical handset.
- Mobile App - This will configure which services you have access to on the mobile app (useful if when roaming you are only interested in certain contacts, or only expect calls on a particular call queue)
- Softphone - This will configure which services you have access to on the desktop and web clients. This is good for management who may need to obtain an overview of select groups.

Simply select the user (or users with the checkboxes on the left) you wish to configure this for, and apply the relevant option to each of the drop-down windows. The "Everyone" option will give users access to all services and will fill BLF alphabetically. This is useful if a handset has an optional expansion module connected as this, in most cases, can accommodate most small business contacts.

Was this article helpful? Yes No