S14 | Supplier screenshot | segment 1

Screenshot_14-10-2026_102613_pages.voip-unlimited.net.jpeg

'oxone

Voxone Tutorial - Additional User Services

Additional services are chargeable features which enrich Voxone functionality.

Simply select a user under the "Additional services" tab and you will be presented with the following:



CC Pro

Used for extended statistics and queue functionality.

CRM Integration

This service is needed to get full access to our various integrations.

Recorded Calls

The user's calls are recorded. Keep in mind that the user needs the right to be able to listen to their own recorded calls. There is also a user right for accessing all recorded calls.

Operator

Operator is a program for telephony operators, which is used to pick up and forward calls. If a user has this additional service, they can use the Operator program.

S14 | Supplier screenshot | segment 2

Screenshot_14-10-2026_102613_pages.voip-unlimited.net.jpeg



Screenshot_14-10-2026_102619_pages.voip-unlimited.net.jpeg

'oxone

Voxone Tutorial - Additional User Services

Additional services are chargeable features which enrich Voxone functionality.

Simply select a user under the "Additional services" tab and you will be presented with the following:



CC Pro

Used for extended statistics and queue functionality.

CRM Integration

This service is needed to get full access to our various integrations.

Recorded Calls

The user's calls are recorded. Keep in mind that the user needs the right to be able to listen to their own recorded calls. There is also a user right for accessing all recorded calls.

Operator

Operator is a program for telephony operators, which is used to pick up and forward calls. If a user has this additional service, they can use the Operator program.

S15 | Supplier screenshot | segment 2

Screenshot_14-10-2026_102619_pages.voip-unlimited.net.jpeg



S16 | Supplier screenshot | segment 1

Screenshot_14-10-2026_10261_pages.voip-unlimited.net.jpeg

'oxone

Voxone Tutorial - Setting user profiles



By default, a newly created Voxone user will have 10 pre-configured profiles that they can select.


These profiles control how calls are routed to a user, as well as allow for changing the outgoing caller ID, and other features such as the Pause Profile.



S16 | Supplier screenshot | segment 2

Screenshot_14-10-2026_10261_pages.voip-unlimited.net.jpeg

If calls are to be routed to both a landline phone, and a mobile app, make sure that the handling of calls are set to "Landline Only" and check the "Also call mobile app" box.



You can quickly dial a shortcode to put yourself on a profile, the syntax is *24*[SpeedDial]#, which will apply the profile associated with that speed dial. For example, the four main profiles of "Available", "Lunch", "Meeting", and "Left for the day" will always be on profiles 0,1,2, and 3. Dialing this will generate a voice confirming the change.

Was this article helpful? Yes No

'oxone

Microsoft Teams and Voxone Integration - Enabling Direct Routing.

Before executing the commands in this guide.

You will need to have the following requirements fulfilled moving forward

Requirements

- Two accounts that is a Teams admin or Global admin in the Microsoft 365 Admin Center
- These accounts also needs Microsoft licenses that supports voice
- Example on licenses that support voice e.g - E5 or E1/E3 + Phonesystem
- The two admin accounts need to have the domain as an email for both sbc1 and sbc2.

Full description on how this is done can be found in the steps below

** Note that accounts can be set up as temporary accounts or use of existing accounts*

This is needed for the configuration for the domains for the domain urlmap (described here)

Existing accounts can be restored to its original username/license and domain

If you decide to use the temporary accounts, they can be removed and their corresponding licenses cancelled ***after completing this guide*** .

Connect the admin accounts to the new domains

1. Log in to **Microsoft 365 Admin Center** with the **Admin Account** (admin.microsoft.com)
2. Go to **Active users** and find one of the two accounts mentioned in **requirements** Let's name these users sbc1@yourdomain.com and sbc2@yourdomain.com in this **example**
3. Click on one of the **users** (e.g sbc1@yourdomain.com)
4. Click **Manage username and email** > Click on the **pen** to edit > Choose **sbc1** from the **domain dropdown** > **Save** settings:



5. Make sure the **username is saved correctly.** You should now have a username like sbc1@tvxteamsxxxxx-sbc1.sfbcust.telavox.se



6. Repeat the process for the **second user** - meant for user **sbc2**. I.e adding a **username** like sbc2@tvxteamsxxxxx-sbc2.sfbcust.telavox.se

When this is done we can start executing the Powershell commands in this guide.

Setup Direct routing and configure Domains and User(s)

1. Add the Teams module to Powershell

Install the Teams module with the below guide

Guide to download and install the Teams-Module

2. Create session towards Teams-Environment and Voxone systems

This step will create the session needed to update the settings in Microsoft-Teams

Run the following command from Powershell (**as administrator**)

```
Connect-MicrosoftTeams
```

3. Make sure the Domains are populated in domain urlmap

Run the following command:

```
Get-CsTenant | fl Tenantid,*Domain*
```

Your result should contain **sbc1** and **sbc2** in the **DomainUrlMap** as **VerifiedDomains** (The naming

Your result should contain **sbc1** and **sbc2** in the **DomainUriMap** or as **VerifiedDomains** (The naming convention is dependent on what powershell version is being used)

PowerShell Version 5.1.X

PowerShell Version 7.X

4. Create direct routing rules for Teams

The original guide from Microsoft can be found here

When running the below commands - remember to change to the **FQDN:s** (Domains)

provided by the Support Team. These **FQDN:s** (Domains) must be changed on both **sbc1** and **sbc2**

4.1 Create the PSTN Gateways

Make sure this is **two** complete rows in **Powershell** (without quotation marks)

```
1) “New-CsOnlinePSTNGateway -Fqdn tvxteamsxxxxx-sbc1.sfbcust.telavox.se -Enable
2) “New-CsOnlinePSTNGateway -Fqdn tvxteamsxxxxx-sbc2.sfbcust.telavox.se -Enable
```

4.2 Create PSTN Usage

```
Set-CsOnlinePstnUsage -Identity Global -Usage @{Add="Voxone"}
```

4.3 Create Voice Route

Make sure this is **two** complete rows in **Powershell** (without quotation marks)

```
1) “New-CsOnlineVoiceRoute -id "Voxone" -NumberPattern ".*" -OnlinePstnGatewayL
2) “Set-CsOnlineVoiceRoute -id "Voxone" -OnlinePstnGatewayList @{add="tvxteamsx
```

4.4 -Create a Voice Routing Policy

```
New-CsOnlineVoiceRoutingPolicy "Voxone" -OnlinePstnUsages "Voxone"
```

S17 | Supplier screenshot | segment 4

Screenshot_14-10-2026_102625_pages.voip-unlimited.net.jpeg

After this you will need to create the direct routing rules for Teams (to place and receive calls to and from Voxone servers) this is done in the **following steps.**

5. Check if a user is present in Microsoft Teams

To check if a user that is created is present in Teams

Run the following command and adjust (username@yourdomain.com)

```
Get-CsOnlineUser -Identity "username@yourdomain.com" | fl RegistrarPool
```

The response to that command should contain and look something like below

.infra.lync.com

6. Associate a number to a Teams-user

First check in **the Voxone Admin Portal** what **landline** number is set to the user, note that **cannot** assign a mobile number to the user.

Then, we need to associate a landline number to a Teams user:

```
Set-CsPhoneNumberAssignment -Identity "username@yourdomain.com" -PhoneNumber "+
```

Remember to use the **E.164** number format i.e +44 (without the first zero) for the UK.

7. Grant Online Voice Routing Policy to a User

To grant usage of the online voice routing policy to a user - Run the following command

```
Grant-CsOnlineVoiceRoutingPolicy -Identity "username@yourdomain.com" -PolicyNam
```

8. Verify user creation

To verify that the user is created correctly - Run the following command

```
Get-CsOnlineUser "username@yourdomain.com" | select OnlineVoiceRoutingPolicy
```

Here you should see **Voxone** as an output.

9. Configure the Teams user(s) in the Voxone Admin Portal


Login to the Voxone **admin portal** with an administrator account here

First, the add-on "**MS-Teams**" needs to be added on the user(s) in the **Voxone Admin Portal (portal.voxone.co.uk)**.

Under "Users -> **Additional services**" add the MS-Teams feature for the user(s) that will be using Microsoft Teams with Voxone. This needs to be done separately for each individual user.

S17 | Supplier screenshot | segment 5

Screenshot_14-10-2026_102625_pages.voip-unlimited.net.jpeg

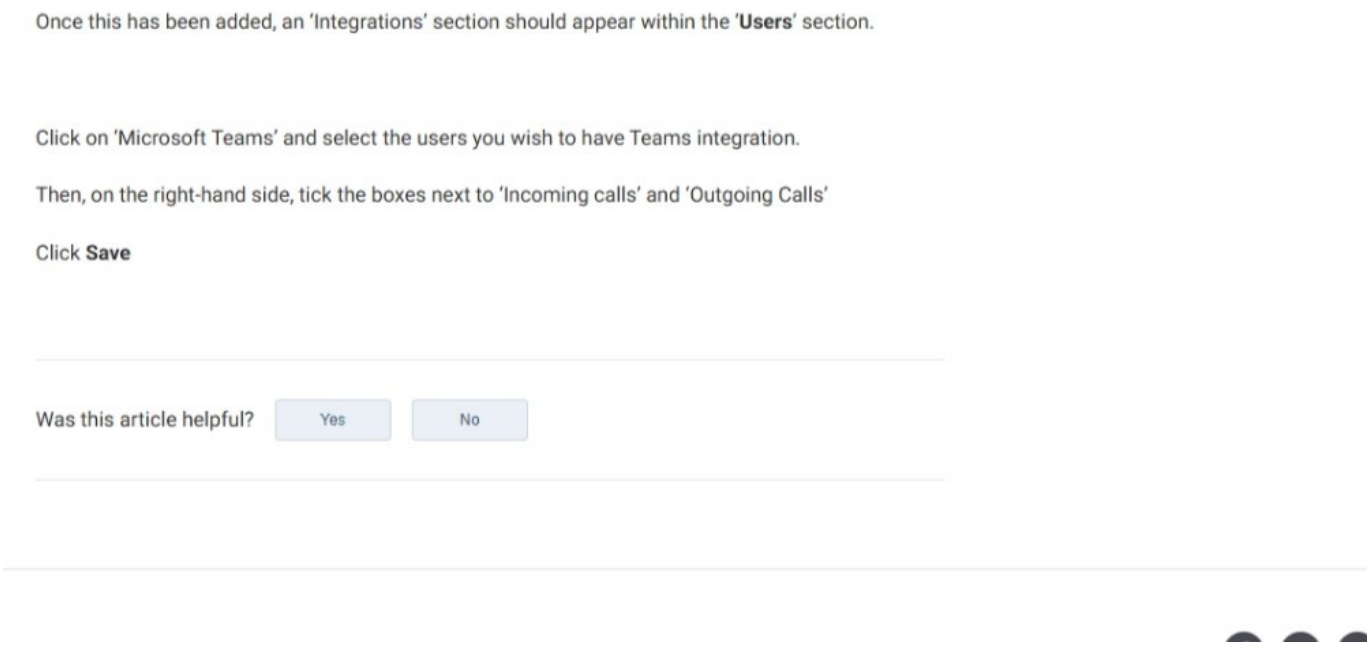

Screenshot_14-10-2026_102631_pages.voip-unlimited.net.jpeg

'oxone

Adding exceptions to the Grey-list

As a security measure, Voxone will block access to certain international destinations in its 'Grey List'

If you're having difficulty placing international calls and hear the message "Subscription is blocked for outgoing calls to this number" its likely that the number you are trying to call is being blocked by the Grey List.

You can add exceptions to the Grey List, or remove it entirely (not recommended) in the Voxone admin portal.

First, log in to the Voxone admin portal with an account that has admin rights, then head over to Users -> Call Routing



Select the users you wish to add an exception for and click the edit button next to 'grey-listed destinations' underneath 'outgoing calls' on the right-hand side.

If you would like to move this entirely, click the delete button instead.



S18 | Supplier screenshot | segment 2

Screenshot_14-10-2026_102631_pages.voip-unlimited.net.jpeg

In the 'New call routing' dialogue box, type in the number you would like to add as an exception. This can be an entire number, partial number, or a country code. In this instance we will add an exception for Israel (+97).



Once you click 'confirm' the exception will be added and the user(s) will be able to make the call.

Was this article helpful? Yes No

S19 | Supplier screenshot | segment 1

Screenshot_14-10-2026_102637_pages.voip-unlimited.net.jpeg

'oxone

Setting up a shared extension

Voxone allows admins to set up a handset as a shared extension with limited functionality without the need for an additional license.

Shared extensions can be assigned to a handset and auto-provisioned, they can make and receive calls but don't include functionality such as profiles or scheduling.

This is done via the **PBX Services** section in the Voxone admin portal:



To create a new shared extension, click the **New PBX Service** button in the top left corner:



S19 | Supplier screenshot | segment 2

Screenshot_14-10-2026_102637_pages.voip-unlimited.net.jpeg

In the **PBX Service** drop down, select **Shared extension**, give it a name and select a **Number** from the **Number** drop down and click the **Create PBX** service button:




This will create the Shared extension, to assign a handset, select one from the **Select Phone** drop down in the fly out on the right-hand side.

After rebooting or factory resetting the handset it will auto-provision with the Shared extension and be ready for use.

S19 | Supplier screenshot | segment 3

Screenshot_14-10-2026_102637_pages.voip-unlimited.net.jpeg

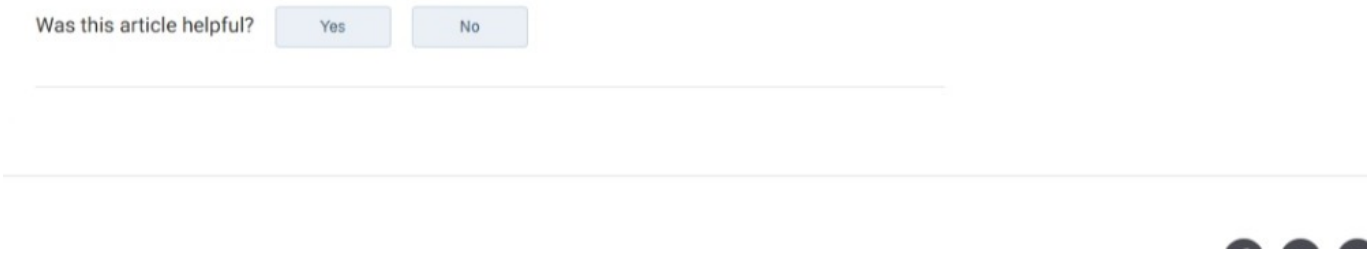

Screenshot_14-10-2026_102644_pages.voip-unlimited.net.jpeg

'oxone

Set an additional speaker output

Voxone users can set an additional speaker output in the Voxone app, this is particularly useful when using a headset.

On receipt of an inbound call, a notification sound will be played through both the headset and the additional speaker (e.g. a laptop speaker).

To set an additional output, head over to **Settings -> Telephony & Audio** in the Voxone app, then click on **Ring tone and Volume**.




Then, click on **Additional ring tone output** and select the desired speaker.




S20 | Supplier screenshot | segment 2

Screenshot_14-10-2026_102644_pages.voip-unlimited.net.jpeg

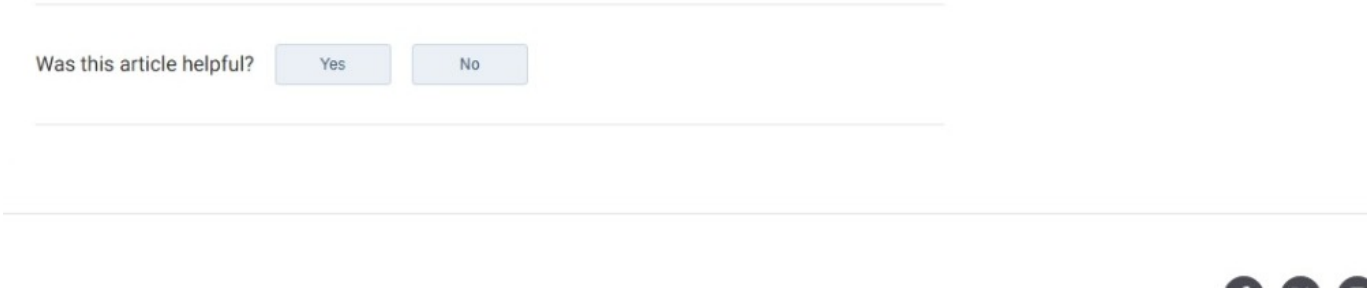

S21 | Supplier screenshot | segment 1

Screenshot_14-10-2026_102652_pages.voip-unlimited.net.jpeg

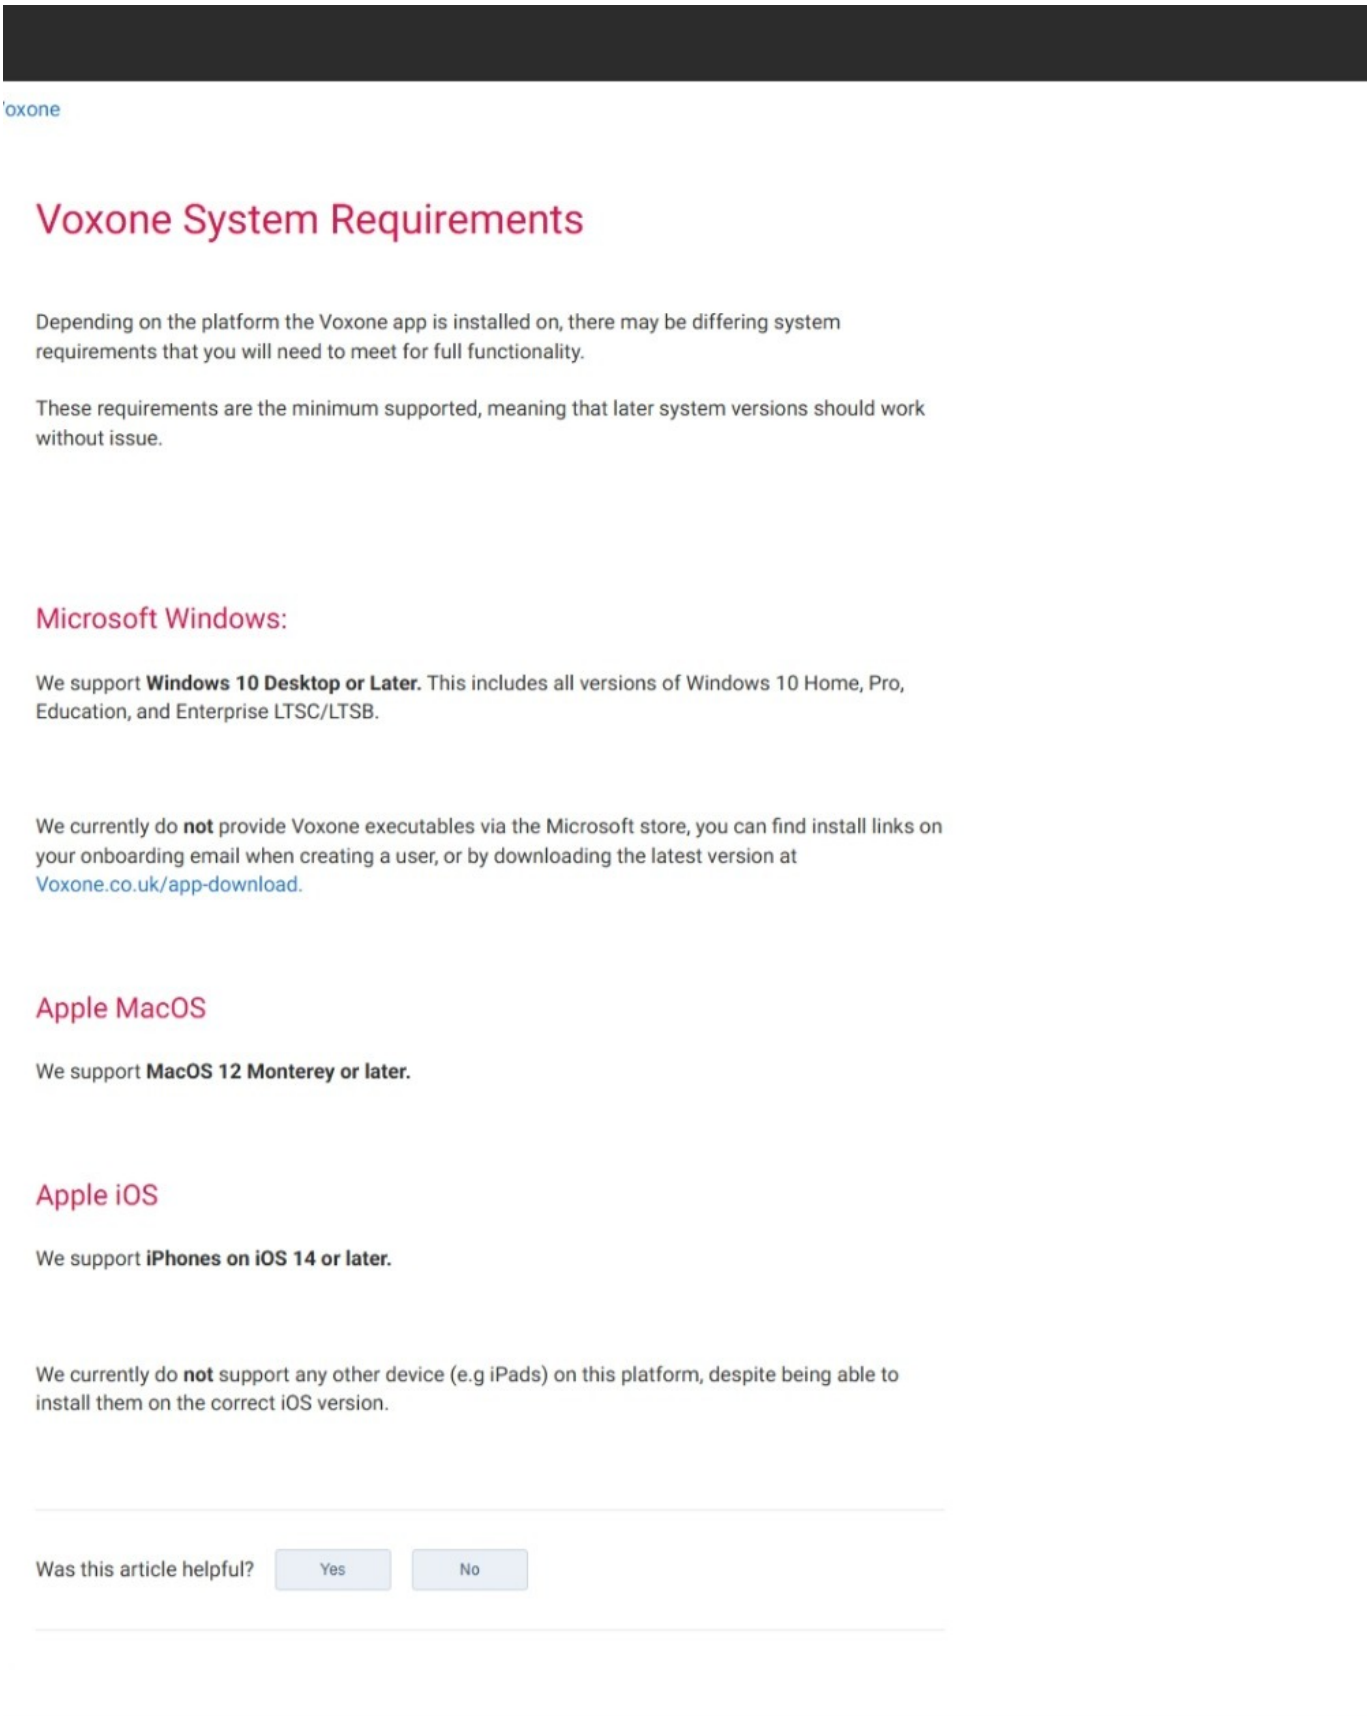

S21 | Supplier screenshot | segment 2

Screenshot_14-10-2026_102652_pages.voip-unlimited.net.jpeg

Screenshot_14-10-2026_102657_pages.voip-unlimited.net.jpeg

'oxone

Keyboard Shortcuts for the Voxone app

Windows

If you press CTRL + F you focus on the search field (specifically used in the Contacts tab).

While in a call, if you click on a colleague or use the arrow up or arrow down button to navigate between them. If you want to transfer a call to a certain colleague, you can use the following shortcuts:

CTRL + A: Attended transfer to their landline number.
CTRL + SHIFT + A: Attended transfer to their mobile number.
CTRL + B: Blind transfer to their landline number.
CTRL + SHIFT + B: Blind transfer to their mobile number.

While on a call, you can also right-click on the contact to find the shortcuts.

There is also a shortcut for answering and hanging up. This shortcut is CTRL + SHIFT + SPACE. **Keep in mind that this shortcut needs to be activated to work. This is done via Options > Enable keyboard shortcuts.**

Mac

If you press CMD + F, you focus on the search field (specifically used in the Contacts tab).

While in a call, if you click on a colleague or use the arrow up or arrow down button to navigate between them. If you want to transfer a call to a certain colleague, you can use the following shortcuts:

CMD + A: Attended transfer to their landline number.
CMD + SHIFT + A: Attended transfer to their mobile number.
CMD + B: Blind transfer to their landline number.
CMD + SHIFT + B: Blind transfer to their mobile number.

While on a call, you can also right-click on the contact to find the shortcuts.

There is also a shortcut for answering and hanging up. This shortcut is CMD + SHIFT + SPACE. **Keep in mind that this shortcut needs to be activated to work. This is done via Options > Enable keyboard shortcuts.**

Was this article helpful? Yes No

Screenshot_14-10-2026_10267_pages.voip-unlimited.net.jpeg

'oxone

Voxone Tutorial - Setting Call Routings



Call routing allows users to create their own short-code for quick dialing purposes internally.

Select a user, and click "New Speed Dial". This will give users the ability to create a local extension that users can dial quickly to either call, or forward calls onto.



From here, you are also able to set grey-listed and black-listed destinations for outbound calls.

Press the "Create new call routing" button, and you are able to select the behaviour for inbound or outbound calls. For example, to globally block calls to premium rate numbers, simply select "premium numbers" from the drop-down and hit confirm. This will create call routing for that particular user.



S23 | Supplier screenshot | segment 2

Screenshot_14-10-2026_10267_pages.voip-unlimited.net.jpeg

Creating blacklists for numbers is equally simple. When creating a new call routing, set the call direction to Incoming and the redirect to Number. If you only need a single number blocked, enter it in the "Number" field. If you require a range of numbers to be blocked, simply enter a partial phone number and Voxone will block any numbers in that range.

Related to

- Blacklist
- Whitelist
- Call Blocking

Was this article helpful? Yes No

S24 | Supplier screenshot | segment 1

Screenshot_14-10-2026_102720_pages.voip-unlimited.net.jpeg

'oxone

Voxone Tutorial - Onboarding a new user

Downloads for the Windows / Mac clients for Voxone are available at https://voxone.co.uk/app-download. Links for Android and Apple devices are available at the bottom of the page.






To log a user into the app, they can do so through the login portal (portal.voxone.co.uk). You can use either the email you have assigned to the account, or the assigned DDI to the user.



S24 | Supplier screenshot | segment 2

Screenshot_14-10-2026_102720_pages.voip-unlimited.net.jpeg

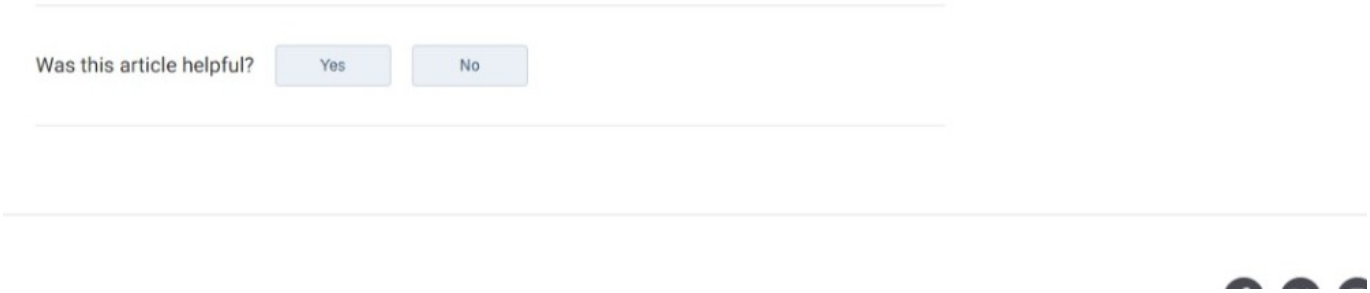

Screenshot_14-10-2026_102725_pages.voip-unlimited.net.jpeg

'oxone

Voxone Firewall and Network Guide

For outgoing traffic:

Create a rule for all UDP and TCP ports for Voxone networks 80.83.208.0/20.

For this rule, there should be a Timeout (TTL) of at least 3720 seconds, as our phones contact us every 3600 seconds. If you can not increase your TTL, contact our support and we can reduce the registration interval on the extension to 120 seconds.

For incoming traffic:

No rules are needed here because the session is initiated from within the network. If the traffic to Voxone is in the firewall, disable all ALG / SIP functions, Application Control, and IPS/IDS/IDP. These usually do more harm than good.

Complete information about our network:

Address: 80.83.208.0

Netmask: 255.255.240.0

Wildcard: 0.0.15.255

Network: 80.83.208.0/20

Broadcast: 80.83.223.255

HostMin: 80.83.208.1

HostMax: 80.83.223.254

Hosts / Net: 4094

Terminals and provisioning:

The following IP/ranges and ports need to be open for the zero-touch provisioning to work.

Gigaset redirect server
148.251.91.32 - 148.251.91.63 (148.251.91.32/27) **Port:** 80, 443
148.251.246.96 - 148.251.246.127 (148.251.246.96/27) **Port:** 80, 443
148.251.243.128 - 148.251.243.159 (148.251.243.128/27) **Port:** 80, 443

Yealink redirect server
IP: 52.29.124.181 **Port:** 443
IP: 3.124.165.251 **Port:** 443
More info

Snom redirect server
IP: 52.28.89.237 **Port:** 80, 443

S25 | Supplier screenshot | segment 2

Screenshot_14-10-2026_102725_pages.voip-unlimited.net.jpeg

Grandstream redirect server
IP: 52.221.130.73 **Port:** 443

Akuvox redirect server
IP: 161.117.206.232 **Port:** 80, 443, 8080

Fanvil redirect server
IP: 119.28.67.228 **Port:** 80, 443

Poly redirect server
Hostname: ztp.polycom.com **Port:** 443
More info

Voxone provisioning server:

Gigaset: 80.83.208.0/20 **Port:** 80

Gigaset IP PRO: 80.83.208.0/20 **Port**: 1449

Yealink: 80.83.208.0/20 **Port:** 442

Snom: 80.83.208.0/20 **Port:** 447

Grandstream: **80.83.208.0/20 Port:** 1446

Akuvox: **80.83.208.0/20 Port:** 1445

Fanvil: **80.83.208.0/20 Port:** 1448

Poly: 80.83.208.0/20 **Port:** 450

Protocol

Below are the protocols used by equipment supplied by Voxone, as well as a description of their function. Different terminal types use different protocols, e.g. HTTPS is preferred for downloading software over e.g. TFTP and HTTP, but in cases where the terminal does not support HTTPS, one of the others is used.

Voxone does not recommend blocking traffic to and from terminals based on ports and/or protocols but rather chooses to trust all traffic to and from Voxone networks. Voxone also does not undertake to use only the protocols below for the future, so a restriction of permitted traffic through firewalls based on the following risks affecting delivered services in the event that the specification below changes. Note that the ports listed in all cases are receiver ports, as a rule rather than exceptions, the equipment uses randomly selected sender ports.

FTP
File Transfer Protocol, RFC959, TCP ports 21 and 20. Used to download terminal configuration and software.

DNS
Domain Name Server, RFC1035, TCP / UDP port 53. DNS functionality is part of a working IP network, and the terminals provided by Voxone will not work unless they have access to a working DNS. If the DNS is located outside the firewall, the firewall must allow the terminals to look it up.

Our provisioned phones are configured with Google's DNS 8.8.8.8 and 8.8.4.4.

HTTP
Hyper Text Transfer Protocol, RFC2616, TCP port 80. Used to download terminal configuration and software. No specific configuration is normally required for HTTP to work satisfactorily as this is one of the most commonly used protocols on the Internet.

S25 | Supplier screenshot | segment 3

Screenshot_14-10-2026_102725_pages.voip-unlimited.net.jpeg

HTTPS
Hyper Text Transfer Protocol over Secure Socket Layer, RFC2818, TCP port 443. Used to download terminal configuration and software.

TFTP
Trivial File Transfer Protocol, RFC1350, UDP port 69 and dynamically allocated ports for data transfer. Used to download terminal configuration and software.

SNTP / NTP
Simple Network Time Protocol, RFC1305 / RFC1361, UDP port 123. Used to set the time/clock in the terminal.

SIP
Session Initiation Protocol, RFC3261, UDP port 5060. Used to hook up and down calls. SIP traffic runs between our SIP server and the phone. This is by far the most important protocol for your telephony to work.

RTP
Real-Time Transfer Protocol, RFC1889, UDP port 1024-65535. The audio stream between the terminal and the phone during a call flows as RTP. The port used is randomized when a call is initiated. All terminals supplied by Voxone use symmetrical RTP, which means that the receiver and sender port for the RTP stream are the same for both incoming and outgoing audio streams. This means that the audio stream that goes from the terminal to us opens the session in the firewall to allow an incoming voice stream over the same session.

SRTP
Secure Real-Time Transfer Protocol. The call is still transported over UDP, but both parties exchanged keys during the connection in the SIP dialogue to enable encryption.

RTCP
Real-Time Control Protocol, RFC3550, UDP port 1024-65535. Some terminals generate RTCP packets that are used in communication between RTP endpoints to convey local statistics and call data, such as information about jitter and any packet losses. This is selected as the RTP port + 1, i.e., if the RTP stream passes port 12480, RTCP will use UDP port 12481.

WSS web socket
WSS is used by our softphone "Voxone desktop" and uses port 8443 against "push servers" and port 443 for SIP.

Was this article helpful? Yes No

Screenshot_14-10-2026_102732_pages.voip-unlimited.net.jpeg

'oxone

Pipedrive contact lookup with Voxone

You can sync your Pipedrive contacts with the Voxone system so that information from the contact card shows within Voxone during calls.

Please note that it may take up to 24 hours once the contact lookup has been added for the Pipedrive contacts to sync.



Adding the contact lookup additional service

Each user that requires the contact lookup will need the contact lookup additional service assigned to them. This is a free additional service so you won't be charged for it.

To add contact lookup to a user, log in to the Voxone Portal as an admin user and navigate to **Users -> Additional Services** and select the user(s):



Then, in the fly out on the right-hand side, tick the box next to **Contact Lookup**



Getting the Pipedrive API key and URL

Before adding the contact lookup app to Voxone, you will need your Pipedrive URL and API key.

To find these, login to Pipedrive and click on your profile icon on the top left, then **Personal Preferences** under the **My Account section**



Head over to the **API** tab and copy **your personal API token**



Your **Pipedrive URL** can be found in the address bar



Installing Pipedrive Contact Lookup

Once you have your API token and URL, head back over to the Voxone portal and navigate to **App Directory** on the right-hand side.



Search for **Pipedrive Contact Lookup** and click **view**



S26 | Supplier screenshot | segment 2

Screenshot_14-10-2026_102732_pages.voip-unlimited.net.jpeg

Then click **add**



Select your Country, then click on **Connect Account**

Enter your Pipedrive username, URL and the API key you copied earlier. Note that the URL will need to have https:// in front of it, e.g. https://voxone.pipedrive.com.

Then click **Connect**

S26 | Supplier screenshot | segment 3

Screenshot_14-10-2026_102732_pages.voip-unlimited.net.jpeg

This will take you back to the Voxone portal and should then populate your Pipedrive username.
Click on **Start Integration**

You should then see that the app has been installed.

Adding the Pipedrive call Widget to your users

Lastly, head over to **Users -> Call Widgets** in the Voxone Portal

Select the User(s) you wish to add the widget to, then click on **Add widget** in the fly out on the right hand side.

S26 | Supplier screenshot | segment 4

Screenshot_14-10-2026_102732_pages.voip-unlimited.net.jpeg

