Screenshot_14-10-2026_102739_pages.voip-unlimited.net.jpeg

'oxone

Installing the Voxone Teams app

The Voxone Teams app allows users to integrate the Voxone app directly into their Teams instance without the need for Direct Routing, which can be time consuming to set up.

The Voxone app will then appear within the customers teams client.



Please note that you will need to log a ticket with our Support Team for them to activate this feature on your account before following the rest of this guide.

Installing Microsoft Admin Connect

To begin with, install **Microsoft Admin Connect**, which links your Voxone instance with a Microsoft 365 admin account on your tenant and allows for easier Single Sign On (SSO).

To access it, log in as an admin and head over to **App Directory** on the left hand side:



S27 | Supplier screenshot | segment 2

Screenshot_14-10-2026_102739_pages.voip-unlimited.net.jpeg

Then search for **Microsoft Admin Connect** and click on **View**



Then click **Add** and sign in with a Microsoft 365 admin account

Installing the Voxone Teams integration

S27 | Supplier screenshot | segment 3

Screenshot_14-10-2026_102739_pages.voip-unlimited.net.jpeg

Once done, head back to the **App directory**, search for the **Companion App for Teams** and click **View**:

Then click the **Add** button:

Adding the app to your Teams instance

Adding the integration will allow you to download a Zip file which you can then upload to your Teams tenant and distribute to your users:

S27 | Supplier screenshot | segment 4

Screenshot_14-10-2026_102739_pages.voip-unlimited.net.jpeg

Once downloaded, sign in to admin.teams.microsoft.com and navigate to **Teams apps -> Manage apps** or follow this link: https://admin.teams.microsoft.com/policies/manage-apps

Click on **Upload new app** select 'Browse' and then select the .zip file from your computer.

Deploying the app to your users

By default, each user will need to sign in and consent to the app, to consent on behalf of your users, go to the Teams manage apps page, search for your app and click on it.


Navigate to the **Permissions** tab and click on **Review permissions and consent** then sign in and consent to the permissions.

To deploy the app across your tenant, assign a setup policy by navigating to Teams Apps -> Setup Policies (https://admin.teams.microsoft.com/policies/app-setup)

You can either create a new setup policy or edit one of your existing ones. Further information on setup policies can be found here.

S27 | Supplier screenshot | segment 5

Screenshot_14-10-2026_102739_pages.voip-unlimited.net.jpeg

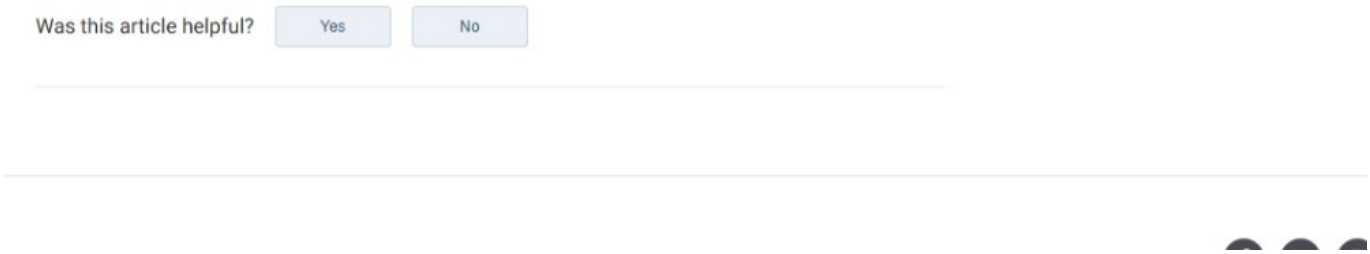

'oxone

Giving users access to a Shared Mailbox

In order for users to be able to view shared mailboxes in their desktop and mobile apps, they first need to be given admin access over the Shared Mailbox PBX services.

This is done by creating a group containing the shared mailbox PBX services that they need access to and then assigning users administrative permissions over that group.

Creating a group and adding the mailboxes

To create the group, log in to the Voxone admin portal with an admin account and head over to **Users -> Groups** then click the **Manage Groups** button.



Depending on what admin access you wish the user to have you can either edit an existing group or create a new one.

To create a new group click on **Create a new group**, then give the group a name and click on **Create group**



In the drop down list under **Add Members** select **PBX Services**



Then either drag the Shared Mailboxes to the left-hand side or click the + button next to it. The shared mailbox should then appear under the **Current members** section.



Once you have made your selections, click **Save** to create the group.

Assigning Permissions

Once you have created a group containing the shared mailboxes, navigate to **Users -> Permissions** in the Voxone admin portal and select the users that you wish to have access to the mailboxes.

S28 | Supplier screenshot | segment 2

Screenshot_14-10-2026_102747_pages.voip-unlimited.net.jpeg



Then, in the fly-out on the right, tick the **Administration** tick box and select the group that contains your shared mailboxes and click **Save**.

Was this article helpful? Yes No

'oxone

Set default call method

By default, the Voxone app will always ask which call method you want to use every time users make a call from the Desktop, web and mobile apps.



This can be confusing for new users and it is often preferable to set the default call method to **Call direct (using VoIP)** which will make a VoIP call from the app that the user is logged in to.

To set the default call method, head over to **Settings -> Telephony & Audio -> Call Method** in the Voxone app.




Then select the preferred method from the list



S29 | Supplier screenshot | segment 2

Screenshot_14-10-2026_102752_pages.voip-unlimited.net.jpeg

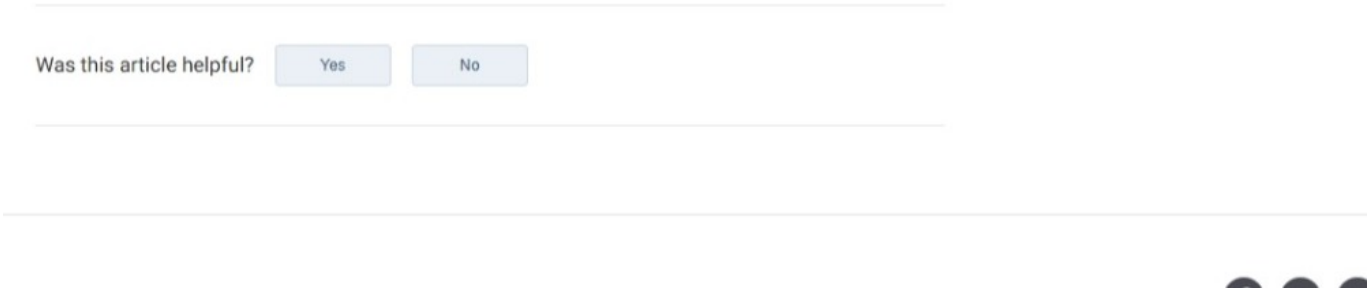

'oxone

Voxone Feature codes

With Feature Codes you are able to manage your extension within the PBX without the need to login. You will manage this via various shortcuts in your terminal and/or mobile device.

You will find a complete list of the shortcuts at the bottom of this page, next we will describe these shortcuts.

Call forwarding

Direct: All incoming direct calls get forwarded to the specified number.

Direct
Activate: *21*<number>#
Deactivate: #21#

Delayed: All calls are forwarded to the specified number after a certain time (in case there is no answer).

Delayed
Activate: *61*<number>#
Deactivate: #61#

When busy: All incoming calls you receive when you are busy get forwarded to the specified number

When busy
Activate: *67*<number>#
Deactivate: #67#

Activate a profile

You can activate your profiles via shortcuts and profile numbers. To find which profile number each profile has, go to the Voxone app on your computer or use the browser version, then go to **Settings > Profiles.** At the bottom of the page click Display profile numbers. If you do not specify a time for activating the profile via Feature Codes, the profile's default time will be activated.

Activate: *24*<profile number>[*time]#
Deactivate: #24#

The profile duration can be typed in the following ways:

1 digit means x amount of days to come (0 means that the profile stays the same until you change it)

2 digits mean x amount of hours to come (if you want to set the profile active for less than 10 hours, you need to start the digit with a 0)

3 digits mean x amount of minutes to come (if you want to set the profile active for less than 100 minures, you need to start the digit with a 0)

4 digits are read as a timestamp for the ongoing day (the two first digits are the hours, and the two last are minutes). If the time has passed already, this means the timestamp for the following day.

6 digits are read as a date (two first digits are the year, the two middle ones are months, and the last two the days).

Queuing systems

You have the option of logging into your various queues. You can only log in and out of queues that you are already a member of. If you are not a member of a queue and try to log in with Feature Codes, you will get a message that says, "The service is not active".

Log in: *75*<queue number>#
Log out : #75*<queue number>#

Call pick up

If one of your colleagues receives a call and you wish to pick up the call immediately before they answer it, you can do so. You can only do this on incoming direct calls to your colleagues.

80<number>

In the shortcut above, the <number> stands for the number or short number the call is picked from.

Hide outbound CLI

If you want to call with a hidden number, you can use Feature Codes to activate this if necessary.

31<number>

In the shortcut above, the <number> stands for the number you want to make a call to.

Redirect ongoing incoming calls

If you have an ongoing call where someone called you, you can transfer this call to another number. Only incoming calls can be forwarded, outgoing calls cannot be forwarded. You have the option to transfer the call directly or, alternatively, do an attended transfer.

It takes a few seconds before the transfer takes place when you type in the command.

The default setting for call forwarding that you have on your user, determines how this forwarding will work. An administrator can adjust this in the admin portal under **Users > Other settings > Call forwarding**. You can choose from the methods below:

Notified (Attended) transfer: You have the opportunity to talk to the person you connect to before completing the transfer.

Direct transfer: You do not get the opportunity to talk to the person you are transfering to. The call will be connected directly.

None: Calls are not forwarded.

#<number>#

In the shortcut above, the <number> stands for the number or short number you want to transfer the call to. If you want to take the call back, press *. End the call to complete the transfer.

S30 | Supplier screenshot | segment 3

Screenshot_14-10-2026_102758_pages.voip-unlimited.net.jpeg

Directly to voicemail

If you have an ongoing call, you can transfer the call directly to a colleague's voicemail if the person wants to leave a message.

59<number>#

The call is directed to the voicemail which is owned by <number>. Also, short numbers can be used in this shortcut.

Bypass

You have the opportunity to call your colleagues and bypass all call routing, referrals and call forwardings. For example, your colleague may have the lunch profile active. Then you have the option to call through this reference or forward the call to reach the person.

60<number>#

By using the bypass shortcut, it means you can go by any call routing. Also, short numbers can be used here.

Was this article helpful? Yes No

'oxone

Syncing presence with Voxone and Teams

By synchronizing availability in Teams with Voxone, it will be much easier to manage your availability in both Voxone and Teams!


MS Teams add-on service

In order to be able to use our Teams presence sync, it is required that the users who will use the sync have the **additional service** **MS Teams**. The add-on can be managed below **Users > Additional services**.


Activate presence sync

Activation of presence sync is done in the admin portal below the tab **App Directory**, first you need to install the **Microsoft Admin Connect** app. After that is done, you can install the **Microsoft Presence Sync** app.

When you install the Presence sync app you'll first have the option to activate **Set Teams presence** and then **Get Teams presence**. Make sure the Microsoft account being used is an admin account and that the email address is the same as the Voxone account you are logged in to.

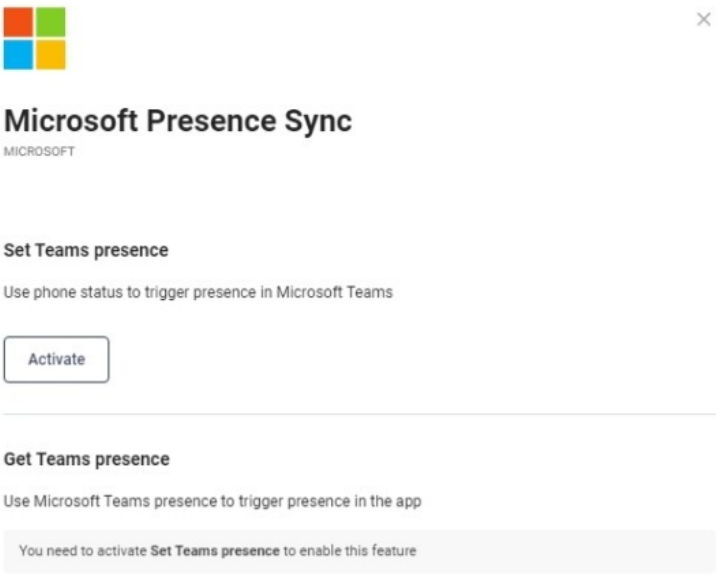


When **Get Teams presence** is activated you'll first only be able to use it with a maximum of 650 users. But if you need to use presence sync with more users than that you have the possibility to connect another Microsoft account to be able to sync an additional 650 users with Get presence.

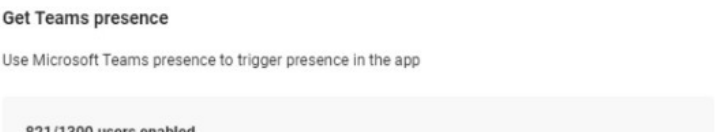

S31 | Supplier screenshot | segment 2

Screenshot_14-10-2026_10279_pages.voip-unlimited.net.jpeg

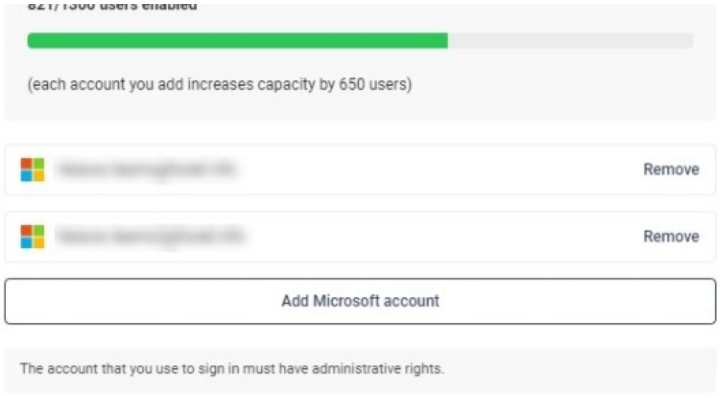

The authentication does not need to be done by every user but only by an administrator, once it is done and everything is in order, the sync works for those users who have the **MS Teams additional service** and an **email address in Voxone that matches the email address in Microsoft/Teams.**

Troubleshooting

If you're having issues activating or authenticating the sync:

- Make sure you are trying to connect with the correct Microsoft account
- Double-check that the email address you are trying to authenticate with matches the email address of the Telavox account you are logged into
- Uninstall the Presence Sync app and Admin connect and try again from the start.

If it doesn't work entirely:

- If you have just recently activated the sync, wait a few minutes and try again later
- Double-check that the user has the **MS Teams** additional service
- Double-check that the user has an email address in Telavox and that it matches the one in Microsoft/Teams
- Contact us and provide specific call examples and information regarding what happens and what has been tested.

Was this article helpful? Yes No

S32 | Supplier screenshot | segment 1

Screenshot_14-10-2026_102815_pages.voip-unlimited.net.jpeg

'oxone

How to use the Co-Listening feature

Each user that wishes to use the co-listening feature will need to have a CC Pro license added to their account. Please be aware that each party (i.e. the listener and the user being listened to) will need CC Pro.

Please note that co-listening does not currently work with the Voxone mobile app.

Once the correct licenses have been assigned, the co-listening feature will be unlocked.

In order to listen in to a call, simply identify the user who's call you wish to listen to within the Voxone softphone app and then click the **call** icon next to their contact record:



Select the '**Listen in**' option to listen to their call:




After selecting this option, the colleague that you are listening in to will hear a beep, alerting them that co-listening is active.



S32 | Supplier screenshot | segment 2

Screenshot_14-10-2026_102815_pages.voip-unlimited.net.jpeg

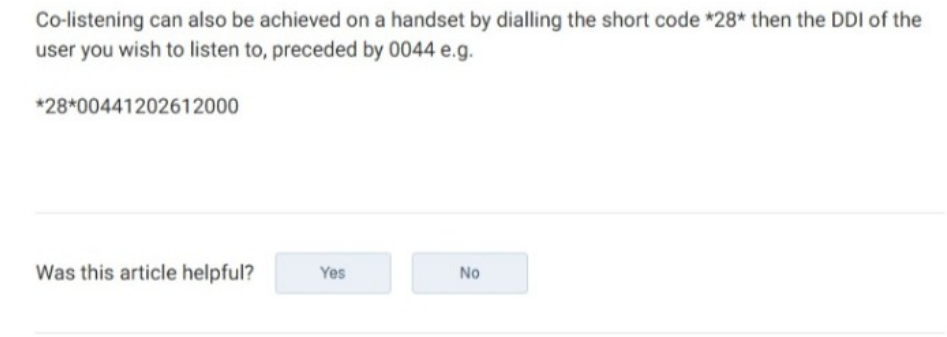

Screenshot_14-10-2026_102821_pages.voip-unlimited.net.jpeg

'oxone

Voxone Tutorial - Adding a new user in the admin portal



The "Users" section on the left-hand menu allows you to create and configure users on the system. This is split into multiple sub-sections, but the most important of these for creation is the "License and Number" section which will be open by default.



From here, you will be able to see all users, their relevant license, and which number(s) are assigned to them. Above this will be a search bar to look for specific users (useful if you are a larger company).

Adding New Users

Click the red button that says "+New user":



Creating an individual user requires a First name and a Surname. Emails are optional for login (you can use email or ddi)

Free licenses do not have a DDI but can have a mobile number. This is useful for those who do not need a physical phone or want to only receive calls and not have the mobile app.

S33 | Supplier screenshot | segment 2

Screenshot_14-10-2026_102821_pages.voip-unlimited.net.jpeg

Assigning a department will group users with the same tag together in the colleague directories.





Creating users in bulk can also be done, select "multiple users" and separate emails with a comma.
Users can be configured via csv later.

S33 | Supplier screenshot | segment 3

Screenshot_14-10-2026_102821_pages.voip-unlimited.net.jpeg

Adding a mobile number will twin calls by default. Doing this is also necessary for certain call functions.

If you have created groups previously, you can add this new user to any that have been created.

Finally, a summary will be available to double-check the entered details.

Deleting a user


Deleting a user will immediately free up the number and the license that is assigned to them for allocating to a new user.

To delete a user, click on Users on the left-hand side and go to the account and login section and select the user that you want to delete:

Then, on the right-hand side scroll to the bottom and click the Delete button under the 'Remove

S33 | Supplier screenshot | segment 4

Screenshot_14-10-2026_102821_pages.voip-unlimited.net.jpeg

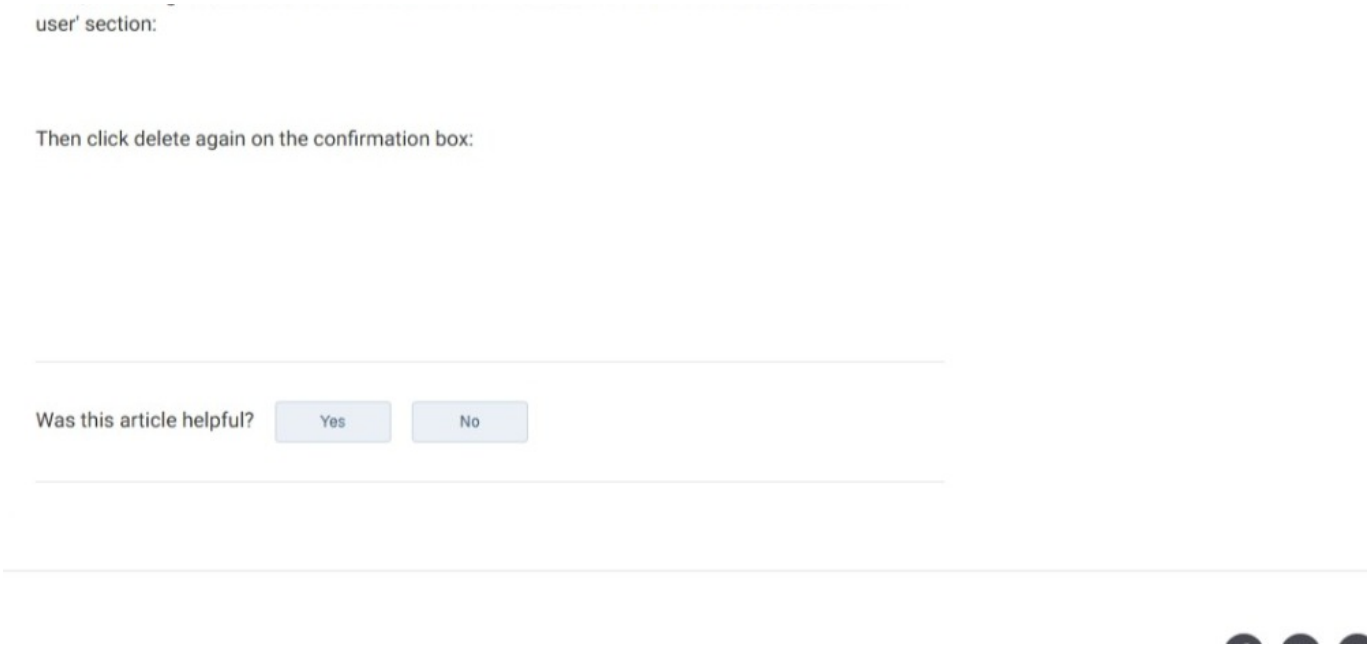

'oxone

Voxone Tutorial - Call queue Strategies

When you create a **queue**, you can select how you want the call to be distributed to the members in the **queue**. You have a couple of different strategies that you can choose from to fit the **queue** members. The members in the **queue** will be listed in what we call a Hunt group.

Treatment of calls to the queue

- **Call all:** All members of the hunt group are called at the same time.
- **Prioritized:** The prioritized strategy will always ring to the first member in the hunt group. If the first person in the group is not free, the call will automatically go to the group's next person. Next time there is a call, it will start from the top again.
- **Cyclic:** The first call of the day will always start at the person who is on top of the group. If the person answers the call, the next one will go to the person next in line. Then it will work like this through all the members in the queue and start from the top again.
- **Fewest calls**: When you use the fewest calls function, it will always ring to the person who has answered the fewest calls that day and is free. The call will not be passed on to the next member but keep on ringing to the member till the call is answered, instead.
- **Least recent:** The person who has gone the longest without a call will get this call. If the call is not answered, it will go to the person in line who has been off the phone for the second-longest time.
- **Randomized**: If you pick the randomized call strategy, you never know who will get the next call. That way, every member should be ready to take calls.



When you have selected which strategy you want to use for your hunt group, you can also manage the **Call length**. The **call length** determines how long every call attempt will be for each member. The recommended length should be at least 20 seconds to give the member some time to answer the call before it goes to the next member. By default, we set this to 22 seconds.



Was this article helpful? Yes No


'oxone

Hubspot Integration with Voxone

Hubspot can be quickly and easily integrated with Voxone, to do so you will need to request this by logging a ticket with our Support Team to enable it.


Please note that you will also need a user that has the CRM integration feature.

To add this feature, log in to portal.voxone.co.uk with an account that has administrative permissions, then head over to 'Users' -> 'Additional Services, select your user(s) and tick the CRM Integration box or click edit in the fly-out on the right:

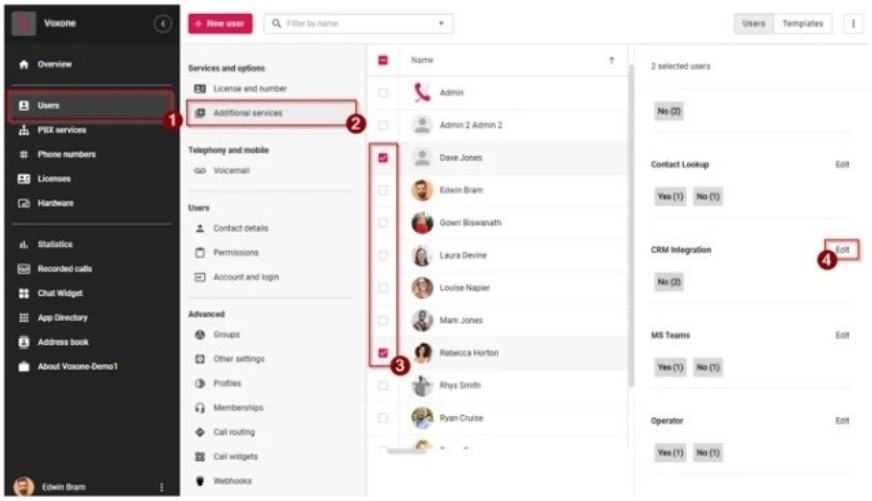

You will then be able to add the integration app to your Hubspot Instance.

First, log in to Hubspot (you will need to be a Hubspot Admin), click the House icon at the top right of the screen, and navigate to the app marketplace:

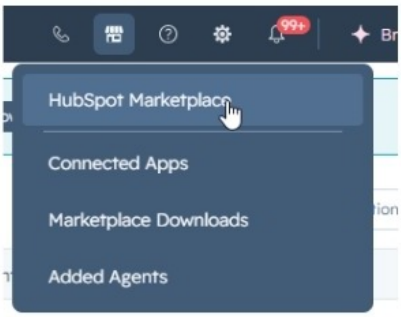

Search for Televox, then click install app and then login with your Voxone credentials




S35 | Supplier screenshot | segment 2

Screenshot_14-10-2026_102833_pages.voip-unlimited.net.jpeg




Hubspot is now connected to Voxone.

To make calls from HubSpot navigate to a company record or contact record and click the telephone number and click call. It will then open the Voxone instance in hubspot and make the call.

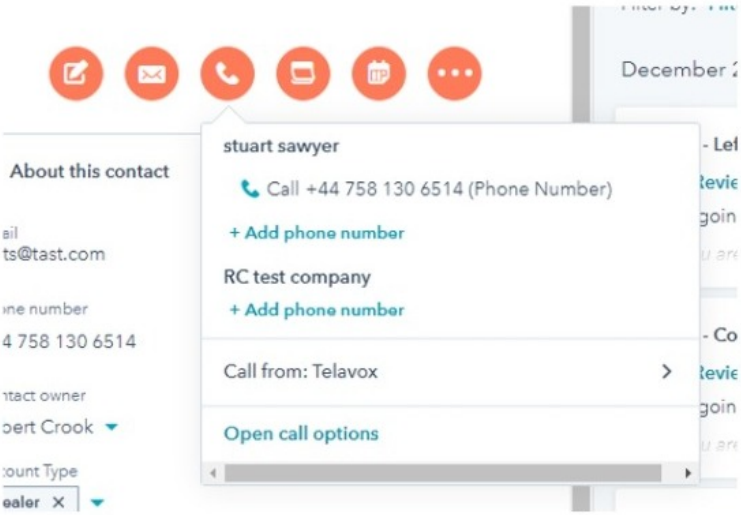

To log all calls made automatically in HubSpot you will need to go to HubSpot settings

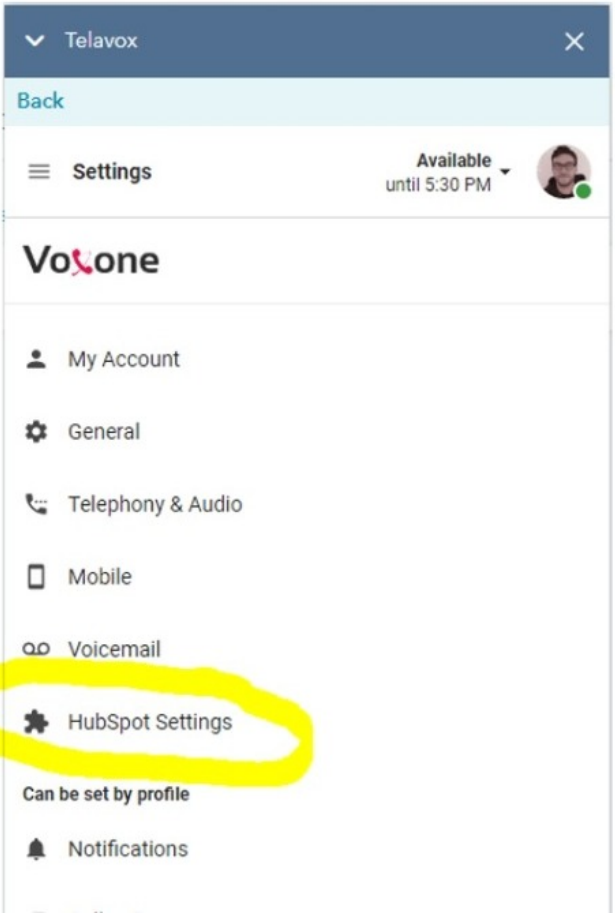


S35 | Supplier screenshot | segment 3


Screenshot_14-10-2026_102833_pages.voip-unlimited.net.jpeg



And then select log calls automatically

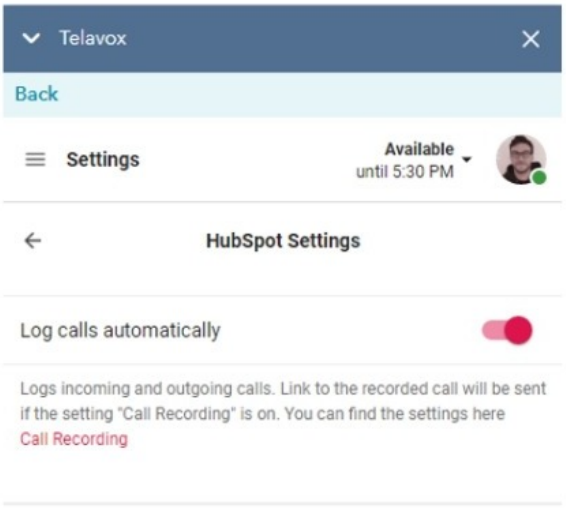

A log of the call and the call recording will be available in the activity section of the contact in HubSpot. Note you will need to have call recording enabled and the permissions to be able to listen to your own calls to play them back within HubSpot.

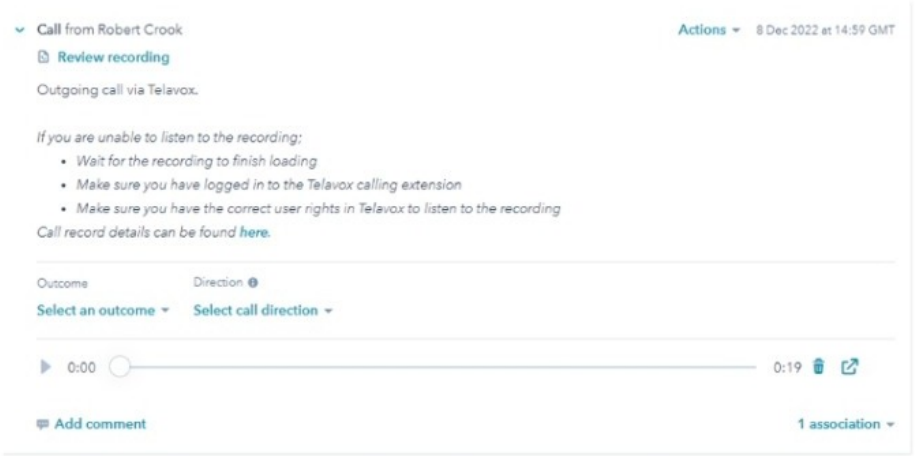

Was this article helpful? Yes No

S36 | Supplier screenshot | segment 1

Screenshot_14-10-2026_102839_pages.voip-unlimited.net.jpeg

'oxone

Voxone Tutorial - Applying call forwards

For numbers that aren't associated with a user or PBX service, you are able to set forwards to external numbers, or to another user or service. This allows you to have multiple numbers come in to the same endpoint.

Under the "Phone Numbers" section, expand the "Current numbers" tab. From here, you should be able to see all numbers underneath this account. Numbers in a range will be in a collapsed list and will need to be expanded before configuring. Simply select "Configure Call routing" on a particular number and enter where you wish the number to divert to.



Once this is saved, it will appear underneath the "Call Forwarding" tab.



Was this article helpful? Yes No

S37 | Supplier screenshot | segment 1

Screenshot_14-10-2026_10284_pages.voip-unlimited.net.jpeg

'oxone

Managing call recording on Voxone

Voxone allows customers to enable call recording for their users and granularly manage access to them via groups and permissions.

Enabling call recording for a user

To enable call recording for a user log in to the Voxone admin portal via our customer portal or by navigating to https://portal.voxone.co.uk and logging in with an admin user.

Navigate to **Users -> Additional Services** and select the user(s) you wish to enable call recording for. Then, in the fly-out on the right tick the box next to **Call Recorder** and click **save**

N.B. Please be aware that this is a chargeable feature and once enabled, a charge will be added to your next invoice.



Enabling call recording on the desktop client

Once users have the call recording additional service, they can enable or disable call recording in the profiles.

To enable call recording for all profiles, navigate to **Settings -> Call recording & co listening**



S37 | Supplier screenshot | segment 2

Screenshot_14-10-2026_10284_pages.voip-unlimited.net.jpeg

To enable it on behalf of users from the admin portal, navigate to **Users -> Profiles**, select the user(s) and scroll down to the **Record All Calls** section in the fly out on the right.



Managing call recording permissions

Once call recording has been enabled for a user, you will need to set the permissions to allows users to view them.

To do this navigate to **Users -> Permissions**, click on the user(s) you wish to give access to then set the permissions in the fly-out on the right.

There are 2 types of permissions you can set.

By ticking the **Recorded calls** box under **User Permissions** box you can allow your users to listen to and download their own recorded calls directly from the Voxone desktop or web apps.

S37 | Supplier screenshot | segment 3

Screenshot_14-10-2026_10284_pages.voip-unlimited.net.jpeg

Users with the Recorded calls User Permission will be able to access their calls from the call history section:

N.B. users with this permission will not be able to delete any call recordings

Supervisor Permissions allow a user to access, download and delete all of the call recordings for a group of users via the Voxone admin portal.

Selecting the **everyone** group will give that user access to all of the call recordings for that Voxone instance, or you can click on the drop down to give access to a specific group.

You can learn more about groups here.

Managing call recordings from the admin portal

If a user has **Supervisor Permissions**, the **Recorded Calls** section will be available to them on the left hand side when they log in to the admin portal.

Here, users can select a specific user to search for by using the **Users/PBX services** filter in the flyout on the left.

The **Counterpart** filter allows you to search for a specific phone number that isn't a user or PBX

S37 | Supplier screenshot | segment 4

Screenshot_14-10-2026_10284_pages.voip-unlimited.net.jpeg

service, i.e. an external number.

N.B. for this filter to match you must prepend 00 and the country code to the phone number you want to search for, e.g. to search for calls to the UK number 01202612000 you will need to input 00441202612000 to the filter

The **Time period** allows you to search for a specific or custom date range.

Call Length filters for calls of a specific length.

The **Inactive Numbers** filter allows you to search numbers on the instance that aren't currently assigned to a PBX service or user.

Once you have set the desired filters, click the **search** button and the results will appear in the pane to he right.

To listen to, download or delete a recording, tick the box next to the recording and select the desired action in the fly-out on the right.

You can also select multiple call recordings to download or delete them en masse.

Was this article helpful? Yes No

Screenshot_14-10-2026_10289_pages.voip-unlimited.net.jpeg

'oxone

Voxone Tutorial - Using Save Keypad Input with Advanced Nodes

You can use Voxones Advanced Nodes App to do things like save keyput inputs into a variable that you tehn add conditions to.

This is useful when you want to have a feature such as a PIN for customers to access speacial support lines, require an IVR with more than 10 options, or when you need to add a feature to your IVR so customers can press a digit to then enter the exension number for user, the latter is the scenario we will cover here.

This guide assumes that you are familiar with creating a standard IVR, if not, please see our tutorial on creating PBX services.

Firstly, you'll need to enable Advanced Nodes from the app directory:



Once installed, create a new IVR via PBX Services -> New PBX service, give it a name and assign a number:



S38 | Supplier screenshot | segment 2

Screenshot_14-10-2026_10289_pages.voip-unlimited.net.jpeg

Add a sound file, in this case we'll include something like 'Please press 1 if you know the extension number for the person you'd like to contact' you can use the text to speech option for this if you'd like.

Click on option 1 then go to 'Advanced' in the fly out on the right:



Select 'Save Keypad Input'

Click on the 'Save Keypad Input' node and give the variable a name like 'EXT_1' you also need to add a sound file here, something like 'please enter the extension number now, followed by the # key'.

You can also remove the requirement to end with # if you'd like:

S38 | Supplier screenshot | segment 3

Screenshot_14-10-2026_10289_pages.voip-unlimited.net.jpeg

The 'f' branch here is what happens in a failure state, so if the user inputs the incorrect amount of digits or doesn't press the # key (if you have required them to do so).

You can set this to 'play audio and return' to prompt them to enter the extension again:

The other branch is where we'll set our conditions based on the Keypad Input Variable.

Click it, then go to Advanced -> Condition in the fly-out on the right. Select the EXT_1 variable we created earlier:

S38 | Supplier screenshot | segment 4

Screenshot_14-10-2026_10289_pages.voip-unlimited.net.jpeg

Then in the condition, drop down to '**EqualTo**' and input the users extension number in the value.

You will need to add a condition for each extension number that you have.

You'll then have a number of branches coming from the condition, again the 'f' branch is the failure state, which could be hang up or play audio and return.

The numeric branches here are what will happen if the conditions are met.

In this example, 0 is what happens if the caller inputs extension 2001 and 1 is what happens if the caller inputs extension 2002.

This is where you'll configure which user the condition will forward the call to by clicking on it and selecting 'Colleague' from the fly-out on the right.

S38 | Supplier screenshot | segment 5


Screenshot_14-10-2026_10289_pages.voip-unlimited.net.jpeg

You should then have something that looks like the below:

You can use the same principals to create PIN numbers to route customers based on the PIN they have, or to create IVRs with more than 10 options.

S38 | Supplier screenshot | segment 6

Screenshot_14-10-2026_10289_pages.voip-unlimited.net.jpeg

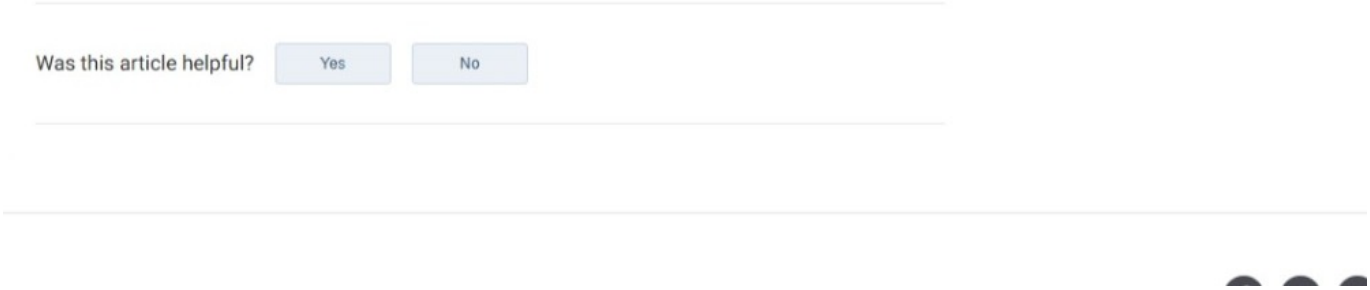

AQs

Factory Resetting Yealink Handsets

This document will cover performing a factory reset on the following handset models:

CP960	CP930W-Base	CP920	VP59	SIP-T57W
SIP-T54W	SIP-T53W	SIP VP-T49G	SIP-T48S	SIP-T48G
SIP-T46G	SIP-T42G	SIP-T41P	SIP-T40G	SIP-T40P
SIP-T29G	SIP-T27G	SIP-T23G	SIP-T23P	SIP-T21(P) E2
SIP-T19(P) E2	CP860	SIP-T28P	SIP-T26P	SIP-T22P
SIP-T21P	SIP-T20P	SIP-T27P	SIP-T42S	SIP-T58A

Handset-Specific instructions:

CP960 - Long press the HOME button, for around 20 seconds, until you receive a notification confirming the factory reset.



T56A/T57W/T58A/T58V/VP59/T49G - Long press the Redial button for around 7 seconds, until you receive a notification confirming the factory reset. Pictured below is a T56A.



S39 | Supplier screenshot | segment 2

Screenshot_14-10-2026_10296_pages.voip-unlimited.net.jpeg



For all other handsets:

Long press the "OK" button for around 7 seconds until you receive a notification confirming the factory reset. Pictured is a T23G.

Was this article helpful? Yes No