

How to Setup BB Chipper and iOS (iPad) Terminal payment 1.0

1. Ensure you have a profile set for the BB Chipper pointing to the correct terminal in Management Console (Setup -> System Preferences -> -Hardware Devices).

Setting listed below:


- Device Type: EMVReader –Transafe

- Auth Timeout: 90

- Uniterm Port: 8123

- Uniterm Device Type: bbpos_cros

(Leave "Uniterm Device" and "BTLE Name" blank this will be filled out by the iOS app)

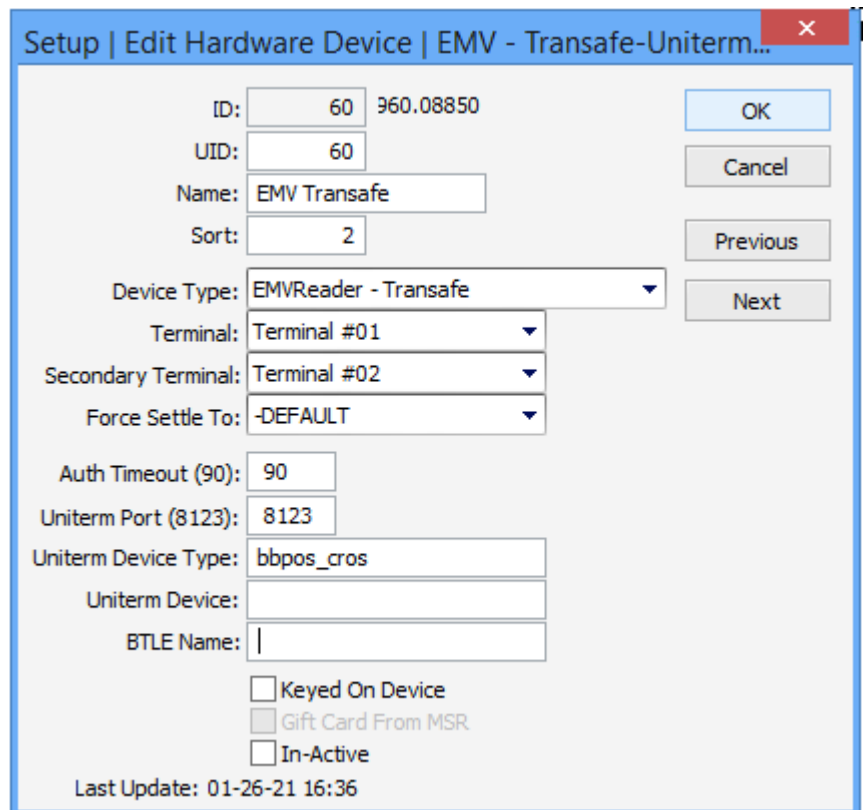

Setup | Edit Hardware Device | EMV - Transafe-Uniterm...

ID: 60 960.08850

UID: 60

Name: EMV Transafe

Sort: 2

Device Type: EMVReader - Transafe

Terminal: Terminal #01

Secondary Terminal: Terminal #02

Force Settle To: -DEFAULT

Auth Timeout (90): 90

Uniterm Port (8123): 8123

Uniterm Device Type: bbpos_cros

Uniterm Device:

BTLE Name:

☐ Keyed On Device

☐ Gift Card From MSR

☐ In-Active

Last Update: 01-26-21 16:36

OK

Cancel

Previous

Next

2. Launch the iOS terminal app and go into the Manager Menu
(Do Not pair it through the device settings.)

3. Ensure the BBChipper (EMV Device) is Turned On

4. Click on “Pair EMV Reader”



5. There will be a popup with the BBChipper’s serial number (Listed on the back of the Chipper). Click on this and it will pair and will be usable immediately.

- This will be automatically detected by the onePOS iOS terminal app after initial setup and will pair using Bluetooth Low Energy.