



CLASS B AIRSPACE COMMUNICATIONS

S Chicago App 133.5



- a. Arriving aircraft should contact Chicago Approach Control on specified frequencies. Although arriving aircraft may be operating beneath the floor of the Class B Airspace on initial contact, communications should be established with approach control for sequencing and spacing purposes.
- b. Aircraft departing the primary airports are requested to advise clearance delivery prior to taxiing of their intended altitude and direction of flight to depart the Class B Airspace. Aircraft departing from other than the primary airports whose route of flight would penetrate the Class B Airspace should give this information to ATC on appropriate frequencies.
- c. Aircraft desiring to transit the Class B Airspace must obtain an ATC clearance to enter the Class B Airspace and will be handled on an ATC workload permitting basis.




KMDW / MDW
CHICAGO MIDW

CHICAGO, ILL
RNAV STAR


10-2A
6 JUN 25
Eff 12 Jun

D-ATIS 132.75	Apt Elev 620
Alt Set: INCHES Trans level: FL 180	
RNAV 1 - DME/DME/IRU or GPS	
RADAR required.	
FISSK 7 RNAV ARRIVAL (FISSK FISSK7) (RWYS 4R, 13L, 22L, 31R)	
▶ LOST COMMS ▼ LOST COMMS ▶ Rwy 22L: If approach clearance not received by TACTT, proceed inbound on RNAV (GPS) or RNAV (RNP) Rwy 22L approach. ▶ LOST COMMS ▼ LOST COMMS ▶	▶ LOST COMMS ▼ LOST COMMS ▶ LOST COMMS ▶
ROUTING	
From FISSK on track 302° to VEECK, then on track 323° to OZZEY, then on track 322° to AZUMO, then on track 301° to cross HALIE at 6000.	
LANDING	
RWY	From HALIE on track 278° to cross OLCVK at or above 4000, then on track 278°. EXPECT RADAR vectors to final approach course.
4R	From HALIE on track 279° to cross TINLY at or above 4000, then on track 279°. EXPECT RADAR vectors to final approach course.
13L	From HALIE on track 343° to cross GERMN at or above 4000, then on track 343° to LNANE, then on track 339° to BOCAH, then on track 274° to cross TACTT at 3000. EXPECT RNAV Rwy 22L approach or RADAR vectors to final approach course.
22L	From HALIE on track 295° to cross ELLIO at 6000, then on track 295° to cross HILLS at 5000 and at 240 Kt. EXPECT ILS or RNAV Rwy 31R approach or RADAR vectors to final approach course.
31R	

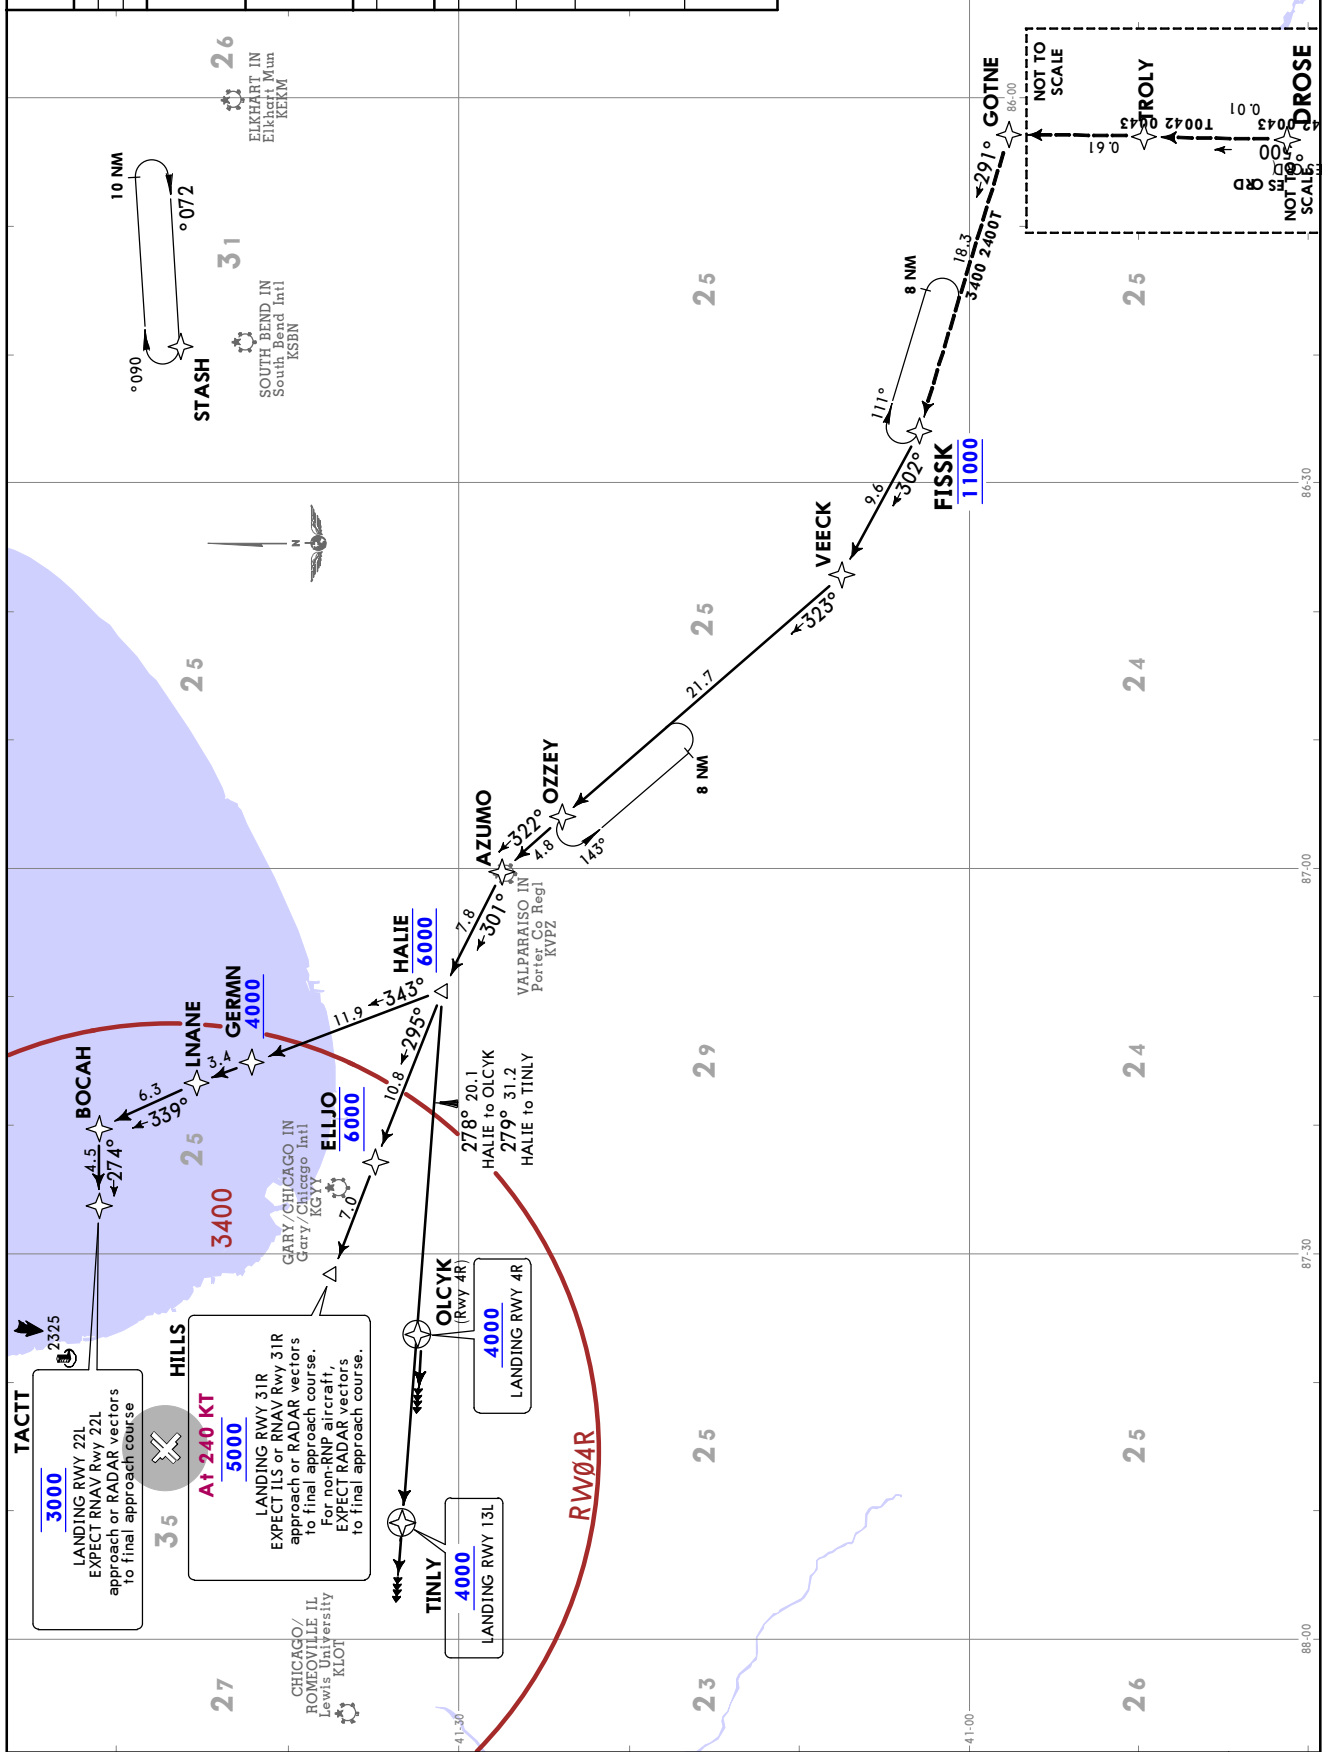

CHANGES: Procedure renumbered, revised.

© JEPPESEN, 2017, 2025. ALL RIGHTS RESERVED.





KMDW/MDW


JEPPesen
 6 JUN 25
 Eff 12 Jun 10-30B1

CHICAGO, ILL
 CHICAGO MIDWAY INTL

TAKE-OFF OBSTACLE NOTES - DEPs

◦ Rwy 4L:

Fence 2 from DER, 421 left of centerline, 8 AGL/610 MSL. Fence beginning 18 from DER, 256 left of centerline, up to 11 AGL/616 MSL. Vehicle on road 143 from DER, 161 left of centerline, 620 MSL. Poles, building beginning 166 from DER, 4 left of centerline, up to 24 AGL/630 MSL. Poles, tree beginning 374 from DER, 19 right of centerline, up to 28 AGL/633 MSL. Poles beginning 621 from DER, 27 right of centerline, up to 34 AGL/639 MSL. Poles beginning 744 from DER, 26 left of centerline, up to 26 AGL/631 MSL. Poles, tree beginning 1154 from DER, 14 left of centerline, up to 41 AGL/646 MSL. Tower, pole beginning 1365 from DER, 50 right of centerline, up to 42 AGL/647 MSL. Sign 1596 from DER, 20 right of centerline, 44 AGL/657 MSL. Trees, signs beginning 1611 from DER, 33 right of centerline, up to 671 MSL. Sign, trees beginning 1946 from DER, 19 left of centerline, up to 88 AGL/691 MSL. Trees, tower beginning 2154 from DER, 145 right of centerline, up to 679 MSL.

◦ Rwy 4R:

Poles, fence beginning 40 from DER, 21 left of centerline, up to 34 AGL/639 MSL. Pole 45 from DER, 475 right of centerline, 26 AGL/628 MSL. Poles, fence, navaid beginning 225 from DER, on centerline, up to 29 AGL/634 MSL. Transmission lines, poles, trees beginning 830 from DER, 9 right of centerline, up to 39 AGL/644 MSL. Poles, transmission lines beginning 891 from DER, 43 left of centerline, up to 38 AGL/641 MSL. Trees, transmission lines, poles, sign beginning 905 from DER, 73 left of centerline, up to 671 MSL. Tree, tramway beginning 1374 from DER, 570 right of centerline, up to 657 MSL. Trees beginning 1448 from DER, 369 left of centerline, up to 679 MSL. Tower 1823 from DER, 110 right of centerline, 61 AGL/672 MSL.

◦ Rwy 13L:

Building 37 from DER, 470 right of centerline, 23 AGL/630 MSL. Trees, poles, smokestack, navaid, transmission lines, buildings beginning 73 from DER, on centerline, up to 641 MSL. Building 101 from DER, 253 left of centerline, 15 AGL/625 MSL. Transmission line, fence beginning 229 from DER, 51 left of centerline, up to 28 AGL/638 MSL. Tree, poles, building beginning 270 from DER, 143 left of centerline, up to 640 MSL. Building, poles beginning 391 from DER, 32 left of centerline, up to 32 AGL/641 MSL. Tree, poles, building, sign beginning 503 from DER, 2 left of centerline, up to 647 MSL. Trees, poles, transmission lines, buildings beginning 613 from DER, 16 right of centerline, up to 660 MSL. Transmission lines, poles beginning 661 from DER, 12 left of centerline, up to 39 AGL/649 MSL. Tree, pole, transmission line, building beginning 708 from DER, 12 left of centerline, up to 680 MSL. Trees beginning 1536 from DER, 79 right of centerline, up to 667 MSL. Trees beginning 1624 from DER, 116 right of centerline, up to 670 MSL. Tree 1728 from DER, 937 left of centerline, 684 MSL. Tree 1793 from DER, 757 right of centerline, 673 MSL. Tree 1903 from DER, 731 right of centerline, 678 MSL. Trees beginning 2038 from DER, 568 right of centerline, up to 679 MSL. Tree 2310 from DER, 869 right of centerline, 684 MSL. Trees beginning 2368 from DER, 393 right of centerline, up to 689 MSL. Tree 2799 from DER, 620 right of centerline, 700 MSL.

◦ Rwy 13R:

Building 79 from DER, 334 right of centerline, 23 AGL/636 MSL. Pole 262 from DER, 255 left of centerline, 11 AGL/621 MSL. Building 458 from DER, 594 right of centerline, 50 AGL/660 MSL. Building 659 from DER, 291 right of centerline, 49 AGL/661 MSL. Building 689 from DER, 367 right of centerline, 50 AGL/663 MSL. Trees, poles, transmission line beginning 977 from DER, 52 right of centerline, up to 692 MSL.

◦ Rwy 22L:

Poles, building, trees beginning 73 from DER, 1 left of centerline, up to 31 AGL/648 MSL. Poles beginning 464 from DER, 75 right of centerline, up to 38 AGL/653 MSL. Trees, transmission lines, buildings, poles beginning 603 from DER, 1 left of centerline, up to 689 MSL. Trees, poles, buildings, transmission lines beginning 648 from DER, 1 right of centerline, up to 675 MSL. Tree 2094 from DER, 705 right of centerline, 679 MSL. Tree 2248 from DER, 598 right of centerline, 682 MSL.

KMDW/MDW



CHICAGO, ILL
CHICAGO MIDWAY INTL

TAKE-OFF OBSTACLE NOTES - DEPs (CONTD)

◦ Rwy 22L: (contd)

Tree 2664 from DER, 542 right of centerline, 686 MSL. Pole 3991 from DER, 1230 left of centerline, 107 AGL/739 MSL. Tank, water tower beginning 4100 from DER, 160 right of centerline, up to 113 AGL/728 MSL. Pole 4356 from DER, 845 left of centerline, 107 AGL/740 MSL. Poles beginning 4484 from DER, 570 left of centerline, up to 107 AGL/743 MSL.

◦ Rwy 22R:


Fence beginning 7 from DER, 132 right of centerline, up to 12 AGL/630 MSL. Pole, fence beginning 83 from DER, 63 right of centerline, up to 18 AGL/636 MSL. Trees, poles, buildings, fence beginning 142 from DER, 1 right of centerline, up to 647 MSL. Fence beginning 201 from DER, on and left of centerline, up to 13 AGL/630 MSL. Poles, fence beginning 281 from DER, 7 left of centerline, up to 18 AGL/635 MSL. Transmission line, buildings beginning 330 from DER, 5 right of centerline, up to 34 AGL/650 MSL. Tree, building, pole, fence beginning 365 from DER, 25 left of centerline, up to 637 MSL. Transmission lines, buildings beginning 381 from DER, 44 right of centerline, up to 37 AGL/654 MSL. Tree, pole beginning 471 from DER, 97 left of centerline, up to 640 MSL. Building 491 from DER, 154 left of centerline, 30 AGL/647 MSL. Trees, buildings, poles, transmission lines beginning 492 from DER, 31 right of centerline, up to 668 MSL. Transmission line 509 from DER, 28 left of centerline, 35 AGL/650 MSL. Poles, transmission line, building beginning 574 from DER, 46 left of centerline, up to 37 AGL/653 MSL. Transmission line 662 from DER, 182 left of centerline, 39 AGL/655 MSL. Trees, pole beginning 676 from DER, 28 left of centerline, up to 660 MSL. Trees, buildings beginning 765 from DER, 29 left of centerline, up to 668 MSL. Tree, building beginning 853 from DER, 47 left of centerline, up to 672 MSL. Trees, buildings beginning 861 from DER, 30 right of centerline, up to 675 MSL. Trees, poles, buildings, transmission lines beginning 880 from DER, 18 left of centerline, up to 675 MSL. Trees, building beginning 1275 from DER, 85 left of centerline, up to 677 MSL. Trees beginning 1386 from DER, 192 right of centerline, up to 689 MSL. Tree 2325 from DER, 219 left of centerline, 679 MSL. Tree 2479 from DER, 326 left of centerline, 682 MSL. Tank, water tower beginning 4331 from DER, 763 left of centerline, up to 113 AGL/728 MSL.

◦ Rwy 31L:

Terrain 14 from DER, 501 right of centerline, 608 MSL. Sign 67 from DER, 349 right of centerline, 5 AGL/611 MSL. Sign 82 from DER, 167 left of centerline, 2 AGL/610 MSL. Building 338 from DER, 559 left of centerline, 49 AGL/657 MSL. Building, trees, pole beginning 538 from DER, 57 left of centerline, up to 53 AGL/661 MSL. Tree 1410 from DER, 51 right of centerline, 648 MSL. Tree 1716 from DER, 192 left of centerline, 662 MSL. Tree 1723 from DER, 6 right of centerline, 658 MSL. Tree 2142 from DER, 689 left of centerline, 674 MSL.

◦ Rwy 31R:

Trees, navaid beginning 83 from DER, on and left of centerline, up to 648 MSL. Pole, navaid, building beginning 140 from DER, 309 right of centerline, up to 29 AGL/634 MSL. Transmission line, poles, tree beginning 315 from DER, 20 right of centerline, up to 34 AGL/639 MSL. Tree 342 from DER, 558 left of centerline, 654 MSL. Trees, poles, transmission lines, building beginning 395 from DER, 13 left of centerline, up to 658 MSL. Trees, poles, transmission lines, building beginning 563 from DER, 41 right of centerline, up to 647 MSL. Transmission lines, poles beginning 1116 from DER, 123 right of centerline, up to 46 AGL/651 MSL. Trees beginning 1204 from DER, 134 left of centerline, up to 670 MSL. Tree 1585 from DER, 756 right of centerline, 652 MSL. Trees beginning 1598 from DER, 654 right of centerline, up to 658 MSL. Trees beginning 1663 from DER, 435 right of centerline, up to 666 MSL. Building spire 2213 from DER, 709 left of centerline, 77 AGL/682 MSL. Tree 2374 from DER, 712 right of centerline, 673 MSL. Tank 5574 from DER, 1451 right of centerline, 162 AGL/756 MSL. Water tower 5606 from DER, 1420 right of centerline, 160 AGL/757 MSL.

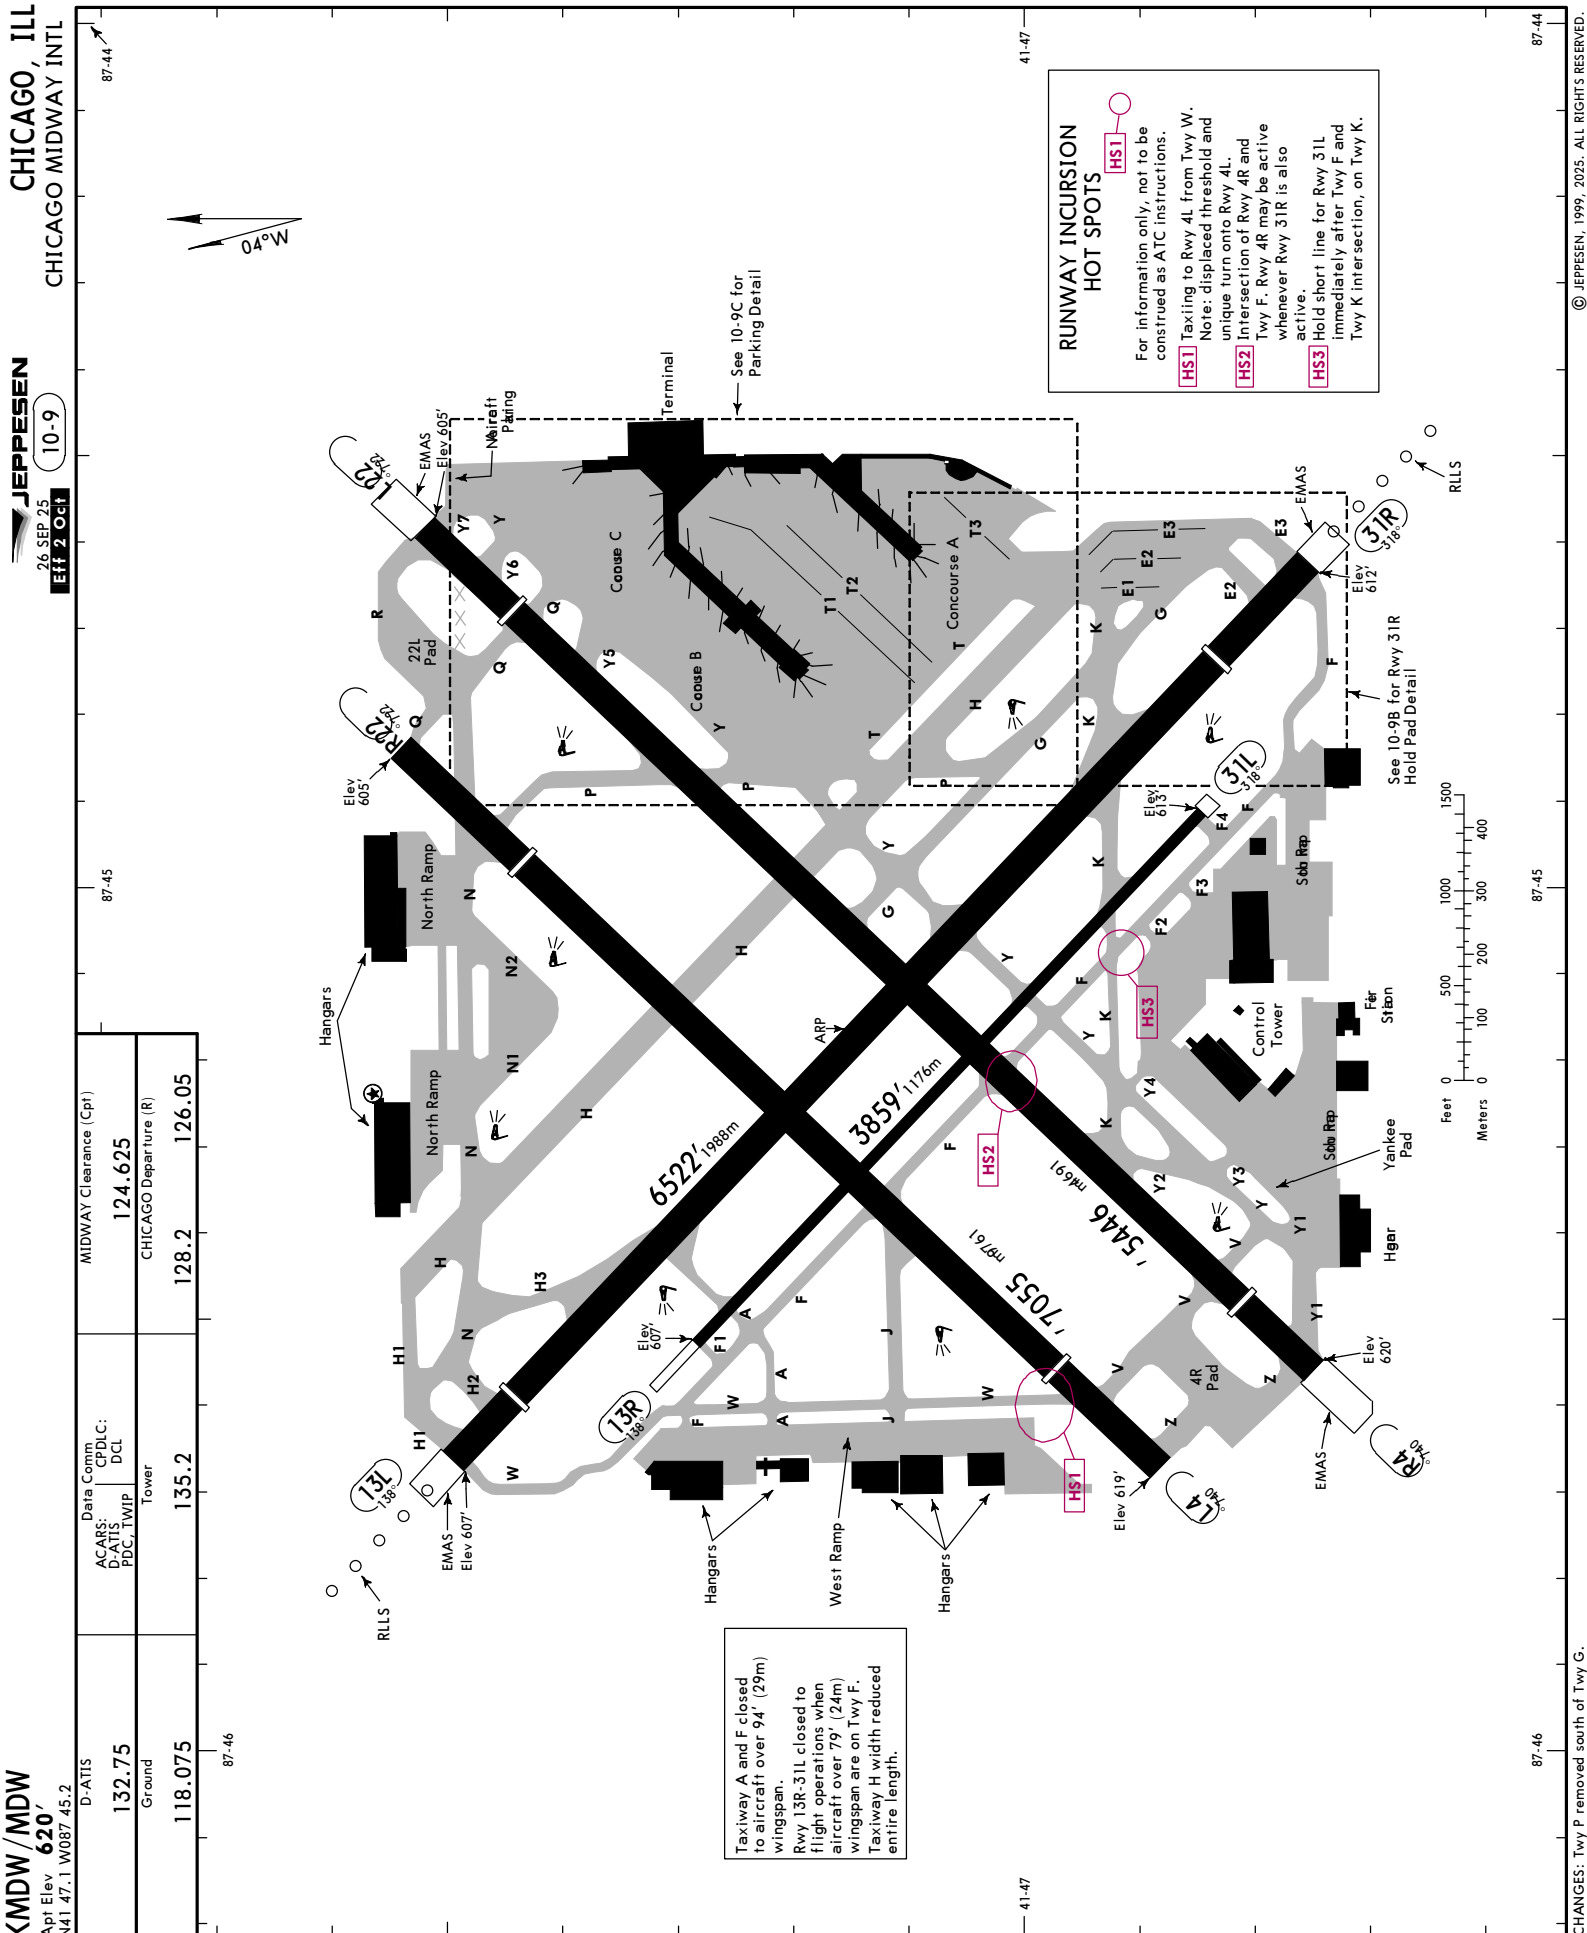

GENERAL

ASDE-X in use. Operate transponders with altitude reporting mode and ADS-B (if equipped) enabled on all airport surfaces.
Terminal Doppler Weather Radar.
Birds on and in vicinity of airport.
Rwys 13R/31L and 4L/22R not available for scheduled air carrier operations with more than 9 passenger seats or unscheduled air carrier at least 31 passenger seats.
Noise abatement procedures: all departures are requested to expedite climb through 1500' MSL 2200-0600 LT daily.
Rwy 22L preferred departure runway 2200-0700 LT.
Airport closed to solo student training.

ADDITIONAL RUNWAY INFORMATION

RWY	USABLE LENGTHS		TAKE-OFF	WIDTH
	— LANDING BEYOND —	Glide Slope		
4R	HIRL CL REIL PAPI-L (angle 3.0°, TCH 66')	RVR ② 5927' 1807m	6446' 1965m	150' 46m
① 22L	HIRL CL REIL PAPI-R (angle 3.0°, TCH 43')	RVR ③ 5810' 1771m		
① Grooved.				
② LDA 5928' (1807m).				
③ LDA 5812' (1771m).				
4L	MIRL PAPI-L (angle 3.0°, TCH 39')	grooved 4749'1447m		150' 46m
22R	MIRL PAPI-L (angle 3.0°, TCH 35')	grooved 4629'1411m		
13R	MIRL			60' 18m
31L				
13L	HIRL CL RLLS PAPI-R (angle 3.0°, TCH 47')	RVR 6059'1847m	5188'1581m	150' 46m
④ 31R	HIRL CL REIL RLLS PAPI-L (angle 3.0°, TCH 63')	RVR 5826'1776m	4926'1501m	
④ Grooved.				

TERPS

TAKE-OFF & OBSTACLE DEPARTURE PROCEDURE

Rwys 4R, 13L, 22L, 31R			
LOWER THAN STANDARD			
OpSpec Authorization Required			
Both RVRs are required & controlling		RCLM or CL or HIRL or Adequate Vis Ref	
CL & HIRL	CL, or RCLM & HIRL	RCLM (day only) or CL or HIRL	TDZ RVR 16 or 1/4
TDZ RVR 5	TDZ RVR 10	TDZ RVR 12	TDZ RVR 16
Rollout RVR 5	Rollout RVR 10	Rollout RVR 10	or 1/4
Rwys 4L, 13R, 22R, 31L			
LOWER THAN STANDARD		STANDARD	
OpSpec Authorization Required			
RCLM or Adequate Vis Ref		3 & 4 Eng	
1/4		1/2	1

CHANGES: None.

Rwys 4L/R, climbing right turn to 2400' heading 100° before proceeding on course.

Rwy 13R, cimb heading 138° to 1400' before turning.

Rwy 13L, climb heading 138° to 1500' before turning.

Rwys 22L/R, climb heading 227° to 1400' before turning.

Rwy 31L, climb heading 318° to 1400' before turning.

Rwy 31R, climb heading 318° to 1500' before turning.

OBSTACLE DP

(For TAKE-OFF OBSTACLE NOTES see 10-9A1, 10-9A2 & 10-9A3)

		FOR FILING AS ALTERNATE	
ILS Rwy 4R ILS Rwy 13L ILS Rwy 31R		RNAV (RNP) Y Rwy 4R RNAV (RNP) Y Rwy 13L RNAV (RNP) Y Rwy 31R RNAV (GPS) Rwy 4L RNAV (RNP) Y Rwy 31R	RNAV (GPS) Z Rwy 13L RNAV (GPS) Rwy 22R RNAV (GPS) Z Rwy 22L RNAV (GPS) Z Rwy 4R RNAV (GPS) Z Rwy 31R
A	600-2	800-2	800-2
B			
C			
D			

KMDW/MDW

 JEPPesen

6 JUN 25

10-9A1

Eff 12 Jun

CHICAGO, ILL

CHICAGO MIDWAY INTL

TAKE-OFF OBSTACLE NOTES

- RWY 4L:
Fence 2' from DER, 421' left of centerline, 8' AGL/610' MSL. Fence beginning 18' from DER, 256' left of centerline, up to 11' AGL/616' MSL. Vehicle on road 143' from DER, 161' left of centerline, 620' MSL. Poles, building beginning 166' from DER, 4' left of centerline, up to 24' AGL/630' MSL. Poles, tree beginning 374' from DER, 19' right of centerline, up to 28' AGL/633' MSL. Poles beginning 621' from DER, 27' right of centerline, up to 34' AGL/639' MSL. Poles beginning 744' from DER, 26' left of centerline, up to 26' AGL/631' MSL. Poles, tree beginning 1154' from DER, 14' left of centerline, up to 41' AGL/646' MSL. Tower, pole beginning 1365' from DER, 50' right of centerline, up to 42' AGL/647' MSL. Sign 1596' from DER, 20' right of centerline, 44' AGL/657' MSL. Trees, signs beginning 1611' from DER, 33' right of centerline, up to 671' MSL. Sign, trees beginning 1946' from DER, 19' left of centerline, up to 88' AGL/691' MSL. Trees, tower beginning 2154' from DER, 145' right of centerline, up to 679' MSL.

- RWY 4R:
Poles, fence beginning 40' from DER, 21' left of centerline, up to 34' AGL/639' MSL. Pole 45' from DER, 475' right of centerline, 26' AGL/628' MSL. Poles, fence, NAVAID beginning 225' from DER, on centerline, up to 29' AGL/634' MSL. Transmission lines, poles, trees beginning 830' from DER, 9' right of centerline, up to 39' AGL/644' MSL. Poles, transmission lines beginning 891' from DER, 43' left of centerline, up to 38' AGL/641' MSL. Trees, transmission lines, poles, sign beginning 905' from DER, 73' left of centerline, up to 671' MSL. Tree, tramway beginning 1374' from DER, 570' right of centerline, up to 657' MSL. Trees beginning 1448' from DER, 369' left of centerline, up to 679' MSL. Tower 1823' from DER, 110' right of centerline, 61' AGL/672' MSL.

- RWY 13L:
Building 37' from DER, 470' right of centerline, 23' AGL/630' MSL. Tree, poles, smokestack, NAVAID, transmission lines, buildings beginning 73' from DER, on centerline, up to 641' MSL. Building 101' from DER, 253' left of centerline, 15' AGL/625' MSL. Transmission line, fence beginning 229' from DER, 51' left of centerline, up to 28' AGL/638' MSL. Tree, poles, building beginning 270' from DER, 143' left of centerline, up to 640' MSL. Building, poles beginning 391' from DER, 32' left of centerline, up to 32' AGL/641' MSL. Tree, poles, building, sign beginning 503' from DER, 2' left of centerline, up to 647' MSL. Trees, poles, transmission lines, buildings beginning 613' from DER, 16' right of centerline, up to 660' MSL. Transmission lines, poles beginning 661' from DER, 12' left of centerline, up to 39' AGL/649' MSL. Tree, pole, transmission line, building beginning 708' from DER, 12' left of centerline, up to 680' MSL. Trees beginning 1536' from DER, 79' right of centerline, up to 667' MSL. Trees beginning 1624' from DER, 116' right of centerline, up to 670' MSL. Tree 1728' from DER, 937' left of centerline, 684' MSL. Tree 1793' from DER, 757' right of centerline, 673' MSL. Tree 1903' from DER, 731' right of centerline, 678' MSL. Trees beginning 2038' from DER, 568' right of centerline, up to 679' MSL. Tree 2310' from DER, 869' right of centerline, 684' MSL. Trees beginning 2368' from DER, 393' right of centerline, up to 689' MSL. Tree 2799' from DER, 620' right of centerline, 700' MSL.

- RWY 13R:
Building 79' from DER, 334' right of centerline, 23' AGL/636' MSL. Pole 262' from DER, 255' left of centerline, 11' AGL/621' MSL. Building 458' from DER, 594' right of centerline, 50' AGL/660' MSL. Building 659' from DER, 291' right of centerline, 49' AGL/661' MSL. Building 689' from DER, 367' right of centerline, 50' AGL/663' MSL. Trees, poles, transmission line beginning 977' from DER, 52' right of centerline, up to 692' MSL.

(CONTINUED ON 10-9A2)

KMDW/MDW

 **JEPPesen**

6 JUN 25

10-9A2

Eff 12 Jun

CHICAGO, ILL

CHICAGO MIDWAY INTL

TAKE-OFF OBSTACLE NOTES (CONTD)

- RWY 22L:

Poles, building, trees beginning 73' from DER, 1' left of centerline, up to 31' AGL/648' MSL. Poles beginning 464' from DER, 75' right of centerline, up to 38' AGL/653' MSL. Trees, transmission lines, buildings, poles beginning 603' from DER, 1' left of centerline, up to 689' MSL. Trees, poles, buildings, transmission lines beginning 648' from DER, 1' right of centerline, up to 675' MSL. Tree 2094' from DER, 705' right of centerline, 679' MSL. Tree 2248' from DER, 598' right of centerline, 682' MSL. Tree 2664' from DER, 542' right of centerline, 686' MSL. Pole 3991' from DER, 1230' left of centerline, 107' AGL/739' MSL. Tank, water tower beginning 4100' from DER, 160' right of centerline, up to 113' AGL/728' MSL. Pole 4356' from DER, 845' left of centerline, 107' AGL/740' MSL. Poles beginning 4484' from DER, 570' left of centerline, up to 107' AGL/743' MSL.

- RWY 22R:

Fence beginning 7' from DER, 132' right of centerline, up to 12' AGL/630' MSL. Pole, fence beginning 83' from DER, 63' right of centerline, up to 18' AGL/636' MSL. Trees, poles, buildings, fence beginning 142' from DER, 1' right of centerline, up to 647' MSL. Fence beginning 201' from DER, on and left of centerline, up to 13' AGL/630' MSL. Poles, fence beginning 281' from DER, 7' left of centerline, up to 18' AGL/635' MSL. Transmission line, buildings beginning 330' from DER, 5' right of centerline, up to 34' AGL/650' MSL. Tree, building, pole, fence beginning 365' from DER, 25' left of centerline, up to 637' MSL. Transmission lines, buildings beginning 381' from DER, 44' right of centerline, up to 37' AGL/654' MSL. Tree, pole beginning 471' from DER, 97' left of centerline, up to 640' MSL. Building 491' from DER, 154' left of centerline, 30' AGL/647' MSL. Trees, buildings, poles, transmission lines beginning 492' from DER, 31' right of centerline, up to 668' MSL. Transmission line 509' from DER, 28' left of centerline, 35' AGL/650' MSL. Poles, transmission line, building beginning 574' from DER, 46' left of centerline, up to 37' AGL/653' MSL. Transmission line 662' from DER, 182' left of centerline, 39' AGL/655' MSL. Trees, pole beginning 676' from DER, 28' left of centerline, up to 660' MSL. Trees, buildings beginning 765' from DER, 29' left of centerline, up to 668' MSL. Tree, building beginning 853' from DER, 47' left of centerline, up to 672' MSL. Trees, buildings beginning 861' from DER, 30' right of centerline, up to 675' MSL. Trees, poles, buildings, transmission lines beginning 880' from DER, 18' left of centerline, up to 675' MSL. Trees, building beginning 1275' from DER, 85' left of centerline, up to 677' MSL. Trees beginning 1386' from DER, 192' right of centerline, up to 689' MSL. Tree 2325' from DER, 219' left of centerline, 679' MSL. Tree 2479' from DER, 326' left of centerline, 682' MSL. Tank, water tower beginning 4331' from DER, 763' left of centerline, up to 113' AGL/728' MSL.

- RWY 31L:

Terrain 14' from DER, 501' right of centerline, 608' MSL. Sign 67' from DER, 349' right of centerline, 5' AGL/611' MSL. Sign 82' from DER, 167' left of centerline, 2' AGL/610' MSL. Building 338' from DER, 559' left of centerline, 49' AGL/657' MSL. Building, trees, pole beginning 538' from DER, 57' left of centerline, up to 53' AGL/661' MSL. Tree 1410' from DER, 51' right of centerline, 648' MSL. Tree 1716' from DER, 192' left of centerline, 662' MSL. Tree 1723' from DER, 6' right of centerline, 658' MSL. Tree 2142' from DER, 689' left of centerline, 674' MSL.

(CONTINUED ON 10-9A3)

KMDW/MDW

 **JEPPESSEN**
6 JUN 25 (10-9A3) Eff 12 Jun

CHICAGO, ILL
CHICAGO MIDWAY INTL

TAKE-OFF OBSTACLE NOTES (CONTD 1)

- RWY 31R:
Trees, NAVAID beginning 83' from DER, on and left of centerline, up to 648' MSL. Pole, NAVAID, building beginning 140' from DER, 309' right of centerline, up to 29' AGL/634' MSL. Transmission line, poles, tree beginning 315' from DER, 20' right of centerline, up to 34' AGL/639' MSL. Tree 342' from DER, 558' left of centerline, 654' MSL. Trees, poles, transmission lines, building beginning 395' from DER, 13' left of centerline, up to 658' MSL. Trees, poles, transmission lines, building beginning 563' from DER, 41' right of centerline, up to 647' MSL. Transmission lines, poles beginning 1116' from DER, 123' right of centerline, up to 46' AGL/651' MSL. Trees beginning 1204' from DER, 134' left of centerline, up to 670' MSL. Tree 1585' from DER, 756' right of centerline, 652' MSL. Trees beginning 1598' from DER, 654' right of centerline, up to 658' MSL. Trees beginning 1663' from DER, 435' right of centerline, up to 666' MSL. Building spire 2213' from DER, 709' left of centerline, 77' AGL/682' MSL. Tree 2374' from DER, 712' right of centerline, 673' MSL. Tank 5574' from DER, 1451' right of centerline, 162' AGL/756' MSL. Water tower 5606' from DER, 1420' right of centerline, 160' AGL/757' MSL.

KMDW/MDW

**JEPPesen**


26 SEP 25

Eff 2 Oct

10-9B

CHICAGO, ILL
CHICAGO MIDWAY INTL

Runway 31R Hold Pad Detail

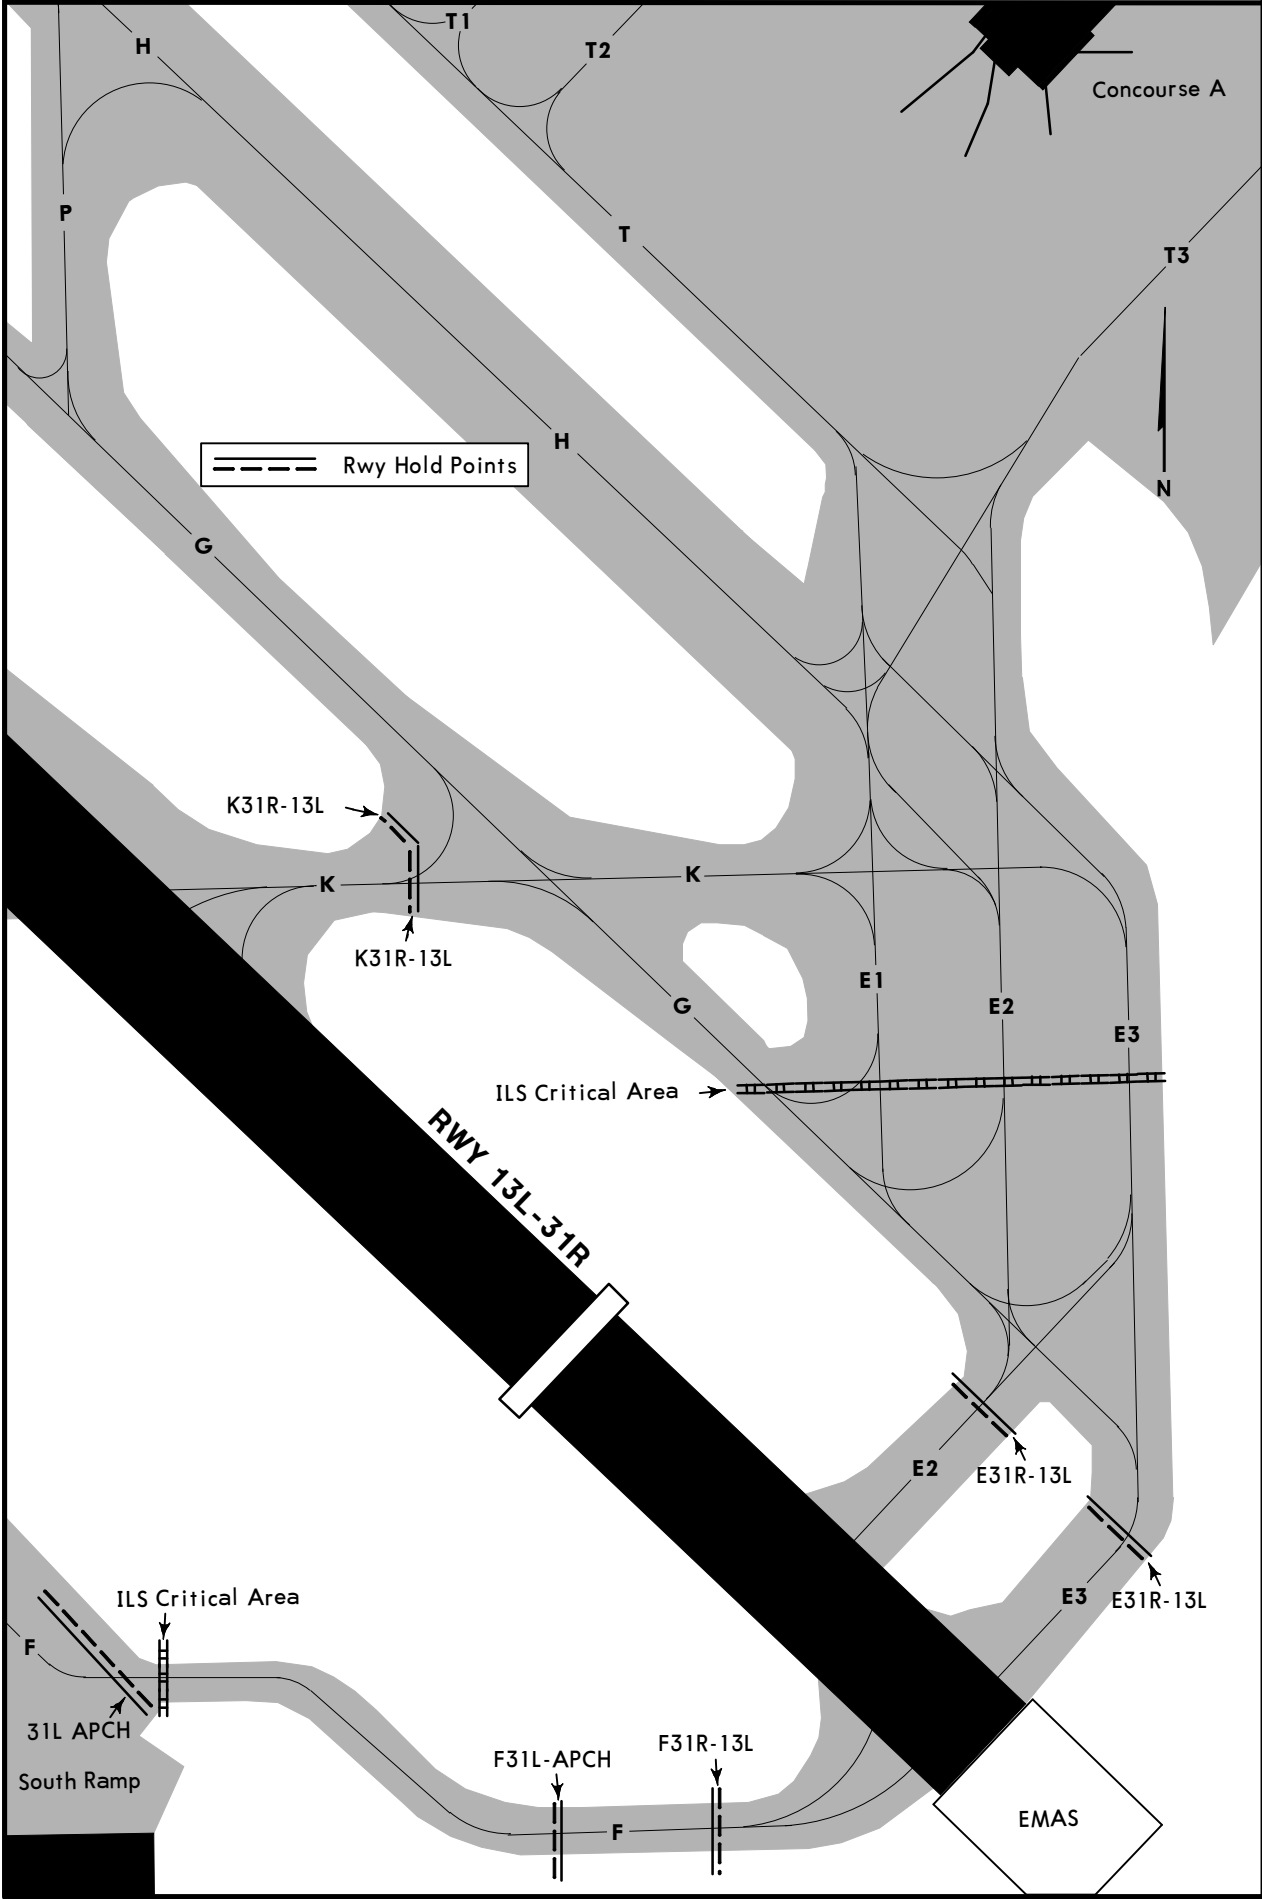

KMDW/MDW

JEPPesen


26 SEP 25

10-9C

Eff 2 Oct

CHICAGO, ILL

CHICAGO MIDWAY INTL

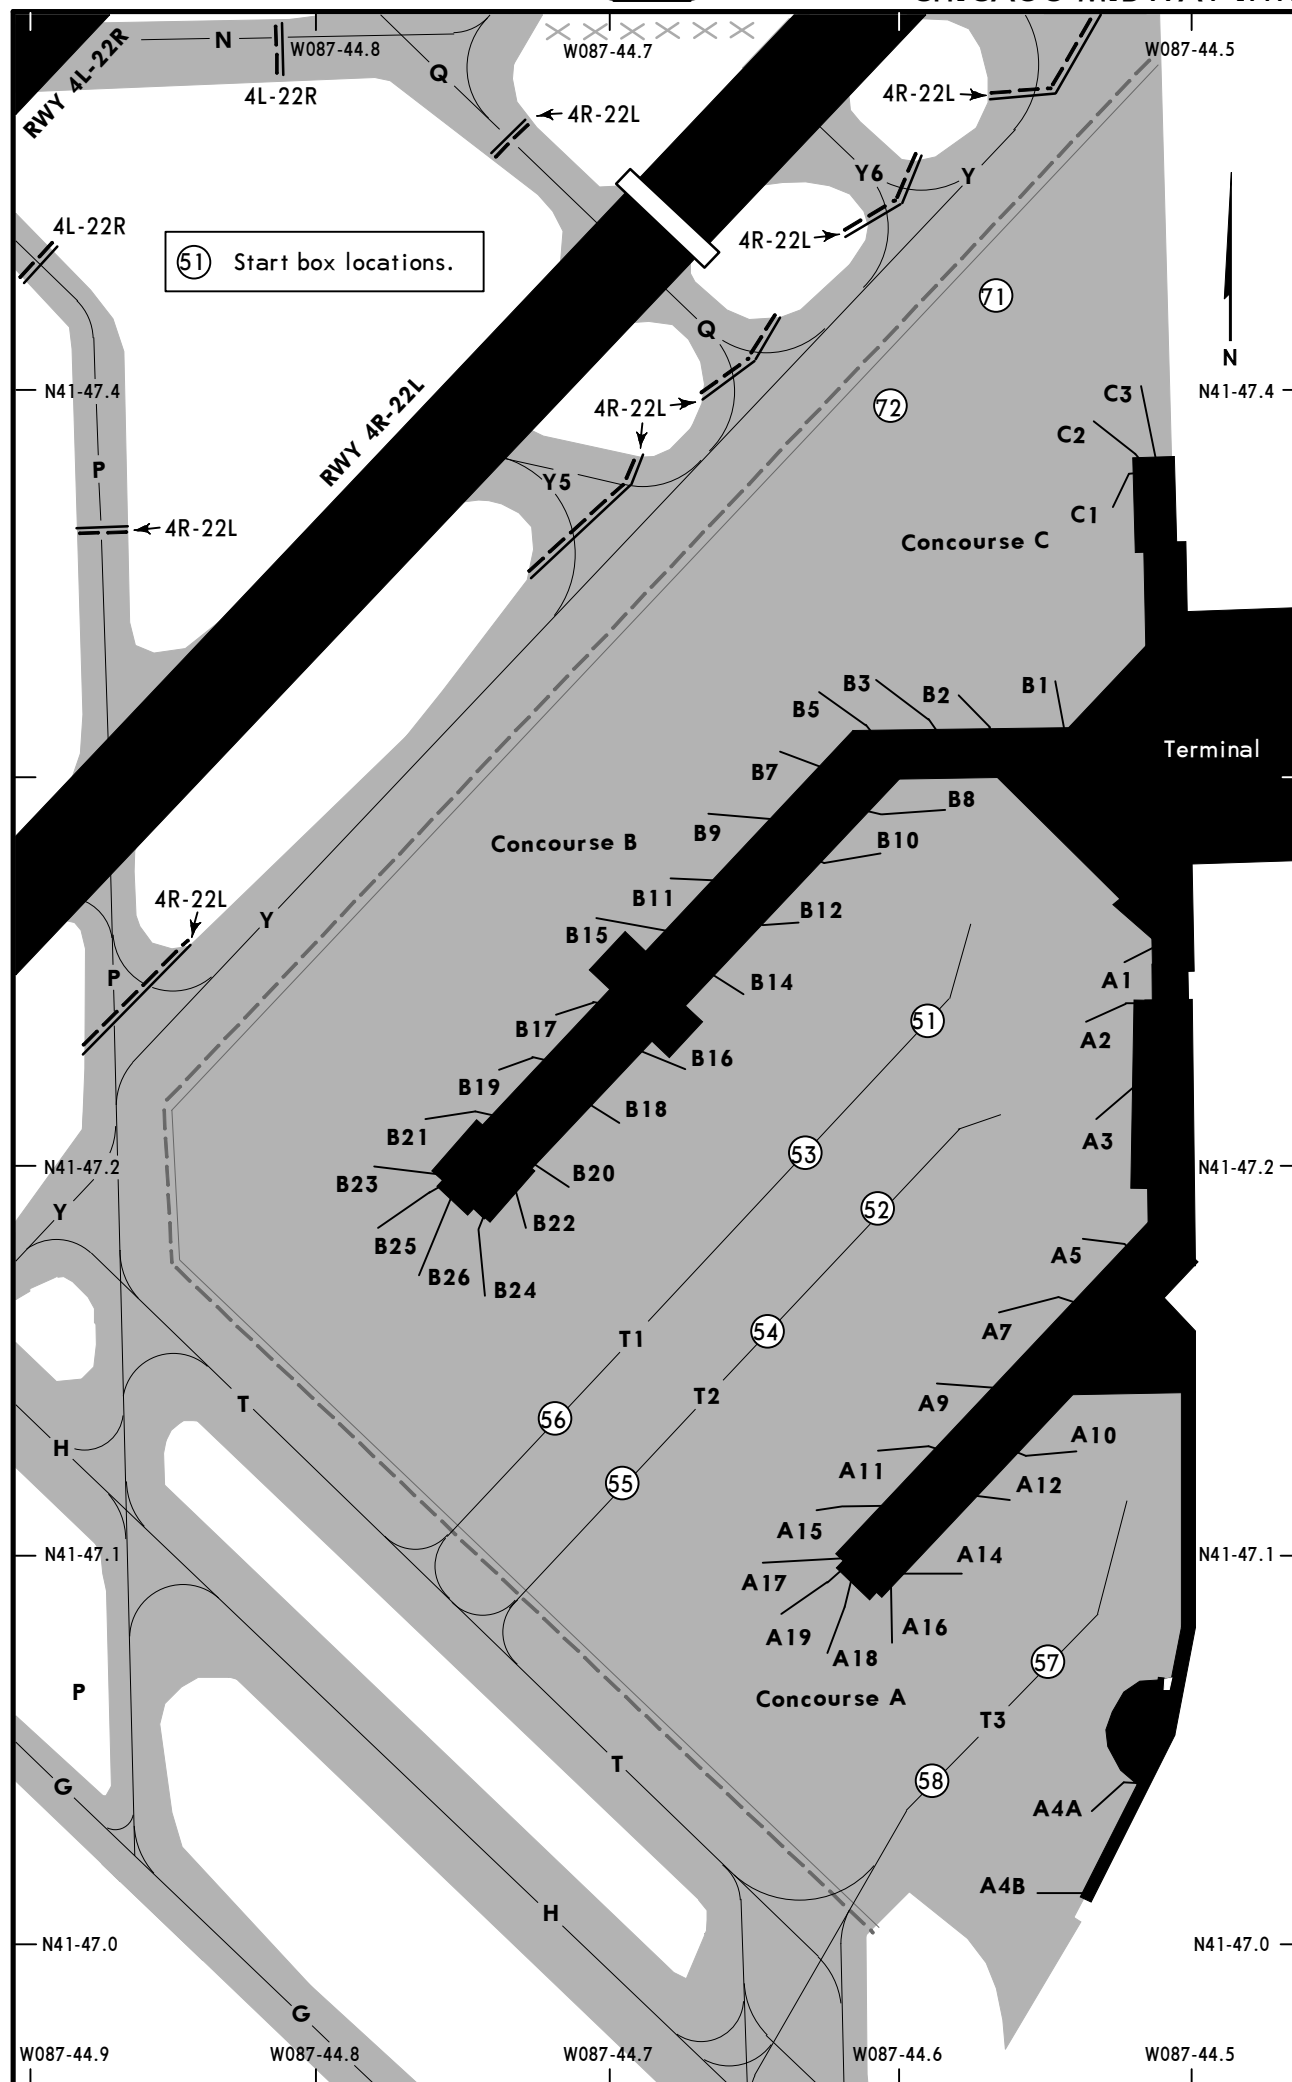

CHANGES: Twy P south of Twy G removed.

© JEPPESEN, 1990, 2025. ALL RIGHTS RESERVED.

KMDW/MDW



CHICAGO, ILL

26 SEP 25

10-9D

Eff 2 Oct

CHICAGO MIDWAY INTL

PARKING SPOT COORDINATES			
GATE No.	COORDINATES	GATE No.	COORDINATES
Concourse A		Concourse C	
A1 thru A3	N41 47.2 W087 44.5	C1 thru C3	N41 47.4 W087 44.5
A4A	N41 47.0 W087 44.5		
A4B	N41 47.0 W087 44.6		
A5	N41 47.2 W087 44.5		
A7	N41 47.2 W087 44.6		
A9	N41 47.1 W087 44.6		
A10	N41 47.1 W087 44.5		
A11, A12	N41 47.1 W087 44.6		
A14 thru A19	N41 47.1 W087 44.6		
Concourse B			
B1	N41 47.3 W087 44.5		
B2, B3, B5, B7, B8	N41 47.3 W087 44.6		
B9	N41 47.3 W087 44.7		
B10	N41 47.3 W087 44.6		
B11	N41 47.3 W087 44.7		
B12	N41 47.3 W087 44.6		
B14	N41 47.2 W087 44.6		
B15	N41 47.3 W087 44.7		
B16 thru B19	N41 47.2 W087 44.7		
B20	N41 47.2 W087 44.7		
B21	N41 47.2 W087 44.8		
B22	N41 47.2 W087 44.7		
B23	N41 47.2 W087 44.8		
B24	N41 47.2 W087 44.7		
B25, B26	N41 47.2 W087 44.8		

KMDW/MDW
CHICAGO MIDWAY INTL

JEPPESSEN
6 JUN 25 (11-1) Eff 12 Jun

CHICAGO, ILL
ILS or LOC Rwy 4R

BRIEFING STRIP™



D-ATIS 132.75		CHICAGO Approach (R) 128.2 126.05		MIDWAY Tower 135.2		Ground 118.075	
LOC IHKH 111.5	Final Apch Crs 047°	CITGO 2400' (1781')		ILS DA(H) 869' (250')	Apt Elev 620' TDZE 619'		
MISSED APCH: Climb to 1100' then climbing RIGHT turn to 2100' on heading 230° and inbound on EON VOR R-001 until crossing IGE CY INT/D20.0 EON then climb to 2600' to EON VOR and hold.							
Alt Set: INCHES		Trans level: FL 180			Trans alt: 18000'		
DME Required for LOC only. RNP Apch-GPS or RADAR required for procedure entry.							
1. Rwy 4R helicopter visibility reduction below RVR 40 or 3/4 SM not authorized. 2. VGSI and ILS glidepath not coincident (VGSI angle 3.00°/TCH 66').							

3400

090°→←270°

2800

MSA CGT VOR

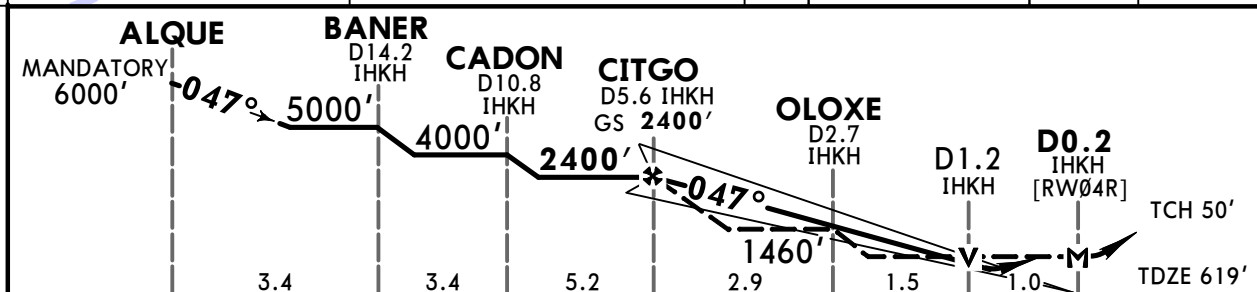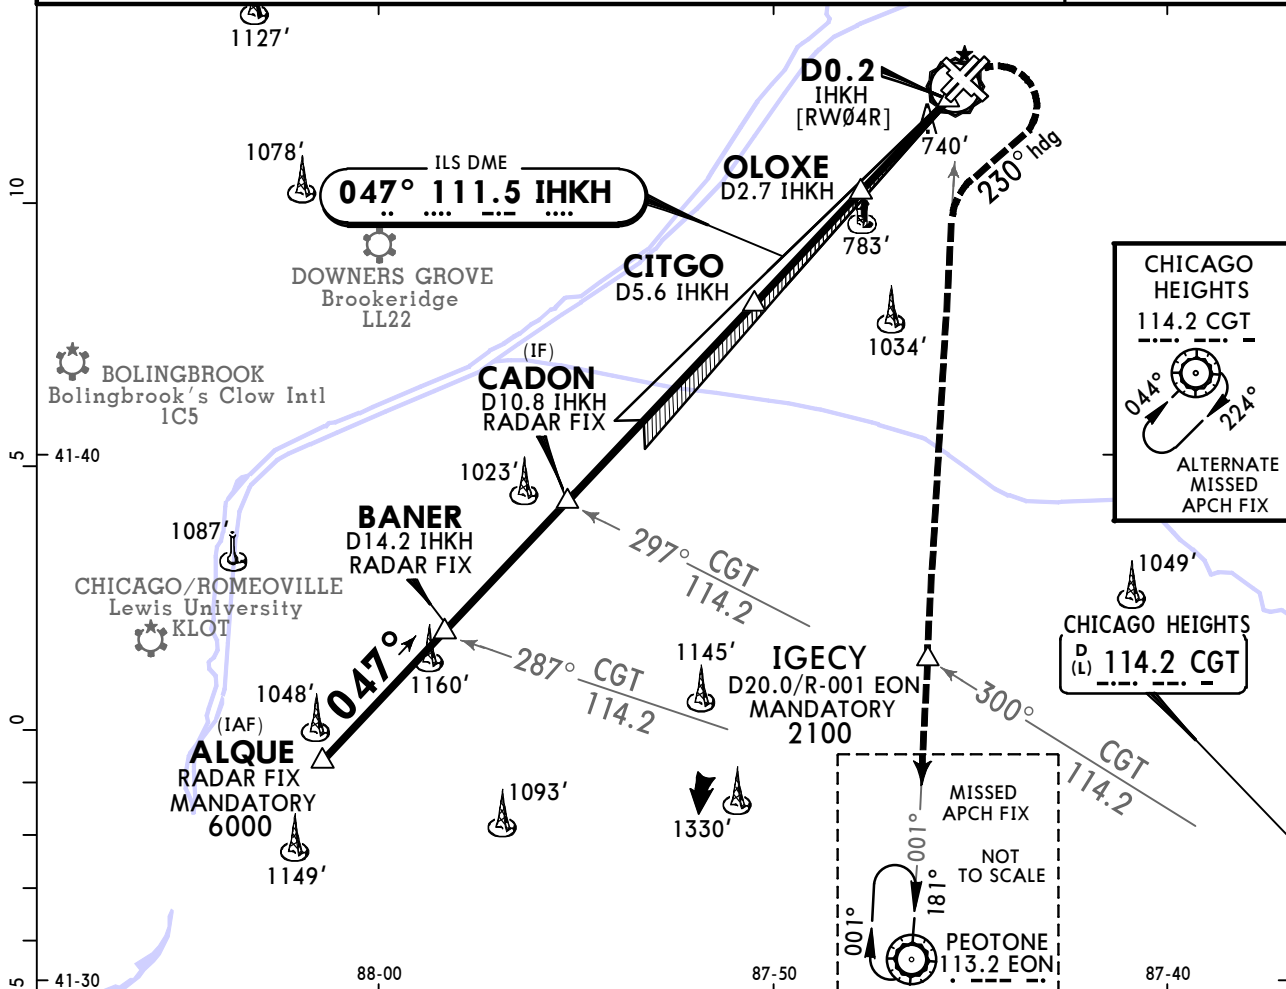

Gnd speed-Kts	70	90	100	120	140	160		REIL	1100'	2100'	on	230°	and	EON	
GS	3.00°	372	478	531	637	743									849
MAP at D0.2 IHKH															
								PAPI-L	↑	RT		hdg	113.2	R-001	

TERPS			STRAIGHT-IN LANDING RWY 4R			CIRCLE-TO-LAND		
ILS			LOC (GS out)			C		
DA(H) 869' (250')			MDA(H) 1000' (381')			Max Kts		
RVR 40 or 3/4			RVR 55 or 1			MDA(H)		
RVR 50 or 1			RVR 60 or 1 1/4			90		
						120		
						140		
						165		

KMDW/MDW
CHICAGO MIDWAY INTL

6 JUN 25



JEPPESSEN

Eff 12 Jun

(11-2)

CHICAGO, ILL
ILS or LOC Rwy 13L

BRIEFING STRIP™	D-ATIS 132.75		CHICAGO Approach (R) 128.2 126.05		MIDWAY Tower 135.2	Ground 118.075
	LOC IMDW 109.9	Final Apch Crs 138°	HITOB 2000' (1389')	ILS DA(H) 861' (250')	Apt Elev 620' TDZE 611'	3400 090° → ← 270° 2800 MSA CGT VOR
	MISSED APCH: Climb to 1100' then climbing RIGHT turn to 2300' on heading 220° and inbound on EON VOR R-001 until crossing IGECY INT/ D20.0 EON then climb to 2600' to EON VOR and hold.					
	Alt Set: INCHES		Trans level: FL 180		Trans alt: 18000'	
	1. DME required for LOC only. 2. Rwy 13L helicopter visibility reduction below RVR 40 or 3/4 SM not authorized.					

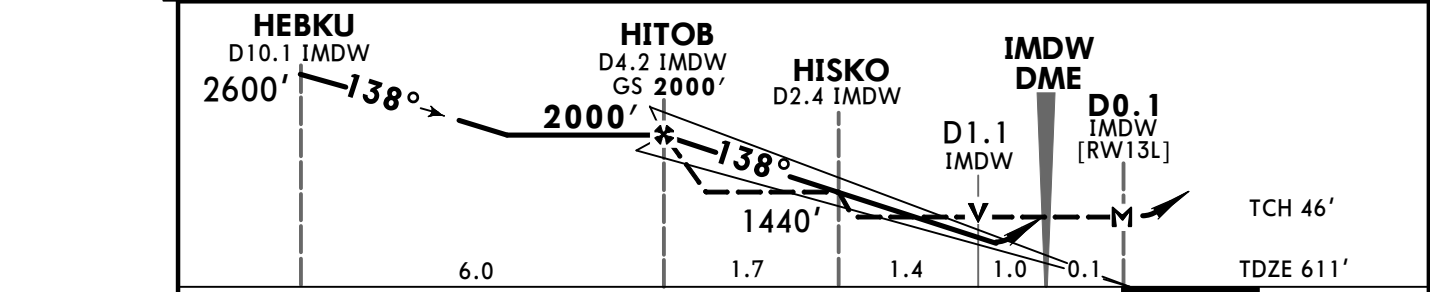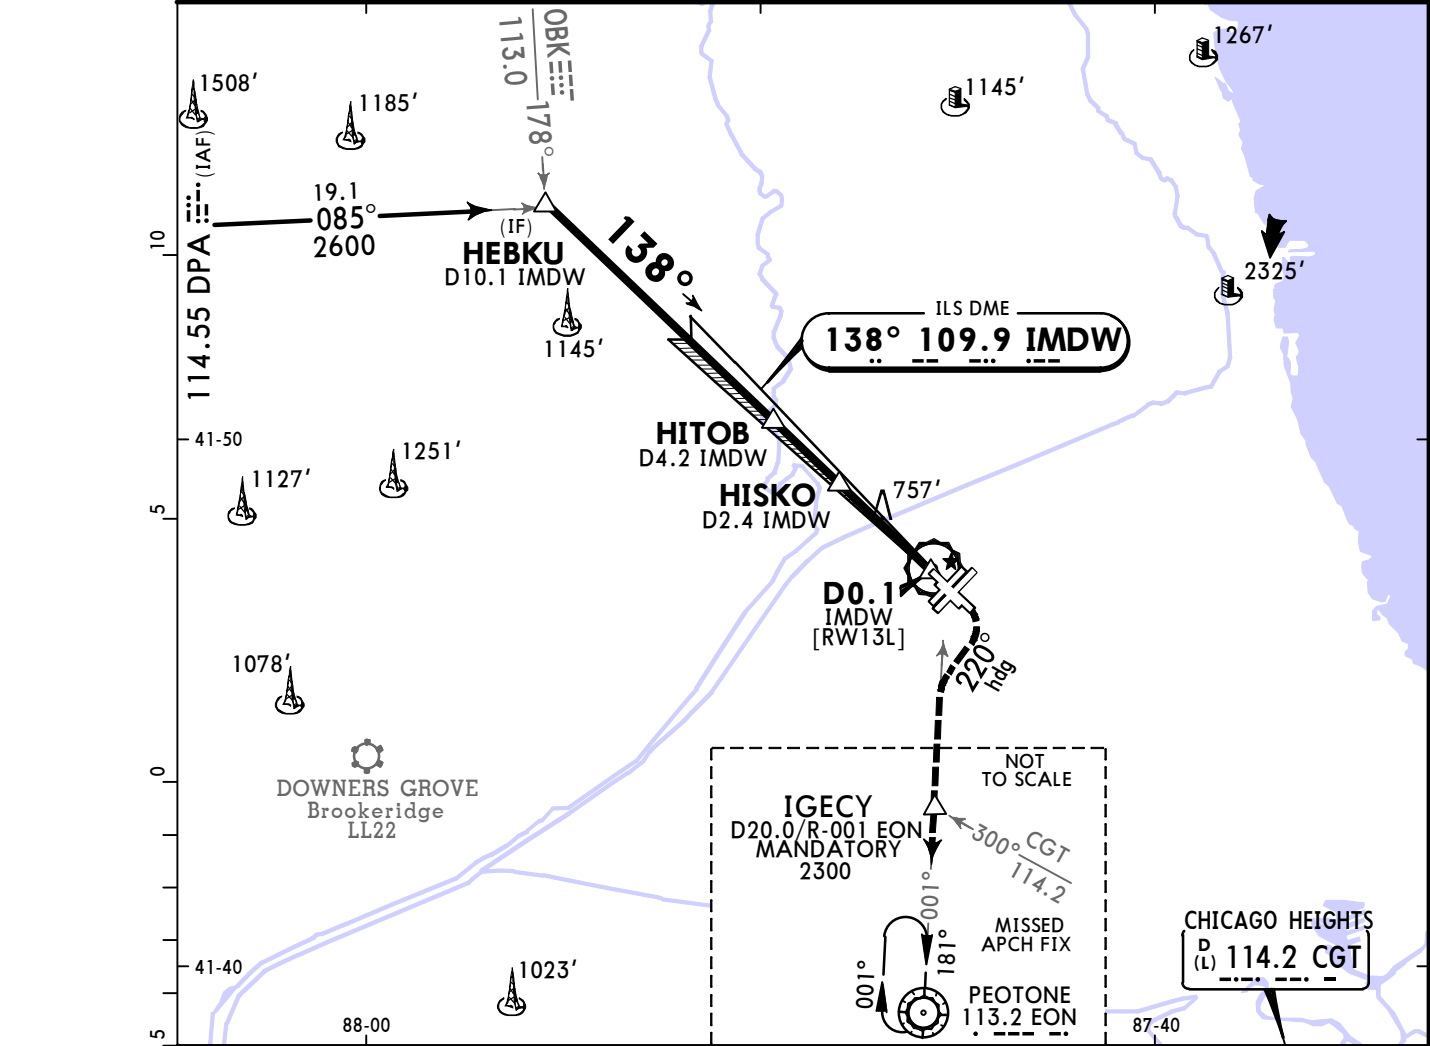

Gnd speed-Kts	70	90	100	120	140	160	RLLS PAPI	1100'	2300'	220°	EON
GS	3.00°	372	478	531	637	743		↑	RT	hdg	and 113.2
MAP at D0.1 IMDW											R-001

TERPS ORIG 12 JUN 2025	STRAIGHT-IN LANDING RWY 13L				CIRCLE-TO-LAND	
	ILS DA(H) 861' (250')		LOC (GS out) MDA(H) 1020' (409')		Max Kts	
	RLLS out		RLLS out		MDA(H)	
	RVR 40 or 3/4		RVR 55 or 1		90	1120' (500') -1
			RVR 60 or 1/4		120	

KMDW/MDW

CHICAGO MIDWAY INTL

JEPPESSEN

6 JUN 25

Eff 12 Jun

(11-3)

CHICAGO, ILL

ILS or LOC Rwy 31R

BRIEFING STRIP™


D-ATIS 132.75		CHICAGO Approach (R) 128.2 126.05		MIDWAY Tower 135.2	Ground 118.075
LOC IMXT 109.9	Final Apch Crs 318°	HOBEL 1700' (1087')	ILS DA(H) 863' (250')	Apt Elev 620' TDZE 613'	
MISSED APCH: Climb to 1100' then climbing LEFT turn to 2100' on heading 150° and inbound on EON VOR R-001 until crossing IGEY INT/D20.0 EON then climb to 2600' direct EON VOR and hold.					
Alt Set: INCHES		Trans level: FL 180		Trans alt: 18000'	
1. DME or RADAR required. 2. Rwy 31R helicopter visibility reduction below RVR 40 or 3/4 SM not authorized. 3. VGSI and ILS glidepath not coincident (VGSI angle 3.00°/TCH 63').					

3400

090°→←270°

2800

MSA CGT VOR

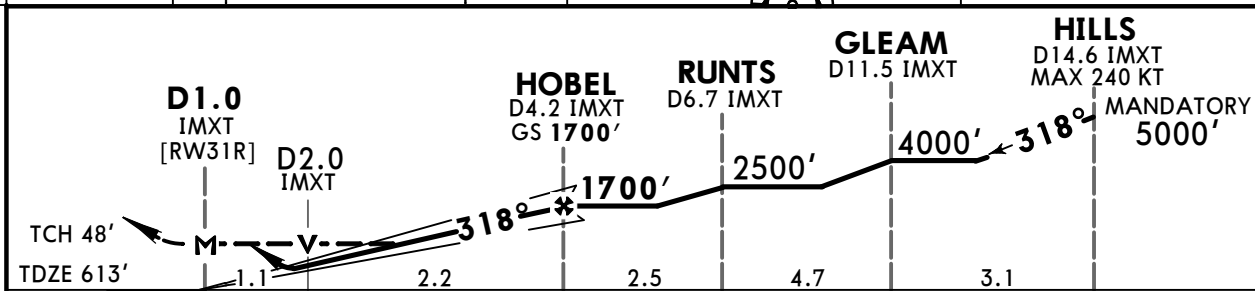

Gnd speed-Kts	70	90	100	120	140	160	REIL		1100'	2100'	150°	EON
GS	3.00°	372	478	531	637	743	PAPI		↑	LT	hdg	and 113.2
MAP at D1.0 IMXT												R-001

TERPS						CIRCLE-TO-LAND		
STRAIGHT-IN LANDING RWY 31R			LOC (GS out)					
ILS			LOC (GS out)					
DA(H) 863' (250')			MDA(H) 1020' (407')					
RLLS out			RLLS out					
A						Max Kts		
B						90		
C						120		
D						140		
						165		

CHANGES: Procedure title, procedure, runways depiction.

© JEPPESSEN, 2025. ALL RIGHTS RESERVED.

KMDW/MDW
CHICAGO MIDWAY INTL

1 AUG 25



12-1

Eff 7 Aug

CHICAGO, ILL
RNAV (GPS) Rwy 4L

BRIEFING STRIP™

D-ATIS 132.75		CHICAGO Approach (R) 128.2 126.05		MIDWAY Tower 135.2		Ground 118.075				
WAAS Ch 97741 W04B		Final Apch Crs 047°		HADGI 2300' (1683')		LPV DA(H) 867' (250')		Apt Elev 620' TDZE 617'		3400 MSA RW04L
MISSED APCH: Climb to 1100' then climbing RIGHT turn to 2400' direct YIGUT and hold.										
RNP Apch - GPS		Alt Set: INCHES		Trans level: FL 180		Trans alt: 18000'				
1. For uncompensated Baro-VNAV systems, LNAV/VNAV not authorized below -19°C or above 54°C. 2. Rwy 4L helicopter visibility reduction below 3/4 SM not authorized. 3. VGSI and RNAV glidepath not coincident (VGSI angle 3.00°/TCH 39').										

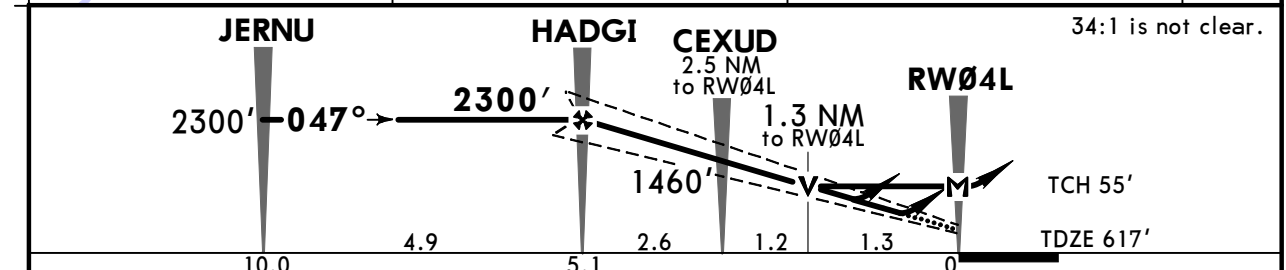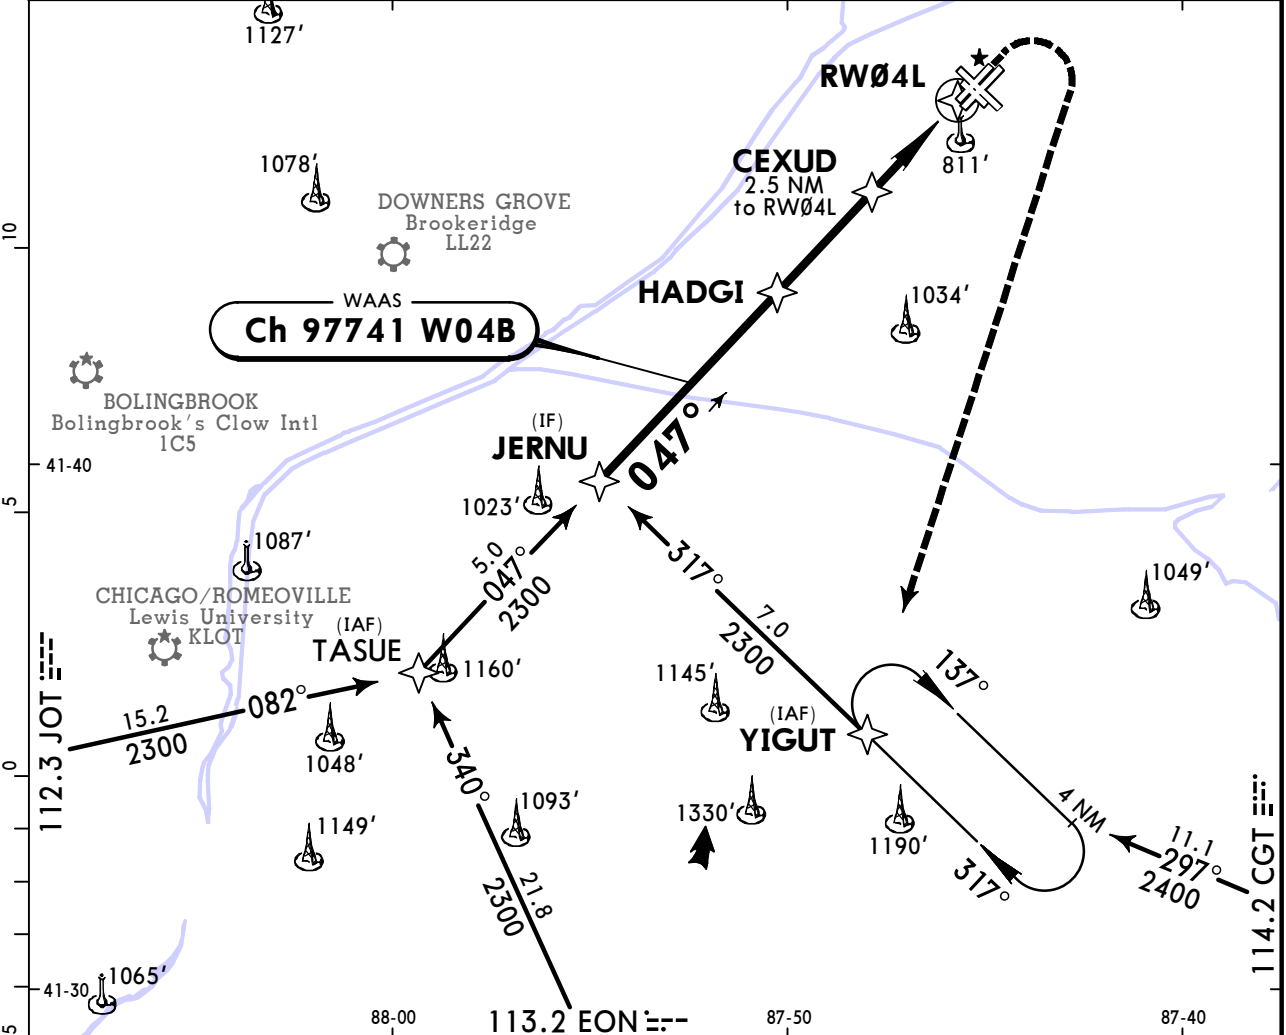

TERPS AMEND 1B 7 AUG 2025

Gnd speed-Kts		70	90	100	120	140	160	PAPI-L	1100' ↑	2400' ↗ RT		YIGUT	
Glide Path Angle 3.00°		372	478	531	637	743	849						
MAP at RW04L													
TERPS													
STRAIGHT-IN LANDING RWY 4L										CIRCLE-TO-LAND			
LPV		LNAV/VNAV				LNAV					Max Kts MDA(H)		
DA(H) 867' (250')		DA(H) 1021' (404')				MDA(H) 1080' (463')							
A	3/4				1 1/8				1		90	1120' (500') - 1	
B											120		
C									140	1340' (720') - 2			
D									165	1340' (720') - 2 1/4			

KMDW / MDW

CHICAGO MIDWAY INTL

6 JUN 25
Eff 12 Jun



12-2

JEPPESEN

CHICAGO, ILL

RNAV (GPS) Z Rwy 4R

D-ATIS 132.75		CHICAGO Approach (R) 128.2 126.05		MIDWAY Tower 135.2		Ground 118.075	
WAAS Ch 65614 W04A	Final Apch Crs 047°	CITGO 2400' (1781')		LPV DA(H) 869' (250')	Apt Elev 620' TDZE 619'	3400 MSA RW04R	
MISSED APCH: Climb to 1100' then climbing RIGHT turn to 2600' direct EON VOR and hold.							
RNP Apch-GPS	Alt Set: INCHES		Trans level: FL 180		Trans alt: 18000'		
1. For uncompensated Baro-VNAV systems, LNAV/VNAV not authorized below -20°C or above 54°C. 2. Rwy 4R helicopter visibility reduction below RVR 40 or 3/4 SM not authorized. 3. VGSI and RNAV glidepath not coincident (VGSI angle 3.00°/TCH 66').							

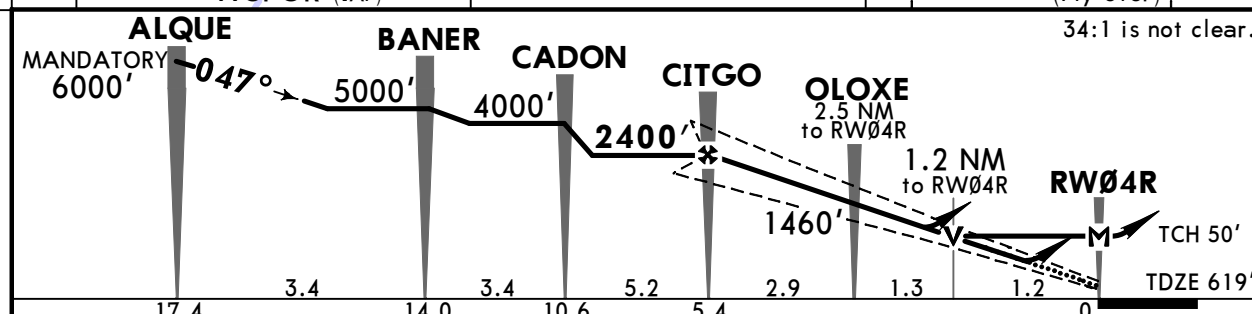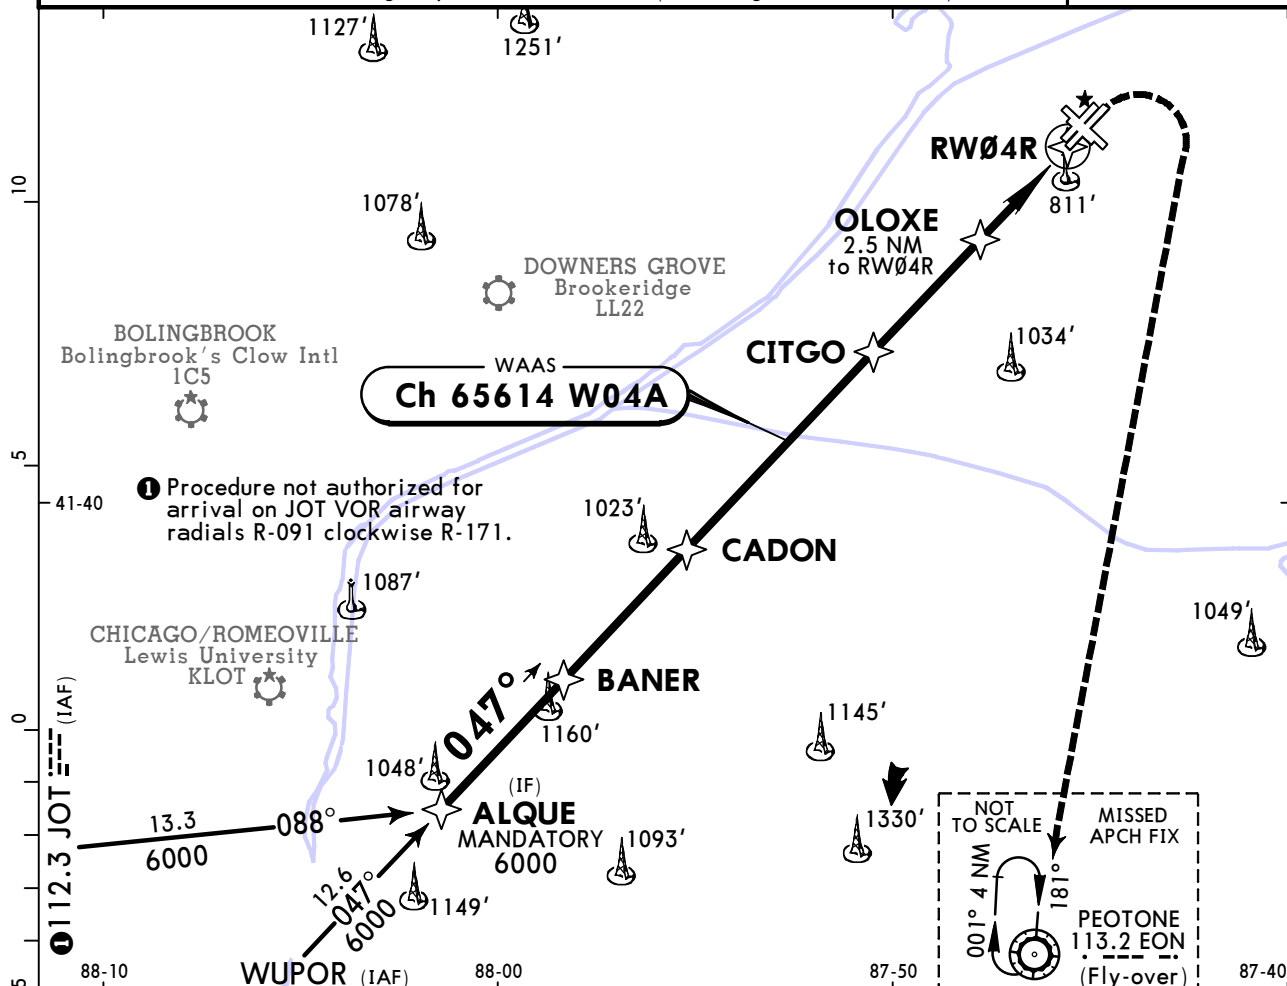

Gnd speed-Kts	70	90	100	120	140	160	REIL PAPI-L	1100' ↑	2600' └─▶ RT	D→	EON 113.2
Glide Path Angle 3.00°	372	478	531	637	743	849					
MAP at RW04R											

TERPS AMEND 4A 12 JUN 2025

TERPS		STRAIGHT-IN LANDING RWY 4R			CIRCLE-TO-LAND		
LPV		RNAV/VNAV	RNAV	C Max Kts			
DA(H) 869' (250')		DA(H) 1097' (478')	MDA(H) 1080' (461')		MDA(H) _____		
A	RVR 40 or $\frac{3}{4}$	$1\frac{3}{8}$	RVR 55 or 1	90	1120' (500') - 1		
B				120			
C			$1\frac{3}{8}$		140	1340' (720') - 2	
D					165		

CHANGES: Notes, runways depiction, chart format.



© JEPPESEN, 2001, 2025. ALL RIGHTS RESERVED.

KMDW/MDW
CHICAGO MIDWAY INTL

JEPPESEN

CHICAGO, ILL
12 JUN 25 12-3 Eff 12 Jun RNAV (GPS) Z Rwy 13L

D-ATIS 132.75		CHICAGO Approach (R) 128.2 126.05		MIDWAY Tower 135.2	Ground 118.075
WAAS Ch 65847 W13A	Final Apch Crs 138°	NAANN 1600' (989')	LPV DA(H) 861' (250')	Apt Elev 620' TDZE 611'	3400 MSA RW13L
MISSED APCH: Climb to 1100' then climbing RIGHT turn to 2600' direct EON VOR and hold.					
RNP Apch-GPS	Alt Set: INCHES	Trans level: FL 180		Trans alt: 18000'	
1. For uncompensated Baro-VNAV systems, LNAV/VNAV not authorized below -21°C or above 54°C. 2. Rwy 13L helicopter visibility reduction below RVR 40 or 3/4 SM not authorized.					

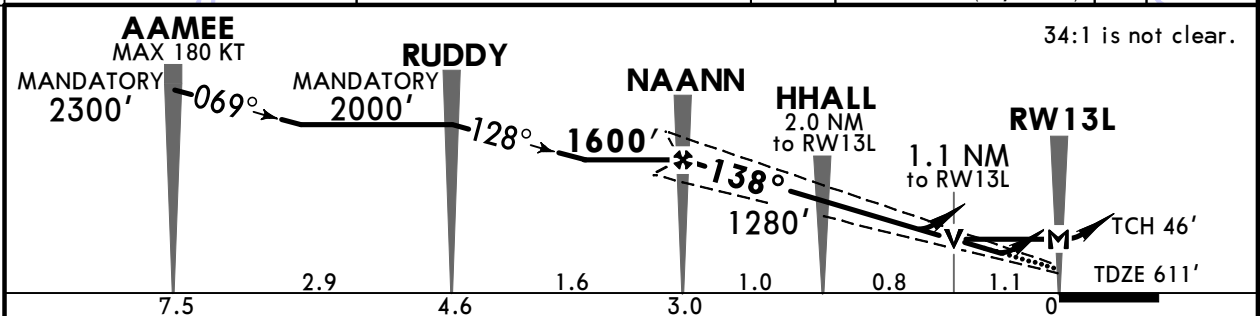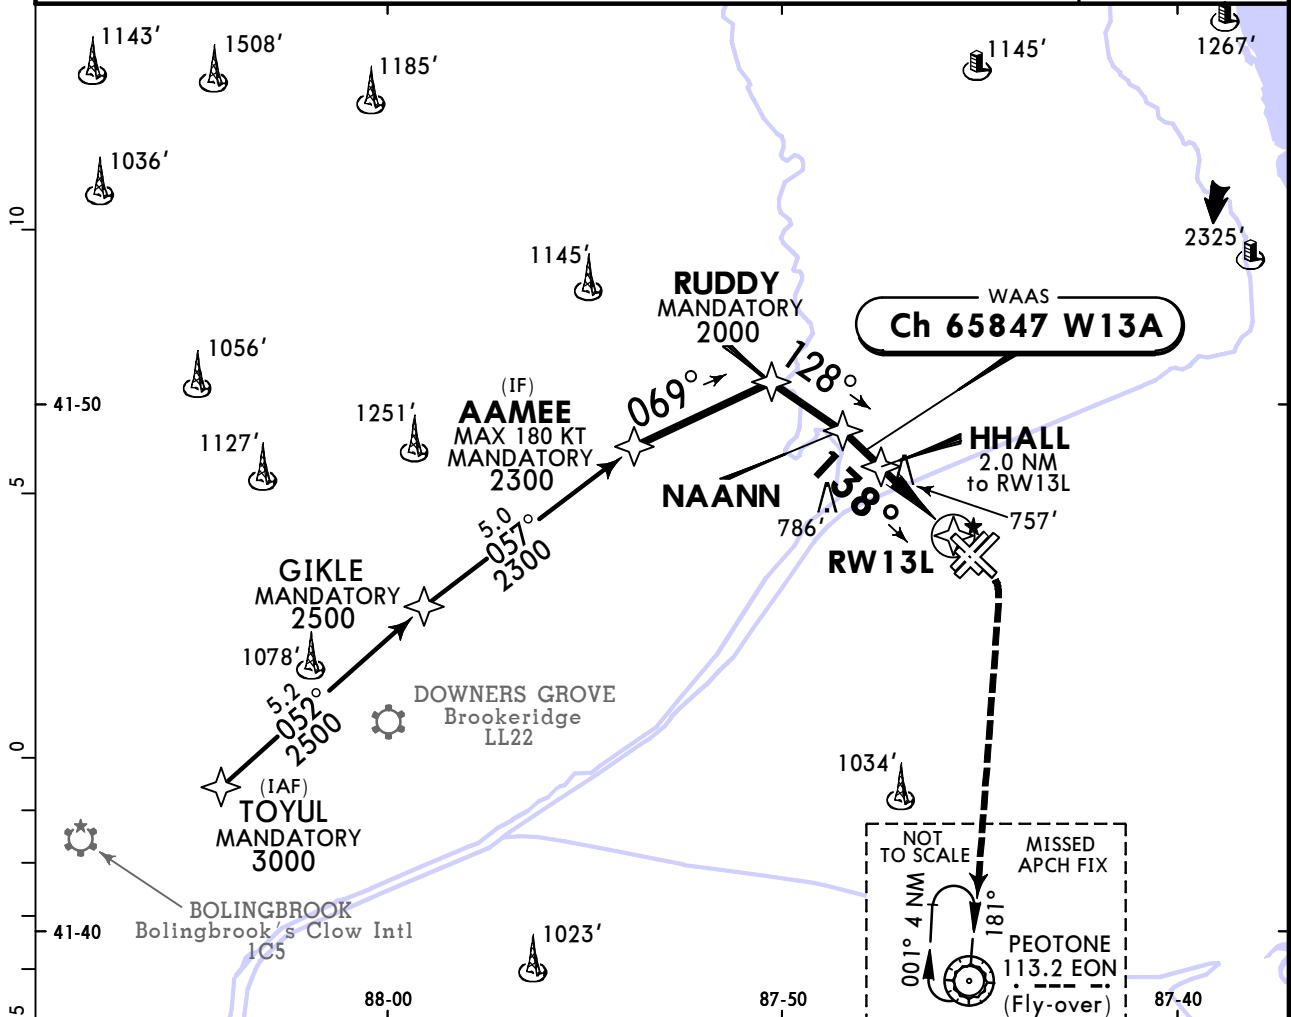

Gnd speed-Kts	70	90	100	120	140	160	RLLS		1100'	2600'	EON 113.2
Glide Path Angle 3.00°	372	478	531	637	743	849	PAPI		↑	RT	
MAP at RW13L											

TERPS			STRAIGHT-IN LANDING RWY 13L			CIRCLE-TO-LAND		
LPV DA(H) 861' (250')		RLLS out	LNAV/VNAV DA(H) 1034' (423')		RLLS out	LNAV MDA(H) 1020' (409')		RLLS out
A								
B								
C								
D								

KMDW / MDW

CHICAGO MIDWAY INTL


JEPPESEN

6 JUN 25

12-4


CHICAGO, ILL

RNAV (GPS) Z Rwy 22L

D-ATIS 132.75		CHICAGO Approach (R) 128.2 126.05		MIDWAY Tower 135.2		Ground 118.075		
DEPARTING STRIP	WAAS Ch 87132 W22A	Final Apch Crs 238°	MNDOE 2500' (1889')	LP MDA(H) 960' (349')	Apt Elev 620' TDZE 611'	3400 MSA HINSN		
	MISSED APCH: Climb to 1300' then climbing LEFT turn to 2600' direct EON VOR and hold.							
	RNP Apch-GPS	Alt Set: INCHES	Trans level: FL 180		Trans alt: 18000'			
	1. RADAR required. 2. Rwy 22L helicopter visibility reduction below RVR 40 or 3/4 SM not authorized. 3. Final approach course offset 10.0°. 4. VGSI and descent angles not coincident (VGSI angle 3.00°/TCH 43').							



34:1 is not clear.

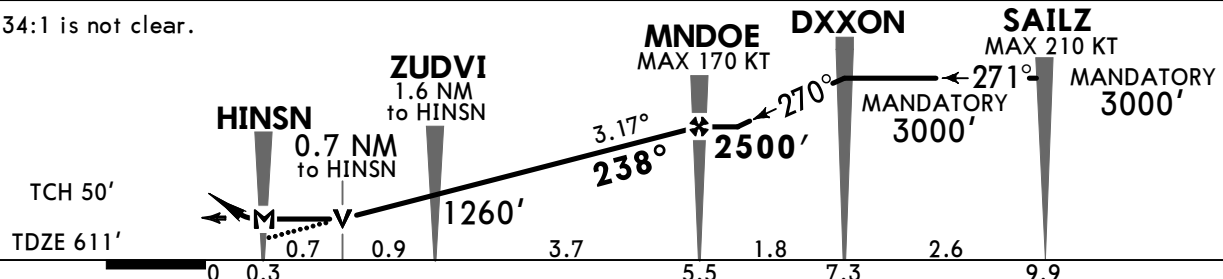

Gnd speed-Kts	70	90	100	120	140	160	REIL PAPI-R	1300' ↑	2600' ← LT	D→	EON 113.2
Descent Angle 3.17°	393	505	561	673	785	897					
MAP at HINSN											

TERPS

STRAIGHT-IN LANDING RWY 22L

CIRCLE-TO-LAND

LP		LNAV	C Max Kts	CIRCLE-TO-LAND
MDA(H) 960' (349')		MDA(H) 1020' (409')		MDA(H) _____
A	RVR 55 or 1	RVR 55 or 1	90	1120' (500') - 1
B			120	
C		RVR 60 or 1¼	140	1340' (720') - 2
D			165	1340' (720') - 2¼

CHANGES: Re-indexed, notes, topography, runways depiction, format.

© JEPPESEN, 2014, 2025. ALL RIGHTS RESERVED.

KMDW/MDW
CHICAGO MIDWAY INTL

6 JUN 25 (12-5) Eff 12 Jun

CHICAGO, ILL
RNAV (GPS) Rwy 22R

D-ATIS
132.75

CHICAGO Approach (R)
128.2 126.05

MIDWAY Tower
135.2

Ground
118.075

WAAS
Ch 56641
W22B

Final
Apch Crs
228°

RUGGO
3000'(2386')

LPV
DA(H)
893'(279')

Apt Elev 620'
TDZE 614'



MISSED APCH: Climb to 1100' then climbing LEFT turn to 2600'
direct IGENCY and on track 187° to EON VOR and hold.

RNP Apch-GPS|Alt Set: INCHESTrans level: FL 180Trans alt: 18000'

1. For uncompensated Baro-VNAV systems, LNAV/VNAV not authorized below -19°C (-2°F) or above 54°C (129°F). 2. Rwy 22R helicopter visibility reduction below 3/4 SM not authorized. 3. VGSI and RNAV glidepath not coincident (VGSI angle 3.00°/TCH 35').

3400

MSA RW22R

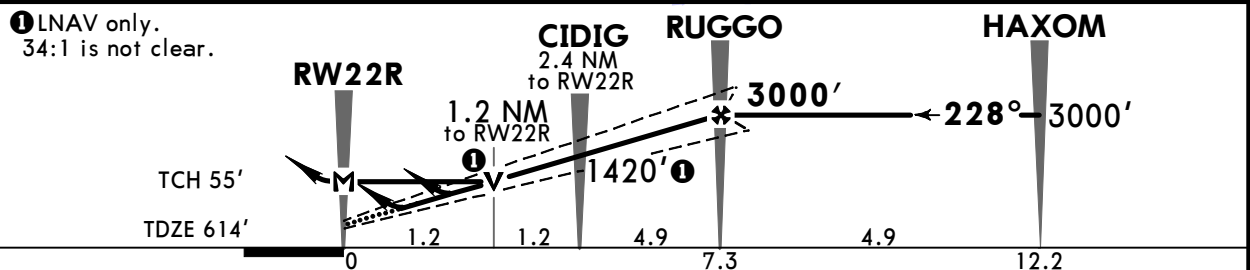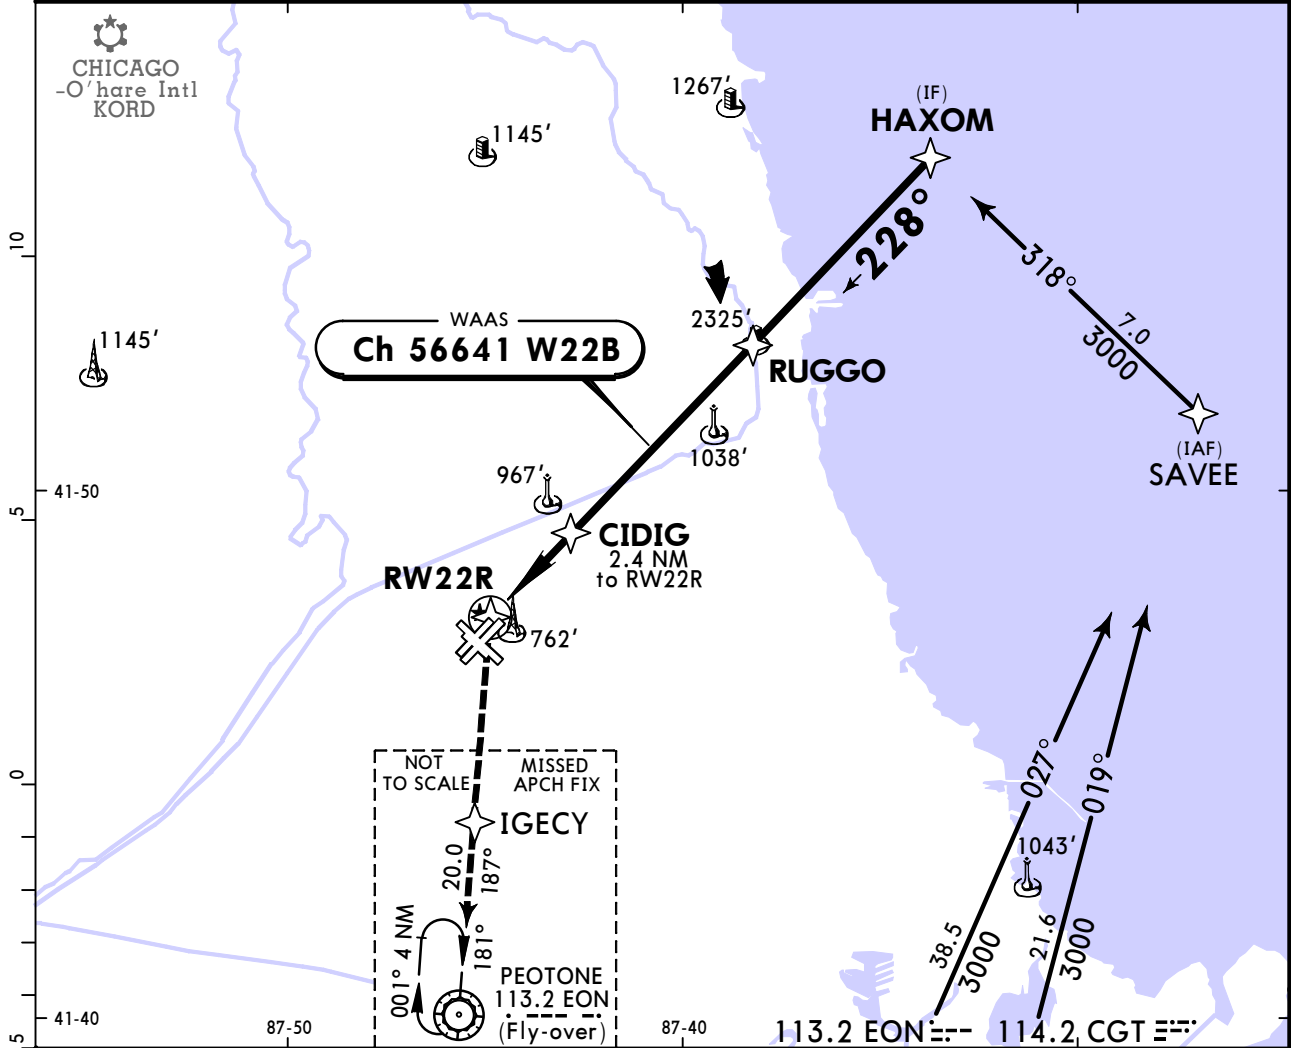

Gnd speed-Kts	70	90	100	120	140	160	PAPI-L	1100'	2600'	IGECY
Glide Path Angle	3.01°	373	479	532	639	745		↑	LT	
MAP at RW22R										



TERPS			STRAIGHT-IN LANDING RWY 22R		CIRCLE-TO-LAND	
LPV		LNAV/VNAV	LNAV			
DA(H) 893' (279')		DA(H) 1005' (391')	MDA(H) 1020' (406')			
A			1			
B						
C	7/8	1 1/8	1 1/8			
D						

KMDW/MDW
CHICAGO MIDWAY INTL

6 JUN 25 (12-6) Eff 12 Jun

CHICAGO, ILL
RNAV (GPS) Z Rwy 31R

D-ATIS 132.75		CHICAGO Approach (R) 128.2 126.05		MIDWAY Tower 135.2		Ground 118.075	
WAAS Ch 61147 W31A	Final Apch Crs 318°	HOBEL 1700' (1087')		LPV DA(H) 863' (250')	Apt Elev 620' TDZE 613'		3400 MSA RW31R
MISSED APCH: Climb to 1100' then climbing LEFT turn to 2600' direct EON VOR and hold.							
RNP Apch-GPS		Alt Set: INCHES		Trans level: FL 180		Trans alt: 18000'	
1. For uncompensated Baro-VNAV systems, LNAV/VNAV not authorized below -20°C or above 54°C. 2. Rwy 31R helicopter visibility reduction below RVR 40 or 3/4 SM not authorized. 3. VGSI and RNAV glidepath not coincident (VGSI angle 3.00°/TCH 63').							

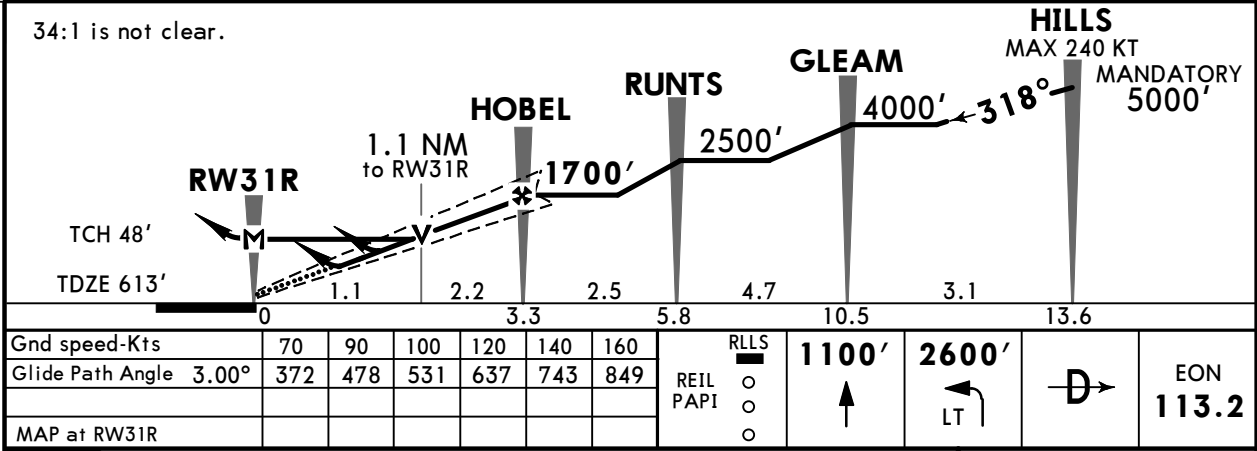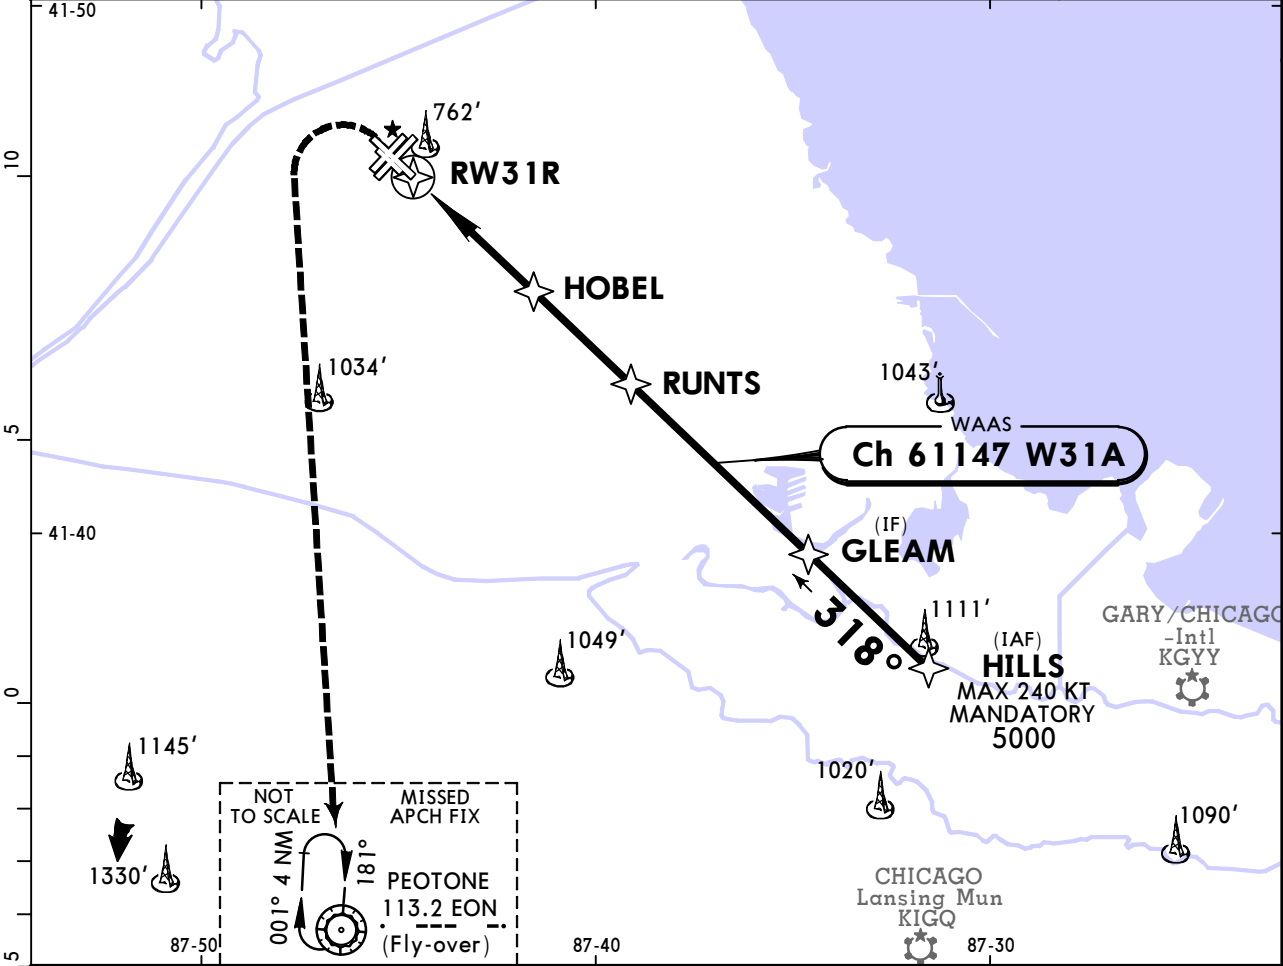

TERPS			STRAIGHT-IN LANDING RWY 31R			CIRCLE-TO-LAND		
LPV DA(H) 863' (250')			LNAV/VNAV DA(H) 953' (340')			LNAV MDA(H) 1020' (407')		
RLLS out			RLLS out			RLLS out		
A	RVR 40 or 3/4		RVR 50 or 1		RVR 55 or 1	Max Kts	MDA(H)	
B						90	1120' (500') - 1	
C					RVR 60 or 1 1/4	120	1340' (720') - 2	
D						140	1340' (720') - 2 1/4	



KMDW/MDW

CHICAGO MIDWAY INTL

JEPPESSEN
6 JUN 25
Eff 12 Jun
12-20

CHICAGO, ILL
RNAV (RNP) Y Rwy 4R

D-ATIS 132.75		CHICAGO Approach (R) 128.2 126.05		MIDWAY Tower 135.2	Ground 118.075
RNAV	Final Apch Crs 047°	YIPEE 1700' (1081')	RNP 0.10 DA(H) 951' (332')	Apt Elev 620' TDZE 619'	3400 MSA RW04R
MISSED APCH: Climb to 1100' then climbing RIGHT turn to 2600' direct EON VOR and hold.					
RNP AR Apch-GPS	Alt Set: INCHES	Trans level: FL 180	Trans alt: 18000'		
1. Authorization required. 2. For uncompensated Baro-VNAV systems, procedure not authorized below -20°C or above 54°C. 3. VGSI and RNAV glidepath not coincident (VGSI angle 3.00°/TCH 66').					

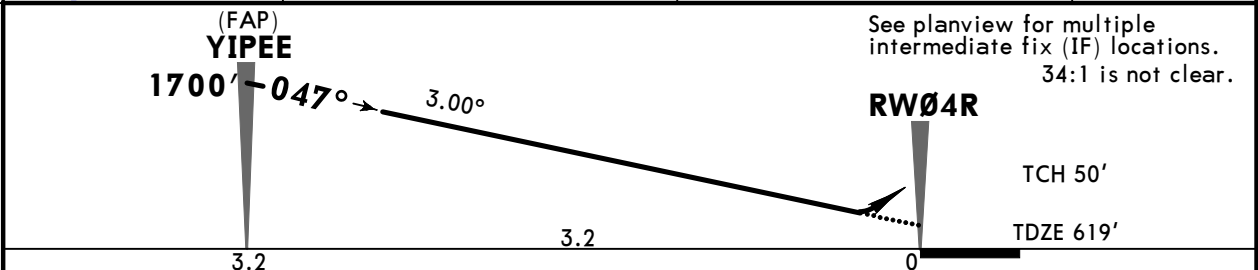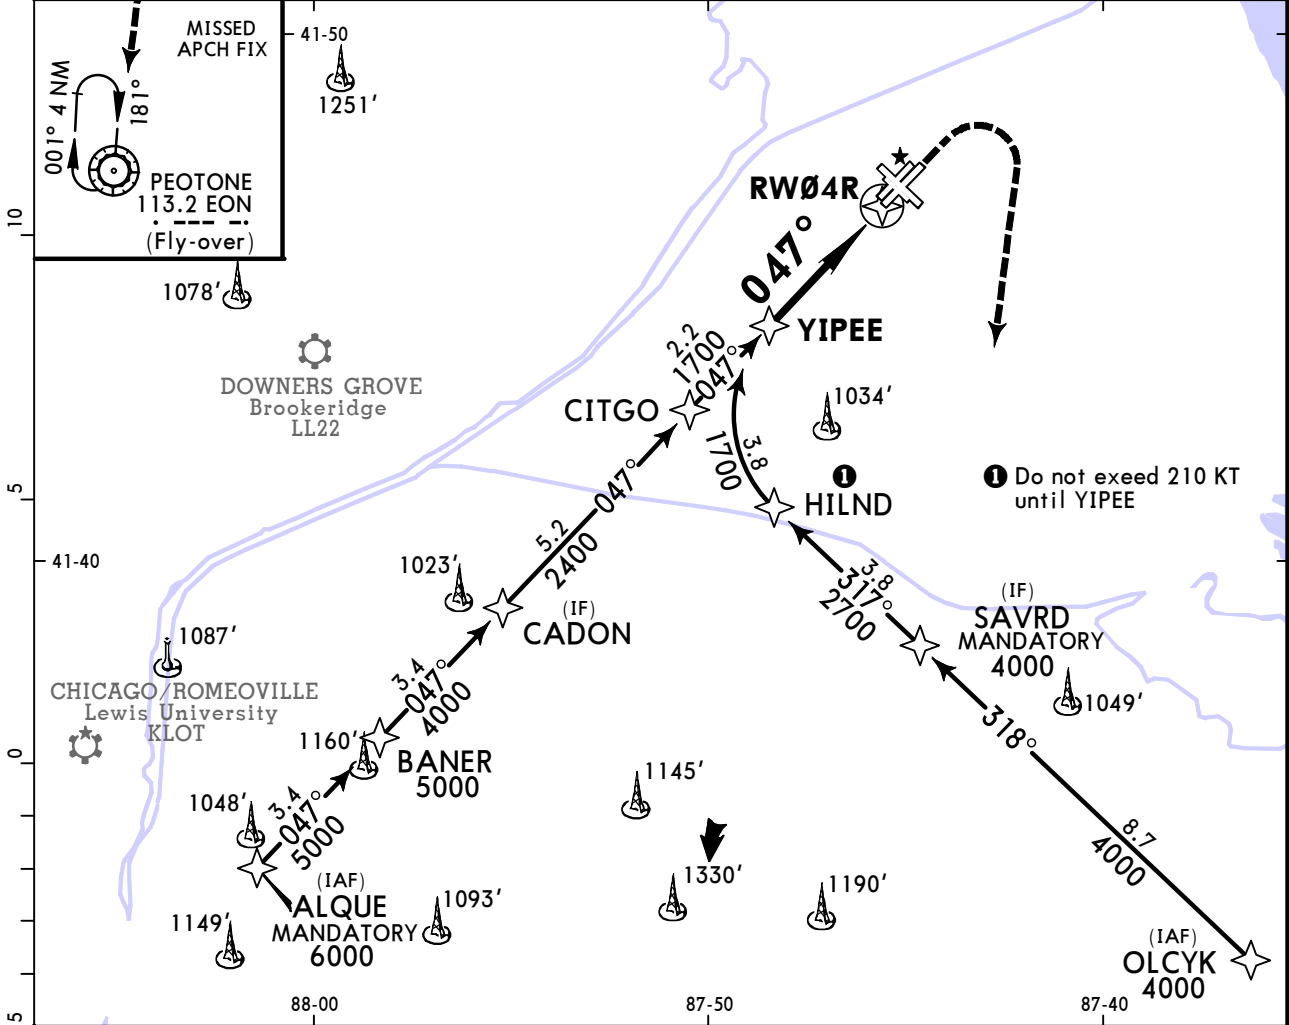

Gnd speed-Kts	70	90	100	120	140	160	REIL PAPI-L	1100'	2600'	D→	EON 113.2
Glide Path Angle 3.00°	372	478	531	637	743	849		↑	RT		

TERPS				STRAIGHT-IN LANDING RWY 4R		
RNP 0.10		RNP 0.20		RNP 0.30		
DA(H) 951' (332')		DA(H) 1020' (401')		DA(H) 1077' (458')		
A	RVR 50 or 1		RVR 60 or 1 1/4		1 3/8	
B						
C						
D						

CHANGES: Topography, runways depiction, format.

© JEPPESSEN, 2013, 2025. ALL RIGHTS RESERVED.

KMDW / MDW

CHICAGO MIDWAY INTL



JEPPesen
6 JUN 25
Eff 12 Jun
12-21

CHICAGO, ILL
RNAV (RNP) Y Rwy 13L

CHICAGO, ILL

RNAV (RNP) Y Rwy 13L

D-ATIS 132.75		CHICAGO Approach (R) 128.2 126.05		MIDWAY Tower 135.2		Ground 118.075	
RNAV	Final Apch Crs 138°	NIDEE 2000' (1389')		RNP 0.10 DA(H) 885' (274')	Apt Elev 620' TDZE 611'		3400 MSA RW13L
MISSD APCH: Climb to 1100' then climbing RIGHT turn to 2600' direct EON VOR and hold.							
Alt Set: INCHES		Trans level: FL 180			Trans alt: 18000'		
RNP AR Apch-GPS, RF. Authorization required.							
1. Authorization required. 2. For uncompensated Baro-VNAV systems, procedure not authorized below -21°C or above 54°C.							

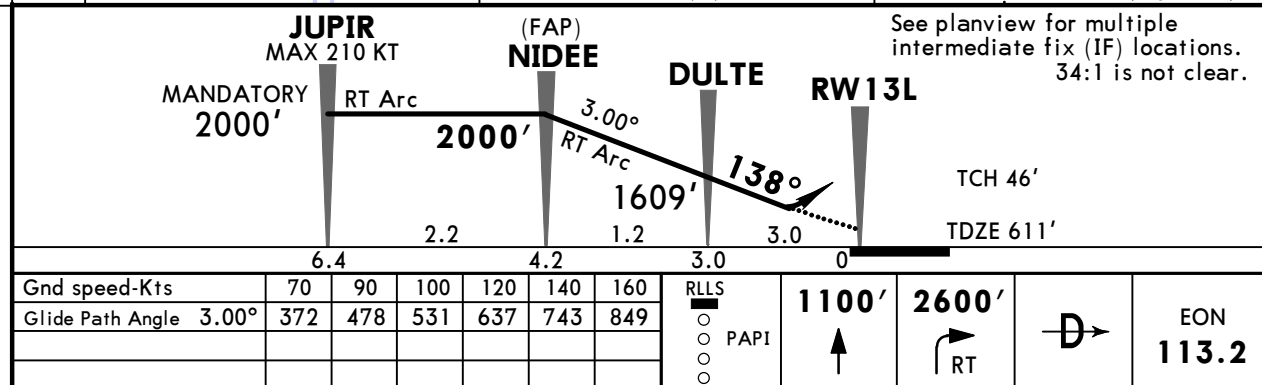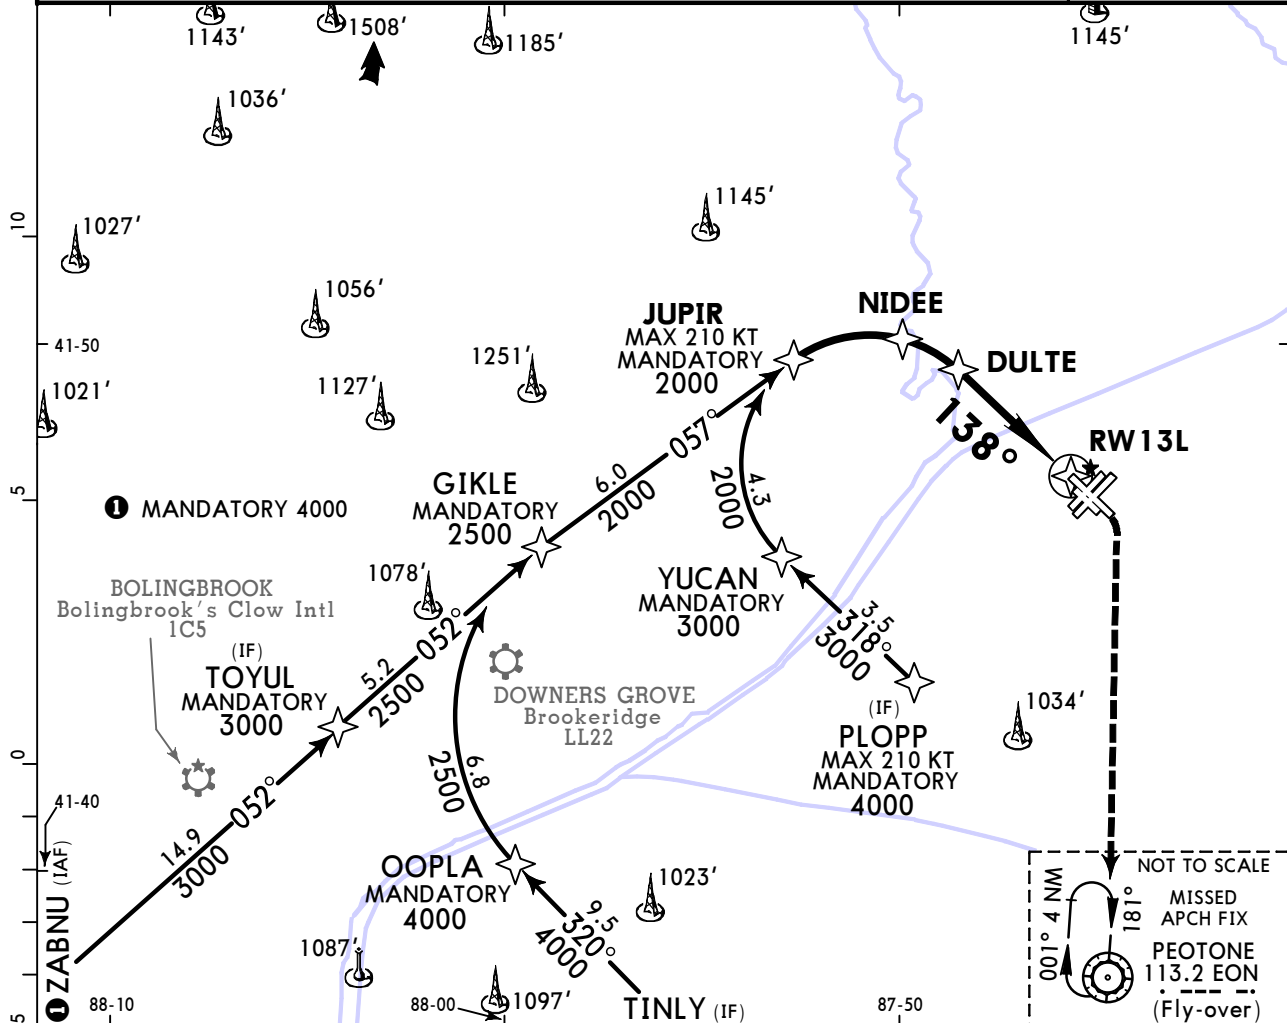

TERPS

STRAIGHT-IN LANDING RWY 13L

RNP 0.10

DA(H) **885'**(274')

RLLS out

RNP 0.20

DA(H) **1005'**(394')

RLLS out

RNP 0.30

DA(H) **1051'**(440')

RLLS out

A

B

C

D

RVR **45** or $\frac{7}{8}$

RVR **60** or $1\frac{1}{4}$

$1\frac{1}{4}$

CHANGES: Procedure title, procedure, runways depiction.

© JEPPESEN, 2025. ALL RIGHTS RESERVED.

KMDW / MDW

CHICAGO MIDWAY INTL


6 JUN 25
ff 12 Jun

12-22

CHICAGO, ILL

RNAV (RNP) Y Rwy 22L

D-ATIS 132.75		CHICAGO Approach (R) 128.2 126.05		MIDWAY Tower 135.2	Ground 118.075
RNAV	Final Apch Crs 228°	YACHT 1500' (889')	RNP 0.10 DA(H) 923' (312')	Apt Elev 620' TDZE 611'	 3400 MSA RW22L
MISSED APCH: Climb to 1300' then climbing LEFT turn to 2600' direct EON VOR and hold.					
RNP AR Apch-GPS	Alt Set: INCHES	Trans level: FL 180		Trans alt: 18000'	
1. Authorization required. 2. For uncompensated Baro-VNAV systems, procedure not authorized below -20°C or above 54°C. 3. VGSI and RNAV glidepath not coincident (VGSI angle 3.00°/TCH 43').					

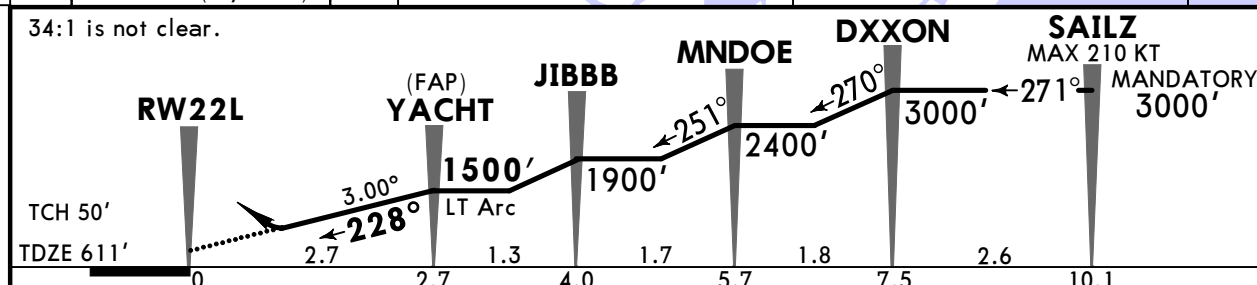

Gnd speed-Kts	70	90	100	120	140	160	REIL PAPI-R 1300' ↑ 2600' ↖ LT → D EON 113.2
Glide Path Angle 3.00°	372	478	531	637	743	849	

TERPS

STRAIGHT-IN LANDING RWY 22L

	RNP 0.10	RNP 0.20	RNP 0.30
A	DA(H) 923' (312')	DA(H) 949' (338')	DA(H) 992' (381')
B	RVR 45 or 7/8	RVR 50 or 1	RVR 60 or 1/4
C			
D			

CHANGES: Topography, runways depiction, format.

© JEPPESEN, 2013, 2025. ALL RIGHTS RESERVED.

ERPS AMEND 4 8 SEP 2022


KMDW/MDW

CHICAGO MIDWAY INTL


JEPPesen
6 JUN 25
Eff 12 Jun 12-23

CHICAGO, ILL
RNAV (RNP) X Rwy 22L

D-ATIS 132.75		CHICAGO Approach (R) 128.2 126.05		MIDWAY Tower 135.2	Ground 118.075
RNAV	Final Apch Crs 228°	YACHT 1500' (889')	RNP 0.10 DA(H) 923' (312')	Apt Elev 620' TDZE 611'	3400 MSA RW22L
MISSED APCH: Climb to 1300' then climbing LEFT turn to 2600' direct EON VOR and hold.					
RNP AR Apch-GPS	Alt Set: INCHES	Trans level: FL 180	Trans alt: 18000'		
1. Authorization required. 2. For uncompensated Baro-VNAV systems, procedure not authorized below -20°C or above 54°C. 3. VGSI and RNAV glidepath not coincident (VGSI angle 3.00°/TCH 43').					

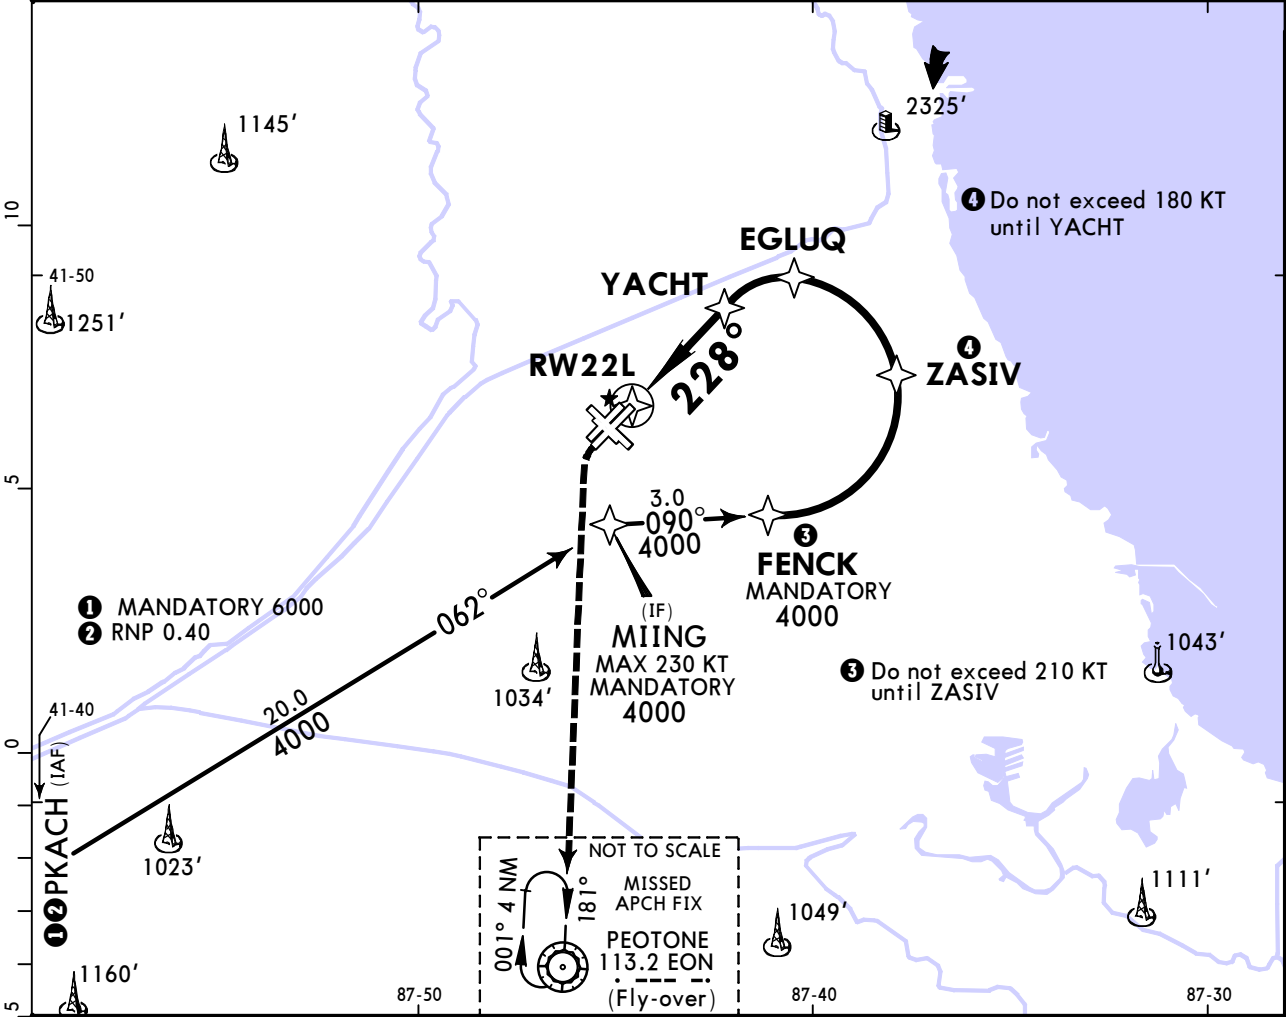

34:1 is not clear.

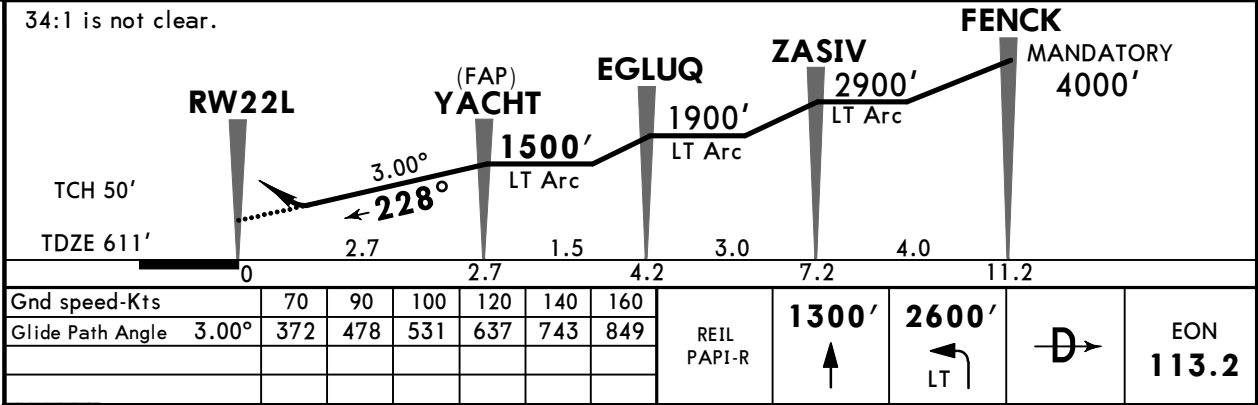

TERPS			STRAIGHT-IN LANDING RWY 22L		
RNP 0.10		DA(H) 923' (312')	RNP 0.20		DA(H) 949' (338')
RNP 0.30		DA(H) 992' (381')			
A					
B	RVR 45 or 7/8		RVR 50 or 1		RVR 60 or 1 1/4
C					
D					



KMDW/MDW
CHICAGO MIDWAY INTL

6 JUN 25
Eff 12 Jun

JEPPesen
12-24

CHICAGO, ILL
RNAV (RNP) Y Rwy 31R

D-ATIS 132.75		CHICAGO Approach (R) 128.2 126.05		MIDWAY Tower 135.2		Ground 118.075	
RNAV	Final Apch Crs 318°	HOBEL 1700' (1087')	RNP 0.10 DA(H) 905' (292')	Apt Elev 620' TDZE 613'		3400 MSA RW31R	
MISSED APCH: Climb to 1100' then climbing LEFT turn to 2600' direct EON VOR and hold.							
RNP AR Apch-GPS	Alt Set: INCHES		Trans level: FL 180		Trans alt: 18000'		
1. Authorization required. 2. For uncompensated Baro-VNAV systems, procedure not authorized below -20°C or above 54°C. 3. VGSI and RNAV glidepath not coincident (VGSI angle 3.00°/TCH 63').							

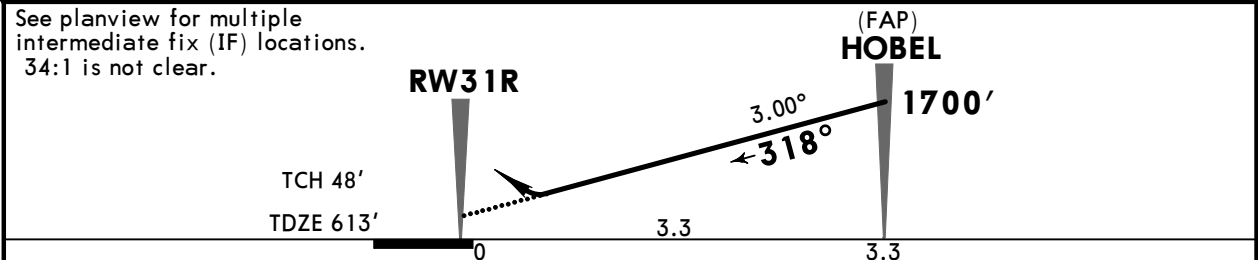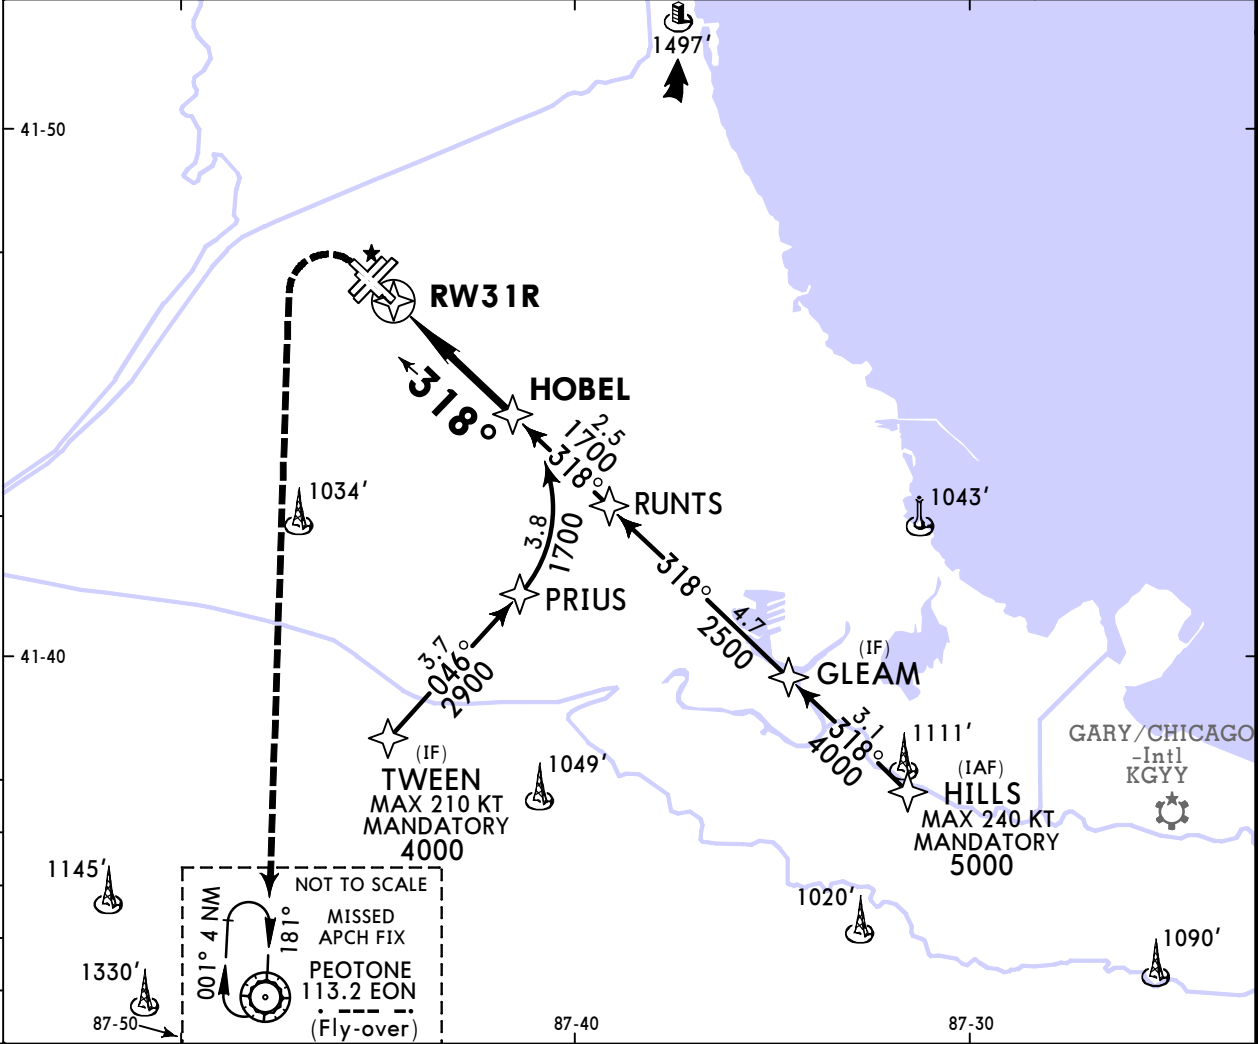

Gnd speed-Kts	70	90	100	120	140	160	RLLS REIL PAPI	1100'	2600'	EON 113.2
Glide Path Angle	3.00°	372	478	531	637	743		↑	LT	

TERPS		STRAIGHT-IN LANDING RWY 31R					
		RNP 0.10		RNP 0.20		RNP 0.30	
		DA(H) 905' (292')		DA(H) 965' (352')		DA(H) 1029' (416')	
		RLLS out		RLLS out		RLLS out	
A	RVR 45 or 7/8		RVR 55 or 1		RVR 60 or 1 1/4		
B							
C							
D							