

Nucleo STM32F411RET6 = ENTERING ON DFU MOD

STEP1

On board Pin VDD and Pin Boot0 are connected together with jumper the both are close each other


STEP 2

USE USB PROTOTYPE (or cut and USB CABLE ON part which you need to connect to NUCLEO)

and connect pins as follow

NO	NUCLEO BOARD	USB PROTOTYPE / USB CABLE
1.	5V	RED CABLE
2	PA12 +	GREEN CABLE
3	PA11 -	WHITE CABLE
4	GND	BLACK CABLE

See on picture as described

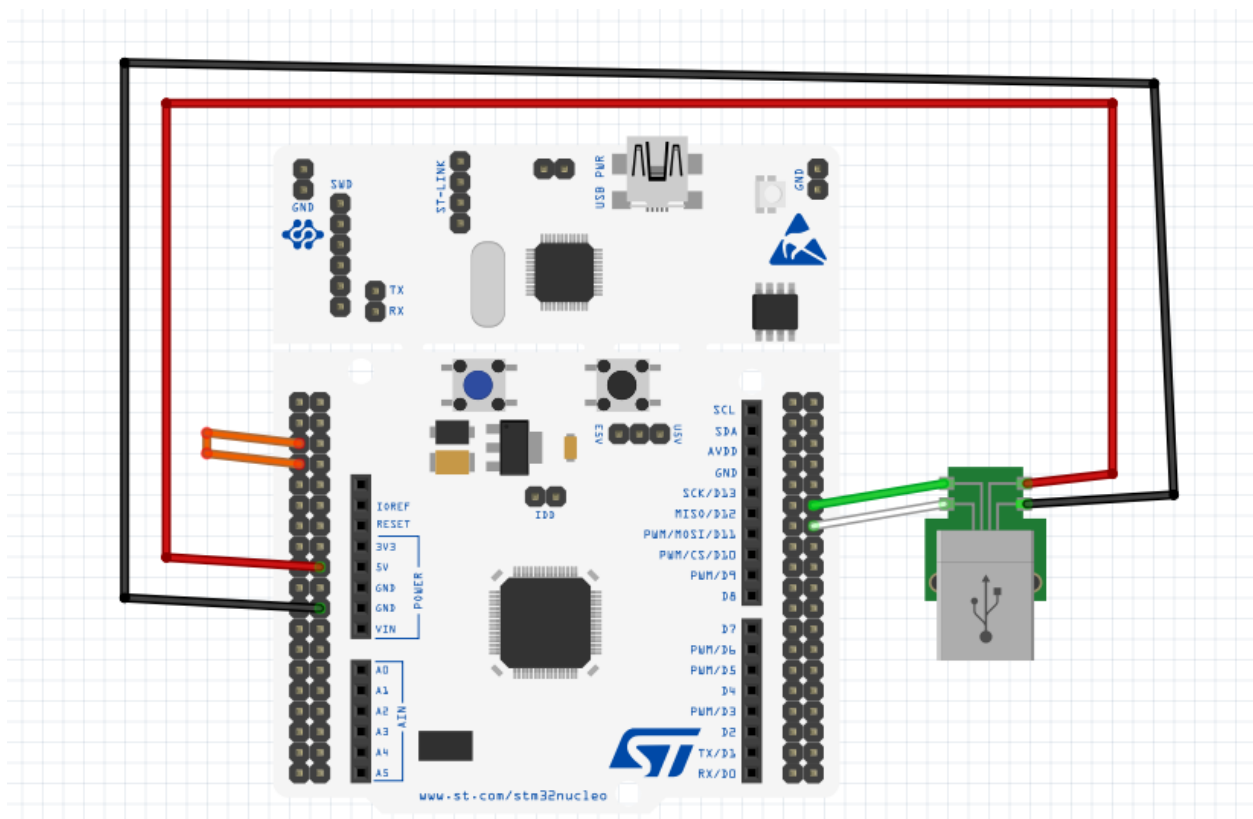

After upload of firmware to to exit from DFU mode (remove ORANGE JUMPER) like following picture (from picture above)

