

UEEE/YKS
YAKUTSK

JEPPESEN
20 JUN 25 10-1P

YAKUTSK, RUSSIA
AIRPORT BRIEFING

1. GENERAL

1.1. ATIS

ATIS 129.95
126.2 (Russian)

1.2. LOW VISIBILITY PROCEDURES (LVP)

LVP shall be applied when RVR values are less than 550m. The flight crews are informed about LVP implementation via ATIS or by ATS controller using the following phrase: "Low visibility procedures in progress, check your minimum".

When LVP are in force, not more than one ACFT may be present on TWY or RWY.

The responsibility for not following the assigned taxi routes on the maneuvering area and potential RWY incursion is imposed on the flight crew.

When LVP are in force, it is prohibited:

- not to take off from the RWY beginning;
- to take off without stop at the line-up position after taxiing to the RWY.

Flight crew shall read back all instructions of ATS controller.

LVP are cancelled when RVR is 550m at all three observation sites. Following message is transmitted via communication channels: "Low visibility procedures cancelled" and the phrase "Low visibility procedures in progress, check your minimum" is deleted from ATIS broadcast.

1.3. TAXI PROCEDURES

TWY C available for helicopters only.

Taxiing onto TWY B from stands B1 thru B12 is not permitted.

When stands 52 thru 55 are occupied, taxiing via TWY D segment, adjoining cargo apron, shall be executed at minimum speed strictly along marking.

1.4. PARKING INFORMATION

Parking into and out of stands by GND controller.

Stands 10A, 52 thru 54 and B1 thru B12 are available for helicopter.

1.5. OTHER

Birds in the vicinity of APT.

2. ARRIVAL

2.1. CAT II OPERATIONS

RWY 23 approved for CAT II operations.

3. DEPARTURE

3.1. DE-ICING

Stands 35 and 36 are designated for de-icing.

Request de-icing treatment not later than 30 minutes prior to departure.

3.2. START-UP AND TAXI PROCEDURES

Engines start-up, taxiing and towing to the RWY holding position shall be executed upon request of the flight crew and by GND controller's clearance.

When requesting start-up clearance from GND controller, flight crews shall report call sign and stand number. When towing is required, flight crew shall report stand number and request towing clearance from GND controller.

UEEE/YKS
YAKUTSK


JEPPESEN
5 JUL 24 (10-1R)

Eff 11 Jul

RADAR MINIMUM ALTITUDES

YAKUTSK, RUSSIA


YAKUTSK Radar (TWR) 120.3	Alt Set: MM (hPa on request) QNH on request (QFE) Trans level: FL050 FL060 if pressure is less than 751 mm (1001.3 hPa) FL070 if pressure is less than 724 mm (965.3 hPa) Trans alt: 3940 (3612) 1. Chart only to be used for cross-checking of altitudes while under radar control. 2. When vectoring is carried out under low-temperature conditions, minimum altitudes shall be adjusted by ATC by altimeter temperature correction.
Apt Elev 328	

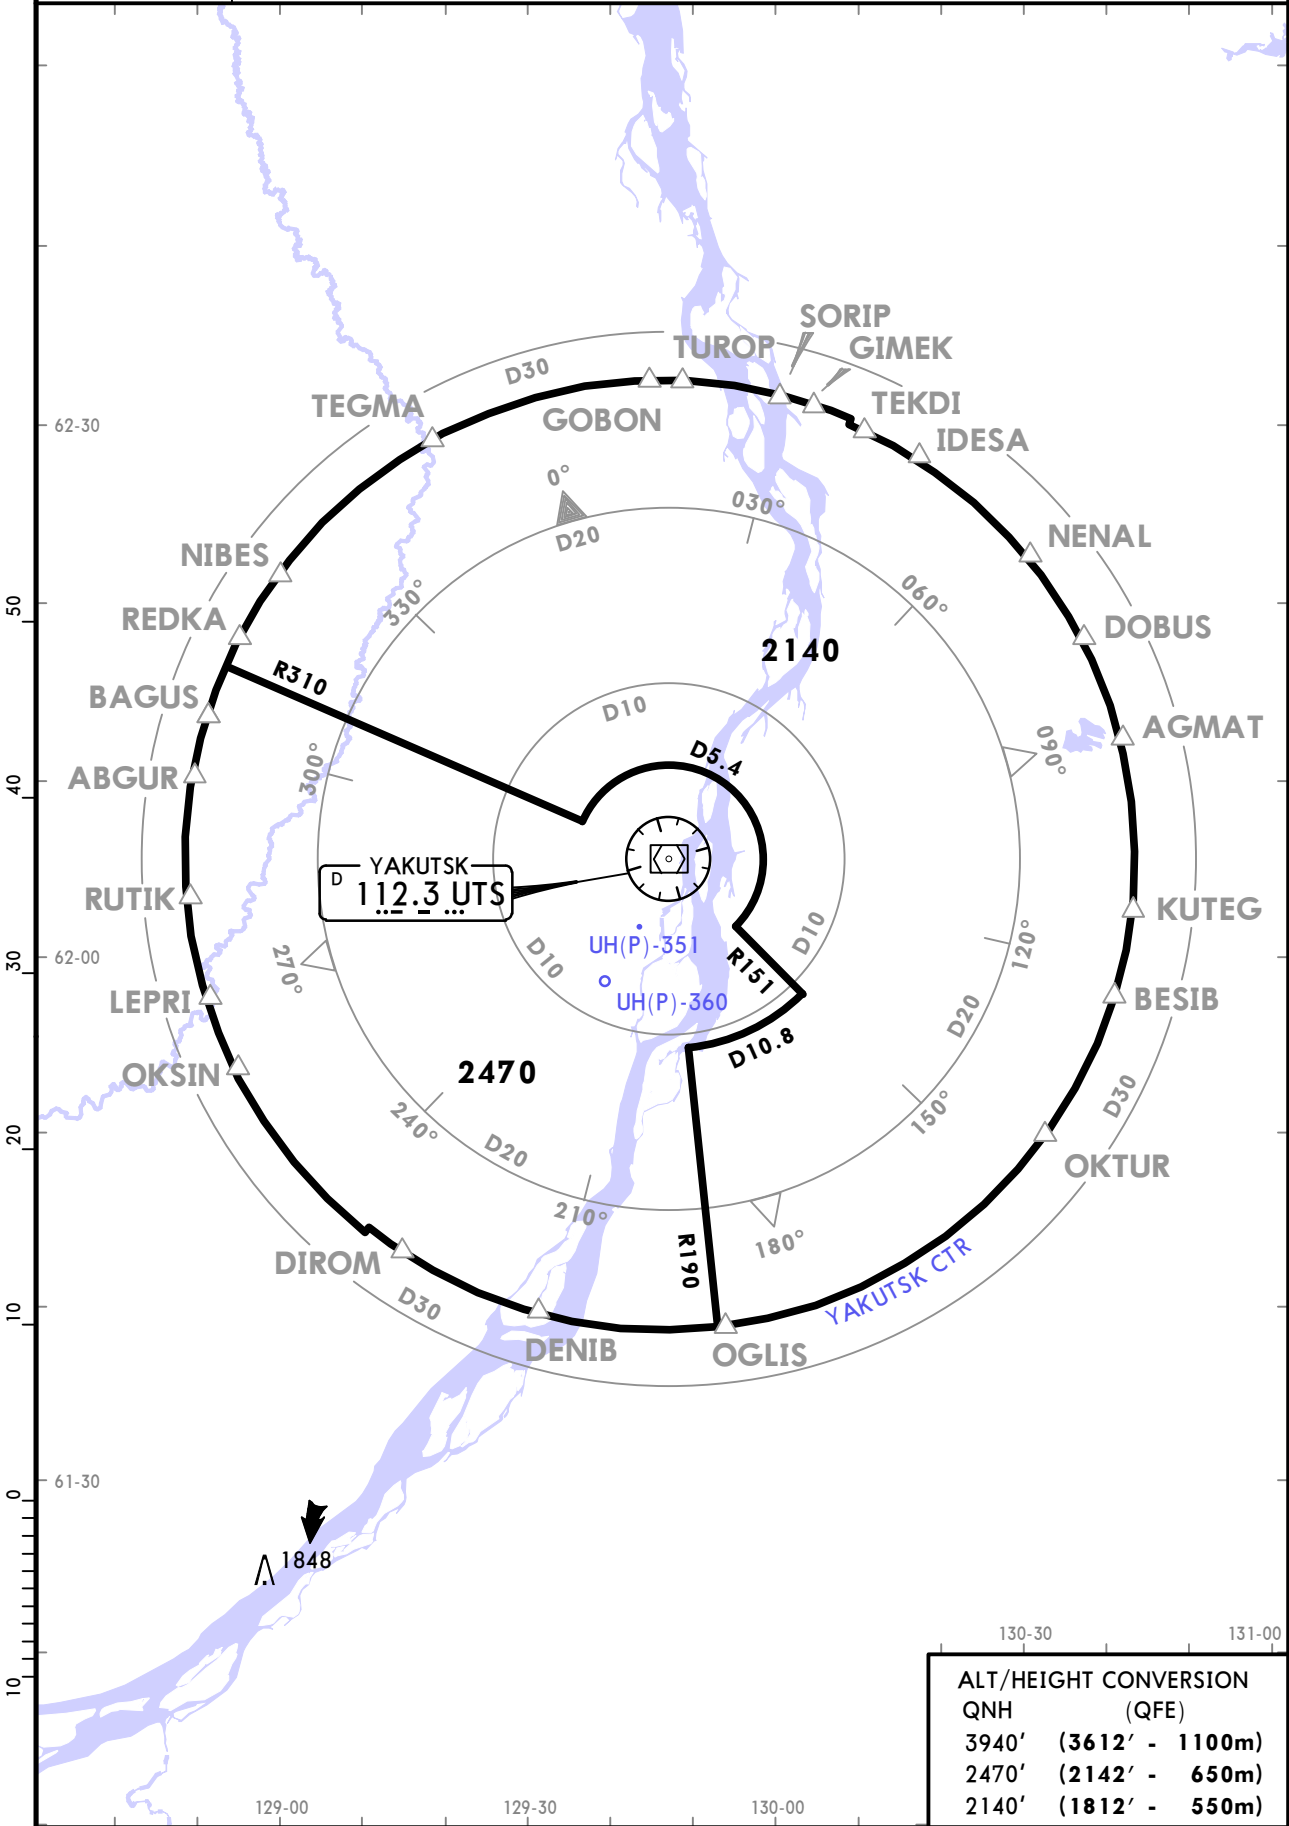

UEEE/YKS
YAKUTSK

JEPPESSEN
5 JUL 24 10-2 Eff 11 Jul

YAKUTSK, RUSSIA
RNAV STAR

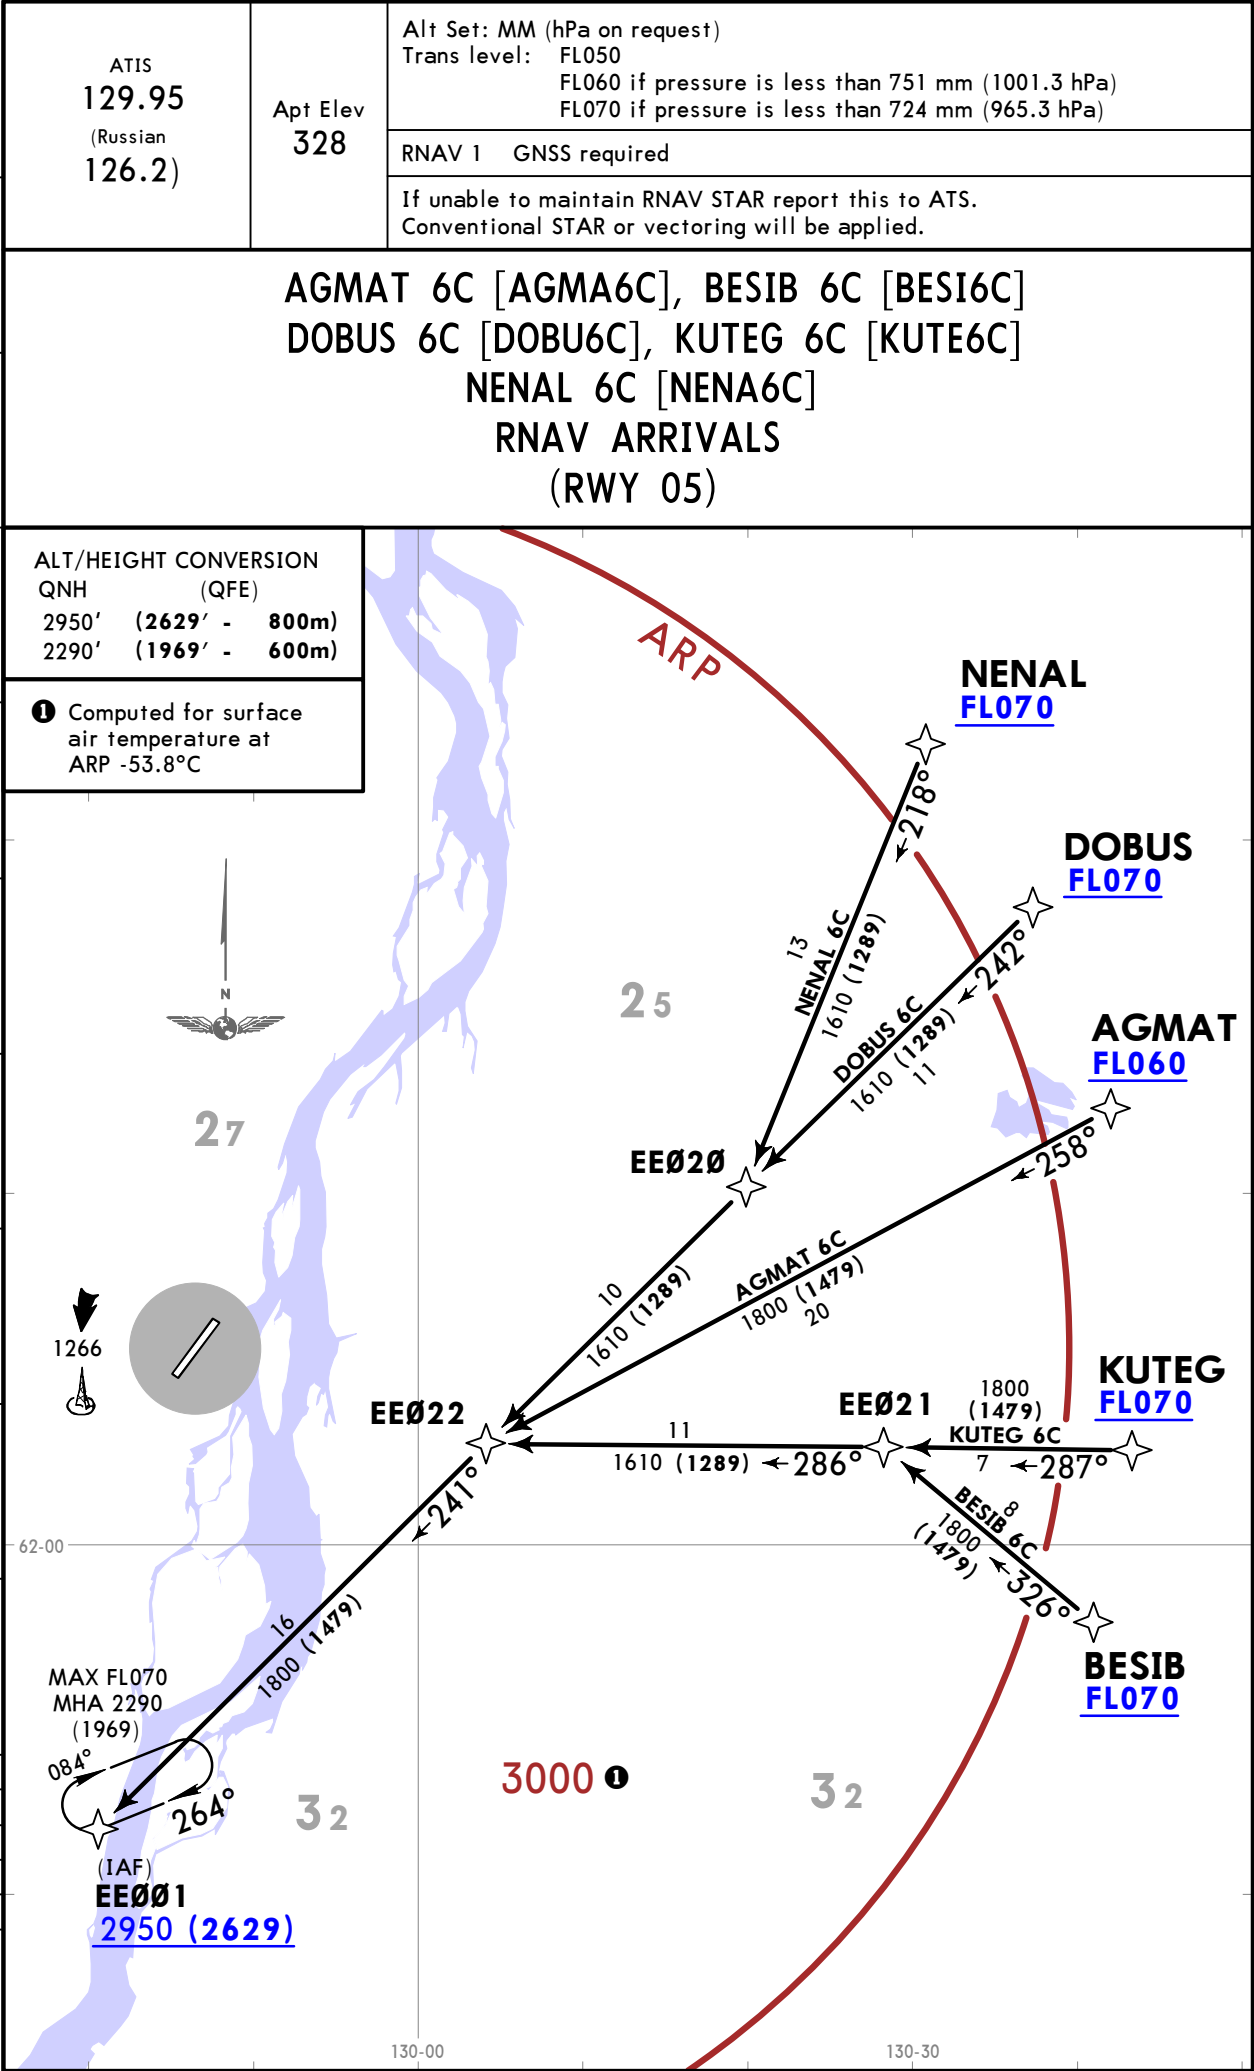

UEEE/YKS
YAKUTSK

JEPPESEN
5 JUL 24 (10-2A) Eff 11 Jul


YAKUTSK, RUSSIA
RNAV STAR

ATIS 129.95 (Russian 126.2)	Apt Elev 328	Alt Set: MM (hPa on request) Trans level: FL050 FL060 if pressure is less than 751 mm (1001.3 hPa) FL070 if pressure is less than 724 mm (965.3 hPa)
		RNAV 1 GNSS required
		If unable to maintain RNAV STAR report this to ATS. Conventional STAR or vectoring will be applied.


AGMAT 6D [AGMA6D], BESIB 6D [BESI6D]
DOBUS 6D [DOBU6D], KUTEG 6D [KUTE6D]
NENAL 6D [NENA6D]
RNAV ARRIVALS
(RWY 23)


ALT/HEIGHT CONVERSION	
QNH	(QFE)
2940'	(2625' - 800m)
1700'	(1385' - 420m)

① Computed for surface air temperature at ARP -53.8°C

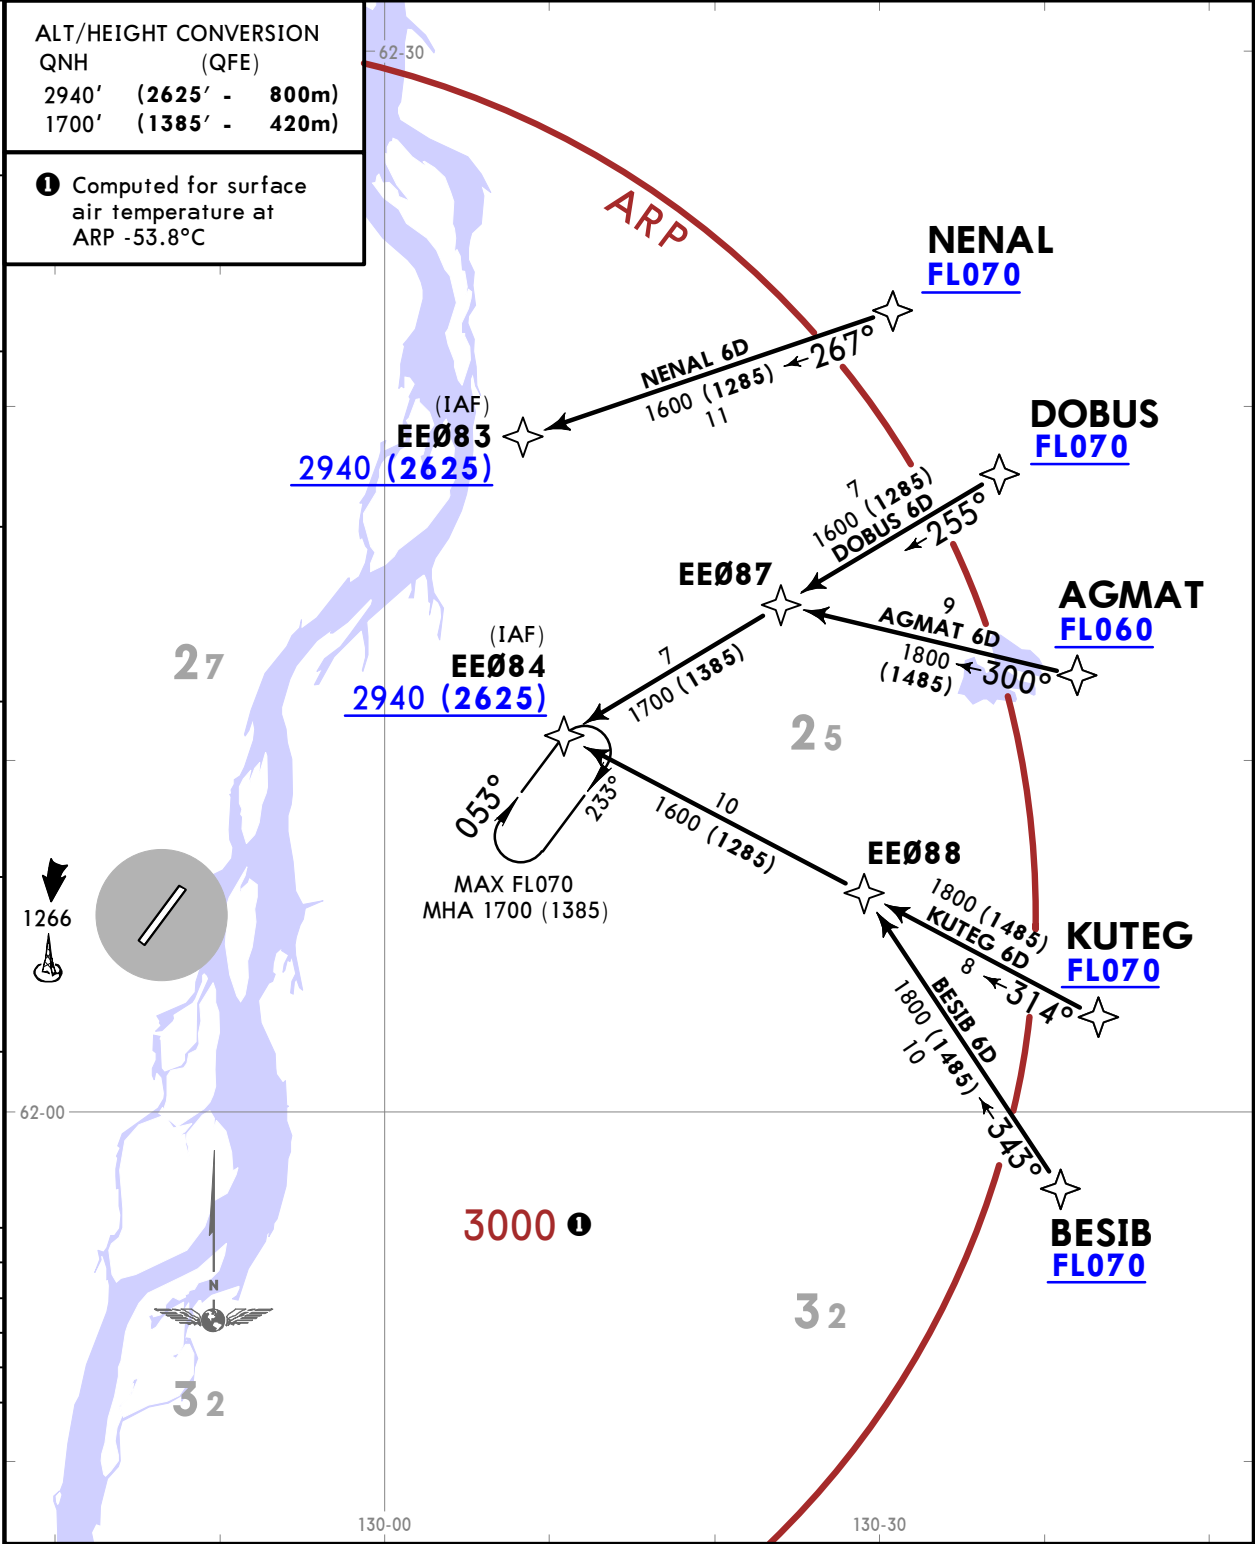

YAKUTSK, RUSSIA
RNAV STAR

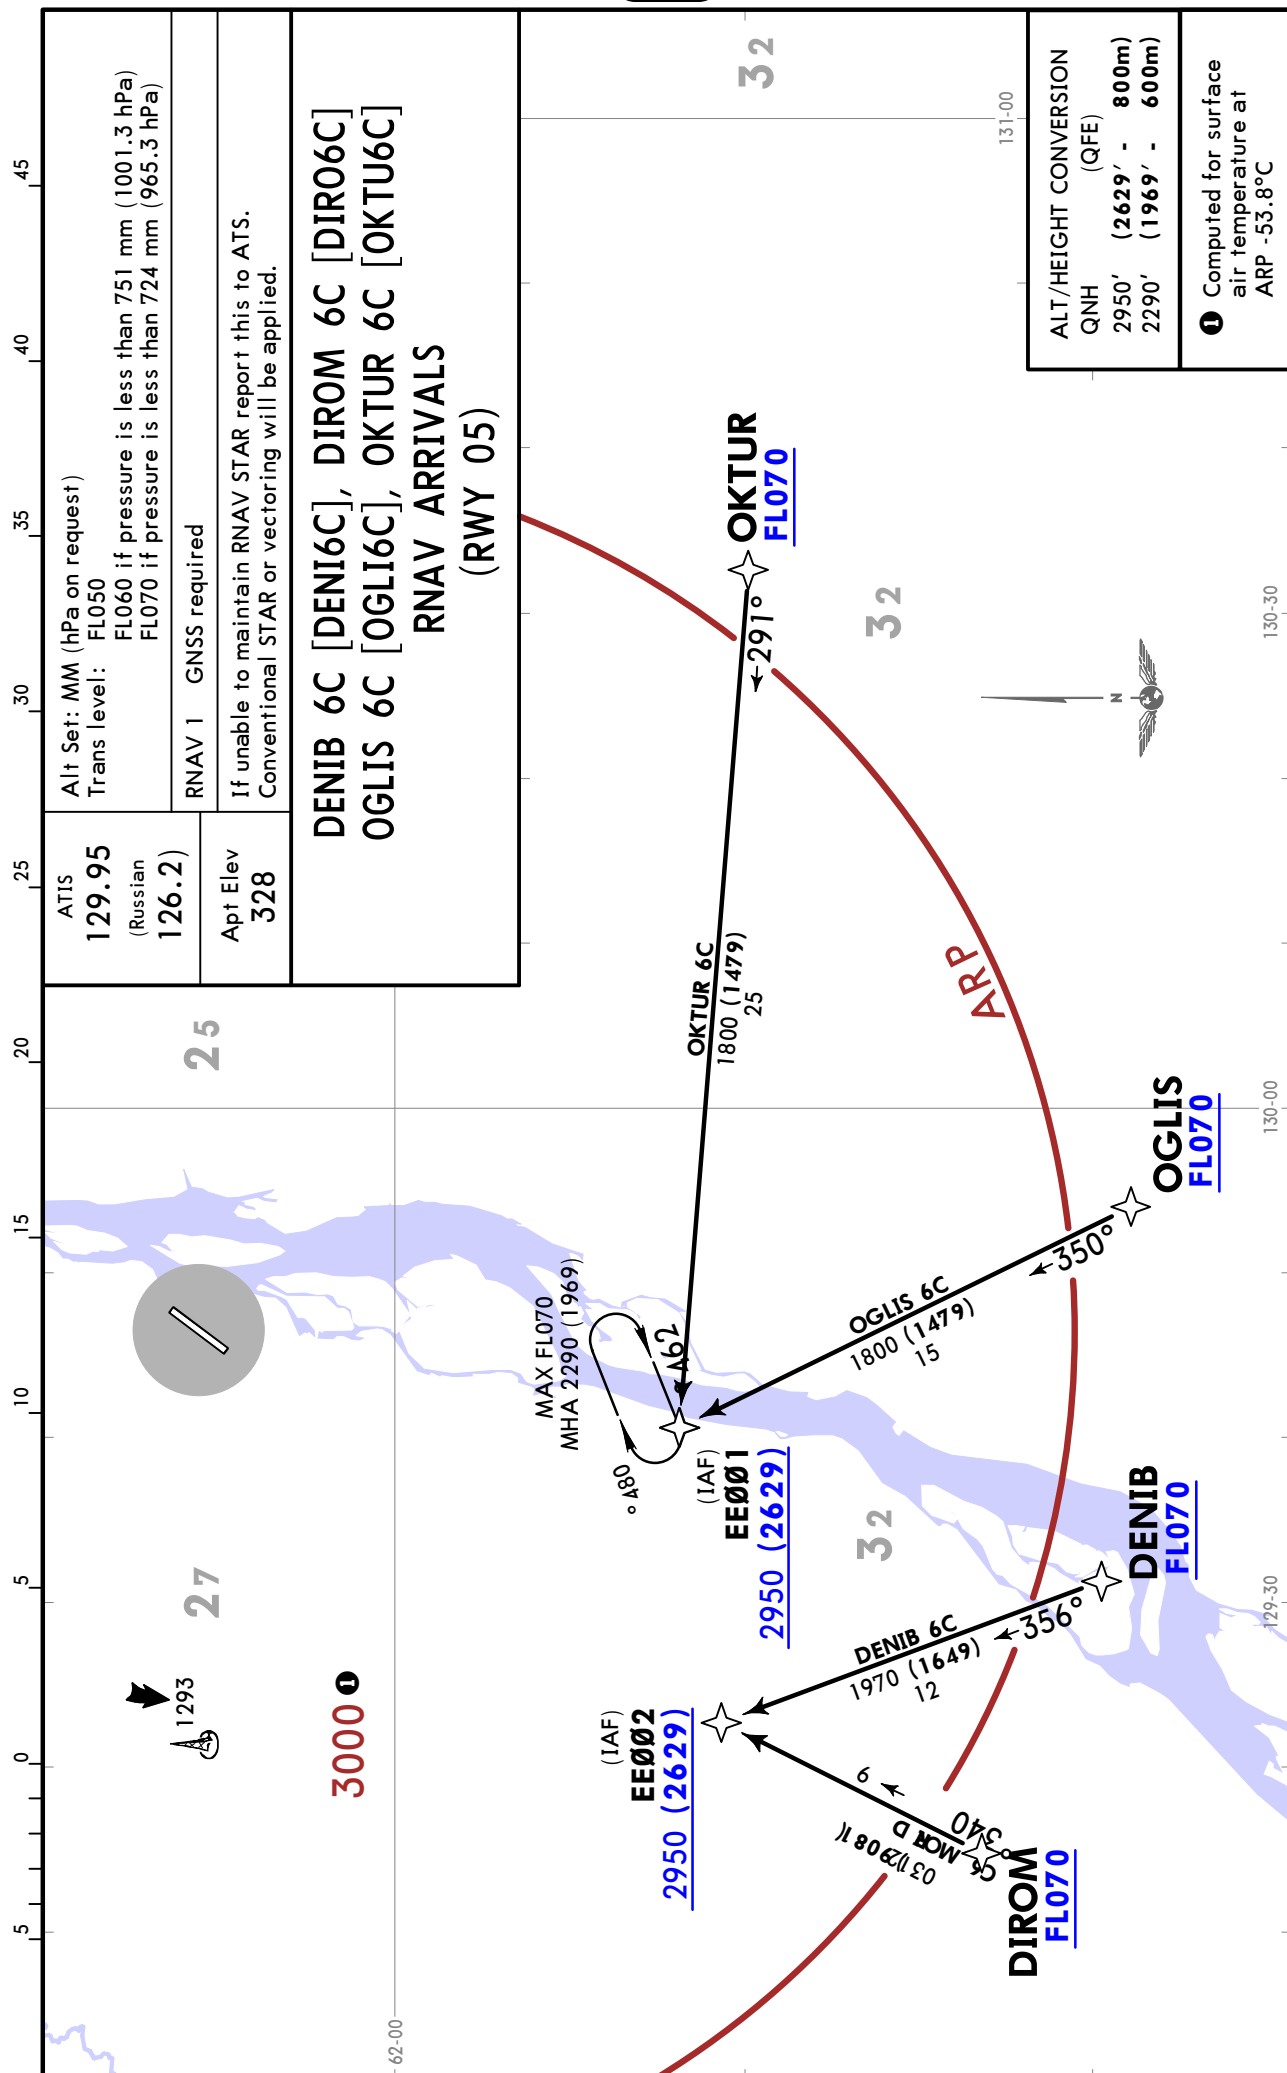

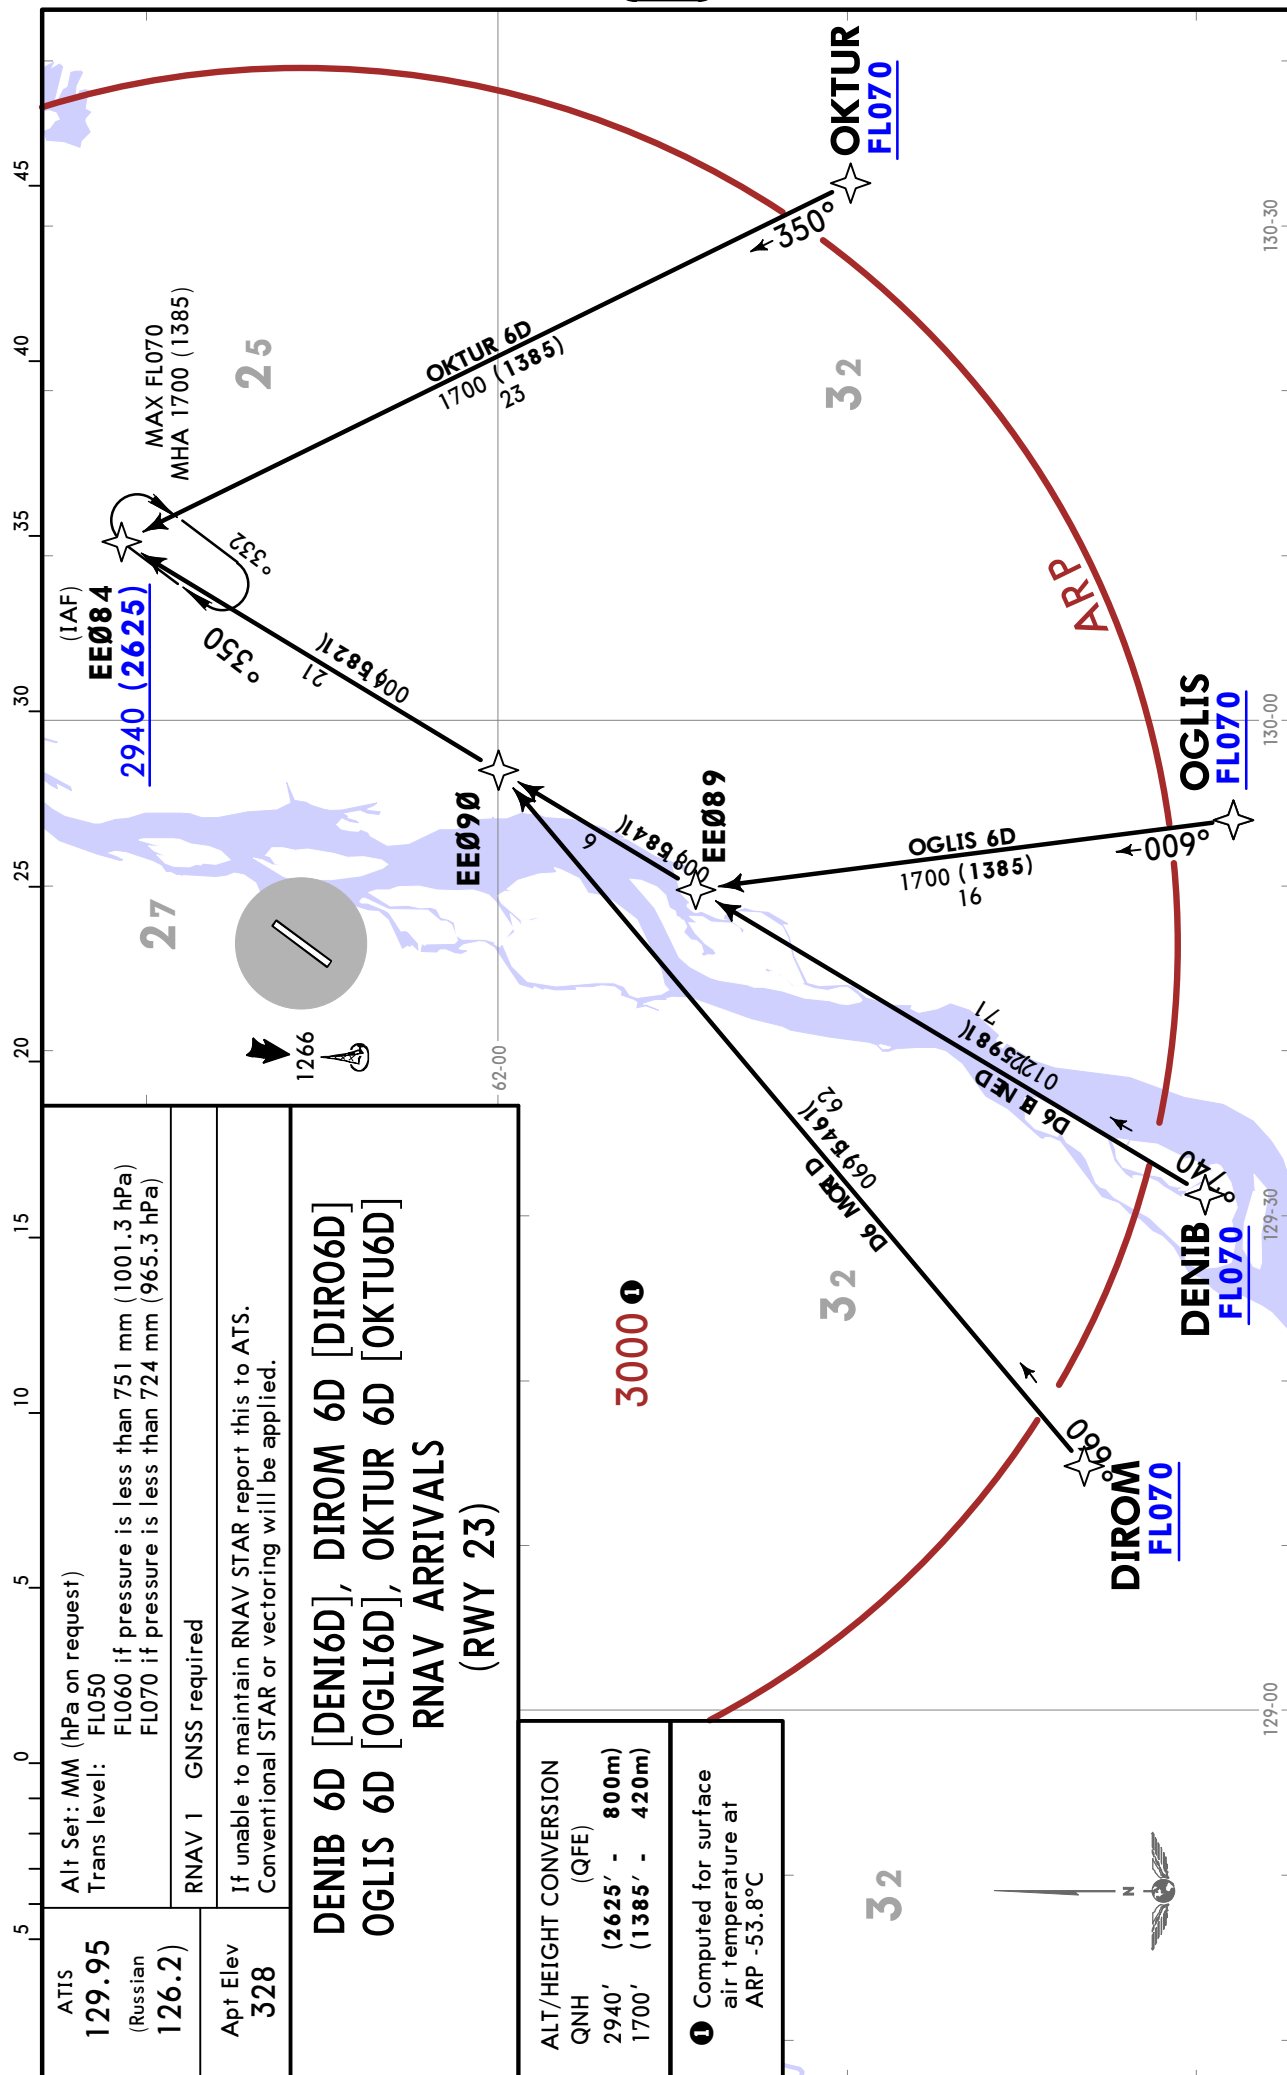

UEEE/YKS
YAKUTSK

JEPPESSEN
2 FEB 24 (10-2D)


YAKUTSK, RUSSIA
RNAV STAR

ATIS 129.95 (Russian 126.2)	Apt Elev 328	Alt Set: MM (hPa on request) Trans level: FL050 FL060 if pressure is less than 751 mm (1001.3 hPa) FL070 if pressure is less than 724 mm (965.3 hPa)
		RNAV 1 GNSS required
		If unable to maintain RNAV STAR report this to ATS. Conventional STAR or vectoring will be applied.

ABGUR 6C [ABGU6C], BAGUS 6C [BAGU6C]
LEPRI 6C [LEPR6C], OKSIN 6C [OKSI6C]
RUTIK 6C [RUTI6C]
RNAV ARRIVALS
(RWY 05)

ALT/HEIGHT CONVERSION
QNH (QFE)
2950' (2629' - 800m)

① Computed for surface
air temperature at
ARP -53.8°C

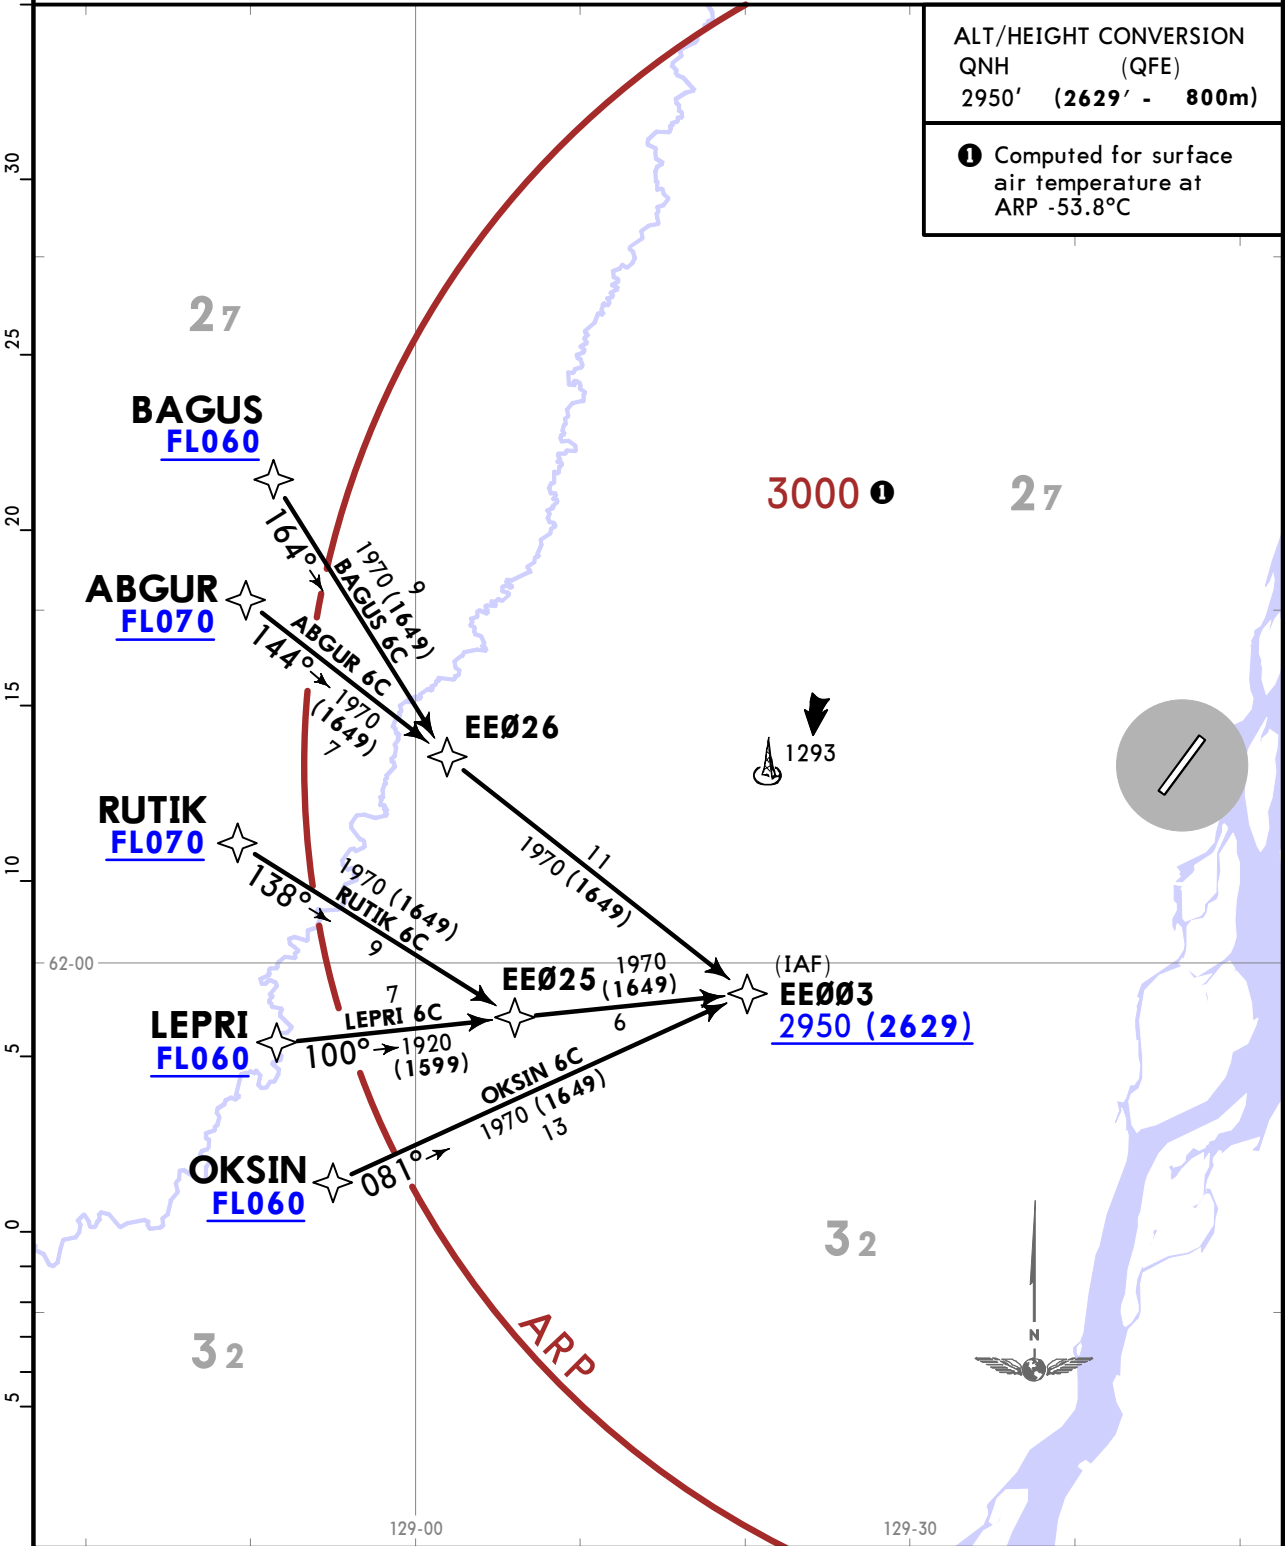


UEEE/YKS
YAKUTSK

JEPPESSEN
2 FEB 24 10-2E

YAKUTSK, RUSSIA
RNAV STAR

ATIS 129.95 (Russian 126.2)	Apt Elev 328	Alt Set: MM (hPa on request) Trans level: FL050 FL060 if pressure is less than 751 mm (1001.3 hPa) FL070 if pressure is less than 724 mm (965.3 hPa)
		RNAV 1 GNSS required
		If unable to maintain RNAV STAR report this to ATS. Conventional STAR or vectoring will be applied.

ABGUR 6D [ABGU6D], BAGUS 6D [BAGU6D]
LEPRI 6D [LEPR6D], OKSIN 6D [OKSI6D]
RUTIK 6D [RUTI6D]
RNAV ARRIVALS
(RWY 23)

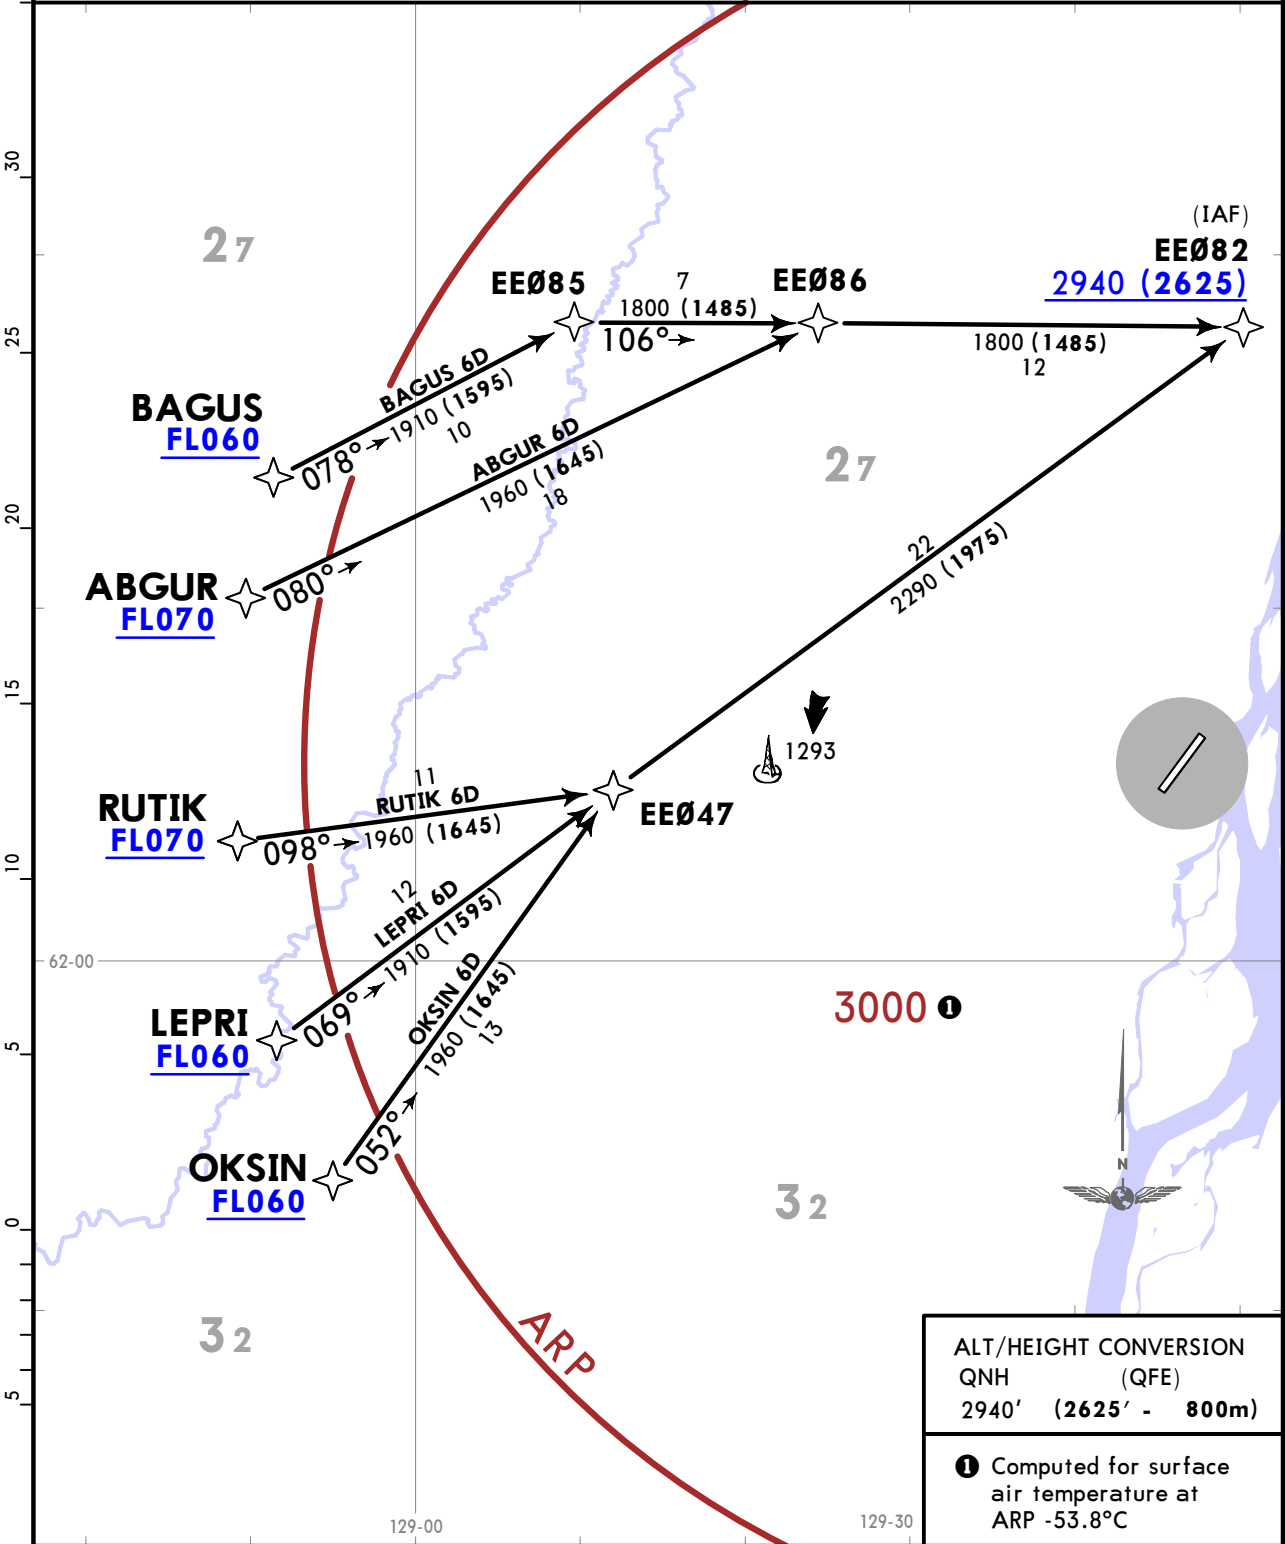

UEEE/YKS
YAKUTSK

JEPPESSEN
2 FEB 24 10-2F


YAKUTSK, RUSSIA
RNAV STAR

ATIS 129.95 (Russian 126.2)	Apt Elev 328	Alt Set: MM (hPa on request) Trans level: FL050 FL060 if pressure is less than 751 mm (1001.3 hPa) FL070 if pressure is less than 724 mm (965.3 hPa)
		RNAV 1 GNSS required
		If unable to maintain RNAV STAR report this to ATS. Conventional STAR or vectoring will be applied.

GOBON 6C [GOBO6C], NIBES 6C [NIBE6C]
REDKA 6C [REDK6C], TEGMA 6C [TEGM6C]
TUROP 6C [TURO6C]
RNAV ARRIVALS
(RWY 05)

ALT/HEIGHT CONVERSION
QNH (QFE)
2950' (2629' - 800m)


① Computed for surface
air temperature at
ARP -53.8°C

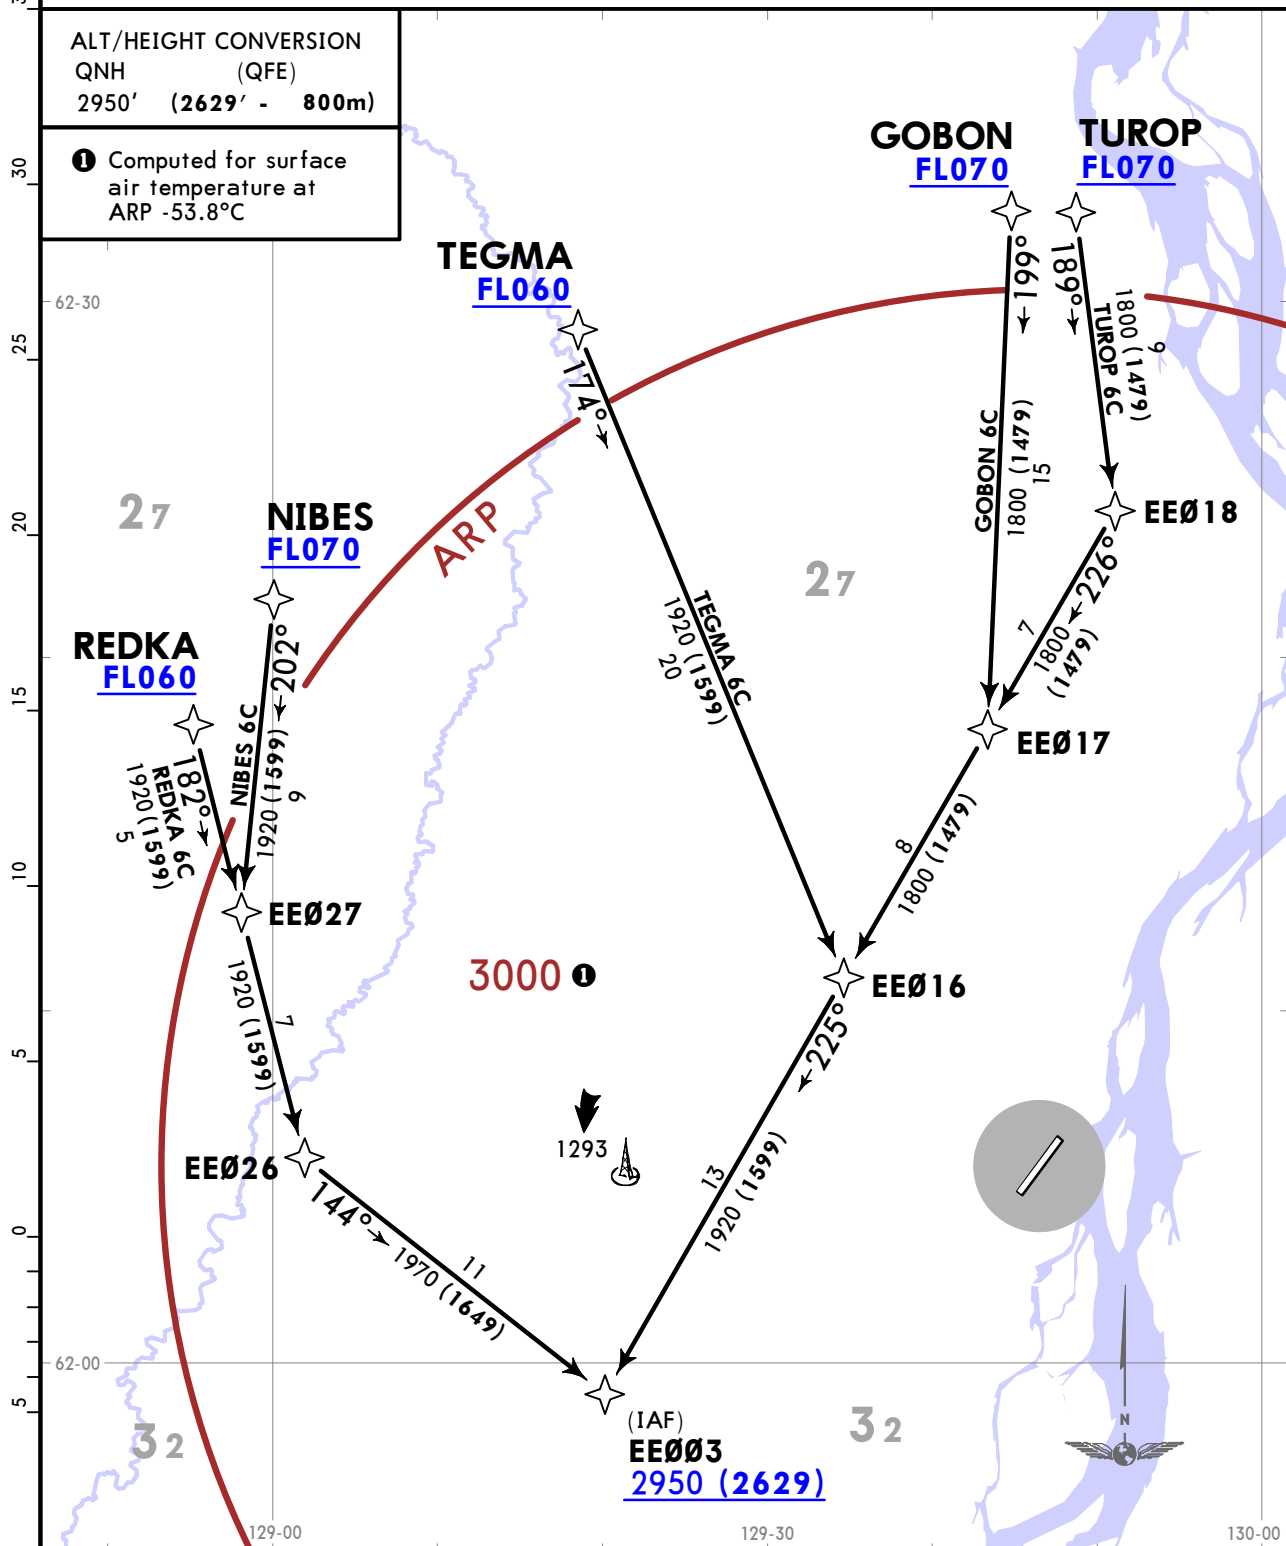

UEEE/YKS
YAKUTSK

JEPPESSEN
2 FEB 24 (10-2G)

YAKUTSK, RUSSIA
RNAV STAR

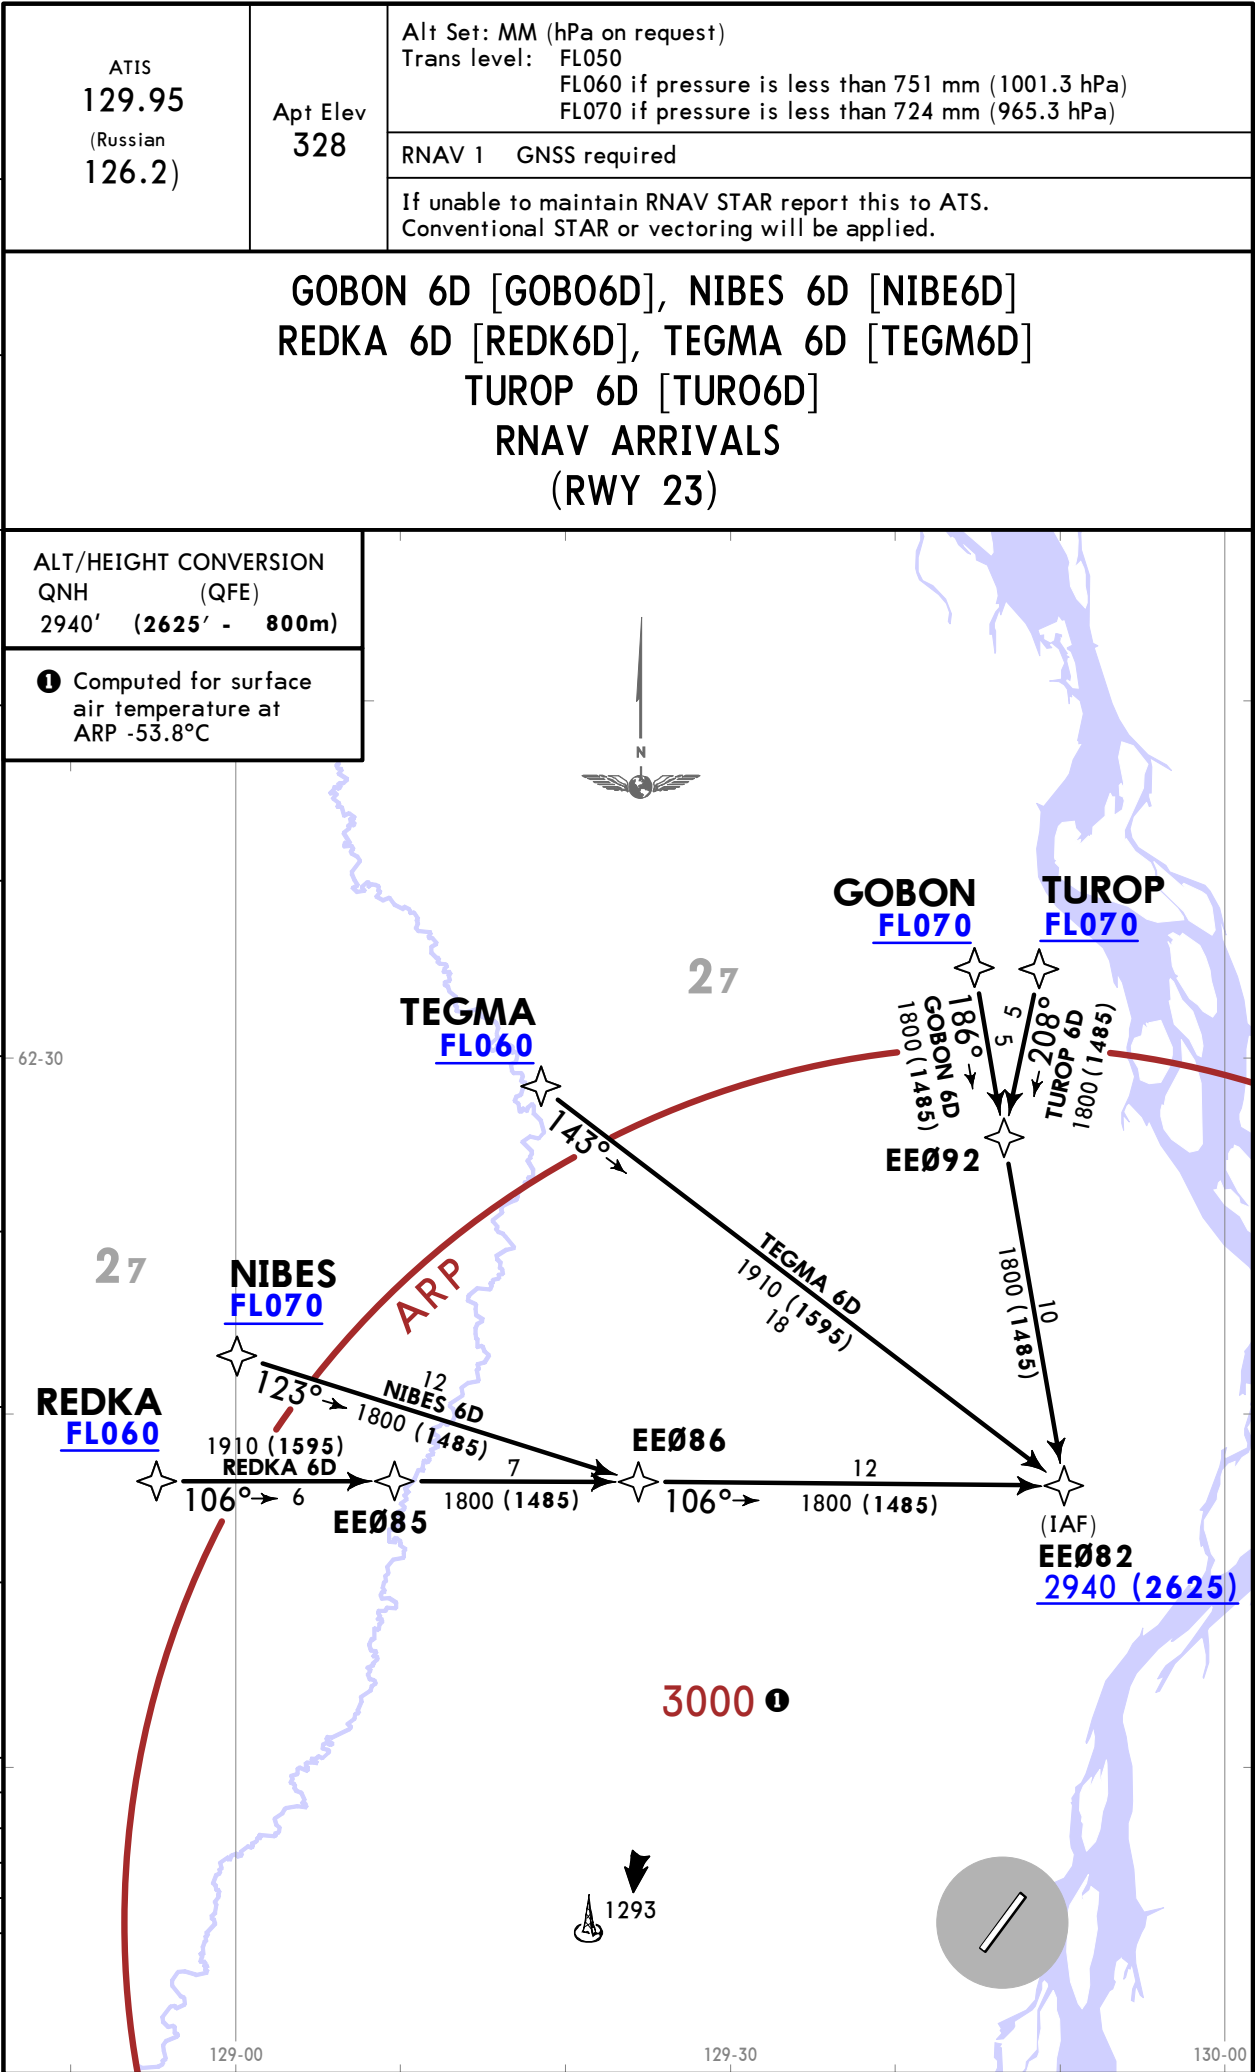

UEEE/YKS
YAKUTSK

JEPPESEN
2 FEB 24 10-2J


YAKUTSK, RUSSIA
RNAV STAR

ATIS 129.95 (Russian 126.2)	Apt Elev 328	Alt Set: MM (hPa on request) Trans level: FL050 FL060 if pressure is less than 751 mm (1001.3 hPa) FL070 if pressure is less than 724 mm (965.3 hPa)
		RNAV 1 GNSS required
		If unable to maintain RNAV STAR report this to ATS. Conventional STAR or vectoring will be applied.

GIMEK 6D [GIME6D], IDESA 6D [IDES6D]
SORIP 6D [SORI6D], TEKDI 6D [TEKD6D]
RNAV ARRIVALS
(RWY 23)

ALT/HEIGHT CONVERSION	
QNH	(QFE)
2940' (2625' - 800m)	
① Computed for surface air temperature at ARP -53.8°C	


25
20
15
10
5
0
5

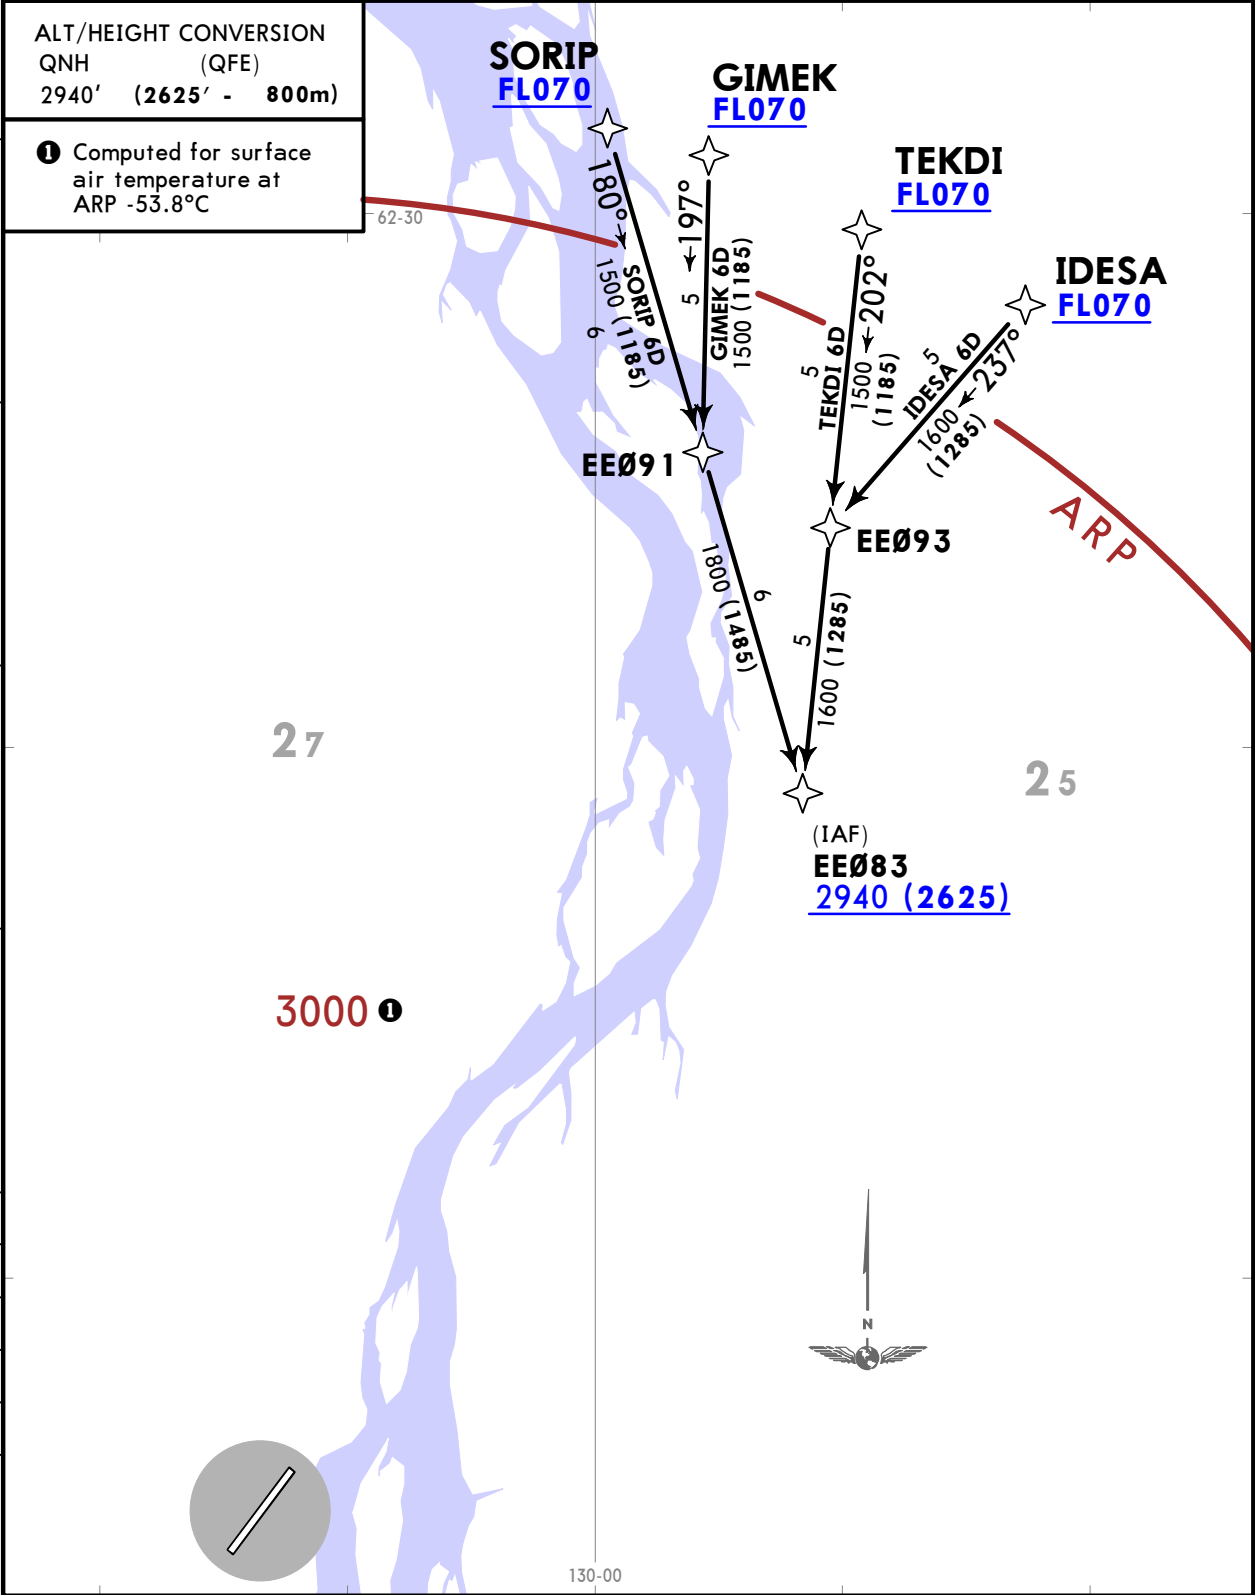


UEEE/YKS
YAKUTSK

JEPPESSEN
9 MAY 25 10-2K Eff 15 May

YAKUTSK, RUSSIA
STAR

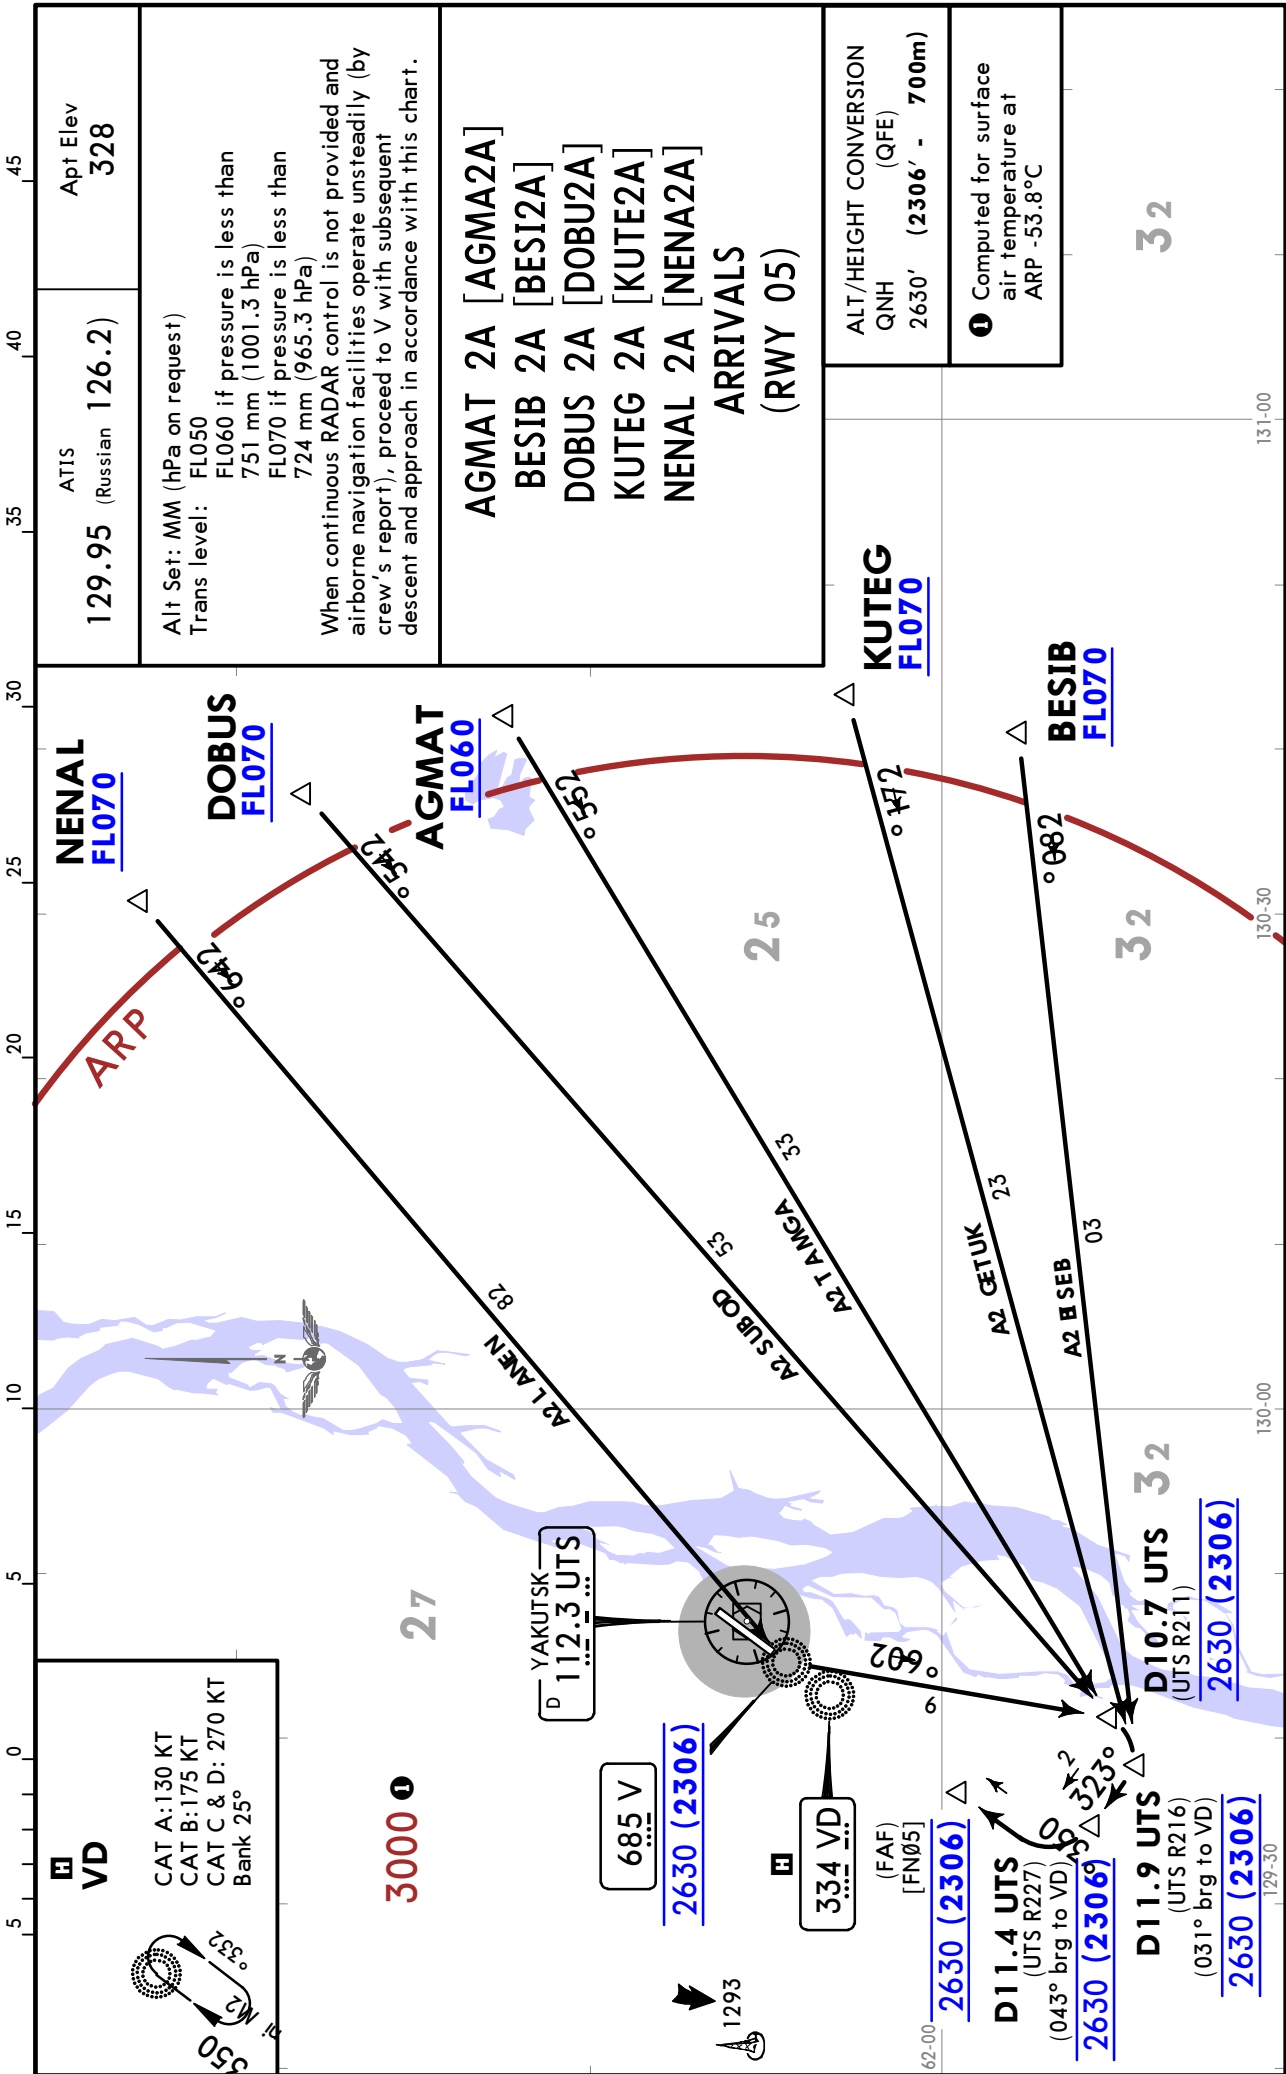

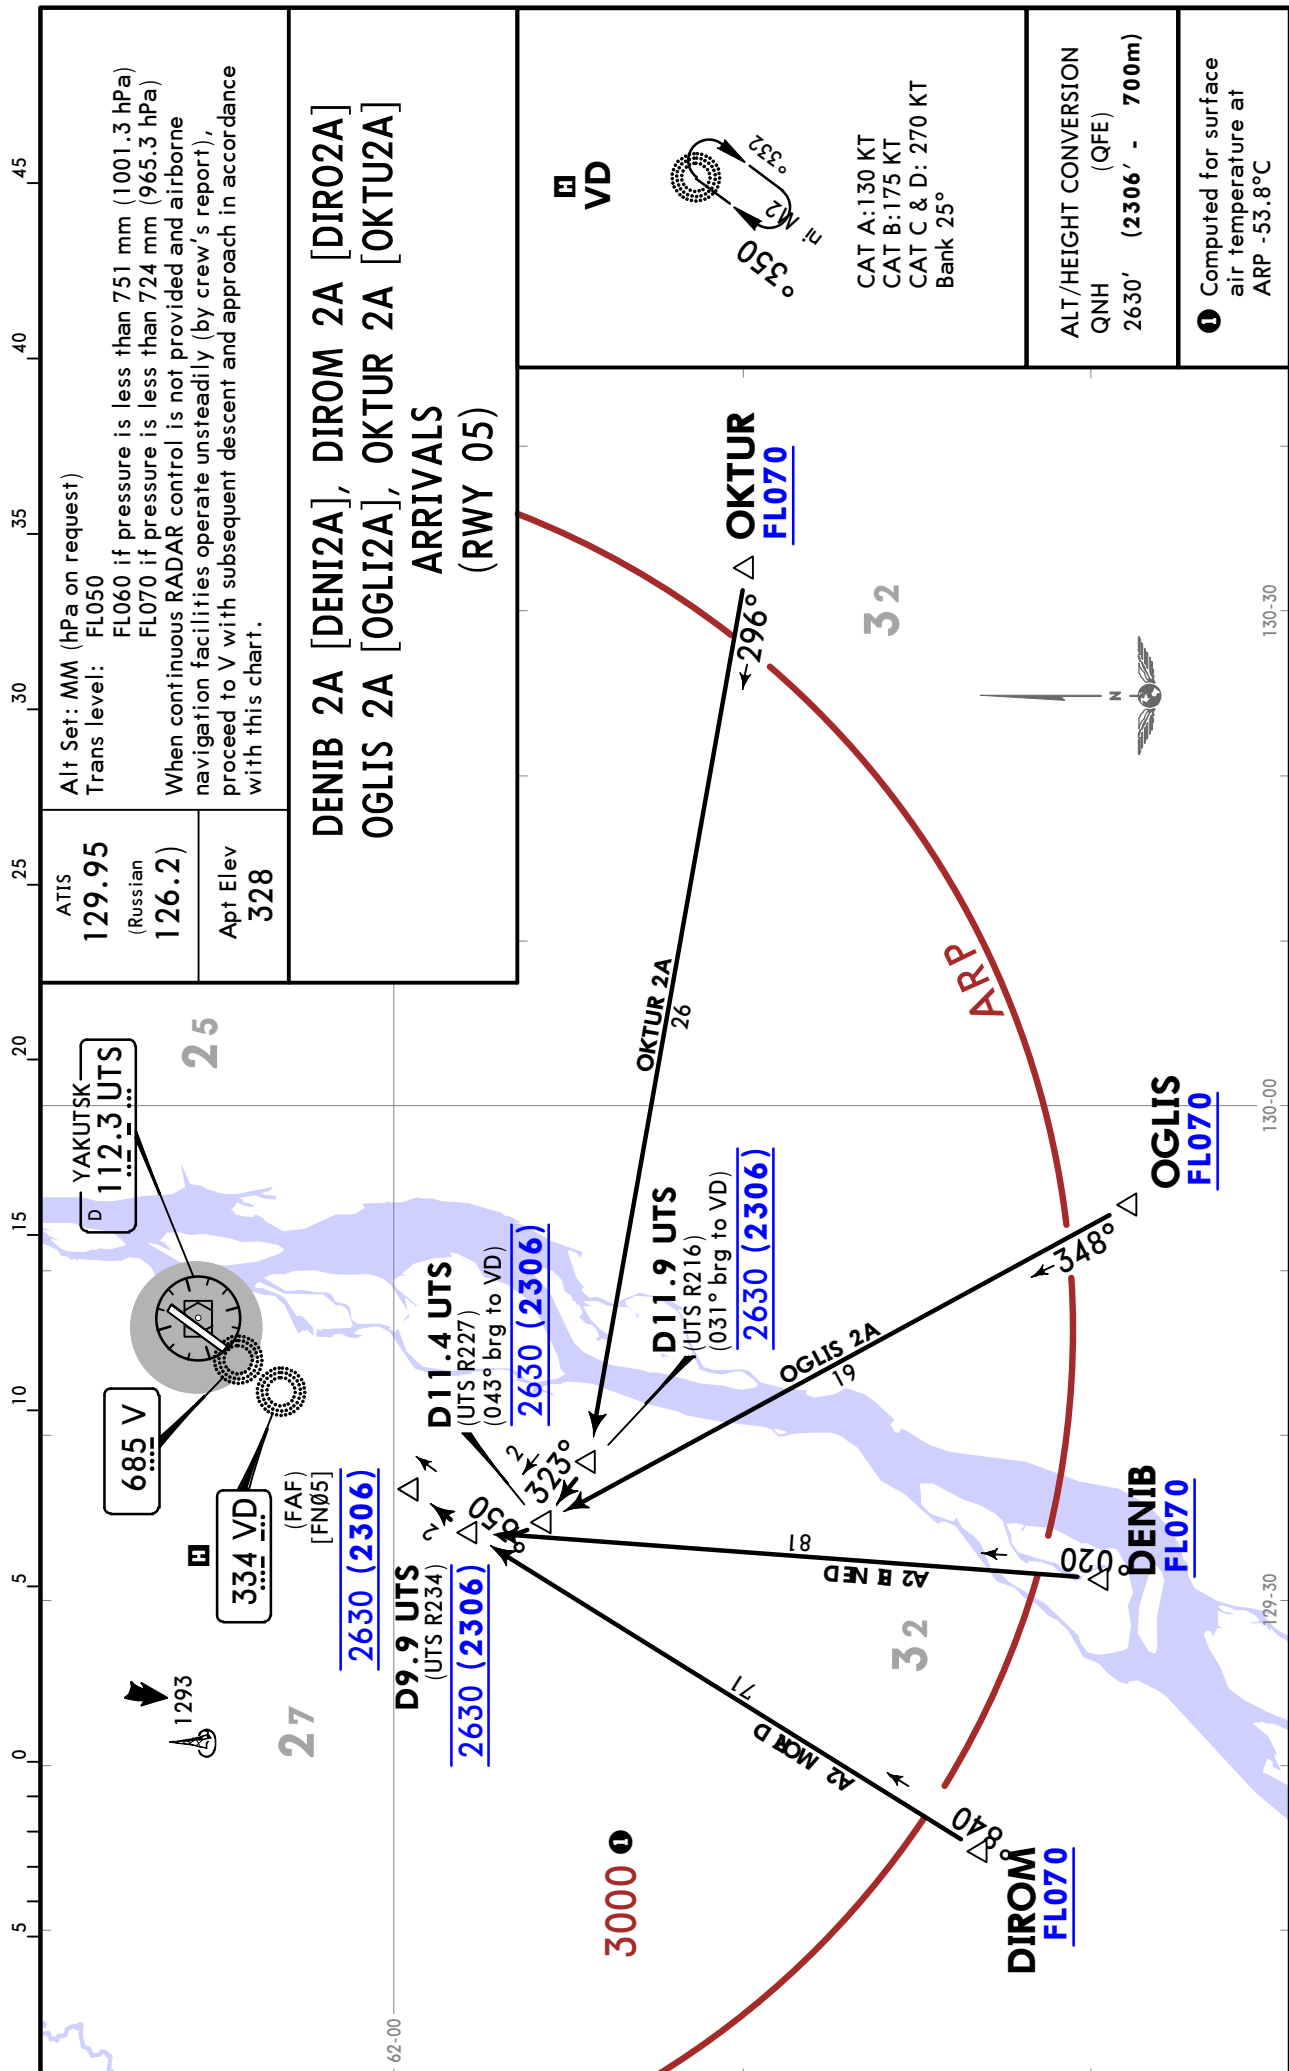STAR

UEEE/YKS
YAKUTSK

JEPPESSEN
9 MAY 25 10-2N Eff 15 May

YAKUTSK, RUSSIA
STAR

ATIS
129.95
(Russian
126.2)

Apt Elev
328

Alt Set: MM (hPa on request)
Trans level: FL050
FL060 if pressure is less than 751 mm (1001.3 hPa)
FL070 if pressure is less than 724 mm (965.3 hPa)
When continuous RADAR control is not provided and airborne navigation facilities operate unsteadily (by crew's report), proceed to M with subsequent descent and approach in accordance with this chart.

DENIB 4A [DENI4A], DIROM 4A [DIRO4A]
OGLIS 4A [OGLI4A], OKTUR 4A [OKTU4A]
ARRIVALS
(RWY 23)

MF
CAT A: 130 KT
CAT B: 175 KT
CAT C & D: 270 KT
Bank 25°
233°
2 Min
053°

D9.8 UTS
(UTS R054)
(237° brg to MF)

D11.8 UTS
(UTS R072)
(260° brg to MF)

D11.2 UTS
(UTS R074)
(263° brg to MF)

334 MF
(UTS R048/D3.0)

685 M

YAKUTSK
112.3 UTS

D4.9 UTS
(323° brg to MF)
2620 (2305)

3000

DIROM
FL070

NOT TO SCALE

DENIB
FL070

OGLIS
FL070

OKTUR
FL070


ALT/HEIGHT CONVERSION	
QNH	(QFE)
2620'	(2305' - 700m)
1960'	(1645' - 500m)

① Computed for surface
air temperature at
ARP -53.8°C

UEEE/YKS
YAKUTSK

JEPPESSEN
2 FEB 24 10-2P


YAKUTSK, RUSSIA
STAR

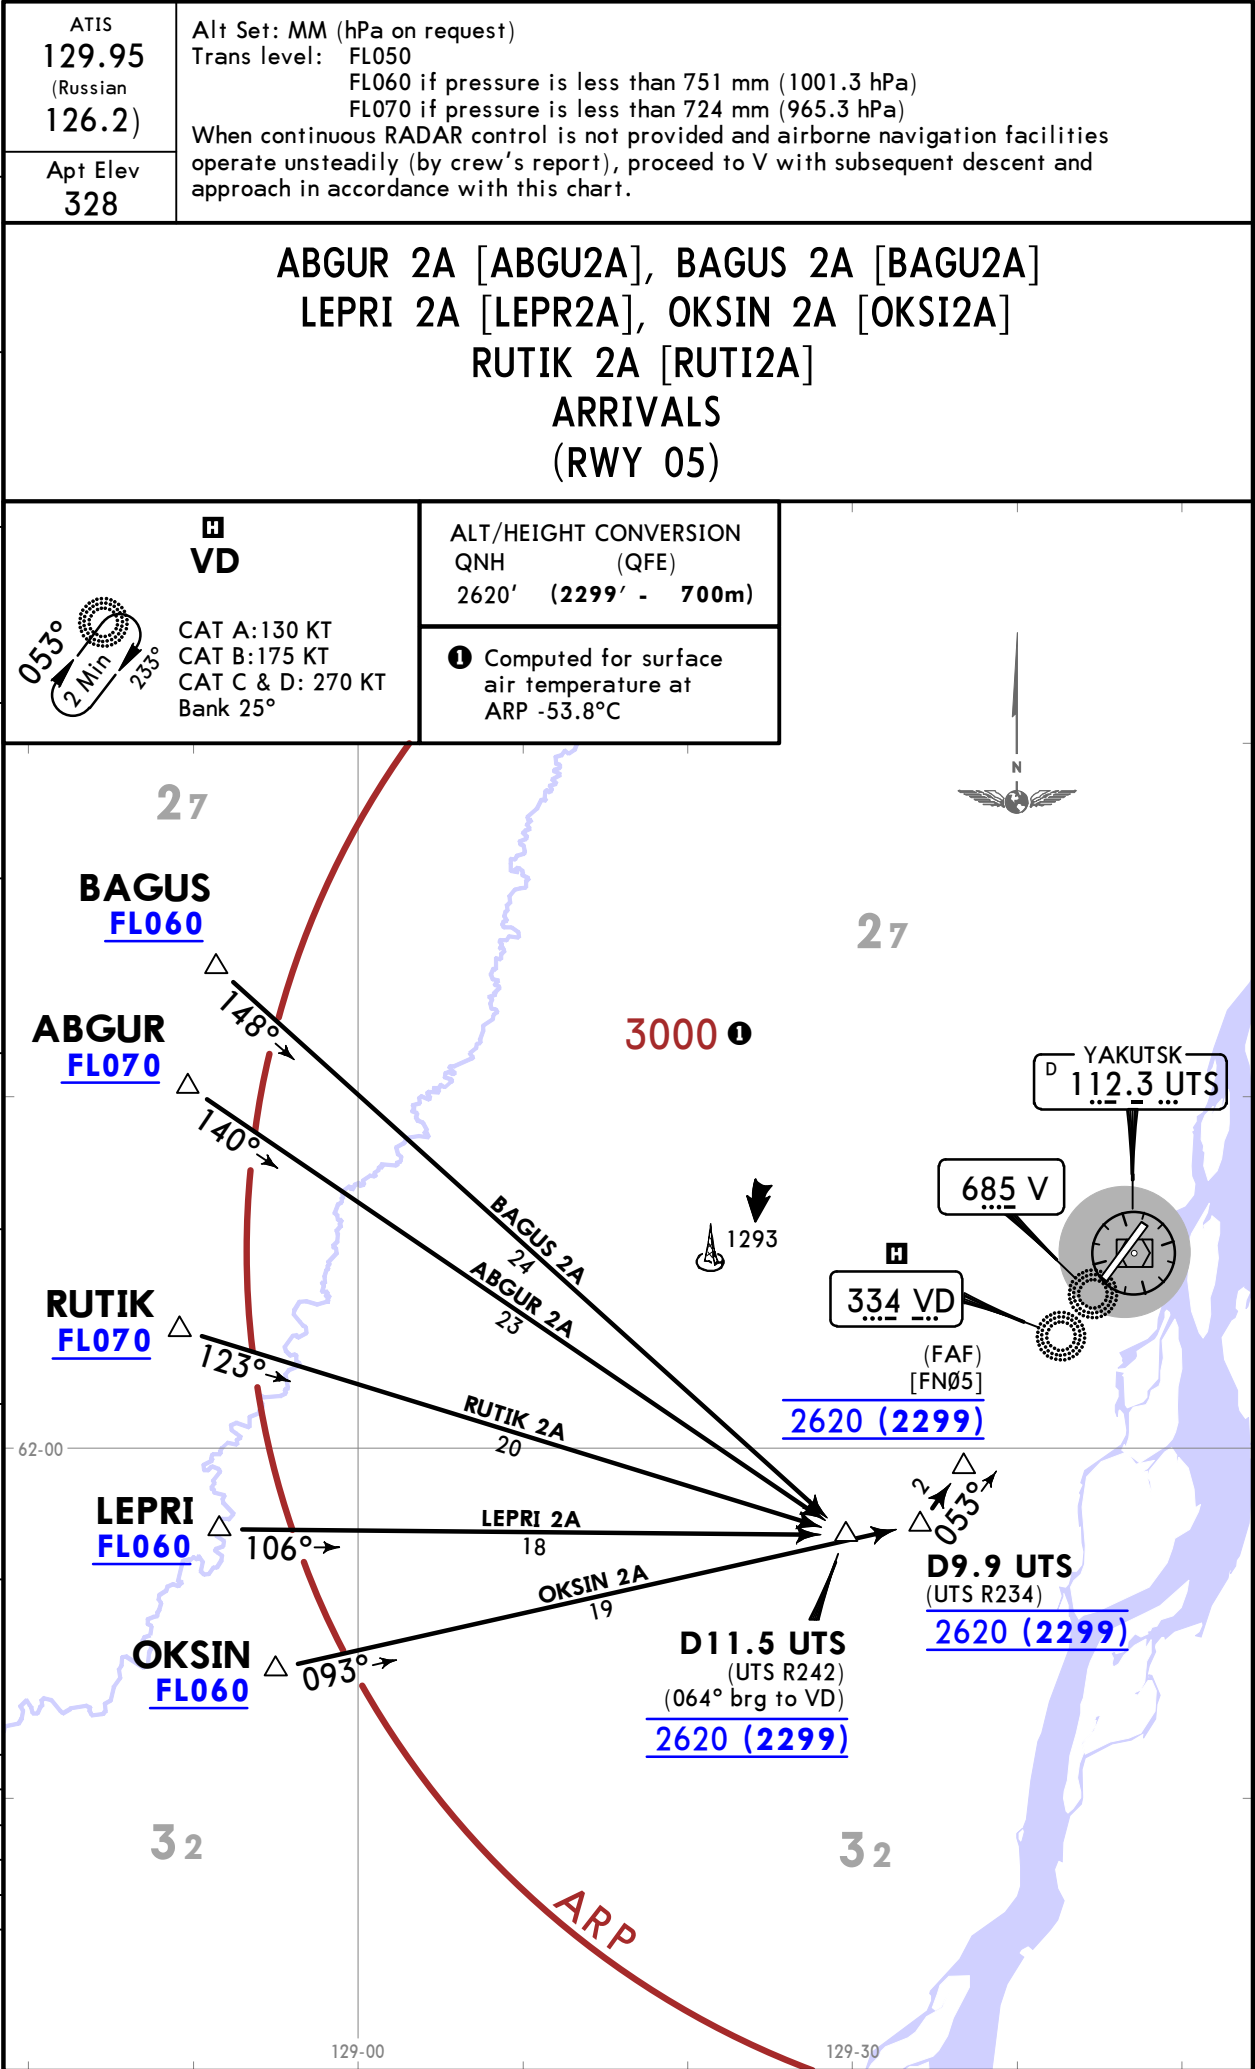

UEEE/YKS
YAKUTSK

JEPPESEN
2 FEB 24 (10-2Q)


YAKUTSK, RUSSIA

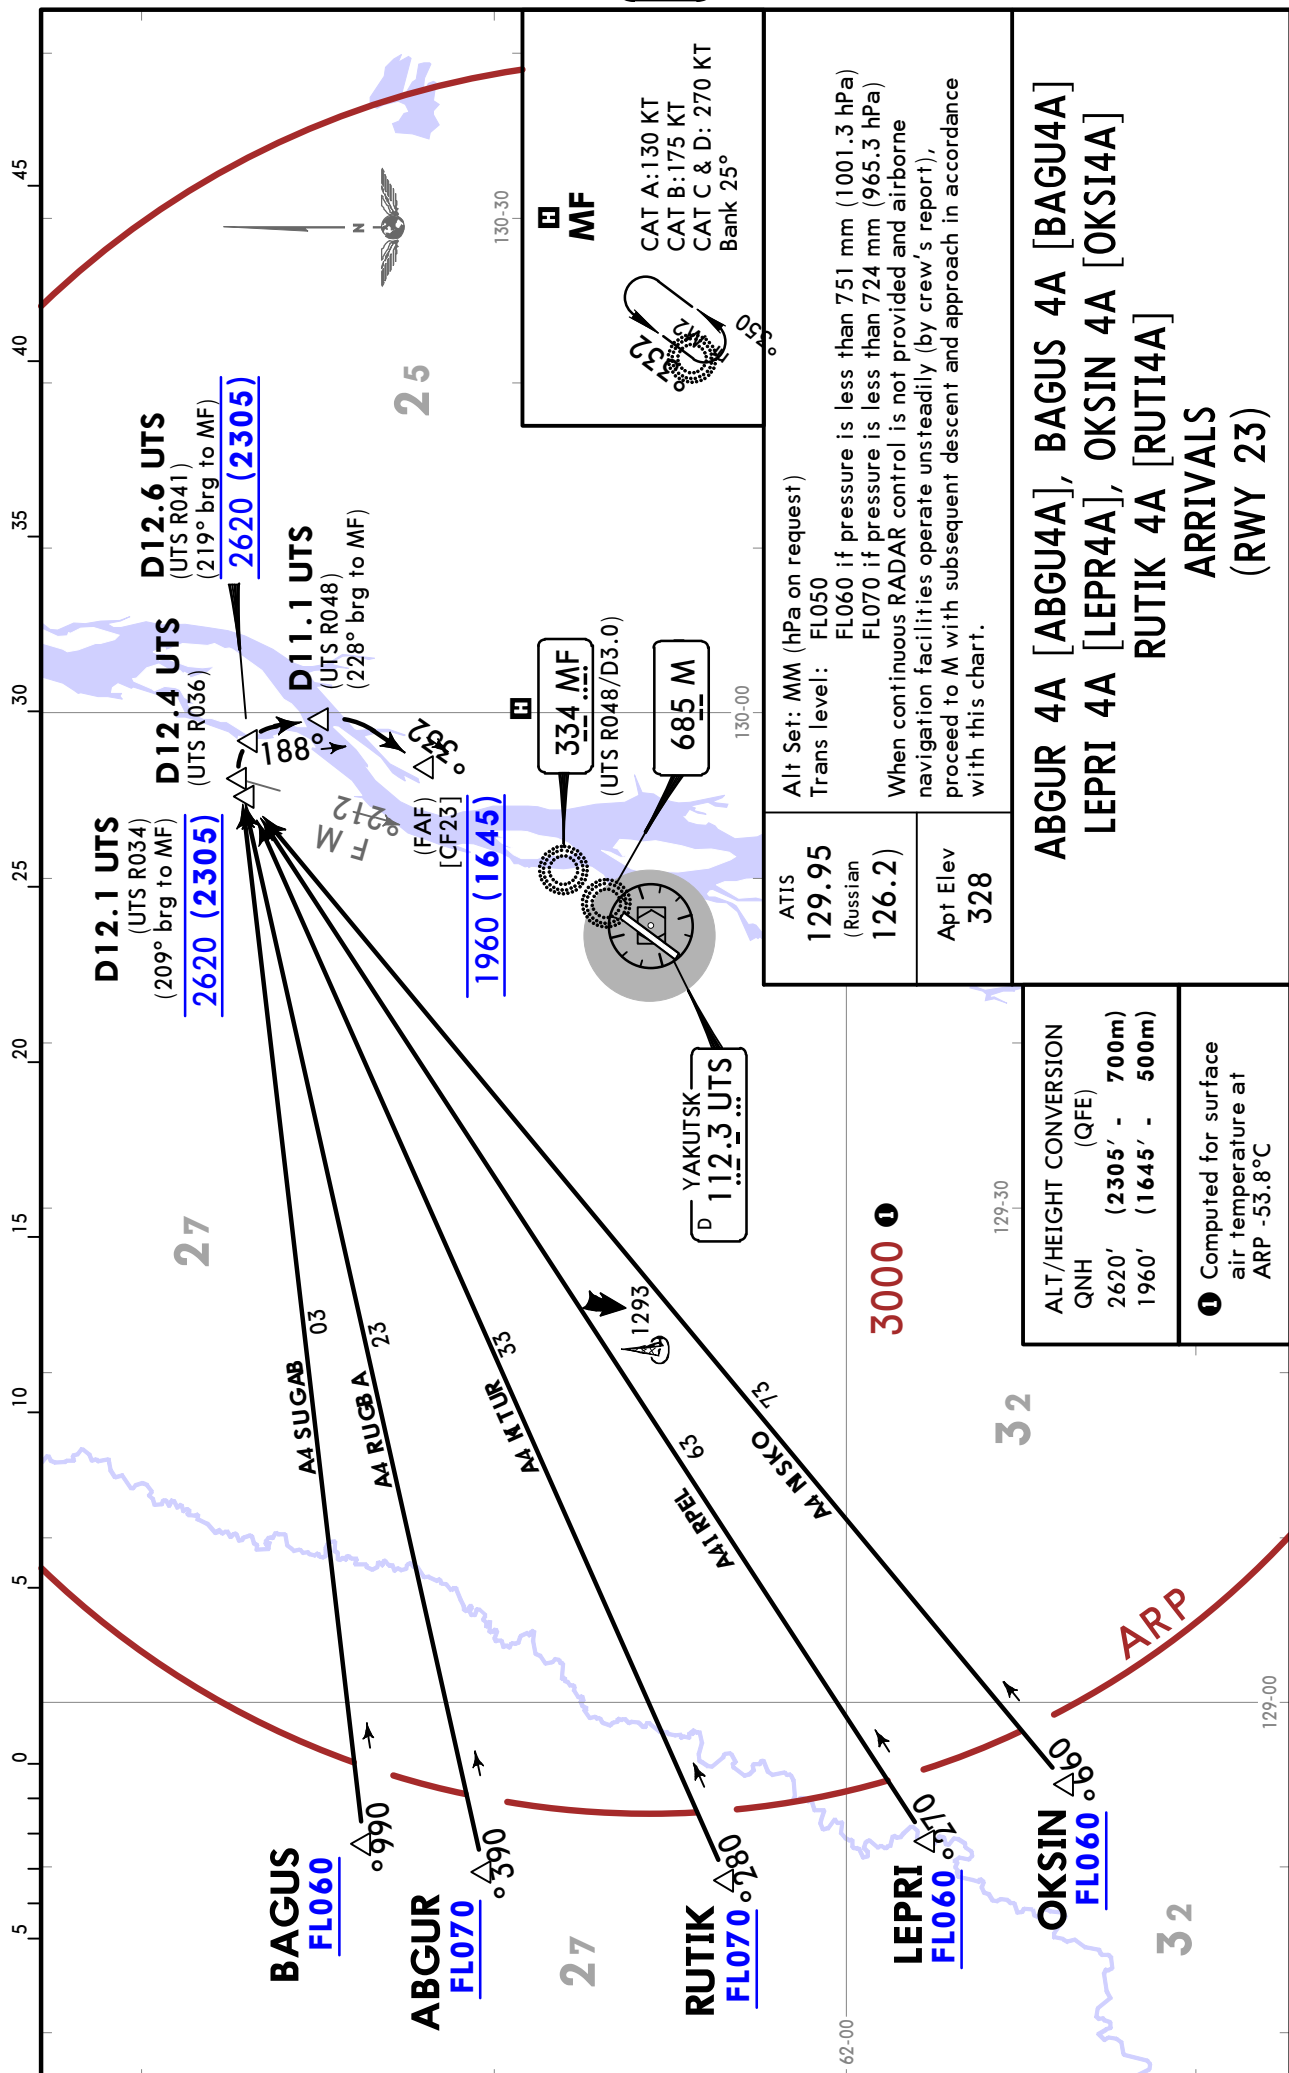STAR

UEEE/YKS
YAKUTSK

JEPPESSEN
9 MAY 25 10-2S Eff 15 May


YAKUTSK, RUSSIA
STAR

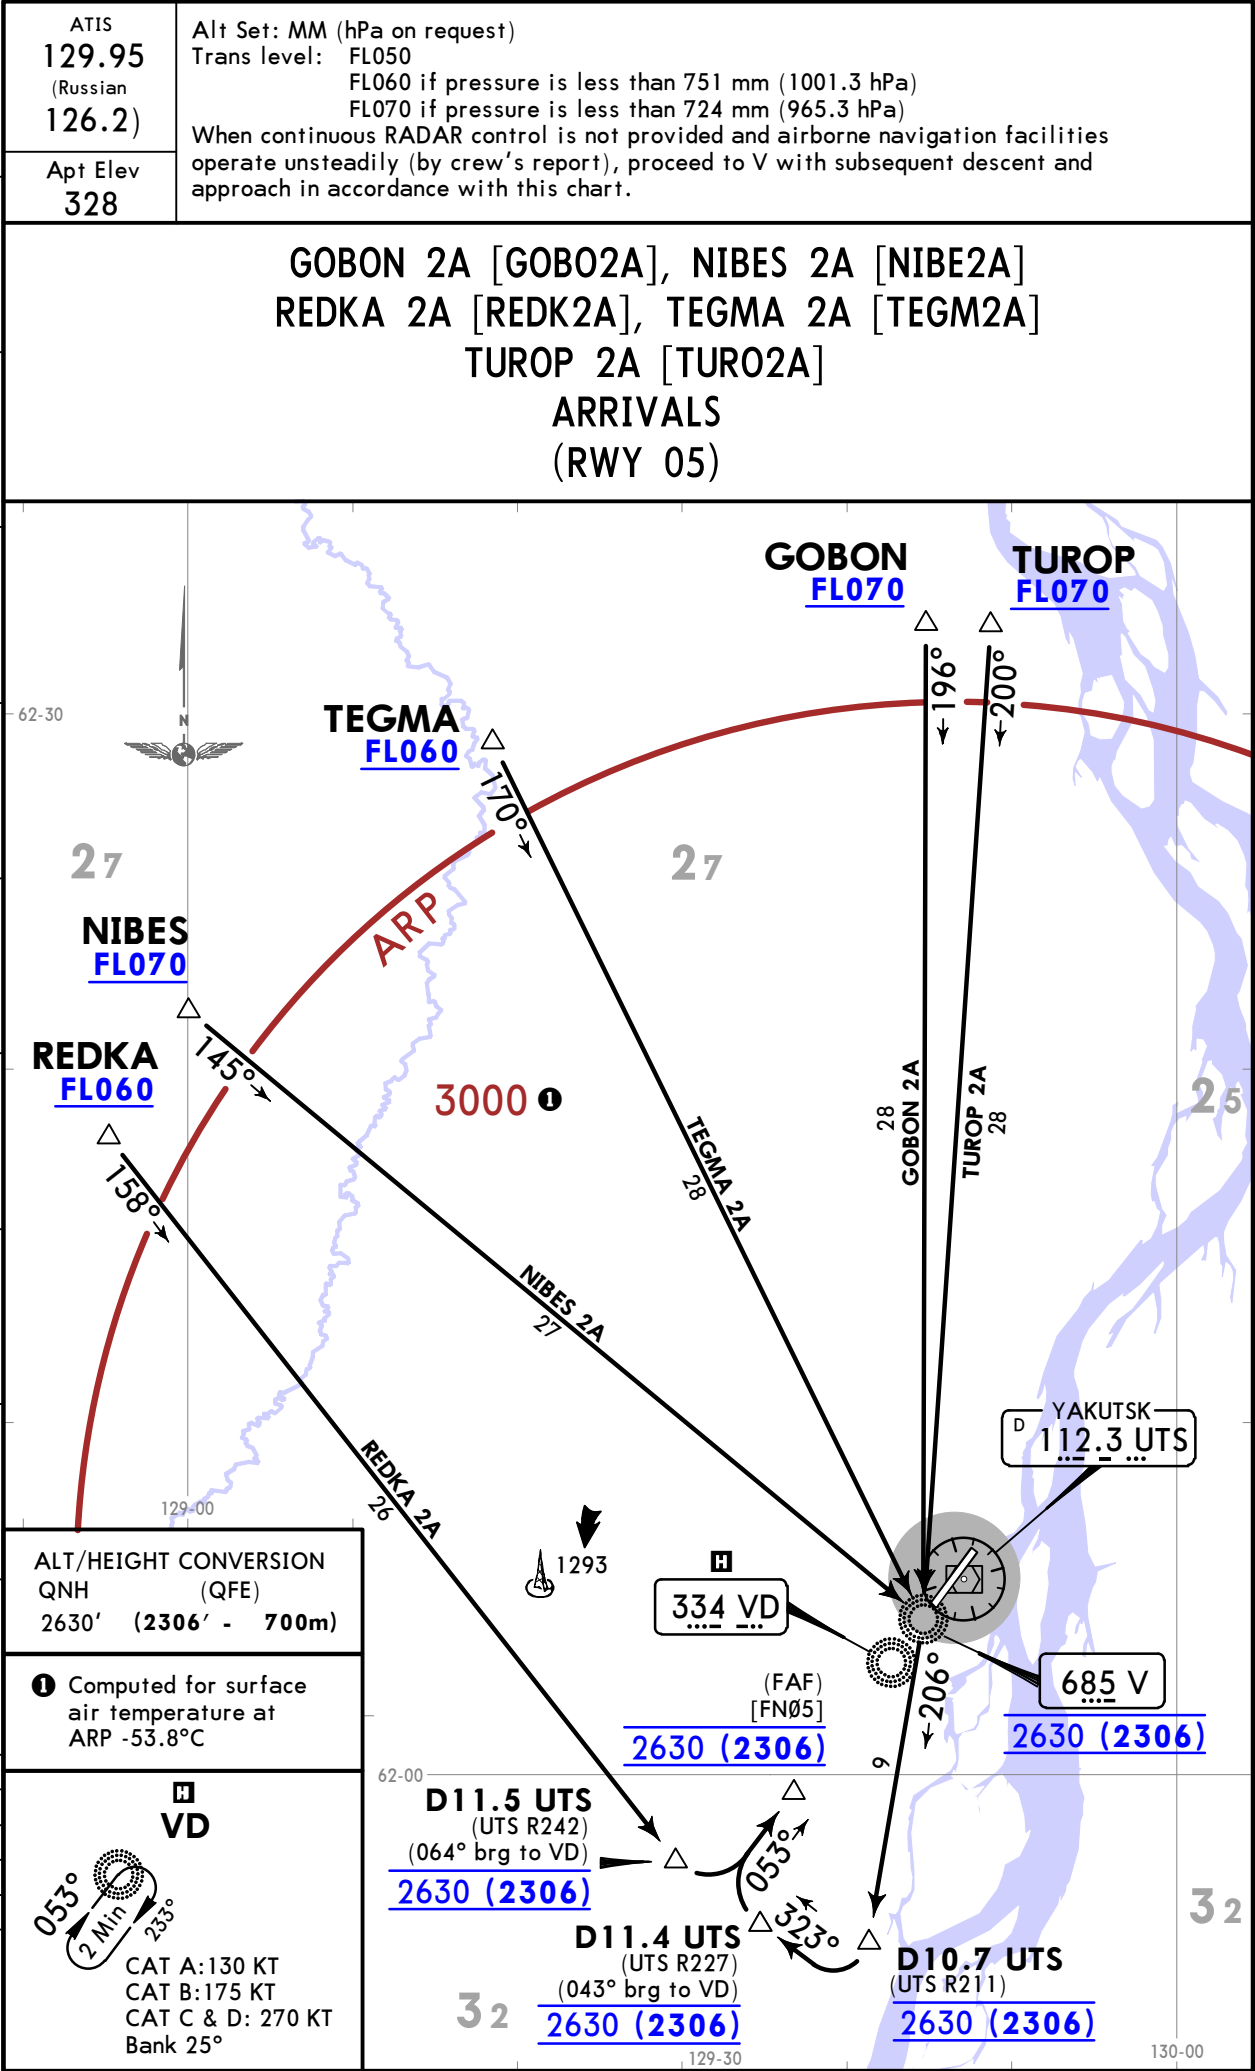

UEEE/YKS
YAKUTSK

JEPPESEN
9 MAY 25 (10-2T) Eff 15 May

YAKUTSK, RUSSIA

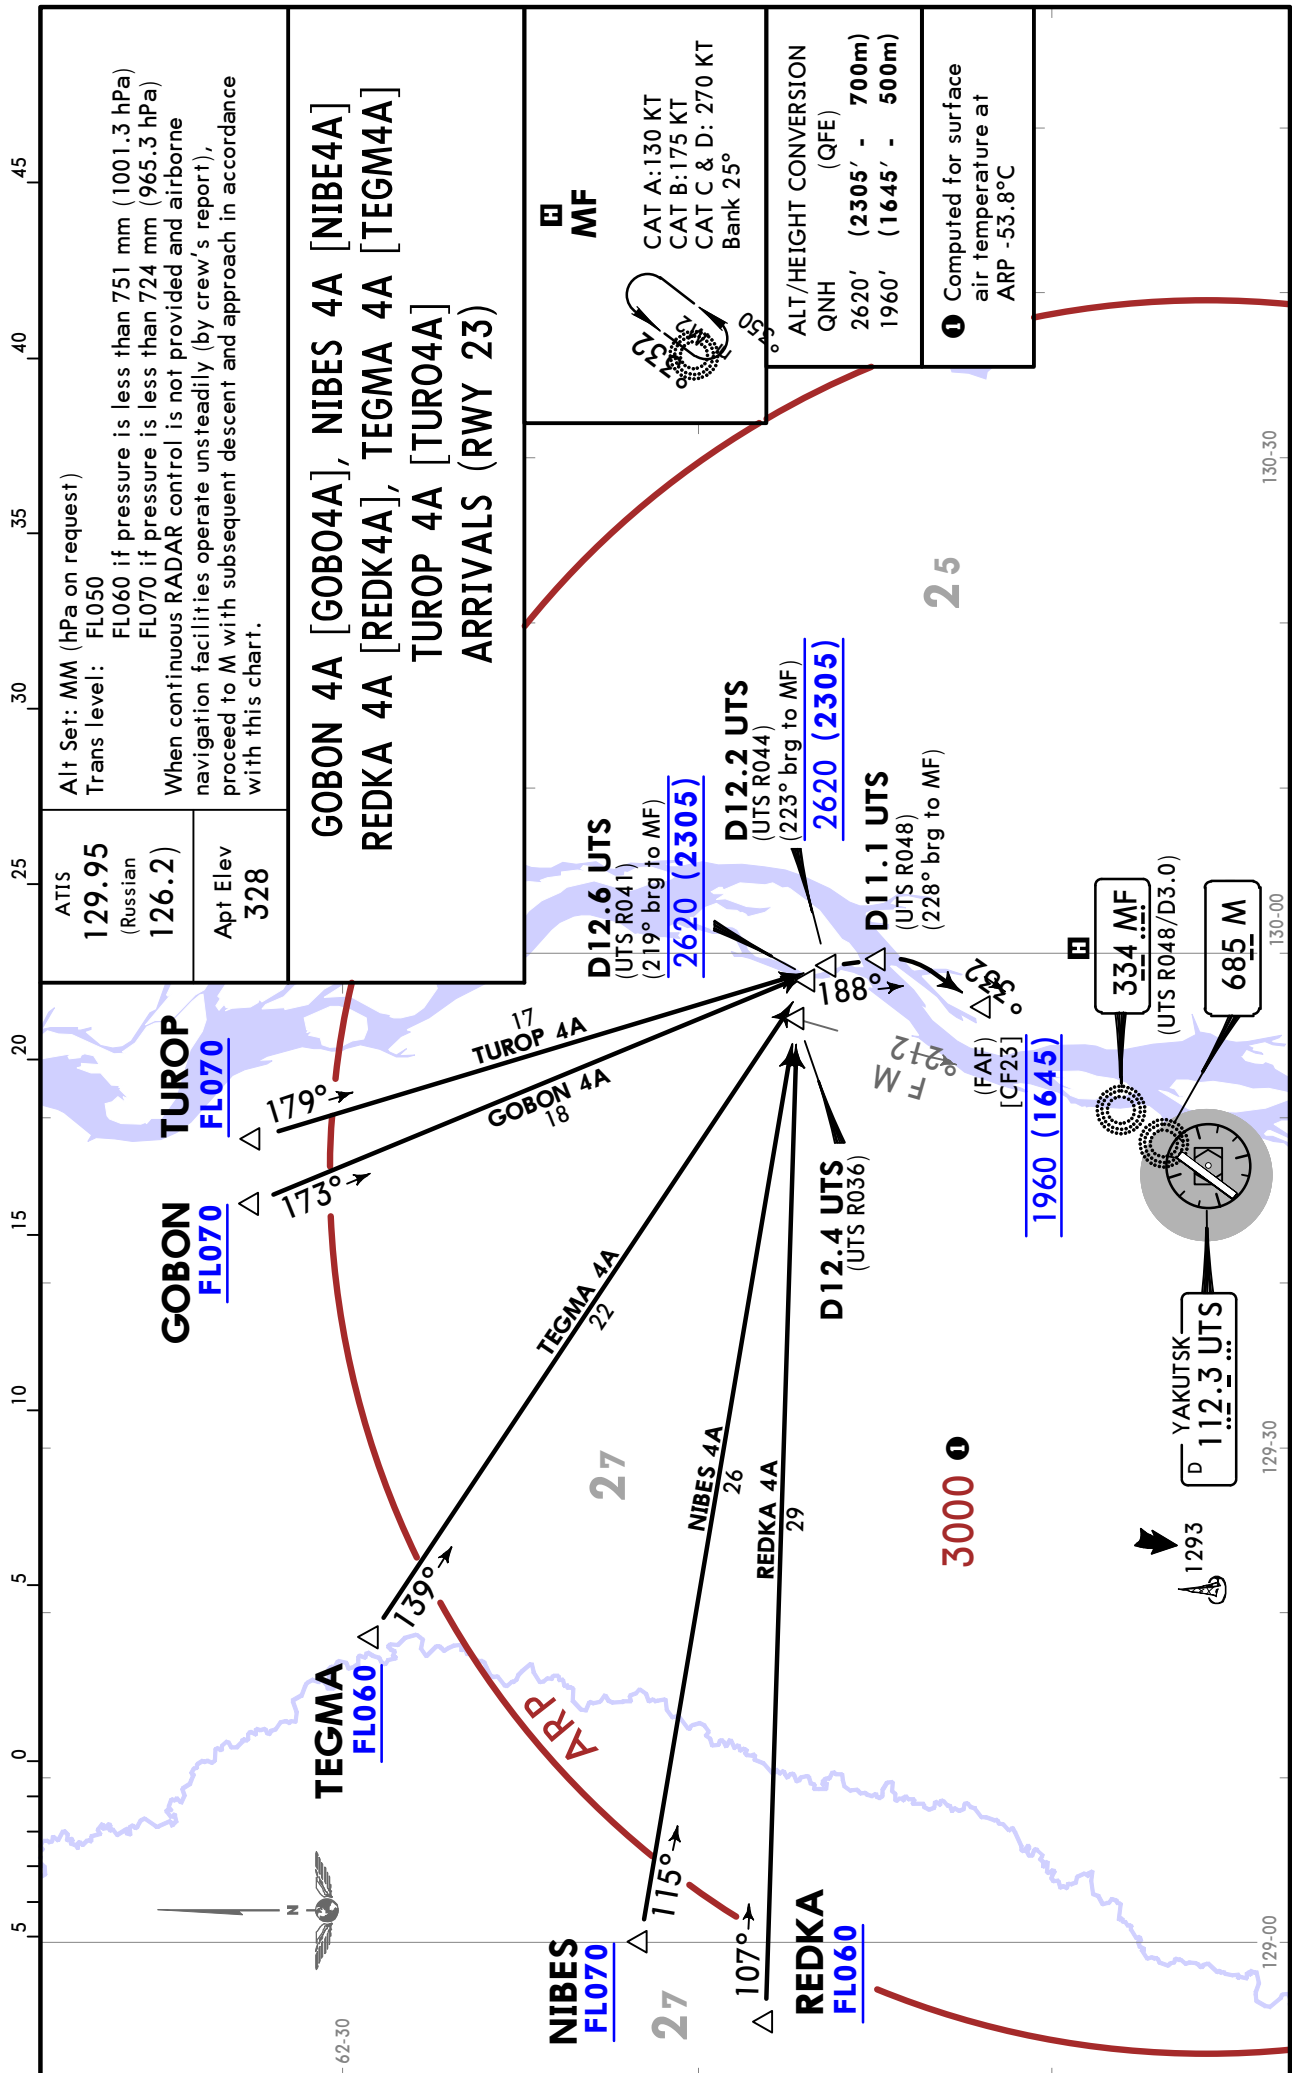STAR

UEEE/YKS
YAKUTSK



9 MAY 25

10-2U

Eff 15 May

YAKUTSK, RUSSIA

STAR

ATIS
129.95
(Russian)
126.2)

Apt Elev
328

Alt Set: MM (hPa on request)
Trans level: FL050
FL060 if pressure is less than 751 mm (1001.3 hPa)
FL070 if pressure is less than 724 mm (965.3 hPa)
When continuous RADAR control is not provided and airborne navigation facilities operate unsteadily (by crew's report), proceed to V with subsequent descent and approach in accordance with this chart.

GIMEK 2A [GIME2A], IDESA 2A [IDES2A]
SORIP 2A [SORI2A], TEKDI 2A [TEKD2A]
ARRIVALS
(RWY 05)

VD



CAT A: 130 KT
CAT B: 175 KT
CAT C & D: 270 KT
Bank 25°

ALT/HEIGHT CONVERSION
QNH (QFE)
2630' (2306' - 700m)

Computed for surface
air temperature at
ARP -53.8°C

SORIP
FL070

GIMEK
FL070

TEKDI
FL070

IDESA
FL070

3000

27

25

1293

334 VD

YAKUTSK
112.3 UTS

685 V

2630 (2306)

(FAF)
[FN05]

2630 (2306)

32

D11.4 UTS
(UTS R227)
(043° brg to VD)

2630 (2306)

D10.7 UTS
(UTS R211)

2630 (2306)

32

129-30

130-00

130-30

UEEE/YKS
YAKUTSK



9 MAY 25

10-2V

Eff 15 May

YAKUTSK, RUSSIA

STAR

ATIS
129.95
(Russian)
126.2)

Apt Elev
328

Alt Set: MM (hPa on request)
Trans level: FL050
FL060 if pressure is less than 751 mm (1001.3 hPa)
FL070 if pressure is less than 724 mm (965.3 hPa)
When continuous RADAR control is not provided and airborne navigation facilities operate unsteadily (by crew's report), proceed to M with subsequent descent and approach in accordance with this chart.

GIMEK 4A [GIME4A], IDESA 4A [IDES4A]
SORIP 4A [SORI4A], TEKDI 4A [TEKD4A]
ARRIVALS
(RWY 23)

MF



CAT A: 130 KT
CAT B: 175 KT
CAT C & D: 270 KT
Bank 25°

ALT/HEIGHT CONVERSION
QNH (QFE)
1960' (1645' - 500m)

Computed for surface
air temperature at
ARP -53.8°C

SORIP
FL070

GIMEK
FL070

TEKDI
FL070

IDES A
FL070

3000

D11.1 UTS
(UTS R048)
(228° brg to MF)

D9.8 UTS
(UTS R051)

(FAF)
[CF23]

1960 (1645)

334 MF


(UTS R048/D3.0)


685 M

YAKUTSK
112.3 UTS



YAKUTSK, RUSSIA

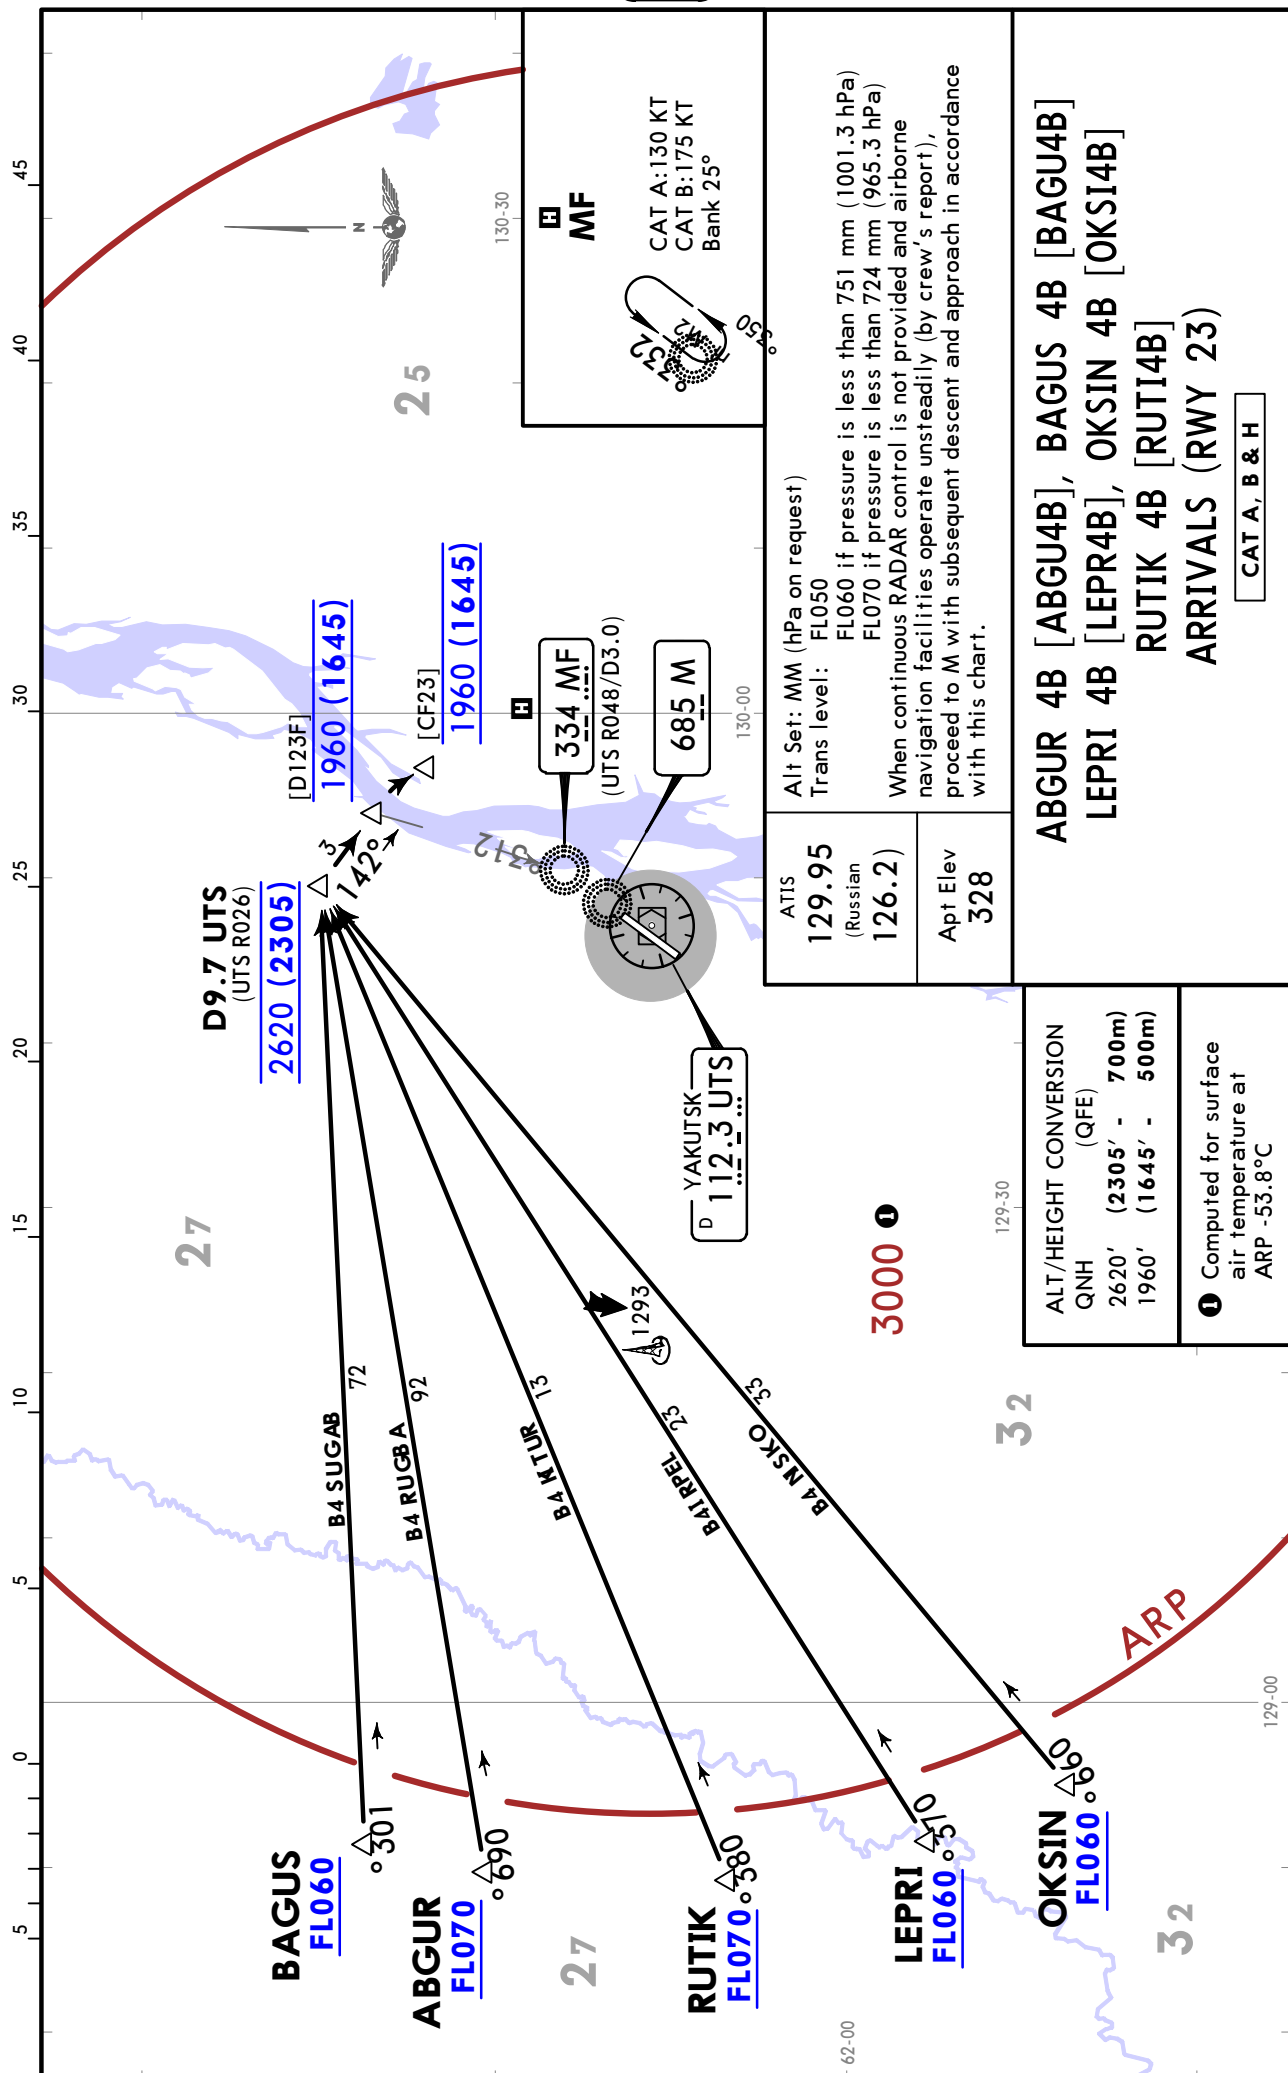

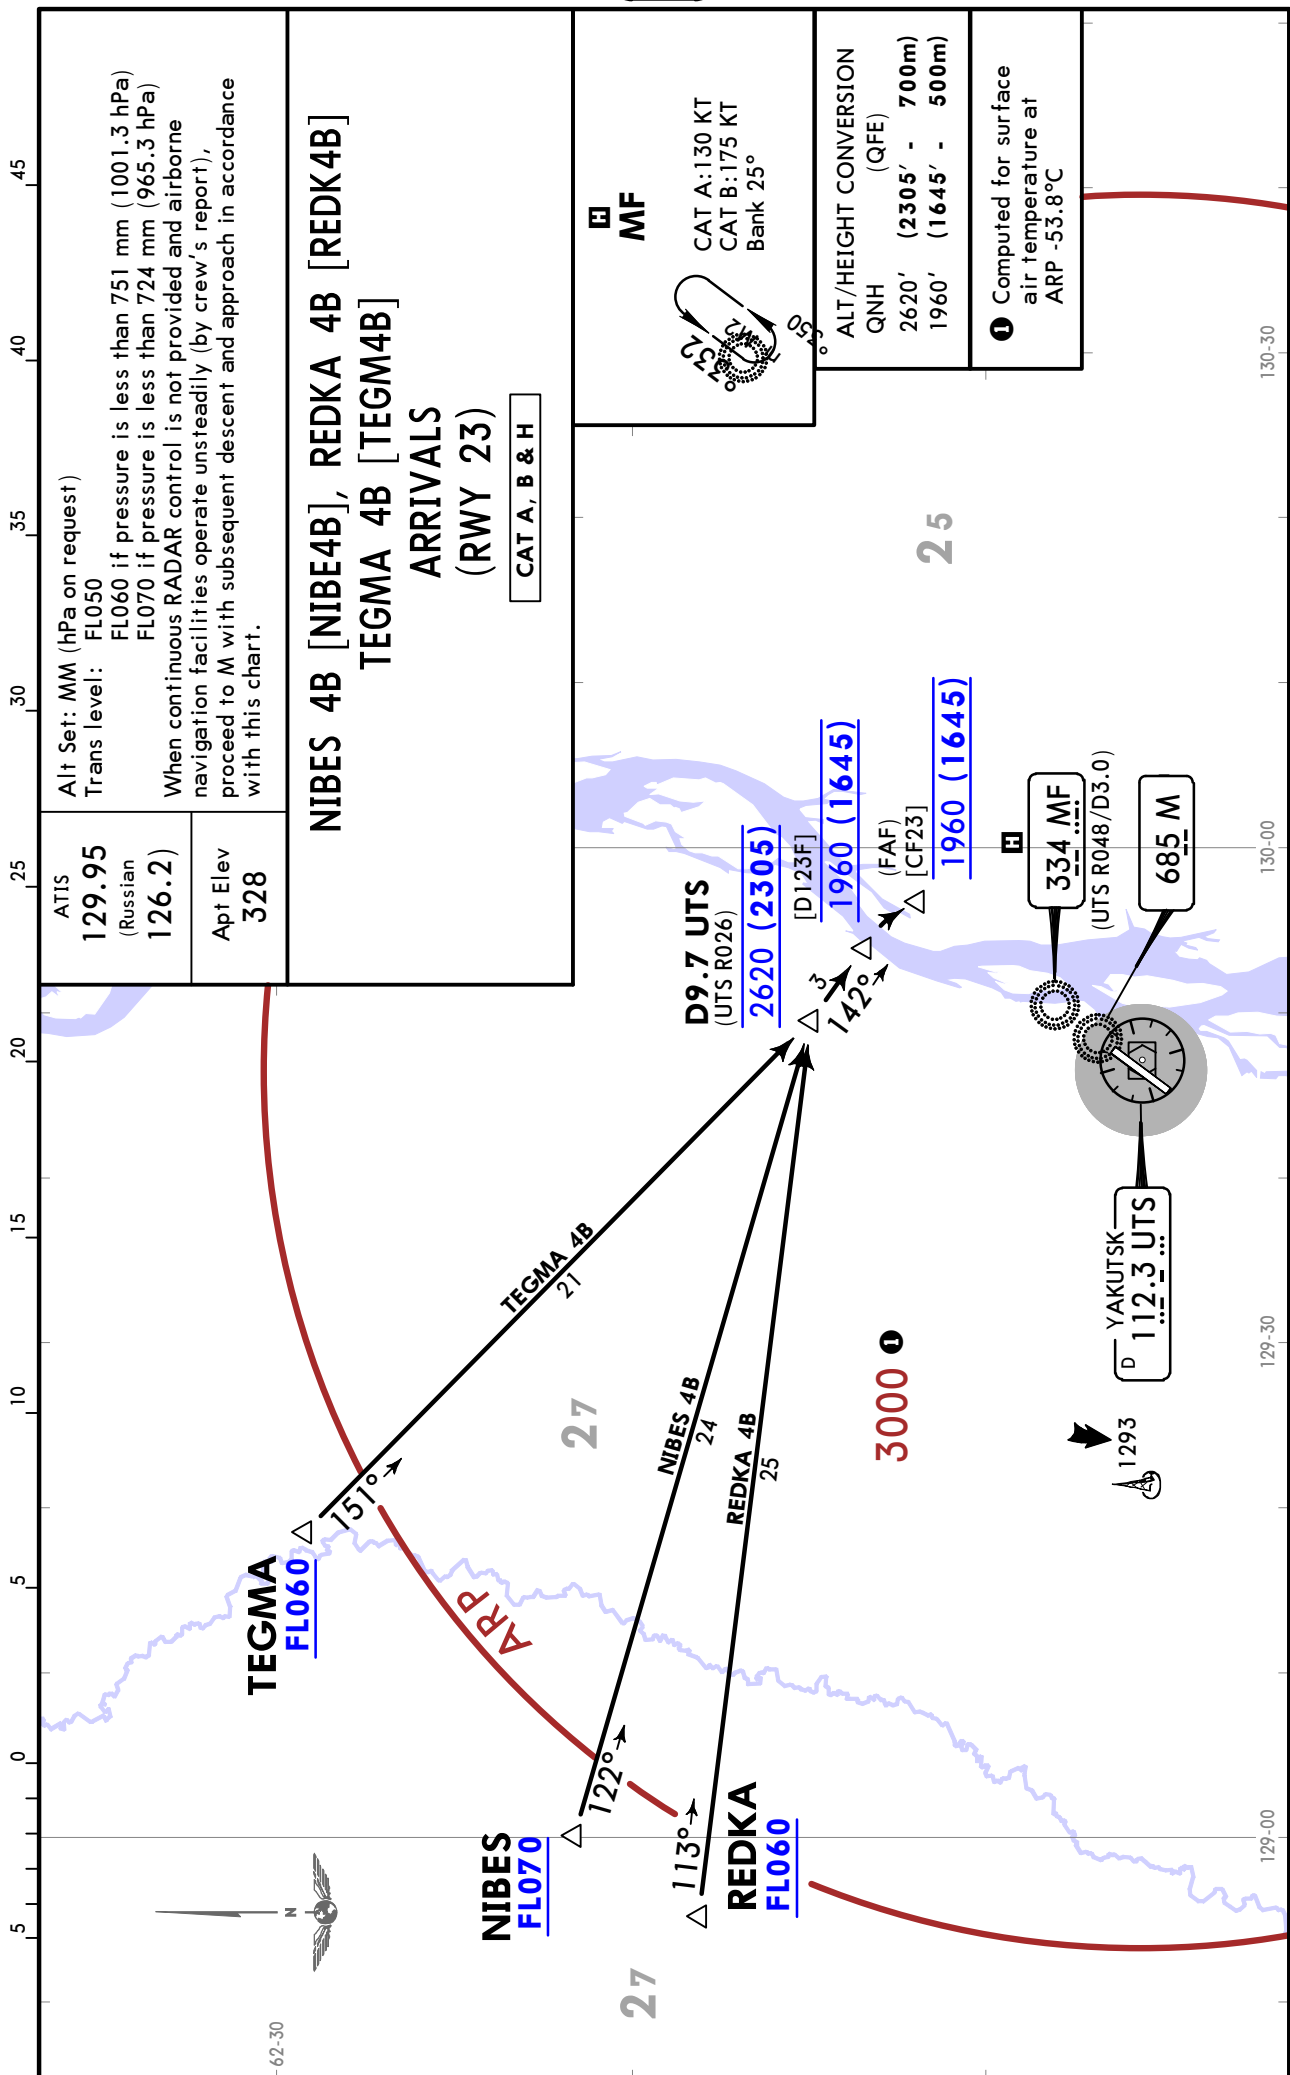STAR

UEEE/YKS
YAKUTSK


2 FEB 24 10-3

YAKUTSK, RUSSIA
RNAV SID

Apt Elev 328	QNH on request (QFE) Trans alt: 3940 (3619)
	RNAV 1 GNSS required
	If unable to MAINTAIN RNAV SID report this to ATS. Conventional SID or vectoring will be applied.

GIMEK 6E [GIME6E], IDESA 6E [IDES6E]
SORIP 6E [SORI6E], TEKDI 6E [TEKD6E]
RNAV DEPARTURES
(RWY 05)

ALT/HEIGHT CONVERSION QNH (QFE) 3940' (3619' - 1100m)	① Computed for surface air temperature at ARP -53.8°C
---	---

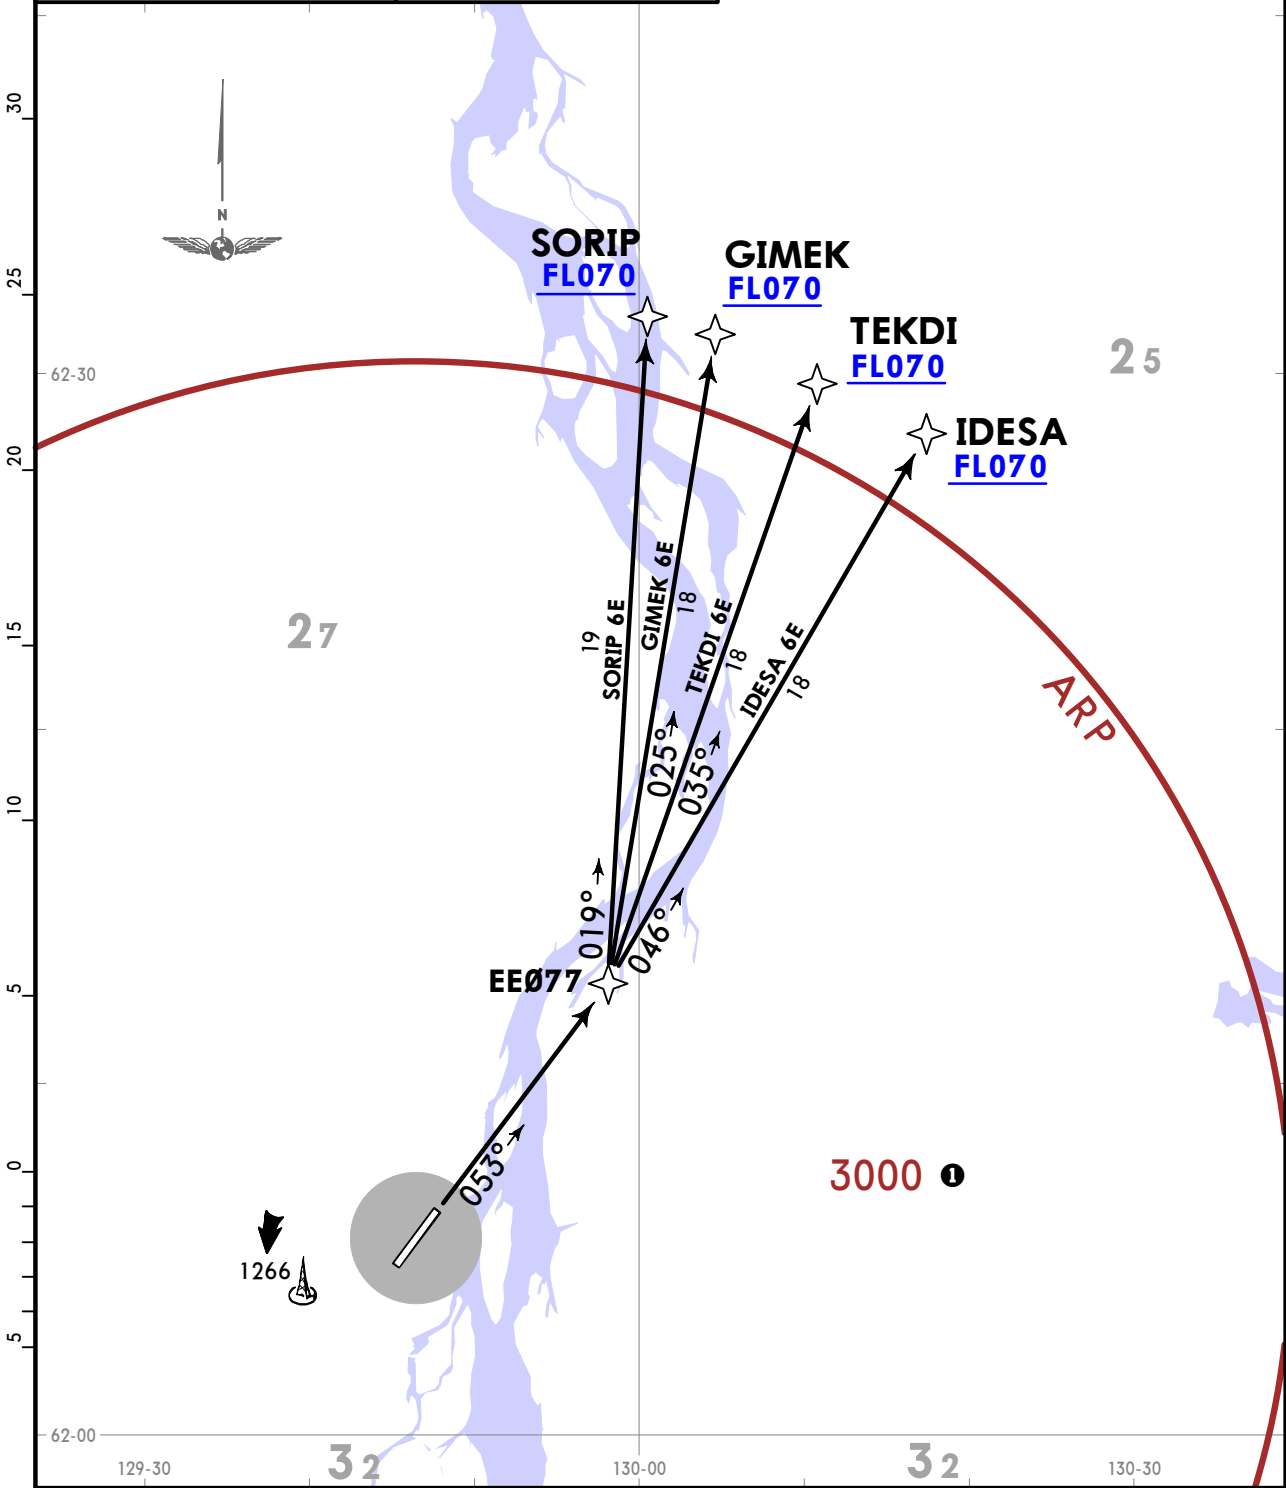


YAKUTSK, RUSSIA
RNAV SID

UEEE/YKS
YAKUTSK

JEPPESSEN
2 FEB 24 10-3B

YAKUTSK, RUSSIA
RNAV SID

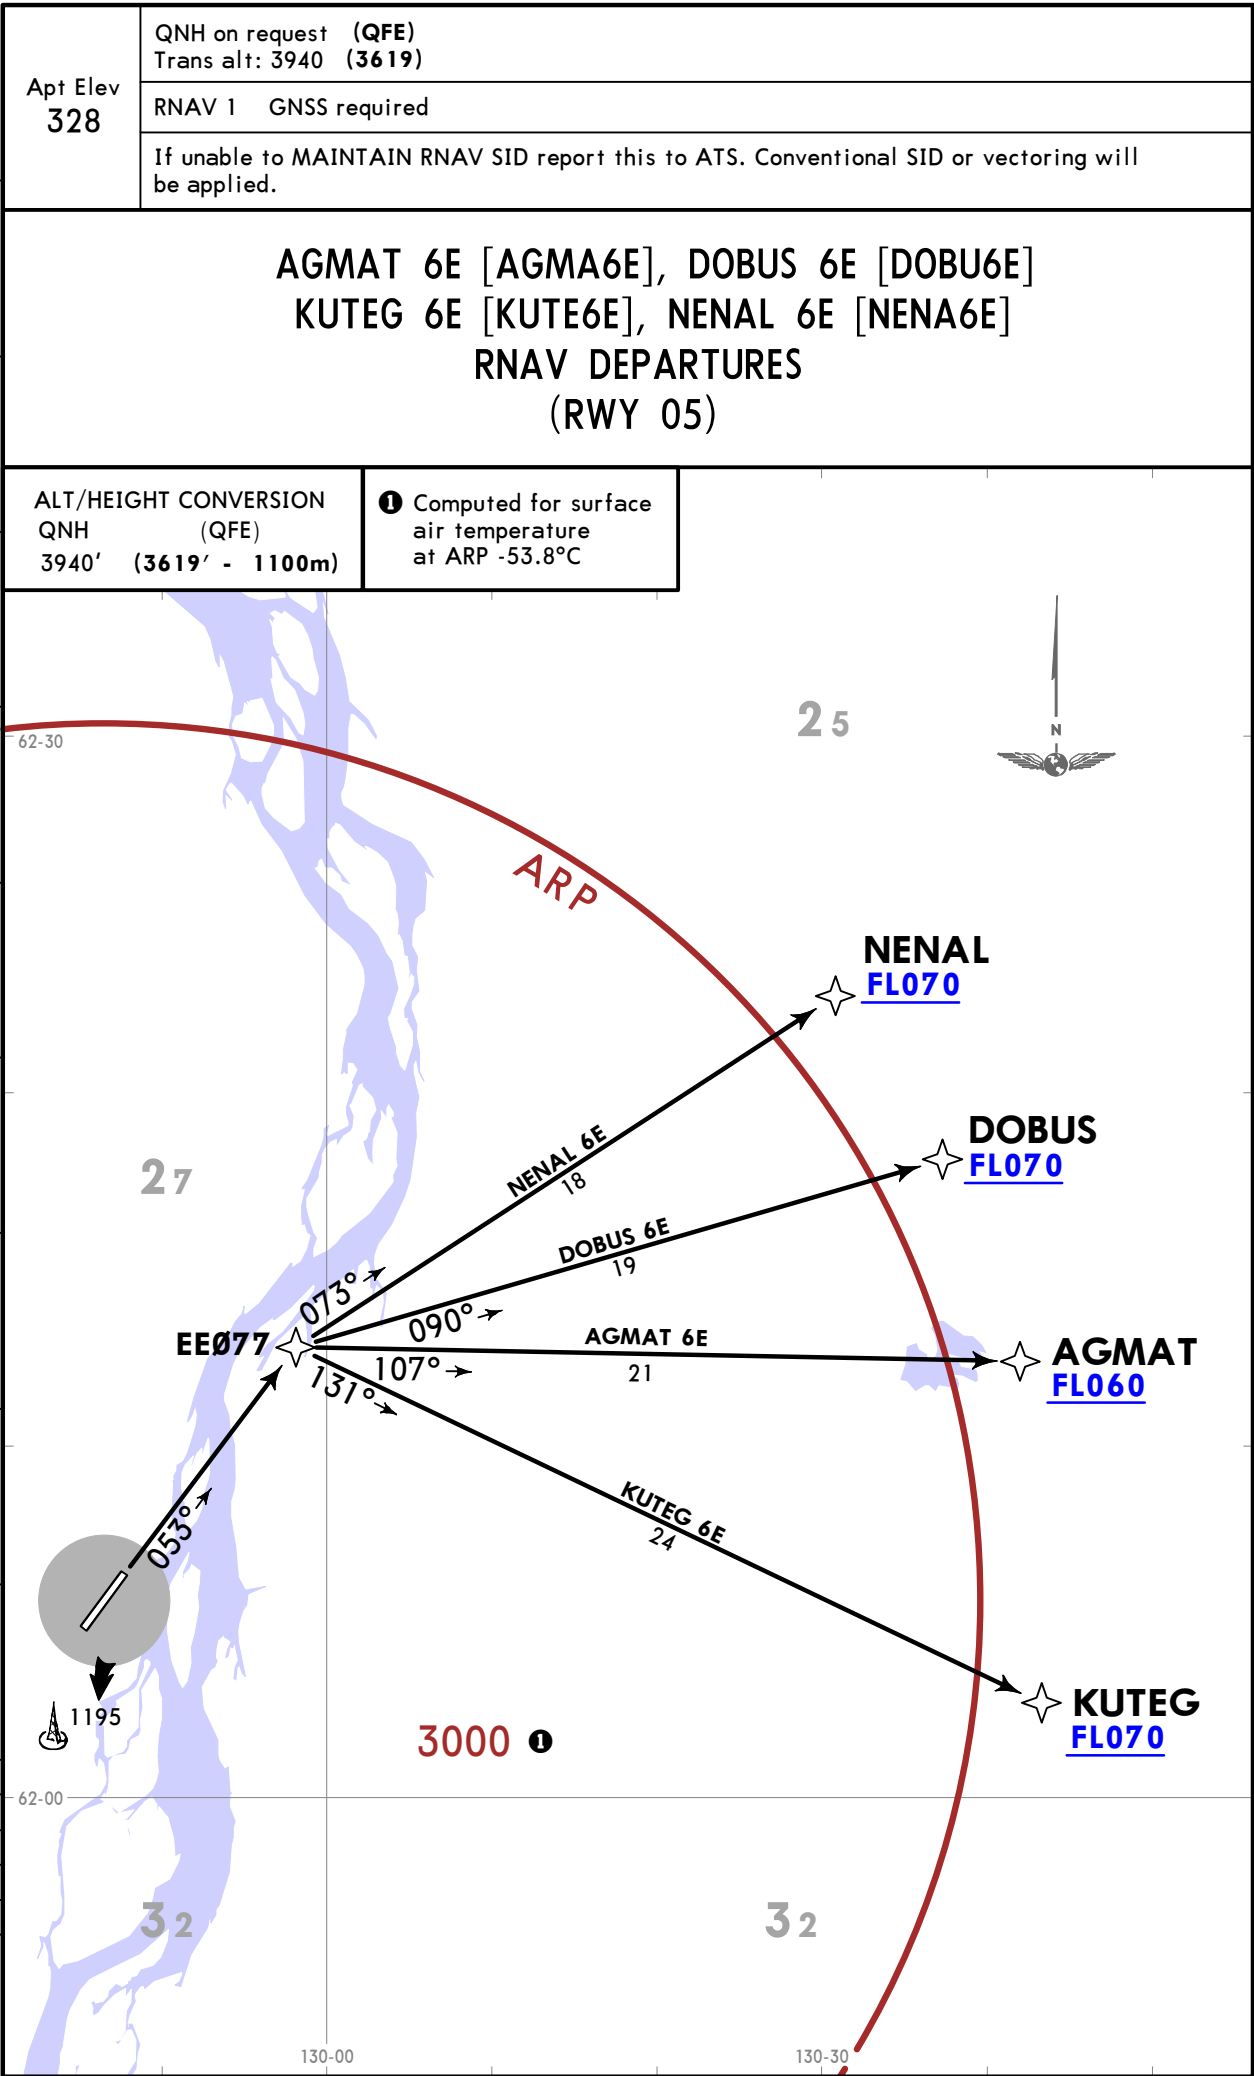

UEEE/YKS
YAKUTSK


JEPPESSEN
2 FEB 24 (10-3C)

YAKUTSK, RUSSIA
RNAV SID

Apt Elev 328	QNH on request (QFE) Trans alt: 3940 (3625)
	RNAV 1 GNSS required
	1. EXPECT close-in obstacles. 2. If unable to MAINTAIN RNAV SID report this to ATS. Conventional SID or vectoring will be applied.

AGMAT 6F [AGMA6F], DOBUS 6F [DOBU6F]
KUTEG 6F [KUTE6F], NENAL 6F [NENA6F]
RNAV DEPARTURES
(RWY 23)

ALT/HEIGHT CONVERSION		❶ Computed for surface air temperature at ARP -53.8°C
QNH	(QFE)	
3940'	(3625' - 1100m)	

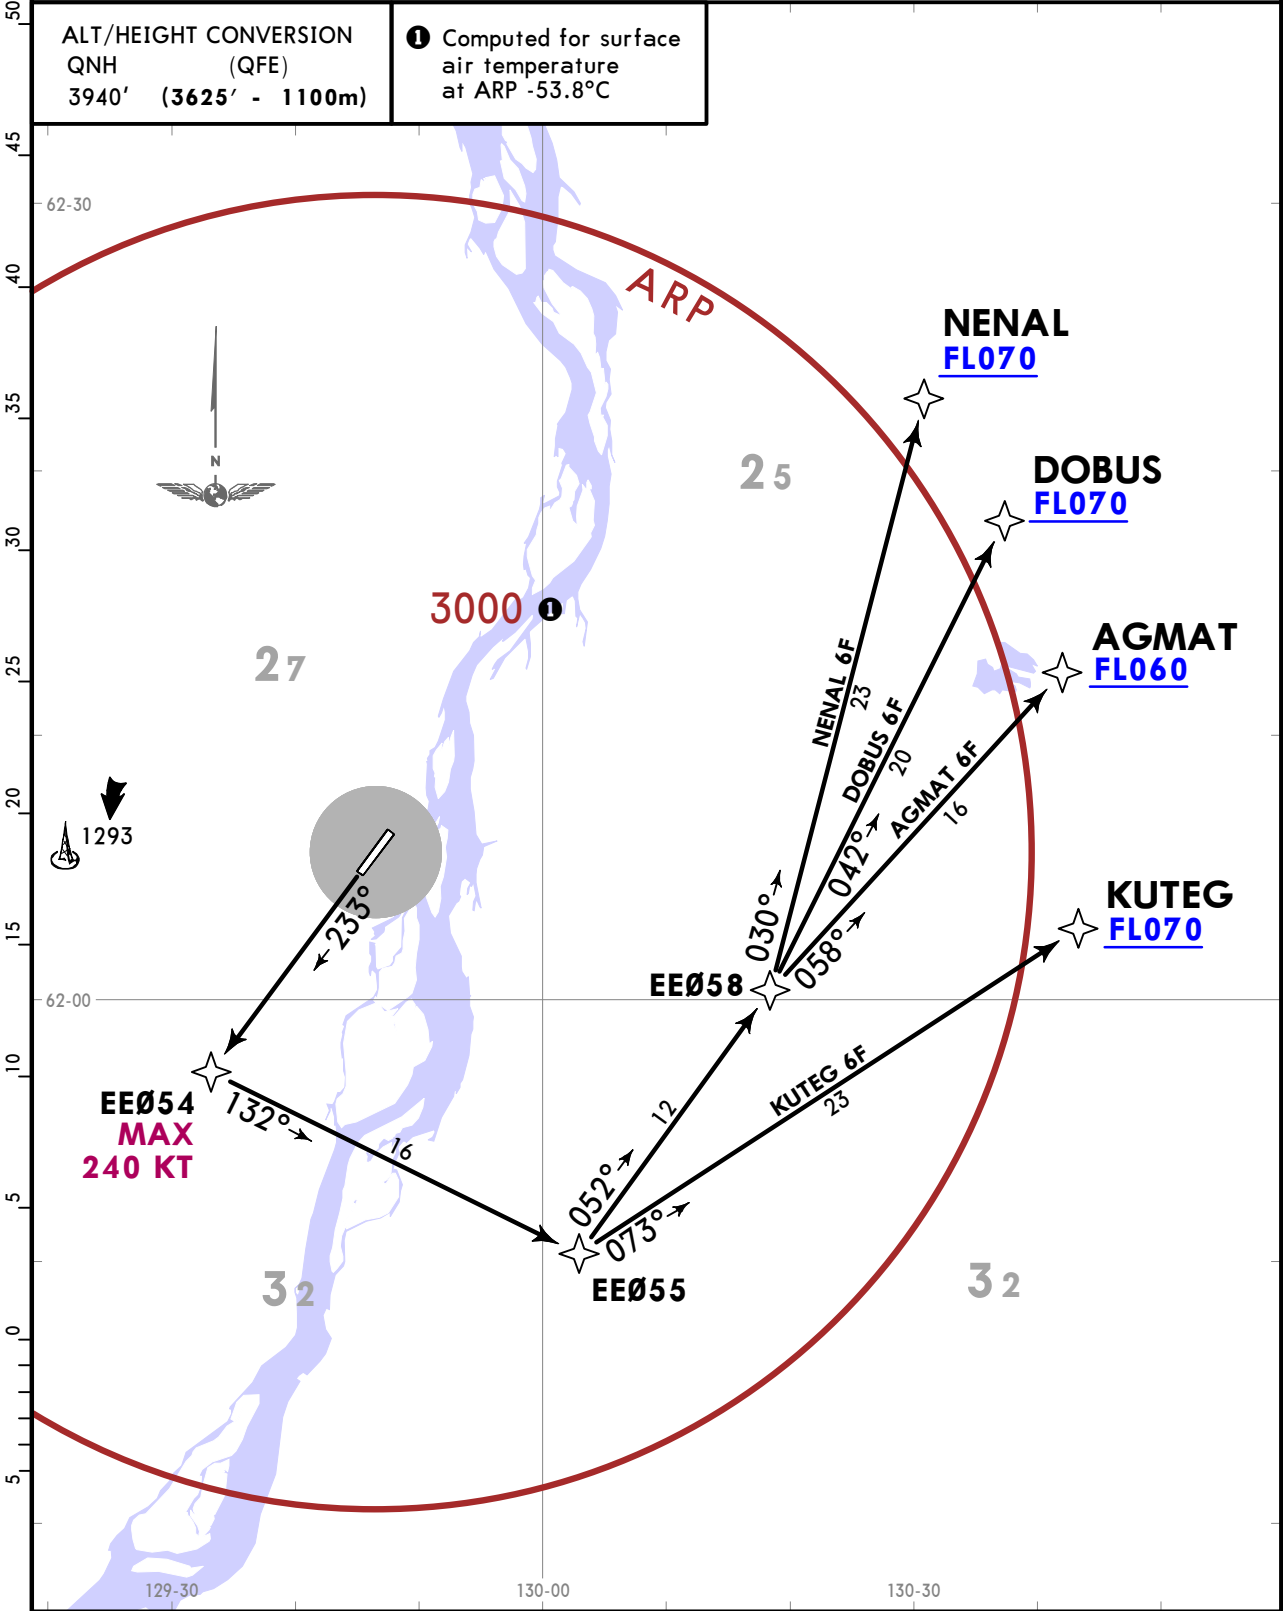

UEEE/YKS
YAKUTSK


JEPPESSEN
2 FEB 24 (10-3D)

YAKUTSK, RUSSIA
RNAV SID

Apt Elev 328	QNH on request (QFE) Trans alt: 3940 (3619)
	RNAV 1 GNSS required
	If unable to MAINTAIN RNAV SID report this to ATS. Conventional SID or vectoring will be applied.

BESIB 6E [BESI6E], DENIB 6E [DENI6E]
OGLIS 6E [OGLI6E], OKTUR 6E [OKTU6E]
RNAV DEPARTURES
(RWY 05)

ALT/HEIGHT CONVERSION QNH (QFE) 3940' (3619' - 1100m)	❶ Computed for surface air temperature at ARP -53.8°C
---	---

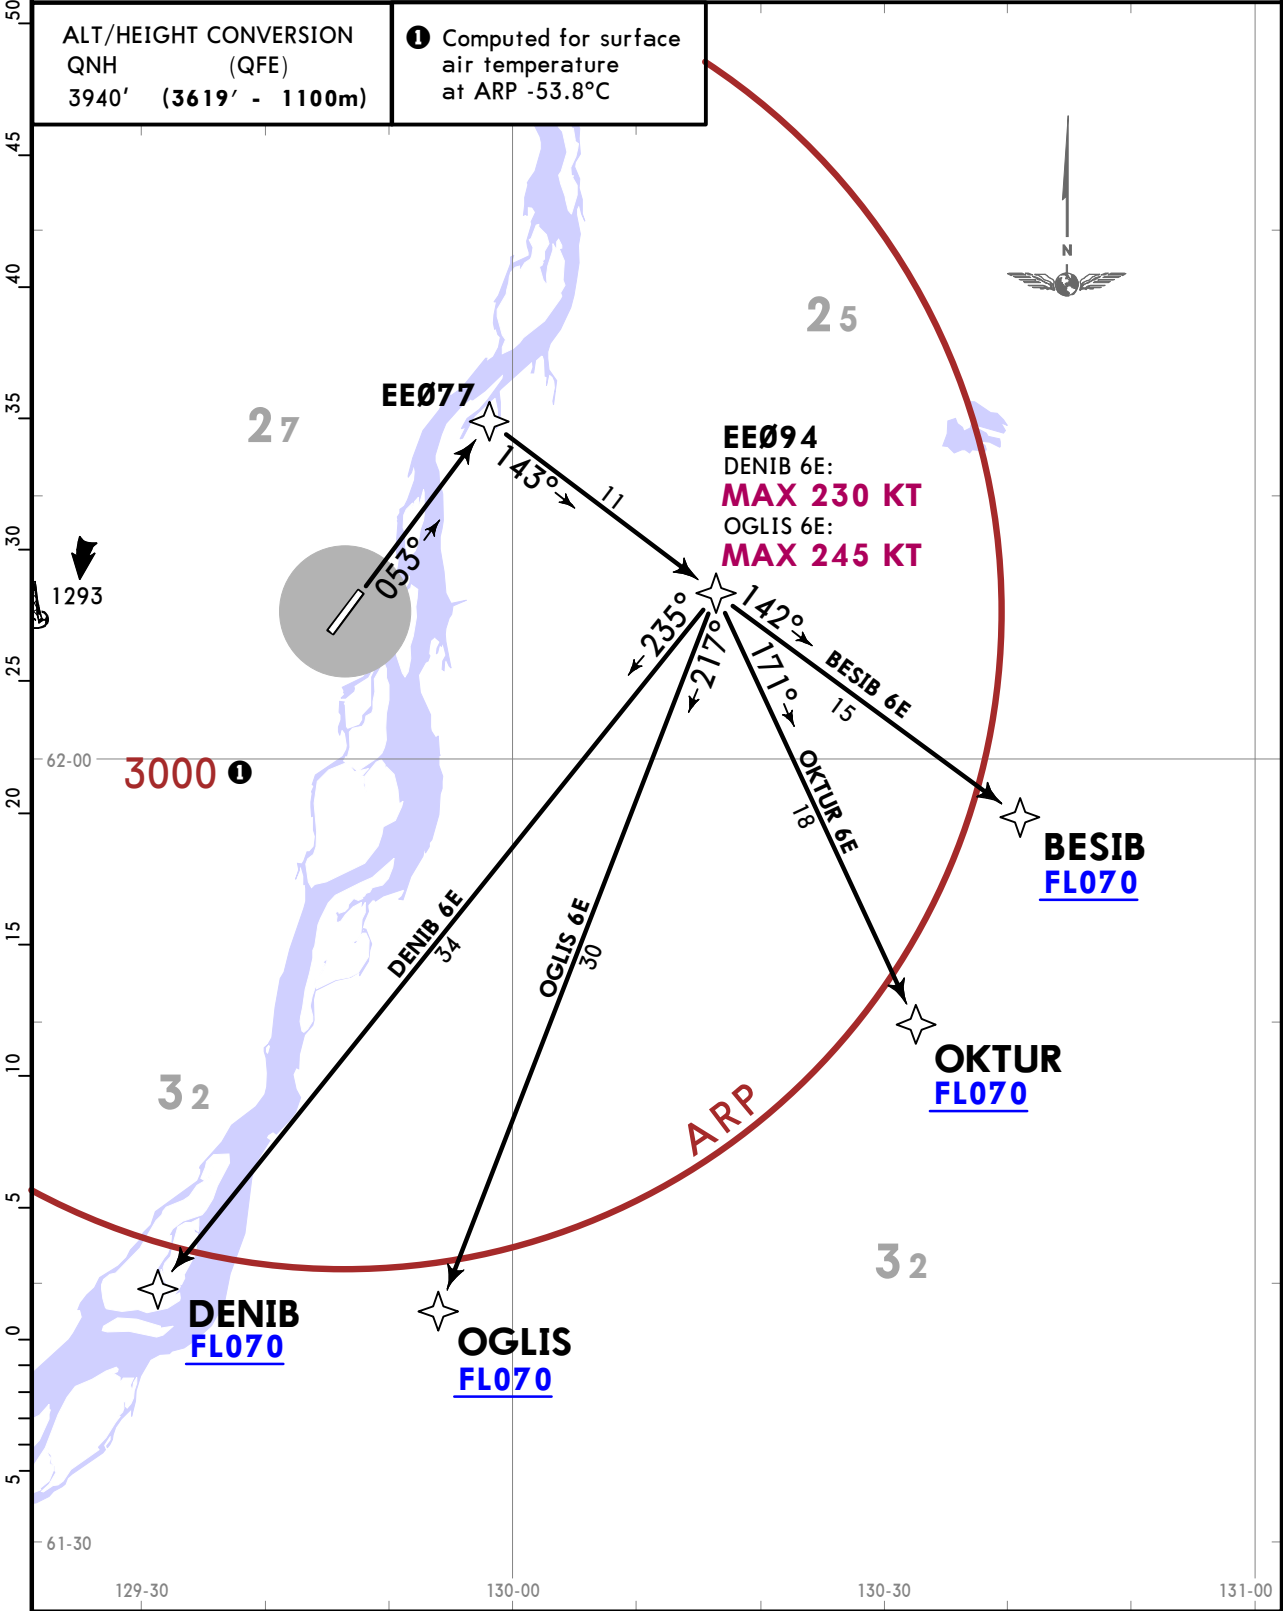

UEEE/YKS
YAKUTSK

JEPPESEN
2 FEB 24 10-3E

YAKUTSK, RUSSIA
RNAV SID

Apt Elev
328

QNH on request (QFE)
Trans alt: 3940 (3625)


RNAV 1 GNSS required

1. EXPECT close-in obstacles.
2. If unable to MAINTAIN RNAV SID report this to ATS. Conventional SID or vectoring will be applied.

BESIB 6F [BESI6F], DENIB 6F [DENI6F]
OGLIS 6F [OGLI6F], OKTUR 6F [OKTU6F]
RNAV DEPARTURES
(RWY 23)

ALT/HEIGHT CONVERSION
QNH (QFE)
3940' (3625' - 1100m)

① Computed for surface
air temperature
at ARP -53.8°C

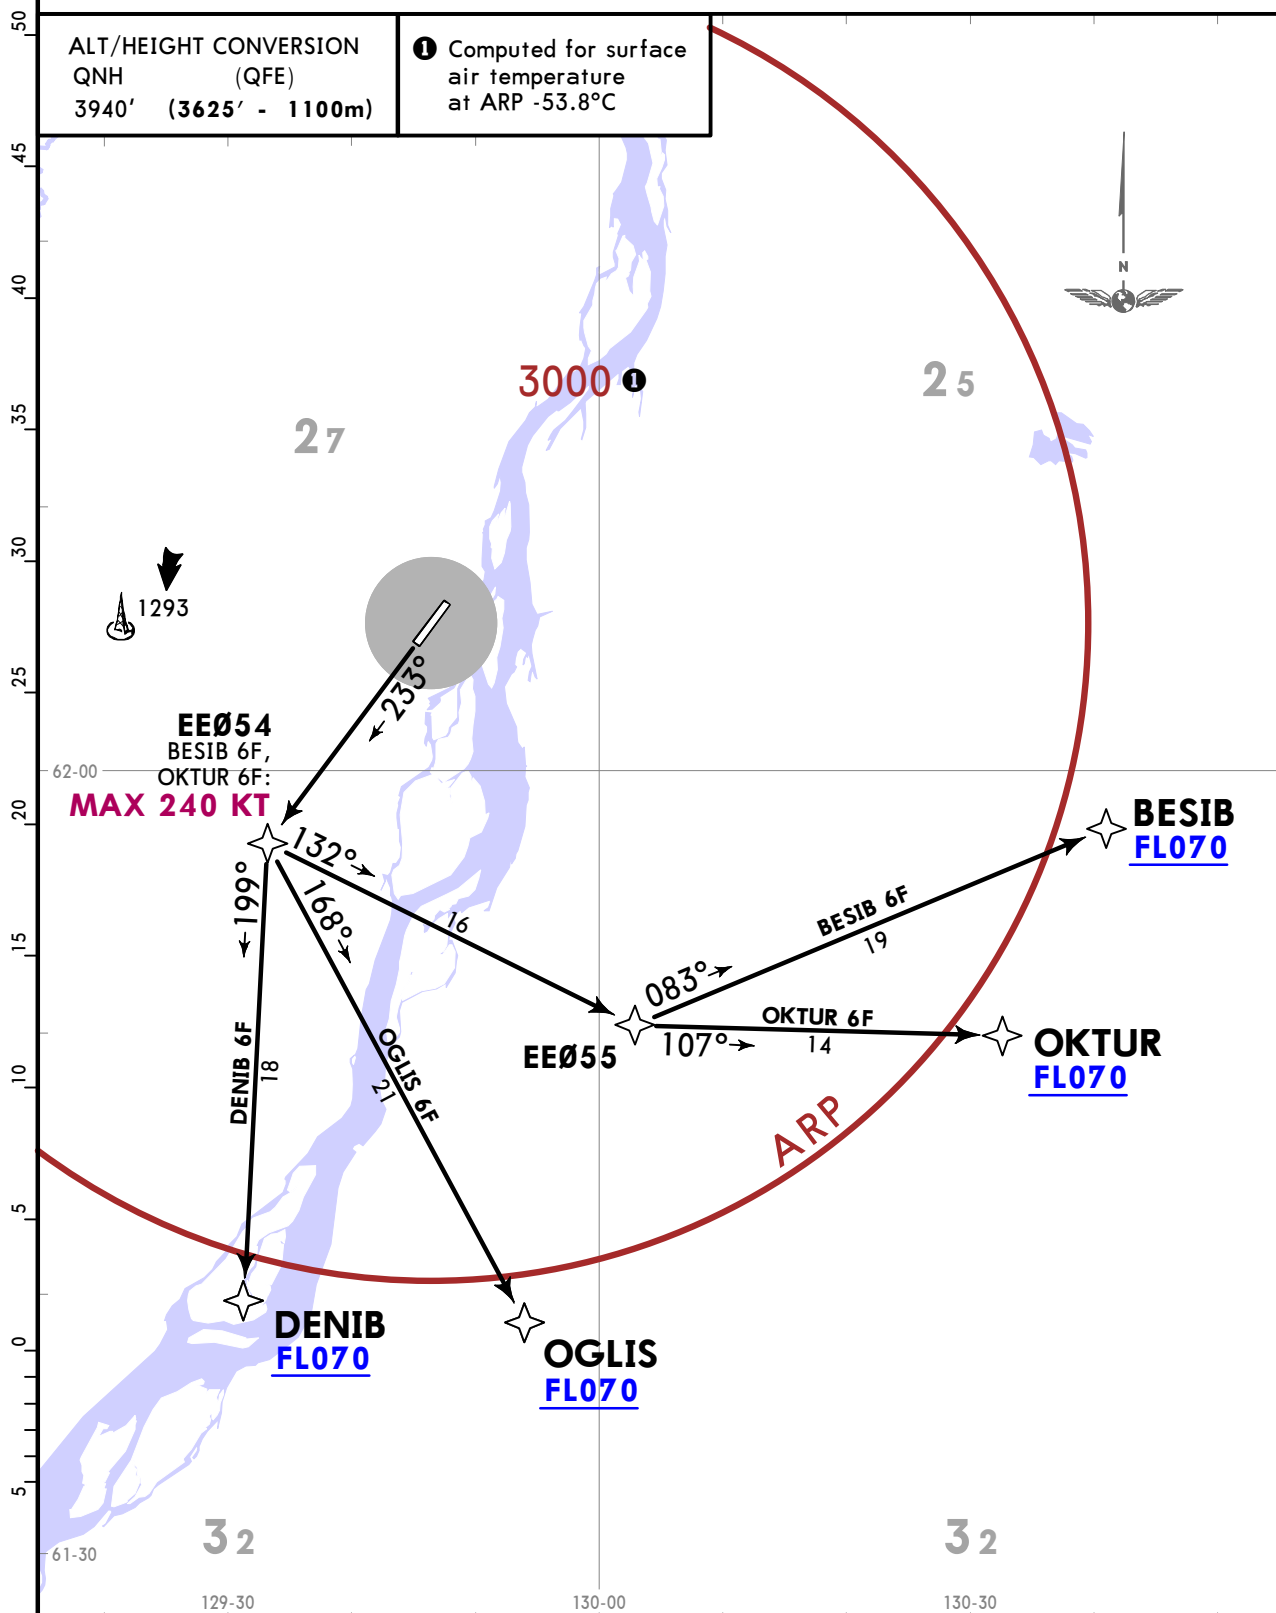


UEEE/YKS
YAKUTSK

2 FEB 24 10-3F

YAKUTSK, RUSSIA
RNAV SID

Apt Elev 328	QNH on request (QFE) Trans alt: 3940 (3619)
	RNAV 1 GNSS required
	If unable to MAINTAIN RNAV SID report this to ATS. Conventional SID or vectoring will be applied.

DIROM 6E [DIR06E], LEPRI 6E [LEPR6E]
OKSIN 6E [OKSI6E], RUTIK 6E [RUTI6E]
RNAV DEPARTURES
(RWY 05)

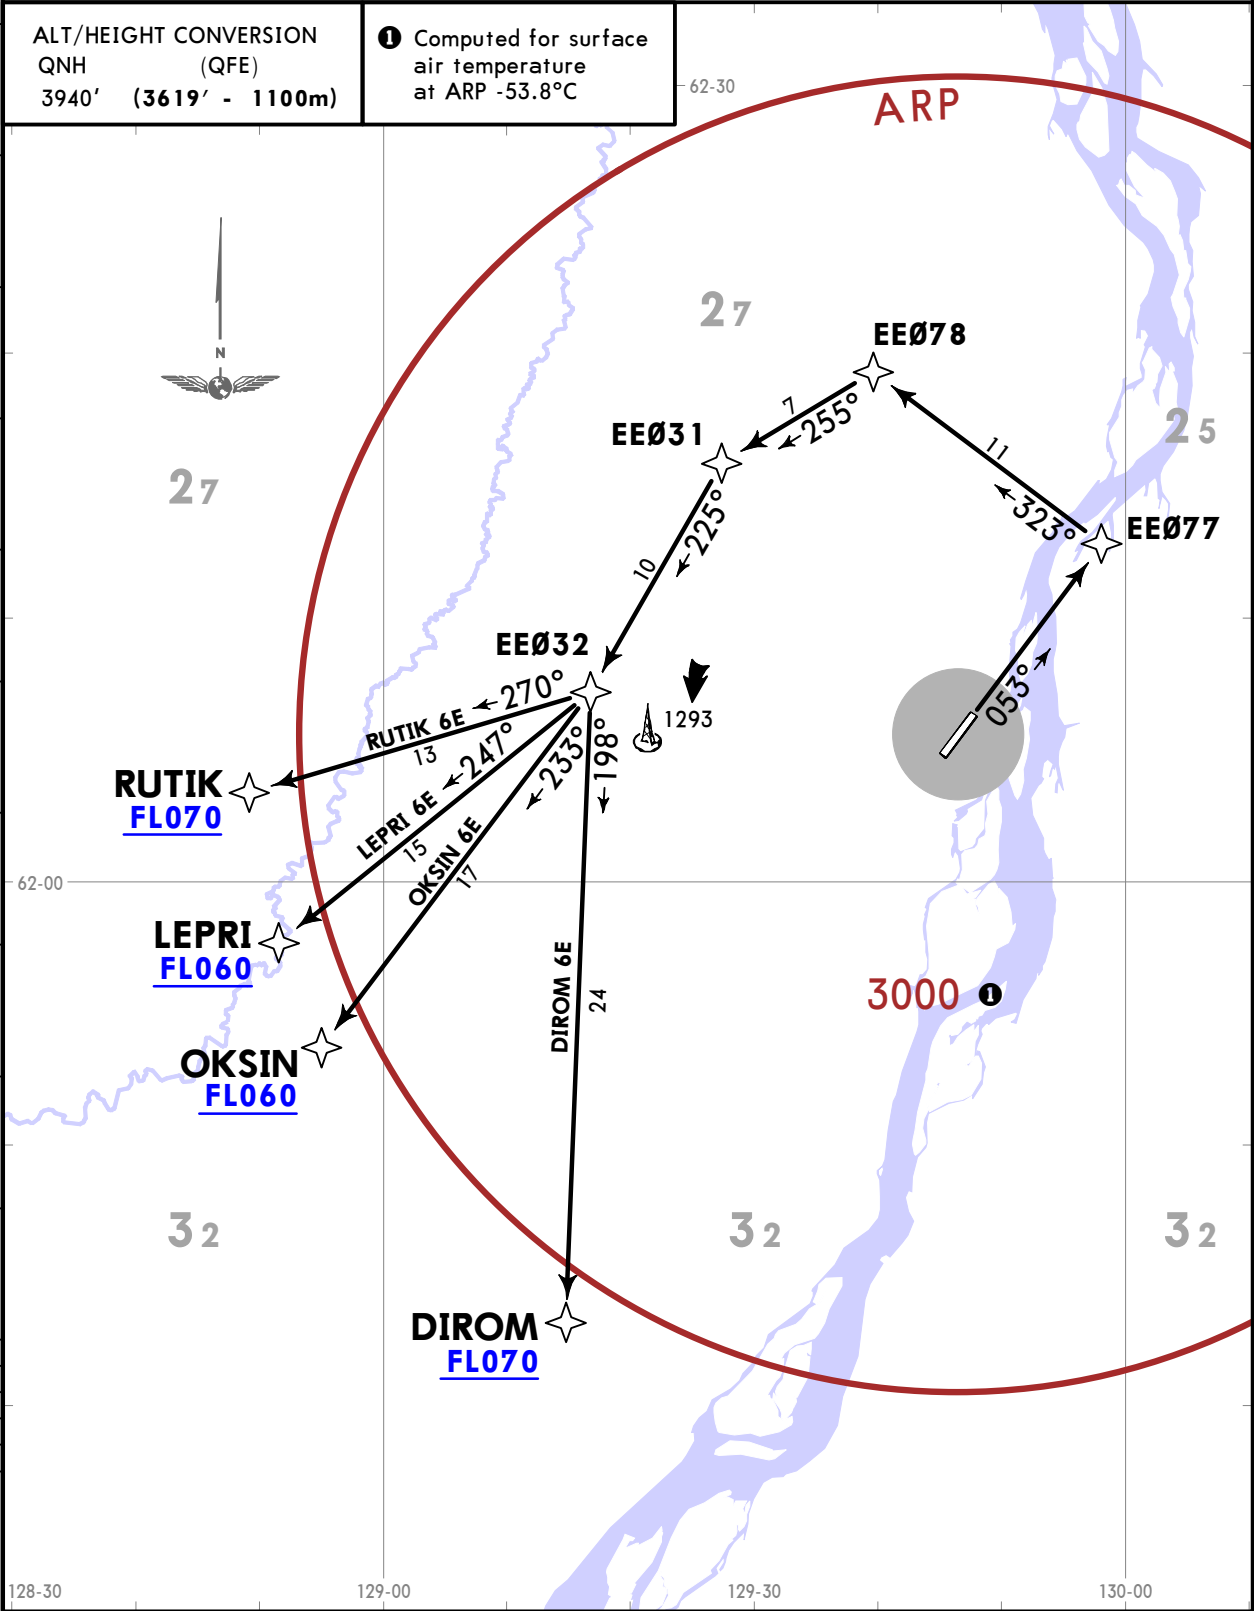


UEEE/YKS
YAKUTSK

JEPPesen
2 FEB 24 **(10-3G)**

YAKUTSK, RUSSIA
RNAV SID

Apt Elev 328	QNH on request (QFE) Trans alt: 3940 (3625)
	RNAV 1 GNSS required
	1. EXPECT close-in obstacles. 2. If unable to MAINTAIN RNAV SID report this to ATS. Conventional SID or vectoring will be applied.

DIROM 6F [DIRO6F], LEPRI 6F [LEPR6F]
OKSIN 6F [OKSI6F], RUTIK 6F [RUTI6F]
RNAV DEPARTURES
(RWY 23)

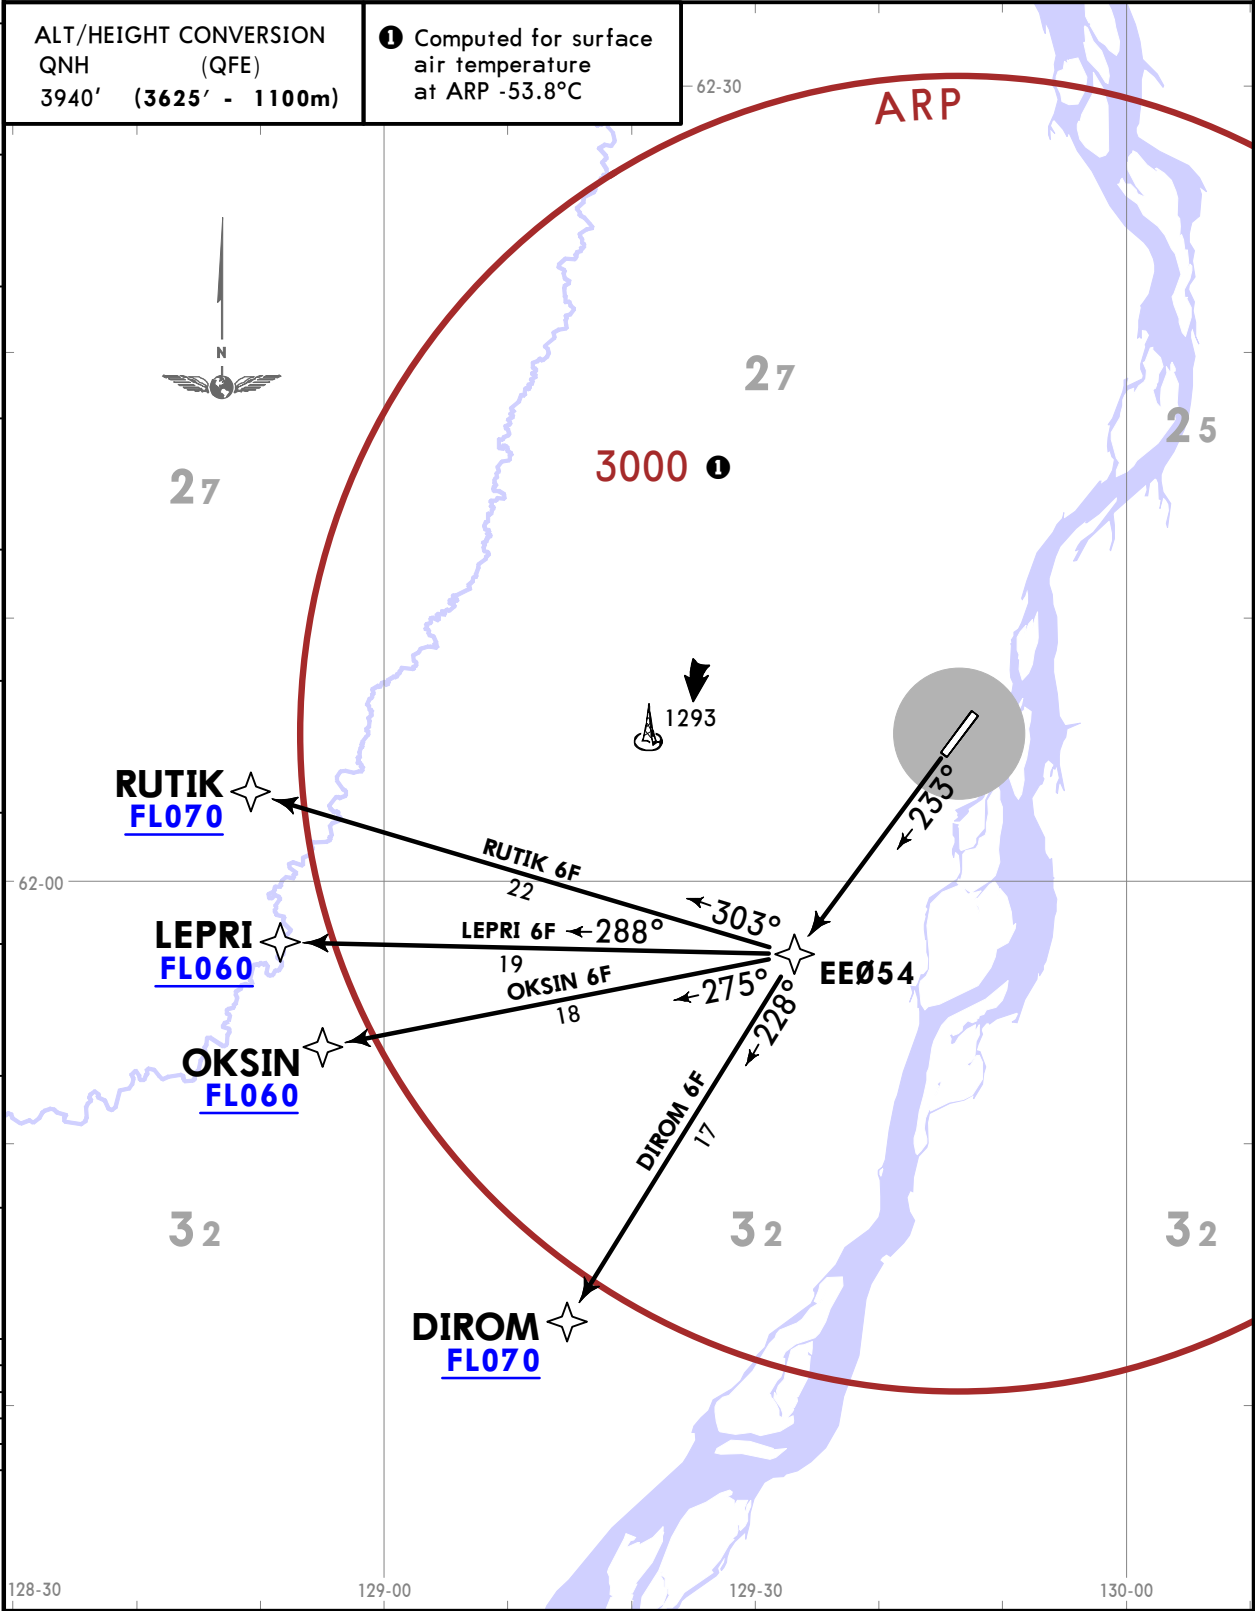


CHANGES: New format.

© JEPPESEN, 2024. ALL RIGHTS RESERVED.

UEEE/YKS
YAKUTSK

JEPPESEN
2 FEB 24 10-3H


YAKUTSK, RUSSIA
RNAV SID

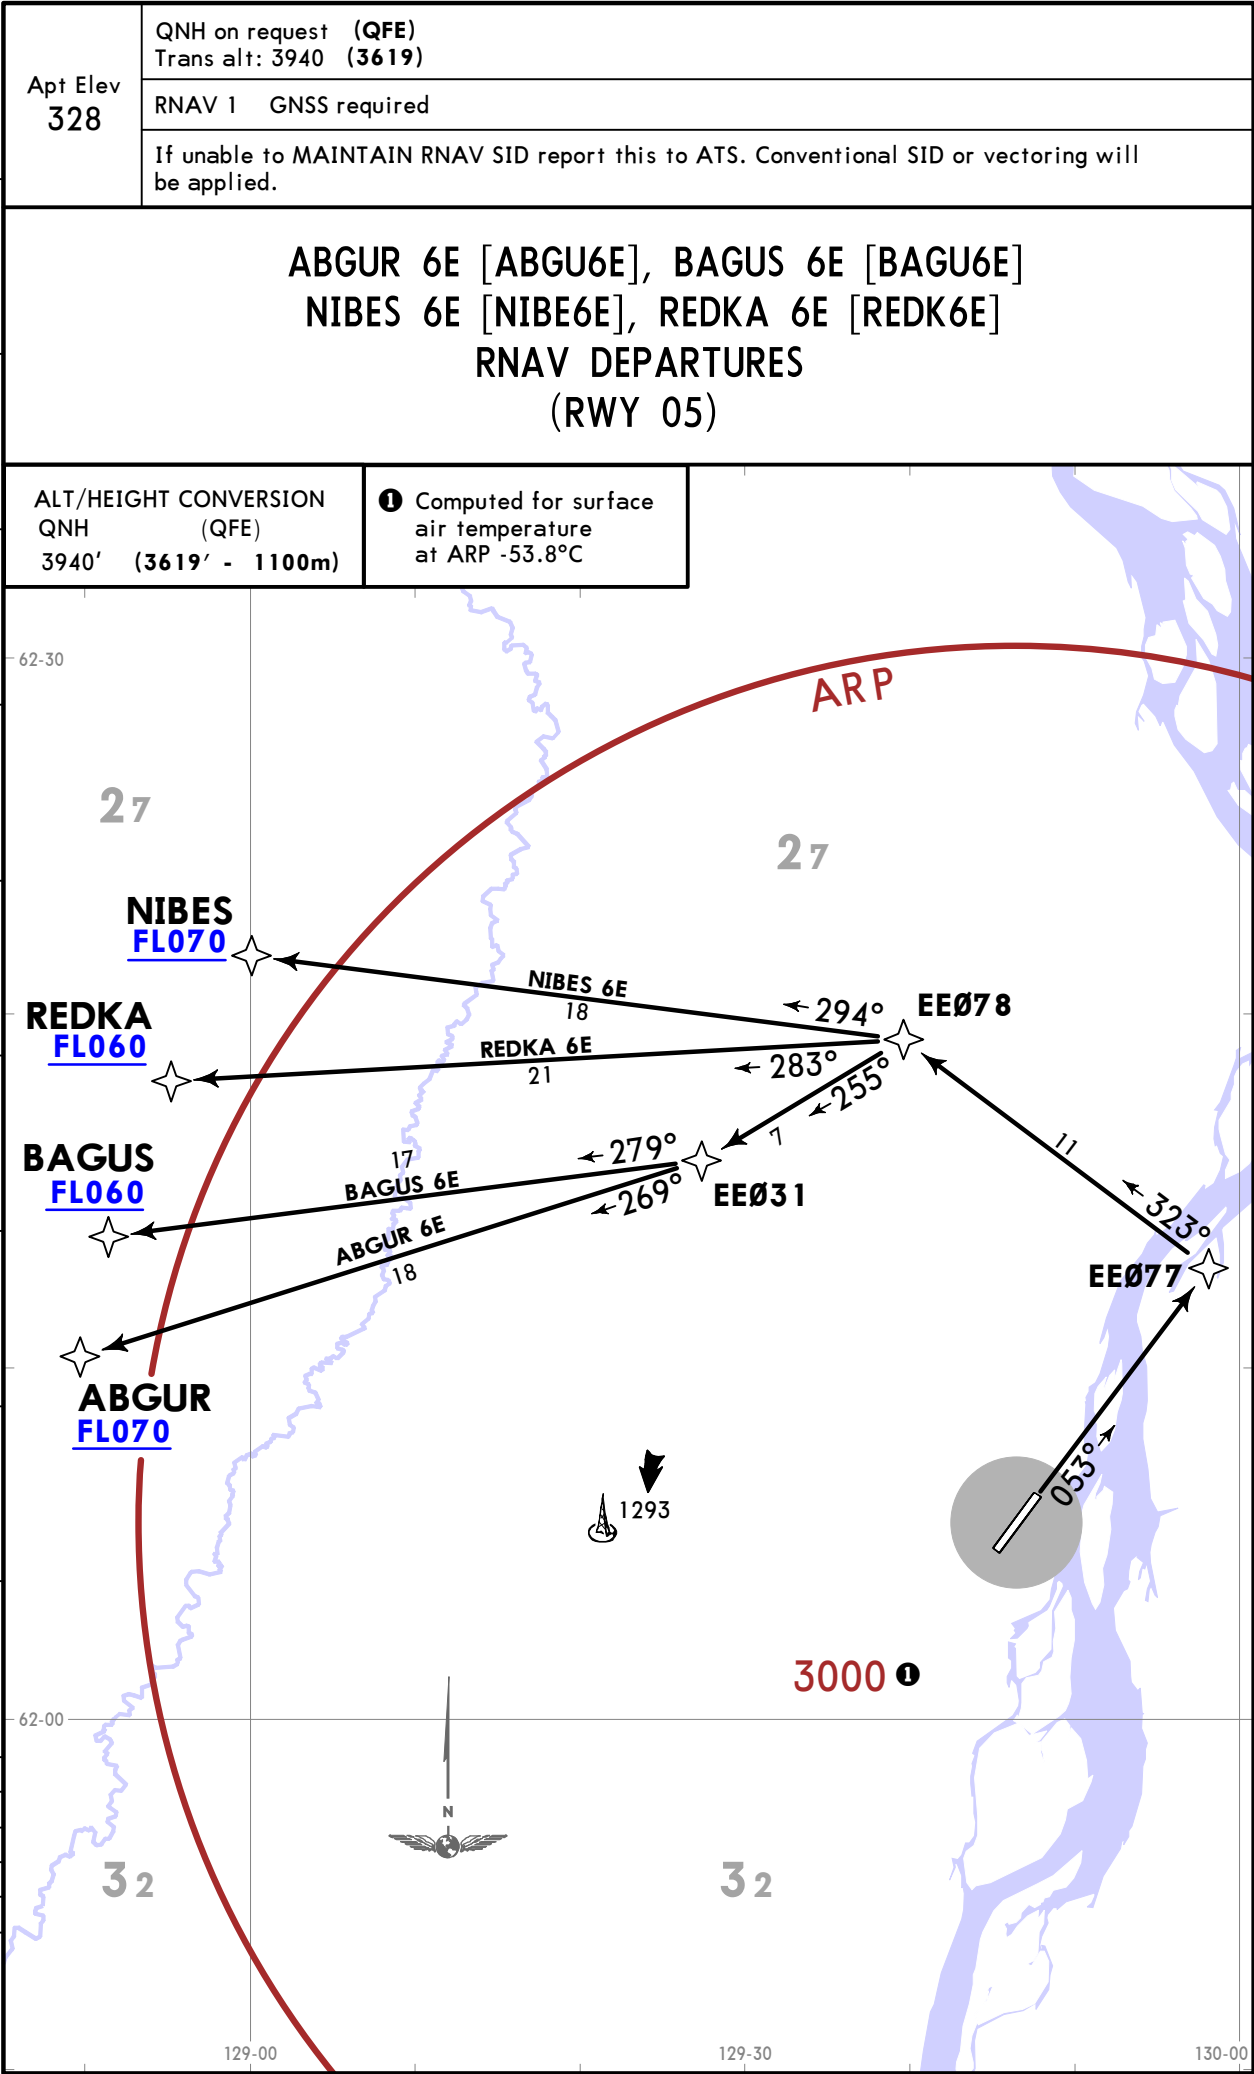

UEEE/YKS
YAKUTSK

JEPPESSEN
2 FEB 24 (10-3J)

YAKUTSK, RUSSIA
RNAV SID

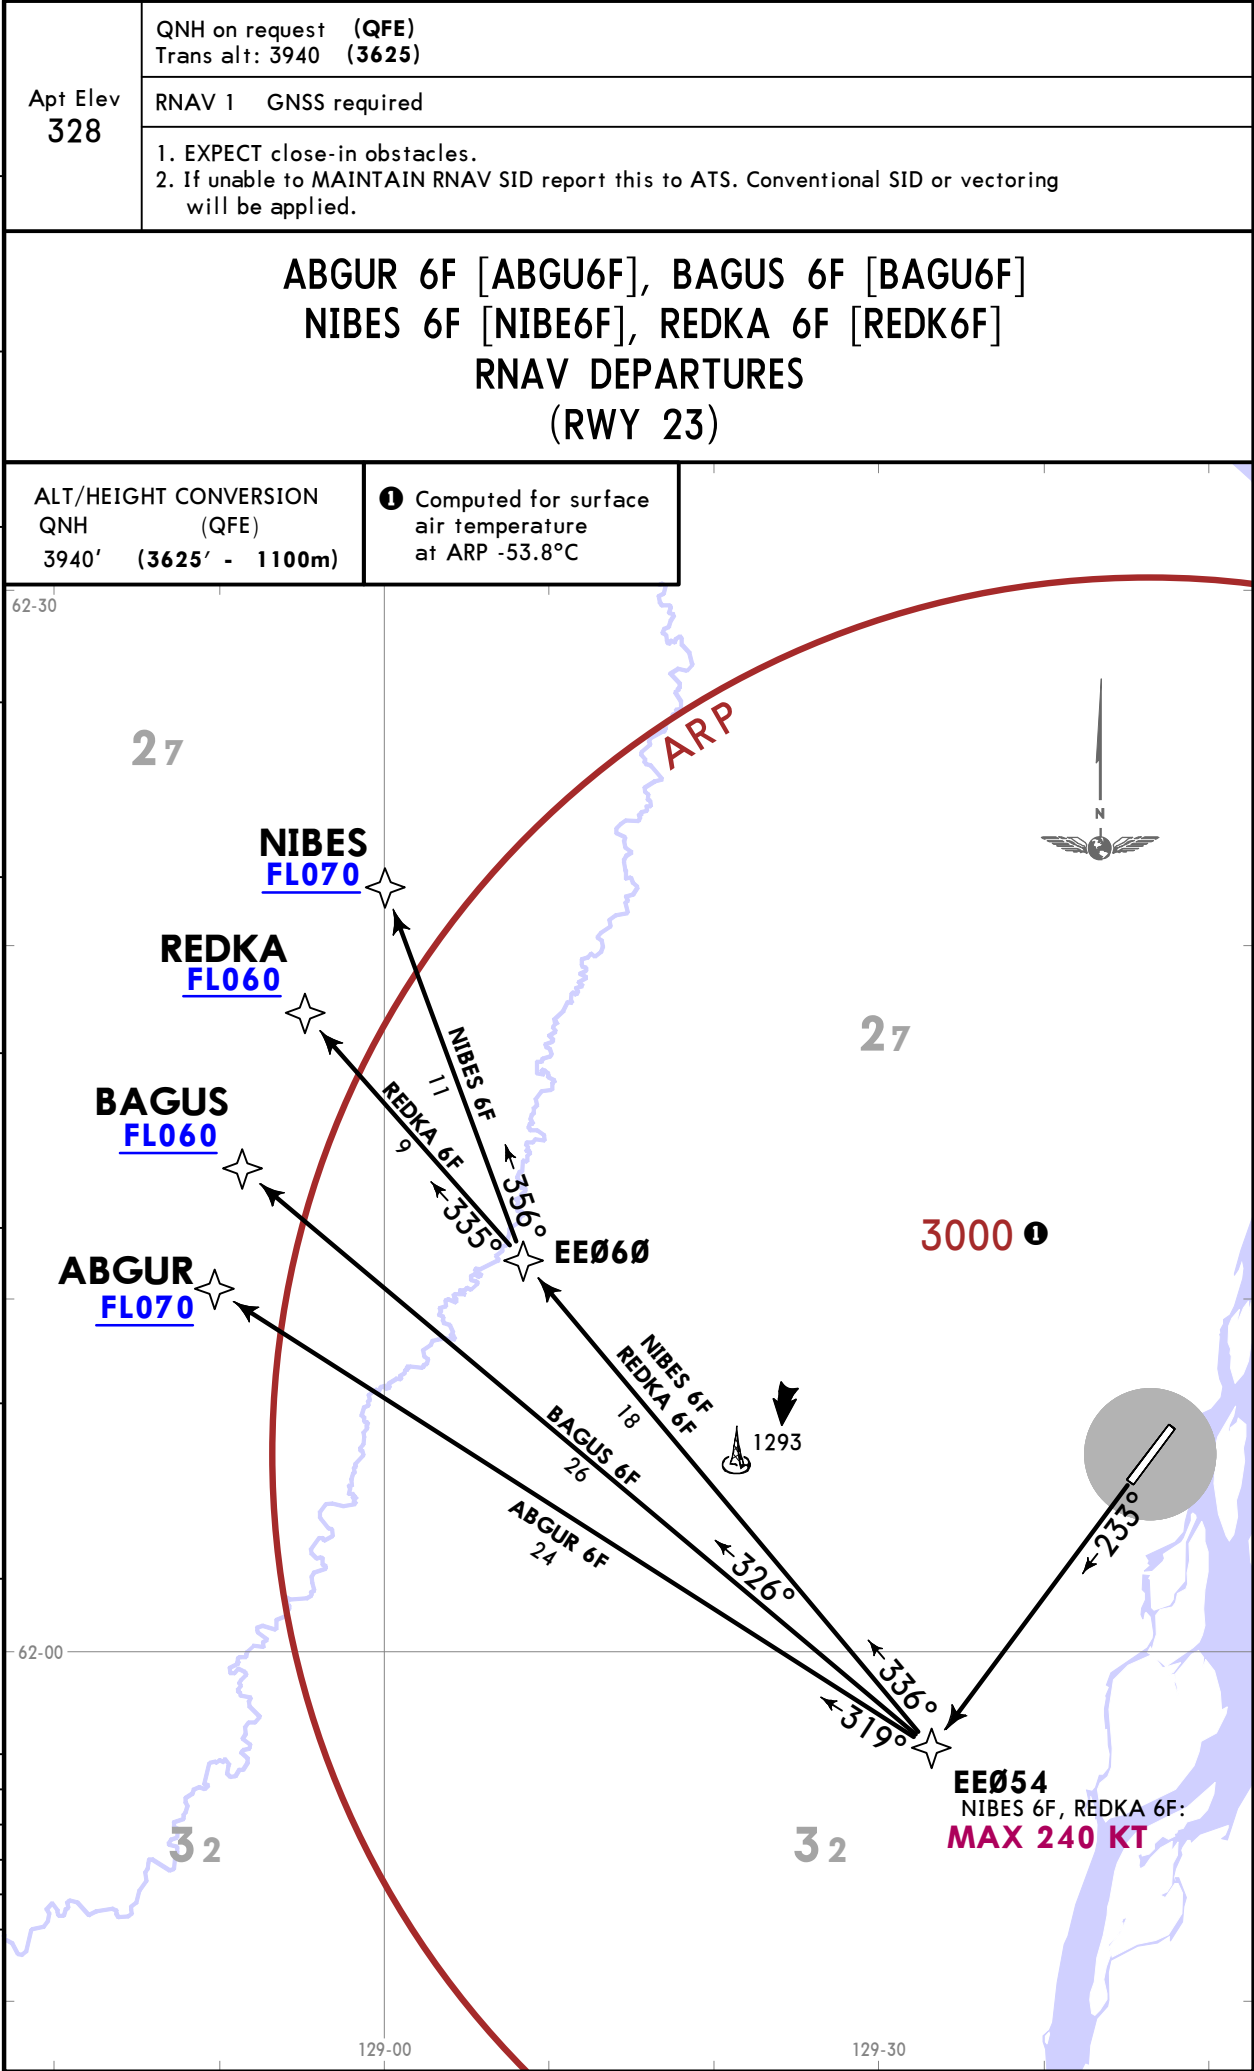

UEEE/YKS
YAKUTSK


JEPPESSEN
2 FEB 24 10-3K

YAKUTSK, RUSSIA
RNAV SID

Apt Elev 328	QNH on request (QFE) Trans alt: 3940 (3619)
	RNAV 1 GNSS required
	If unable to MAINTAIN RNAV SID report this to ATS. Conventional SID or vectoring will be applied.

GOBON 6E [GOB06E], TEGMA 6E [TEGM6E]
TUROP 6E [TURO6E]
RNAV DEPARTURES
(RWY 05)


ALT/HEIGHT CONVERSION QNH (QFE) 3940' (3619' - 1100m)	❶ Computed for surface air temperature at ARP -53.8°C
---	---

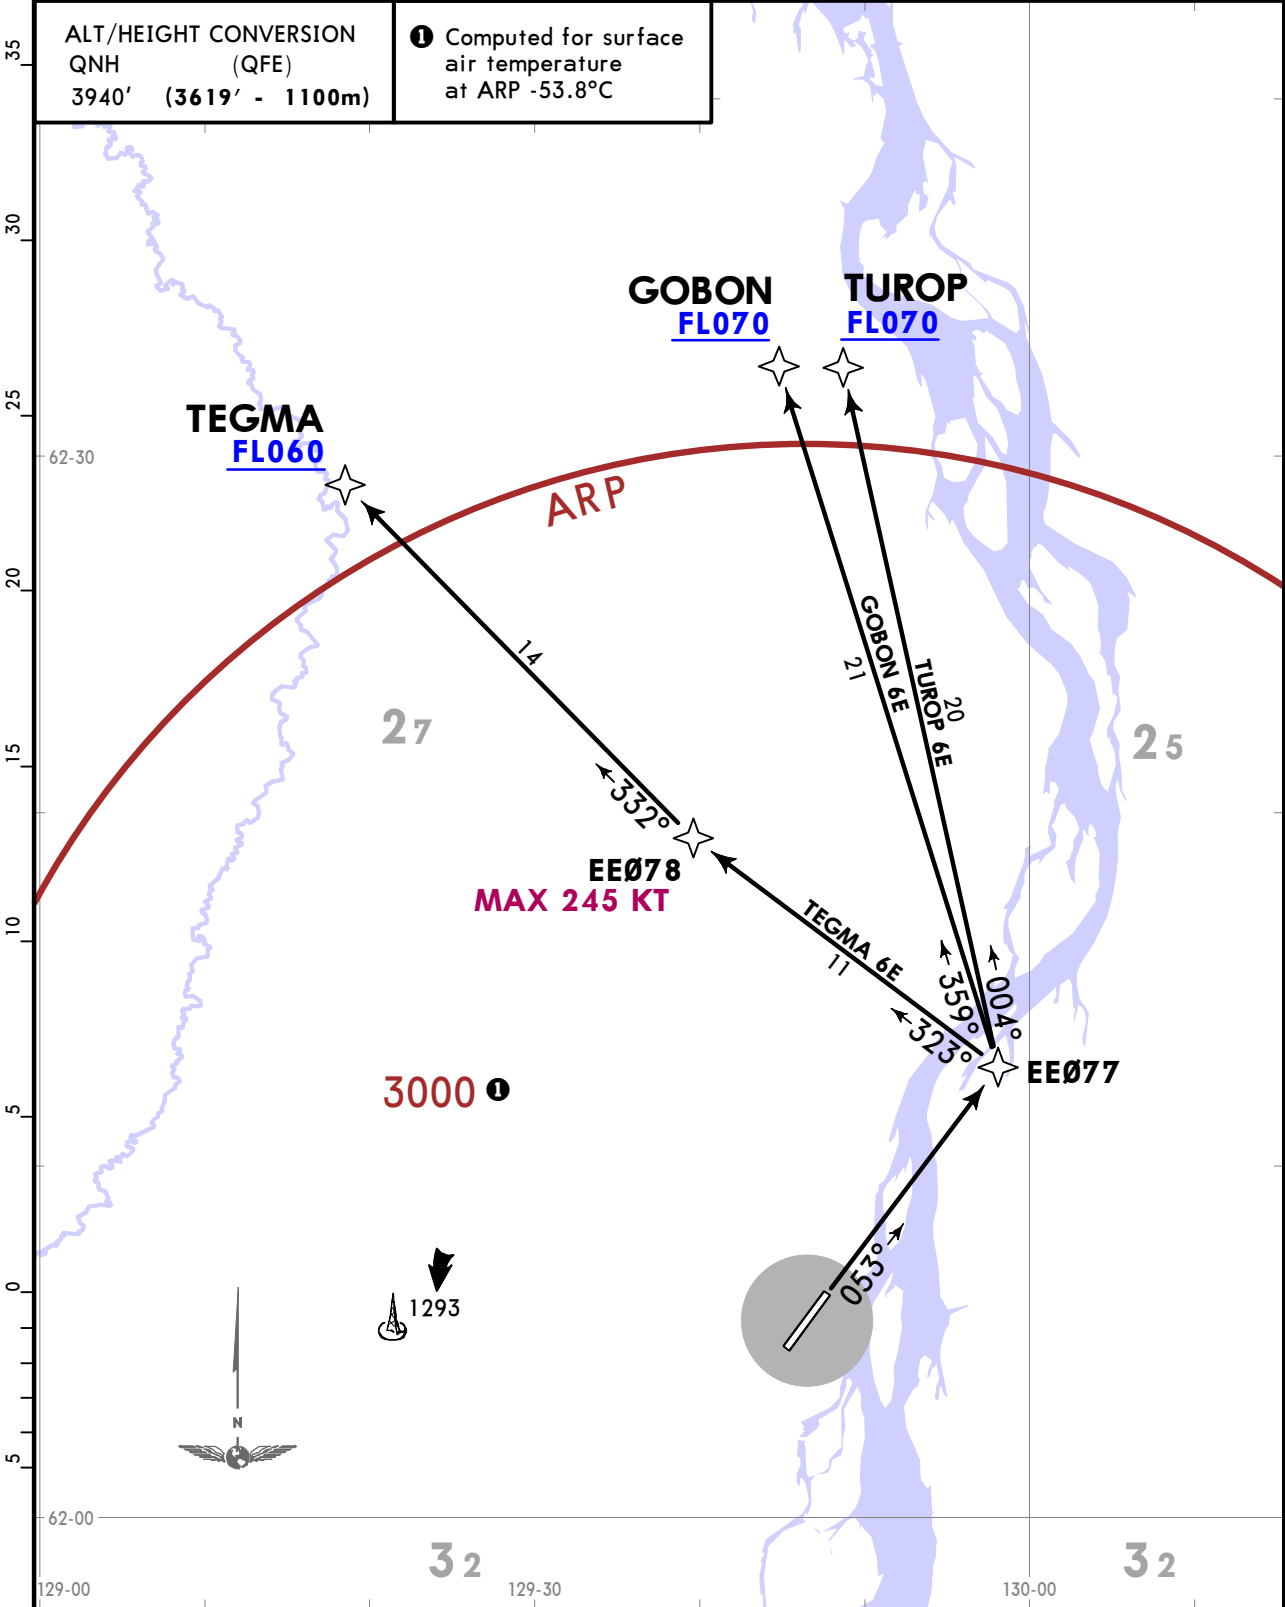

UEEE/YKS
YAKUTSK

JEPPESEN
2 FEB 24 10-3L

YAKUTSK, RUSSIA
RNAV SID

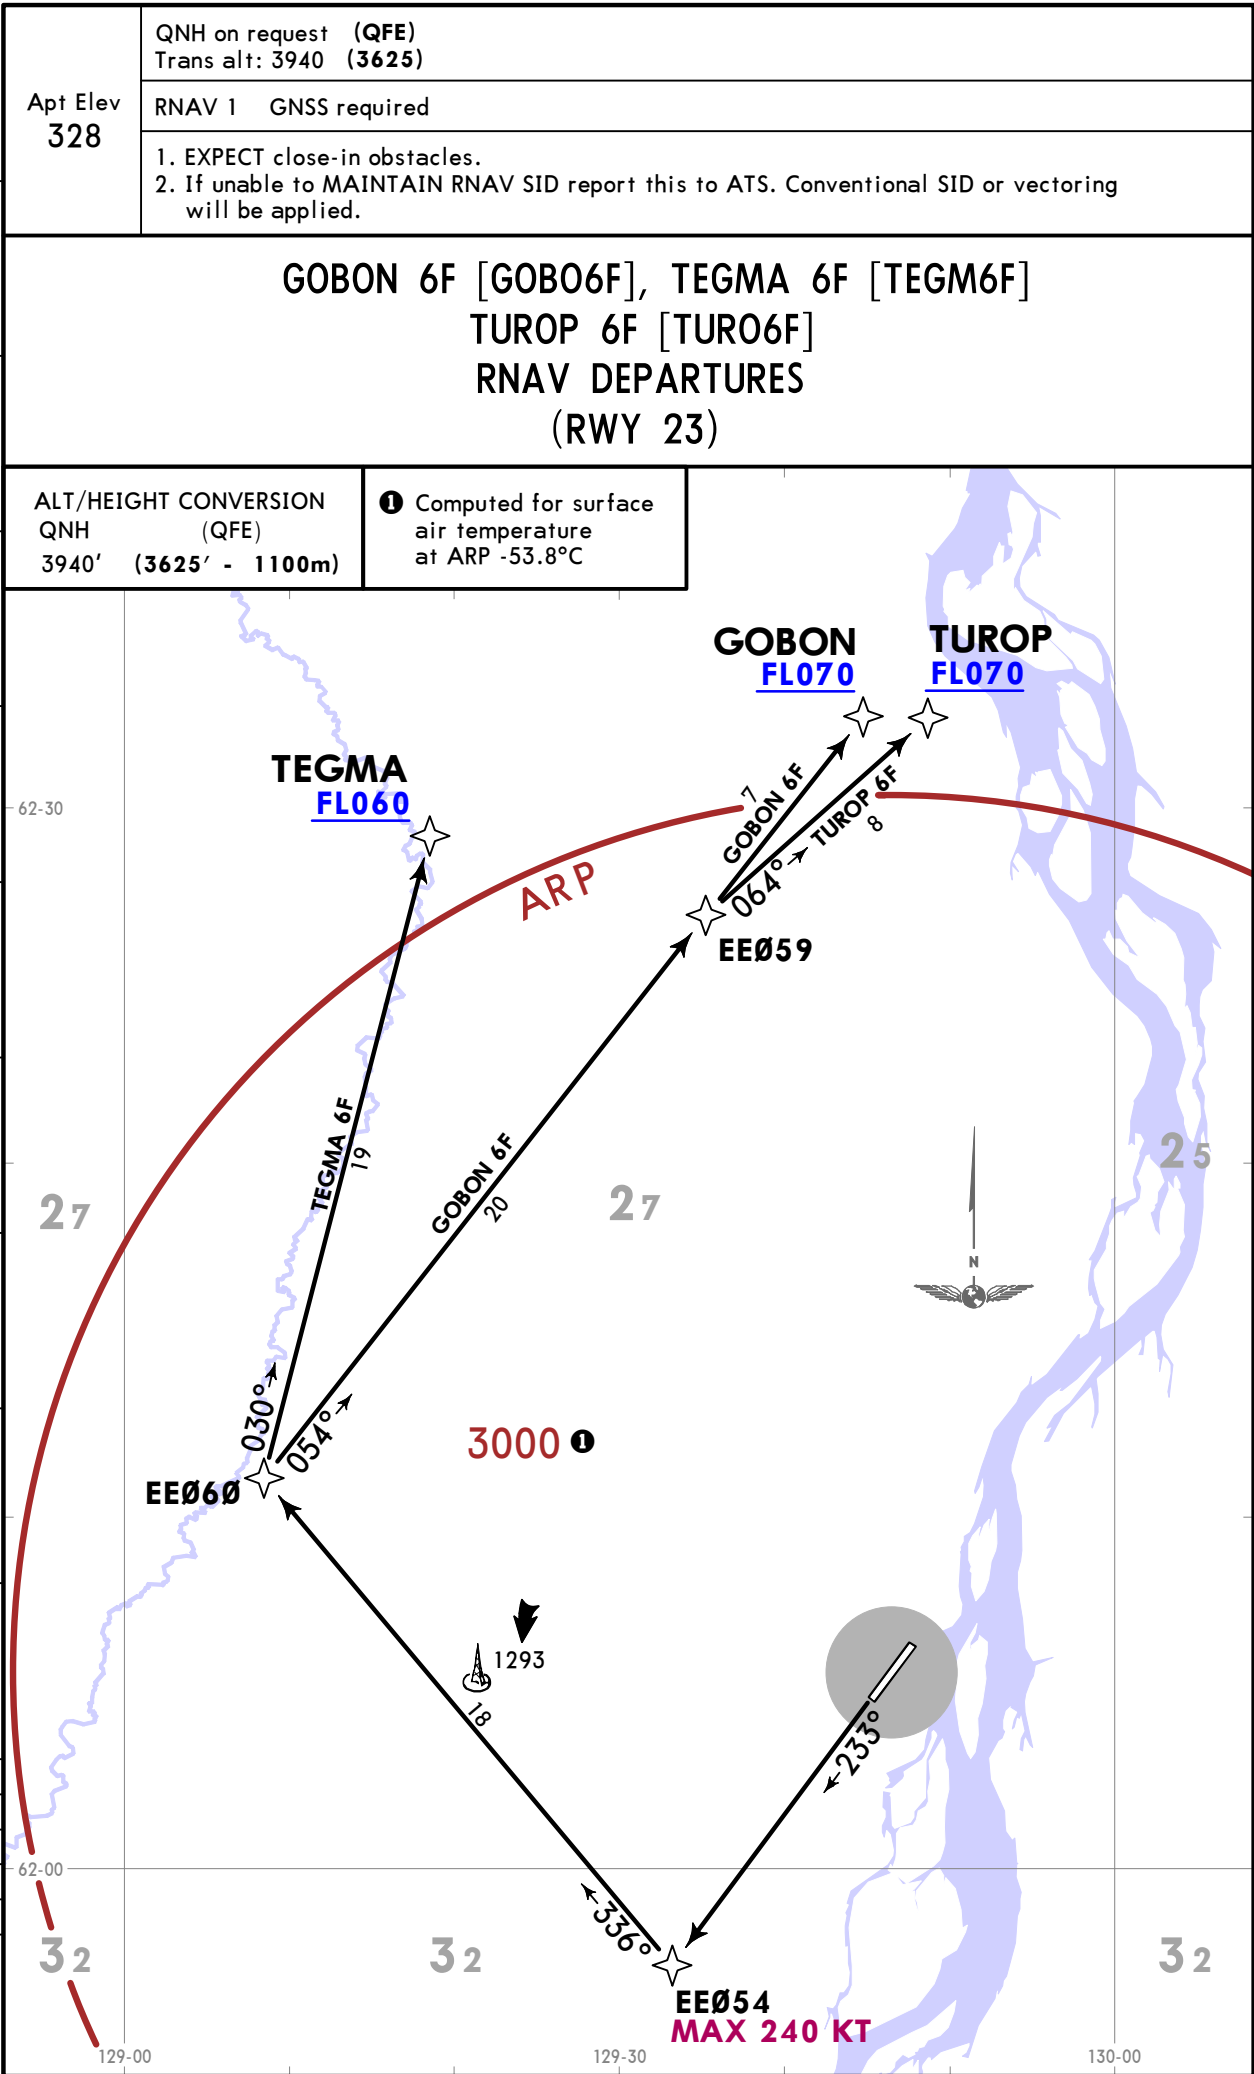

UEEE/YKS
YAKUTSK


JEPPESEN
2 FEB 24 (10-3M)

YAKUTSK, RUSSIA
SID

Apt Elev 328	QNH on request (QFE) Trans alt: 3940 (3619) 1. Crossing altitudes at AWY entry points by ATC. 2. LEFT turns by ATC due to Magan APT area.
-----------------	--

GIMEK 1, IDESA 1
SORIP 1, TEKDI 1
DEPARTURES
(RWY 05)

ALT/HEIGHT CONVERSION QNH (QFE) 980' (659' - 200m) 3940' (3619' - 1100m)	① Computed for surface air temperature at ARP -53.8°C.
---	--

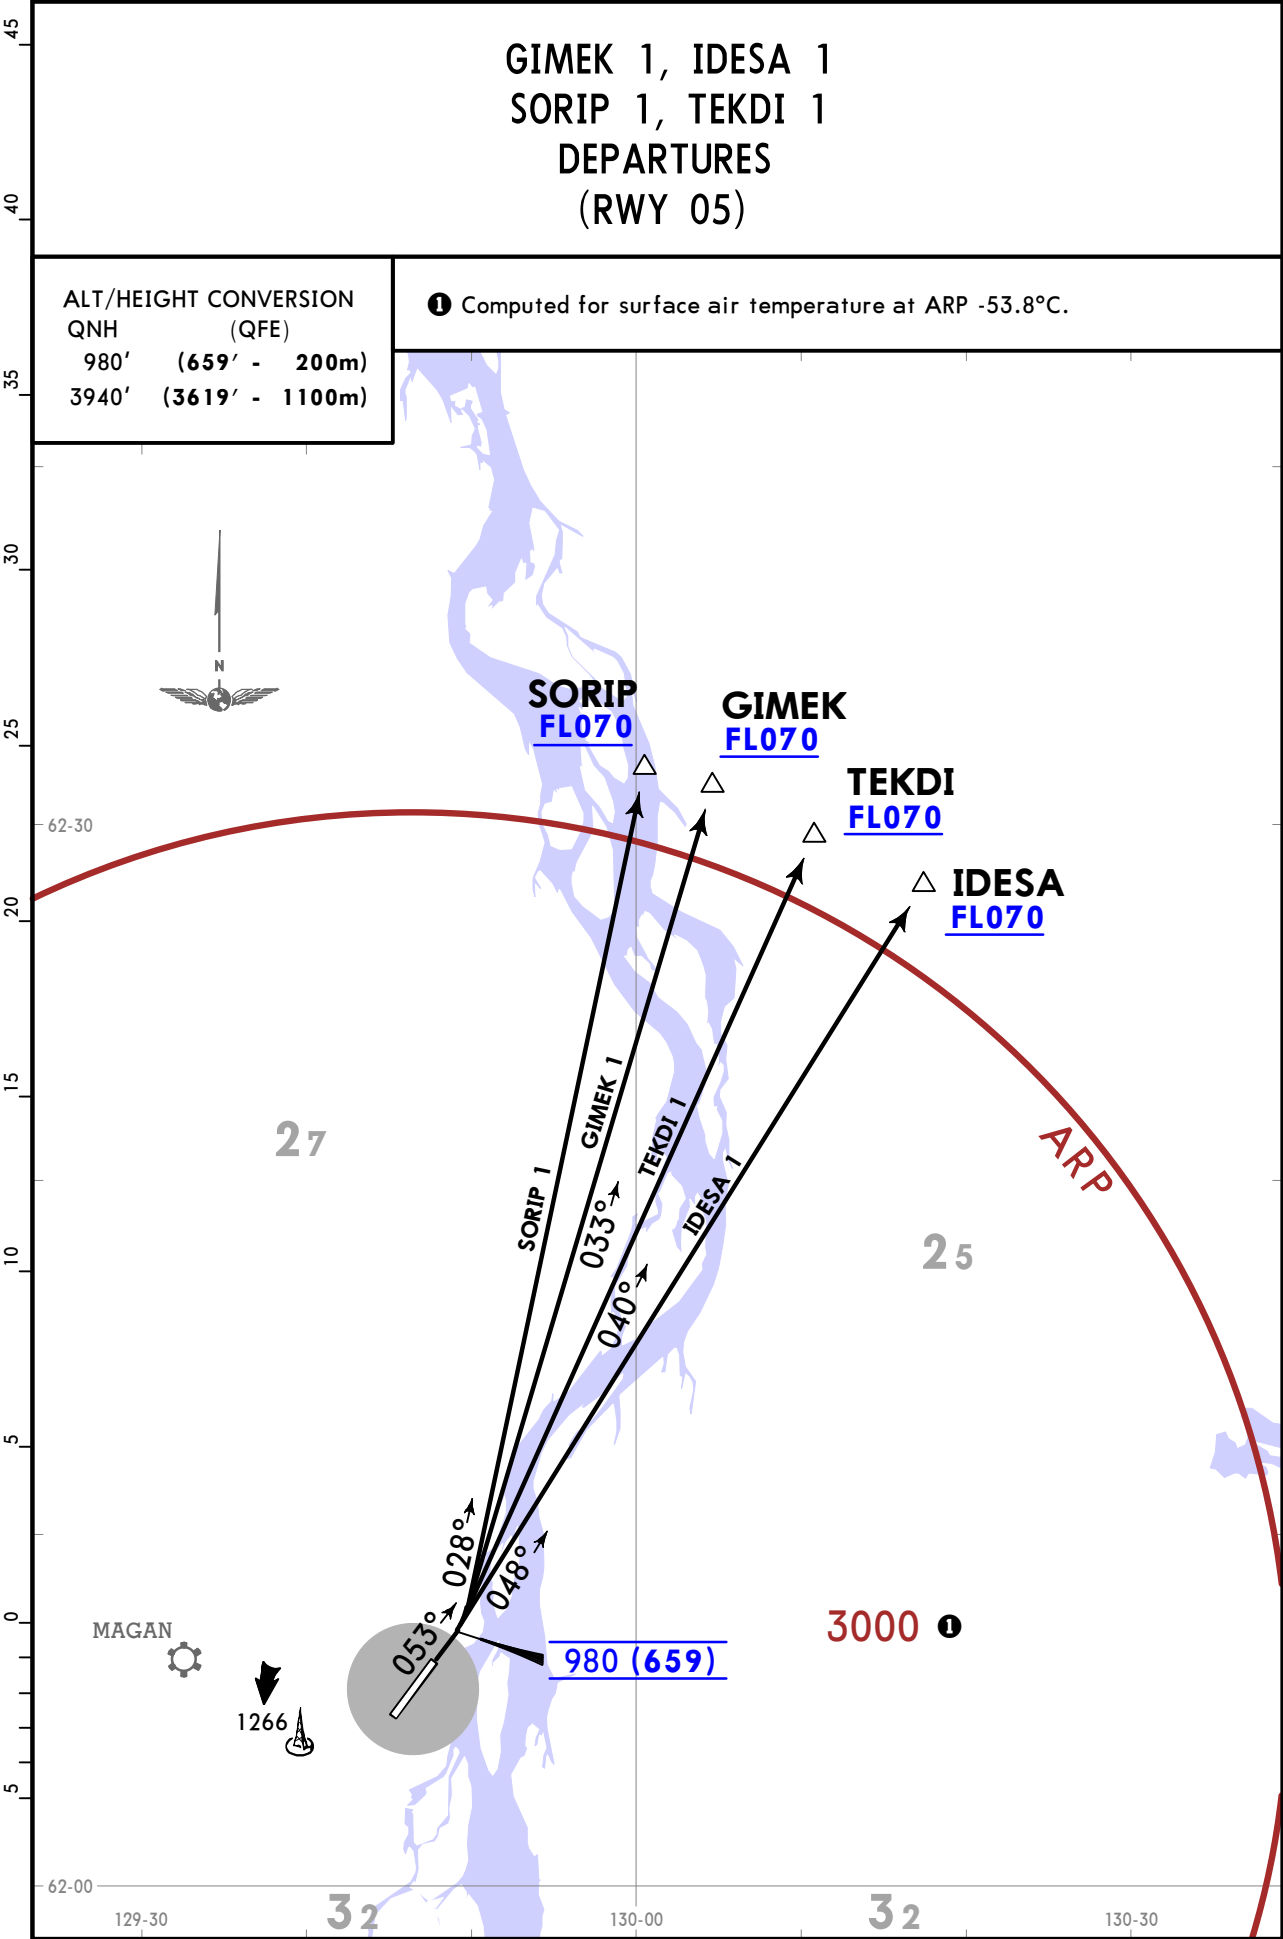

UEEE/YKS
YAKUTSK

JEPPESEN
2 FEB 24 10-3N

YAKUTSK, RUSSIA
SID


Apt Elev
328

QNH on request (QFE)
Trans alt: 3940 (3625)
1. EXPECT close-in obstacles.
2. Crossing altitudes at AWY entry points by ATC.
3. RIGHT turns by ATC due to Magan APT area.

GIMEK 3, IDESA 3
SORIP 3, TEKDI 3
DEPARTURES
(RWY 23)

ALT/HEIGHT CONVERSION
QNH (QFE)
1700' (1385' - 420m)
3940' (3625' - 1100m)


① Computed for surface air temperature at ARP -53.8°C.

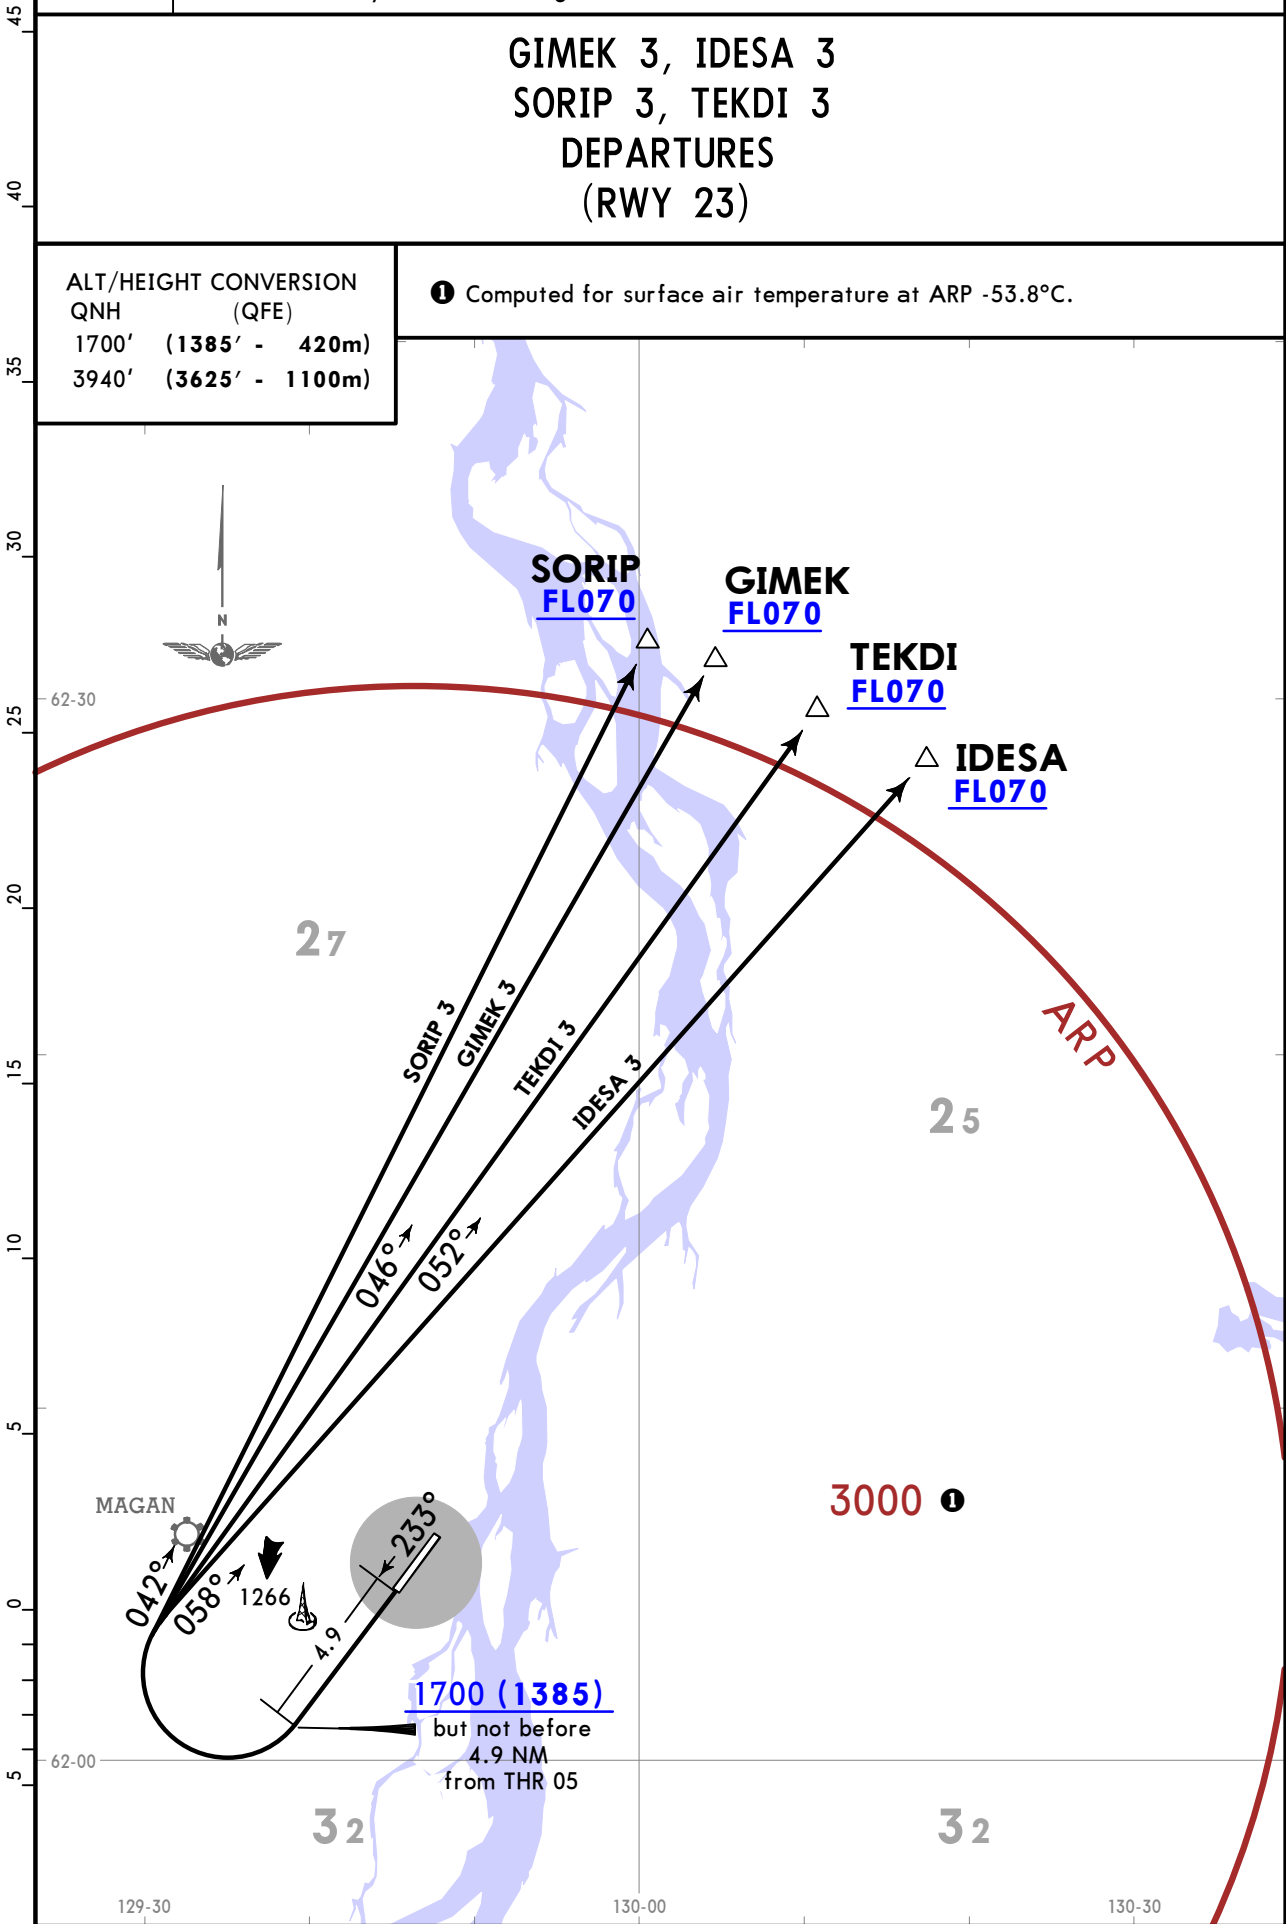

UEEE/YKS
YAKUTSK

JEPPESEN
2 FEB 24 10-3P

YAKUTSK, RUSSIA
SID

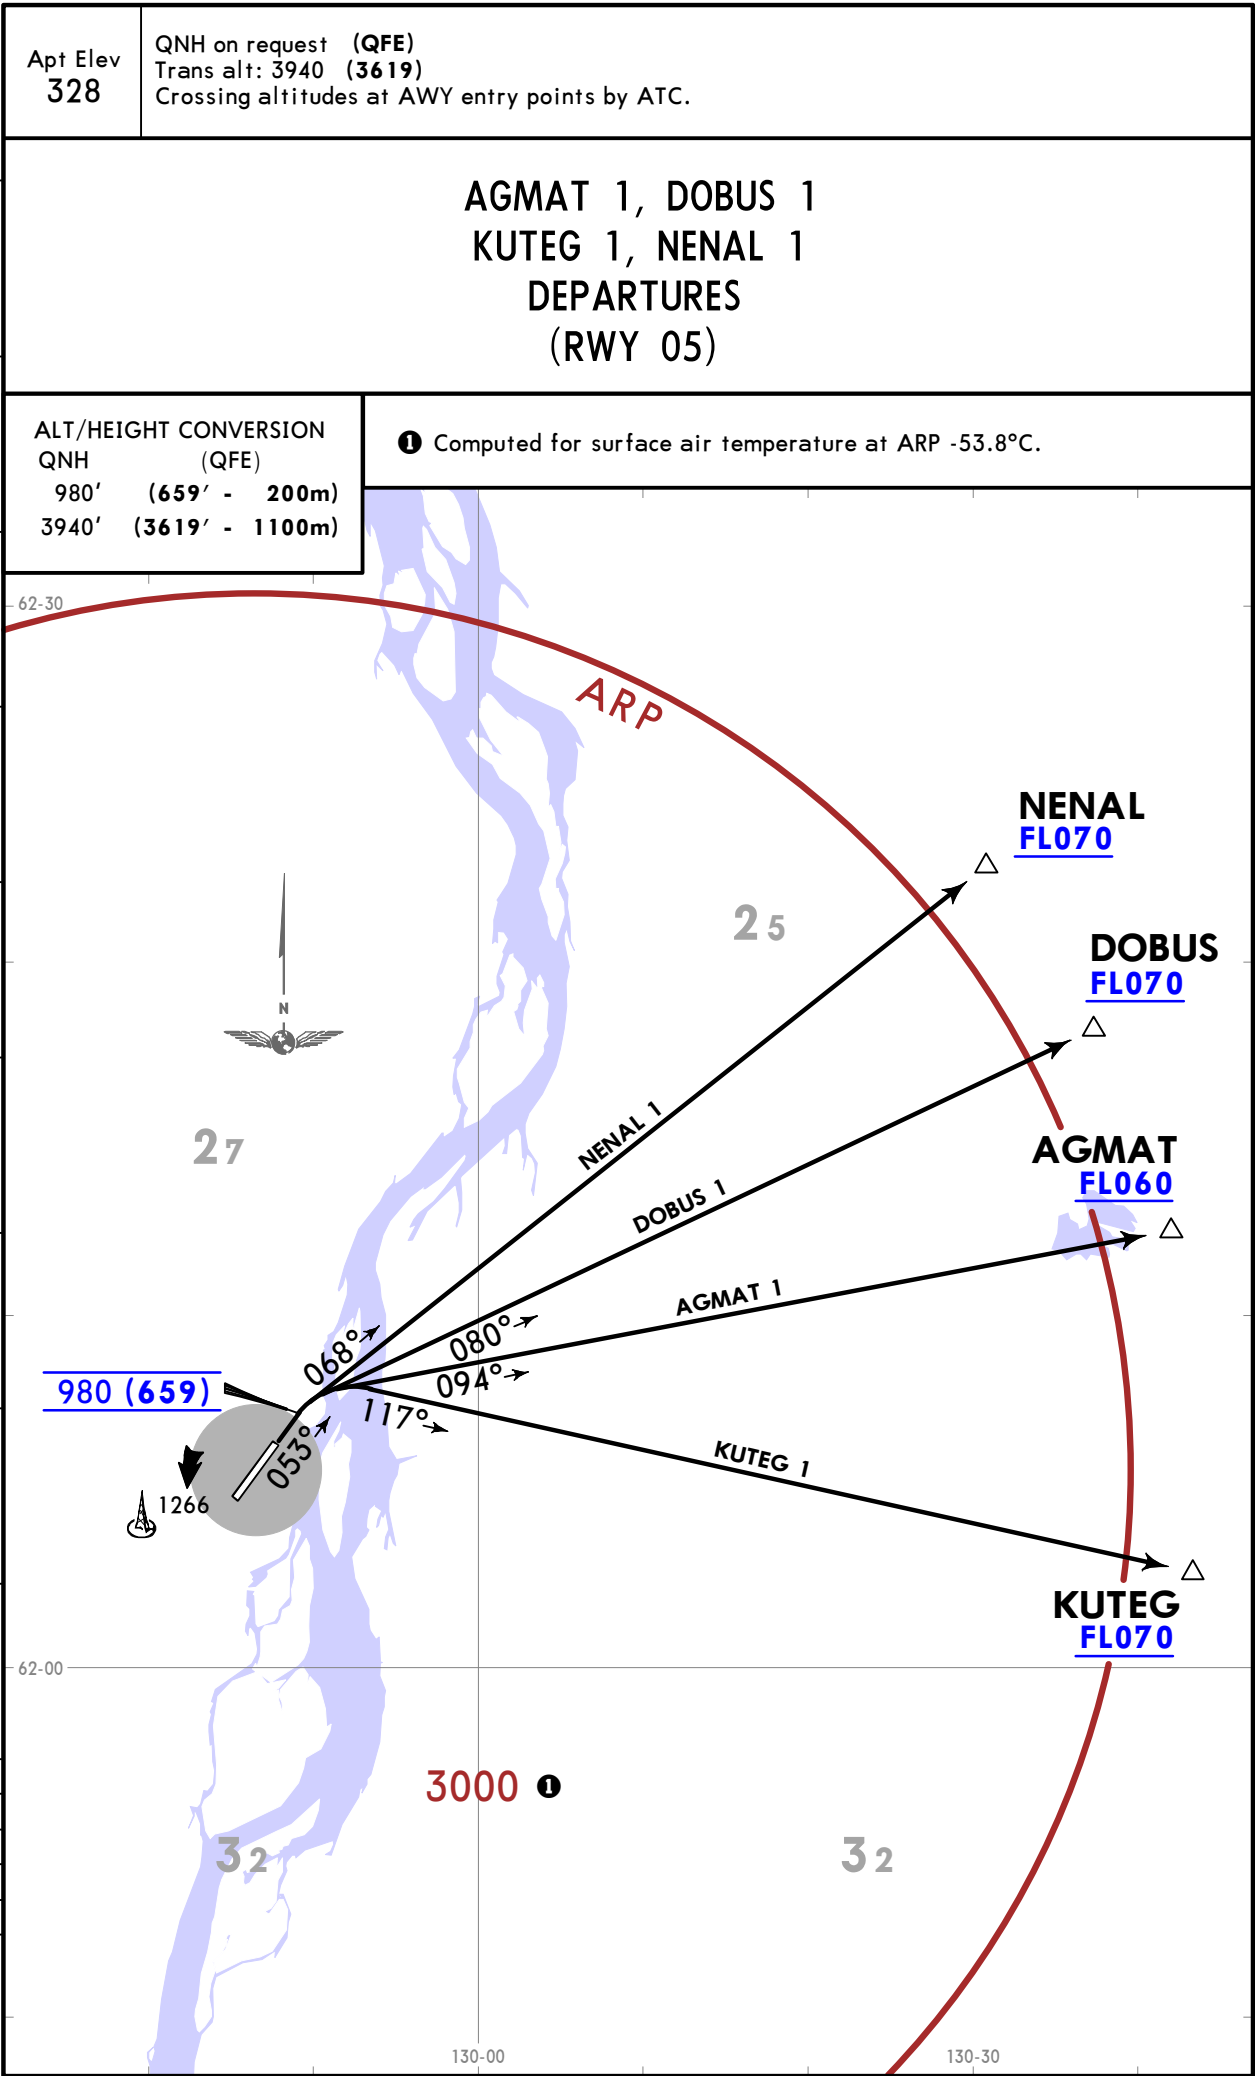

YAKUTSK, RUSSIA

UEEE/YKS
YAKUTSK

JEPPESEN
2 FEB 24 10-3S


YAKUTSK, RUSSIA
SID

Apt Elev 328	QNH on request (QFE) Trans alt: 3940 (3619) Crossing altitudes at AWY entry points by ATC.
-----------------	--

BESIB 1, DENIB 1
OGLIS 1, OKTUR 1
DEPARTURES
(RWY 05)

ALT/HEIGHT CONVERSION	
QNH	(QFE)
980'	(659' - 200m)
3940'	(3619' - 1100m)

① Computed for surface air temperature at ARP -53.8°C.

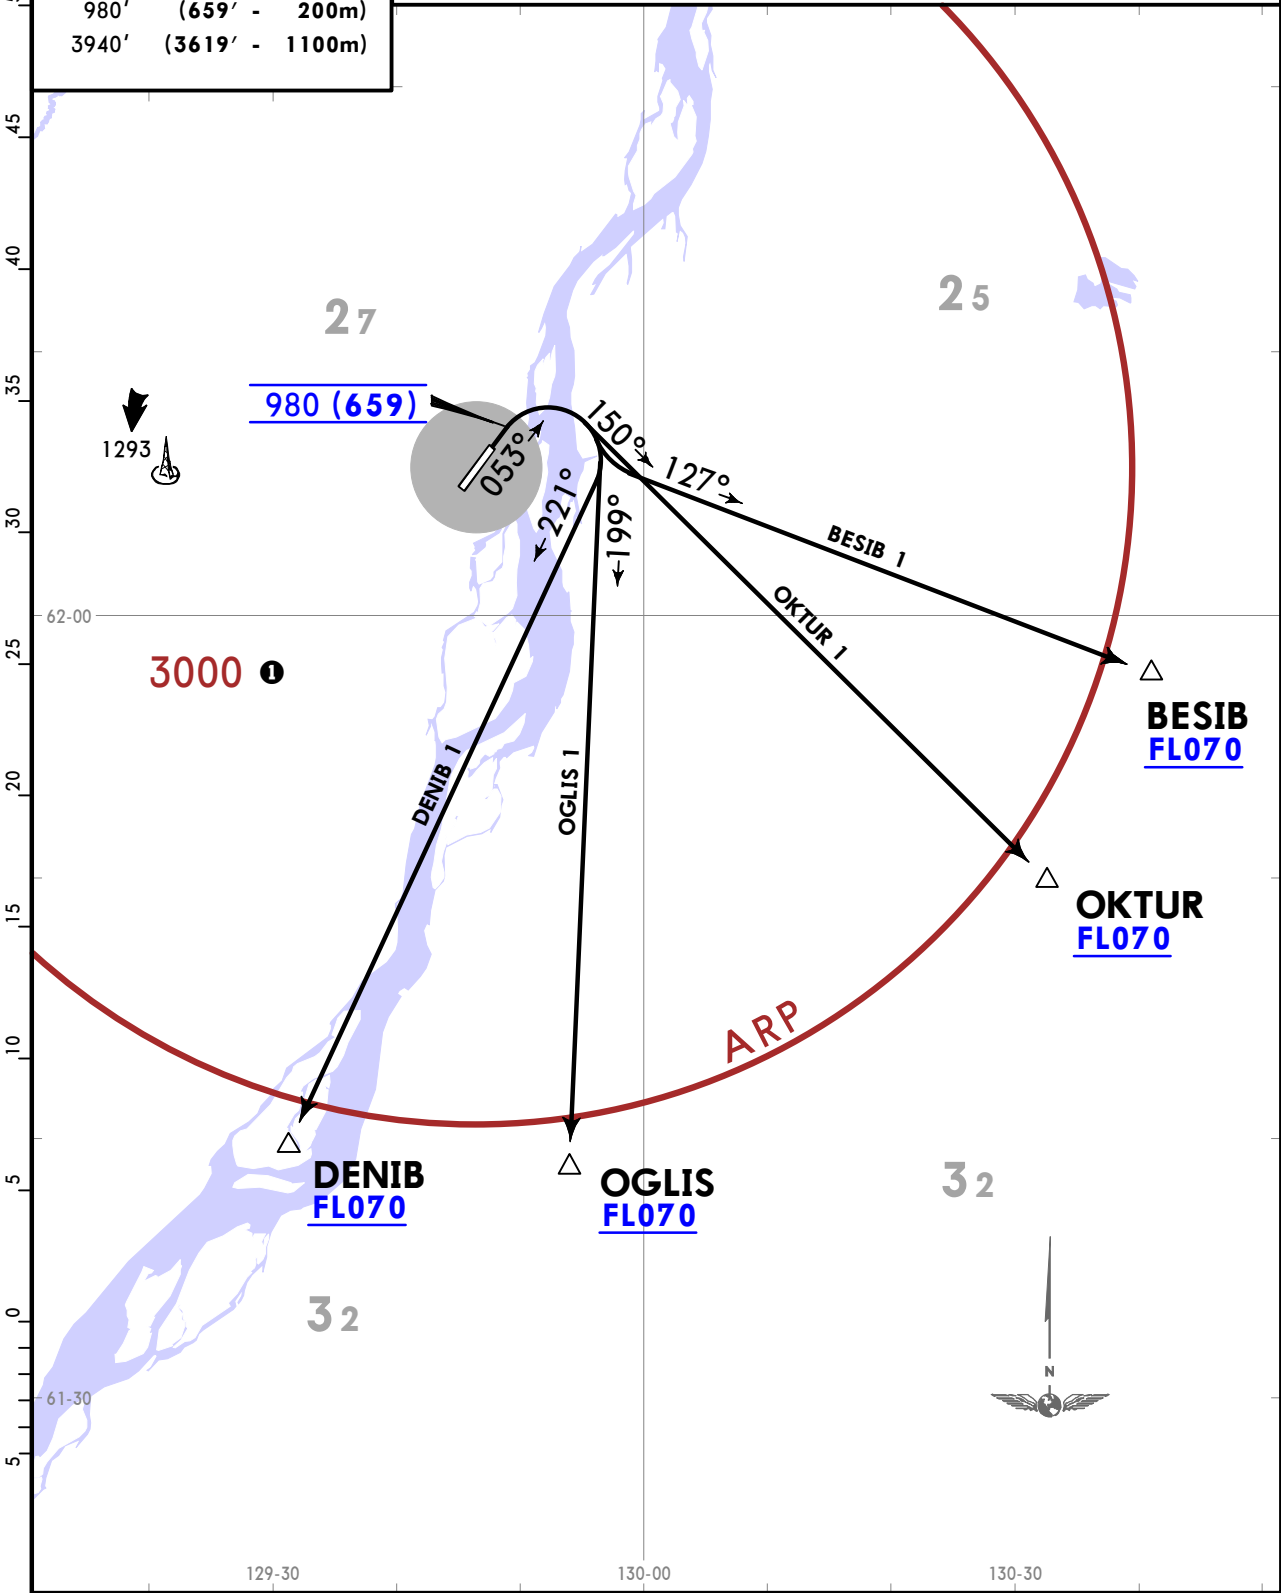

UEEE/YKS
YAKUTSK


JEPPESEN
2 FEB 24 10-3T

YAKUTSK, RUSSIA
SID

Apt Elev 328	QNH on request (QFE) Trans alt: 3940 (3625) 1. EXPECT close-in obstacles. 2. Crossing altitudes at AWY entry points by ATC.
-----------------	--

BESIB 3, DENIB 3
OGLIS 3, OKTUR 3
DEPARTURES
(RWY 23)

ALT/HEIGHT CONVERSION QNH (QFE) 1700' (1385' - 420m) 3940' (3625' - 1100m)	① Computed for surface air temperature at ARP -53.8°C.
---	--

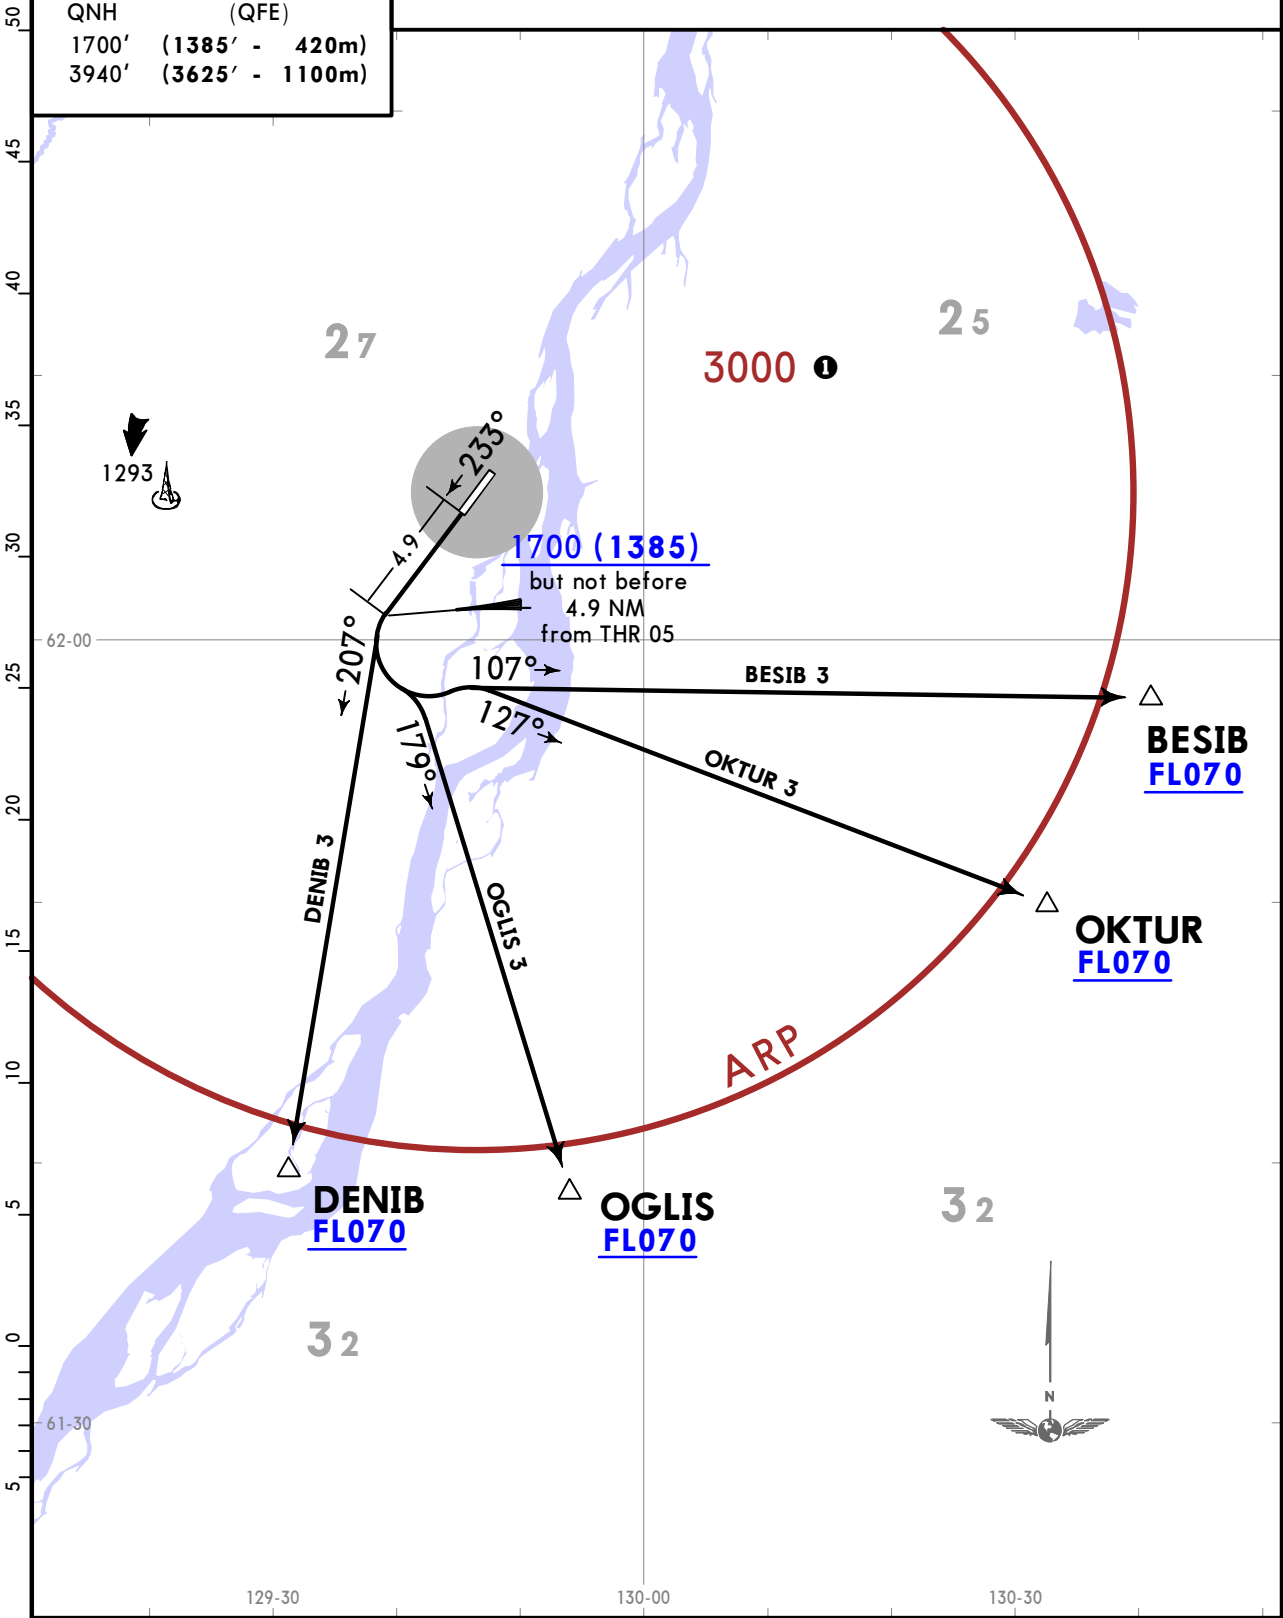

UEEE/YKS
YAKUTSK


JEPPESEN
2 FEB 24 (10-3U)

YAKUTSK, RUSSIA
SID

Apt Elev 328	QNH on request (QFE) Trans alt: 3940 (3619) 1. Crossing altitudes at AWY entry points by ATC. 2. LEFT turns by ATC due to Magan APT area.
-----------------	--

DIROM 1, LEPRI 1
OKSIN 1, RUTIK 1
DEPARTURES
(RWY 05)

ALT/HEIGHT CONVERSION QNH (QFE) 980' (659' - 200m) 3940' (3619' - 1100m)	① Computed for surface air temperature at ARP -53.8°C. ② RIGHT turn to LEPRI, OKSIN, RUTIK by ATC.
---	---

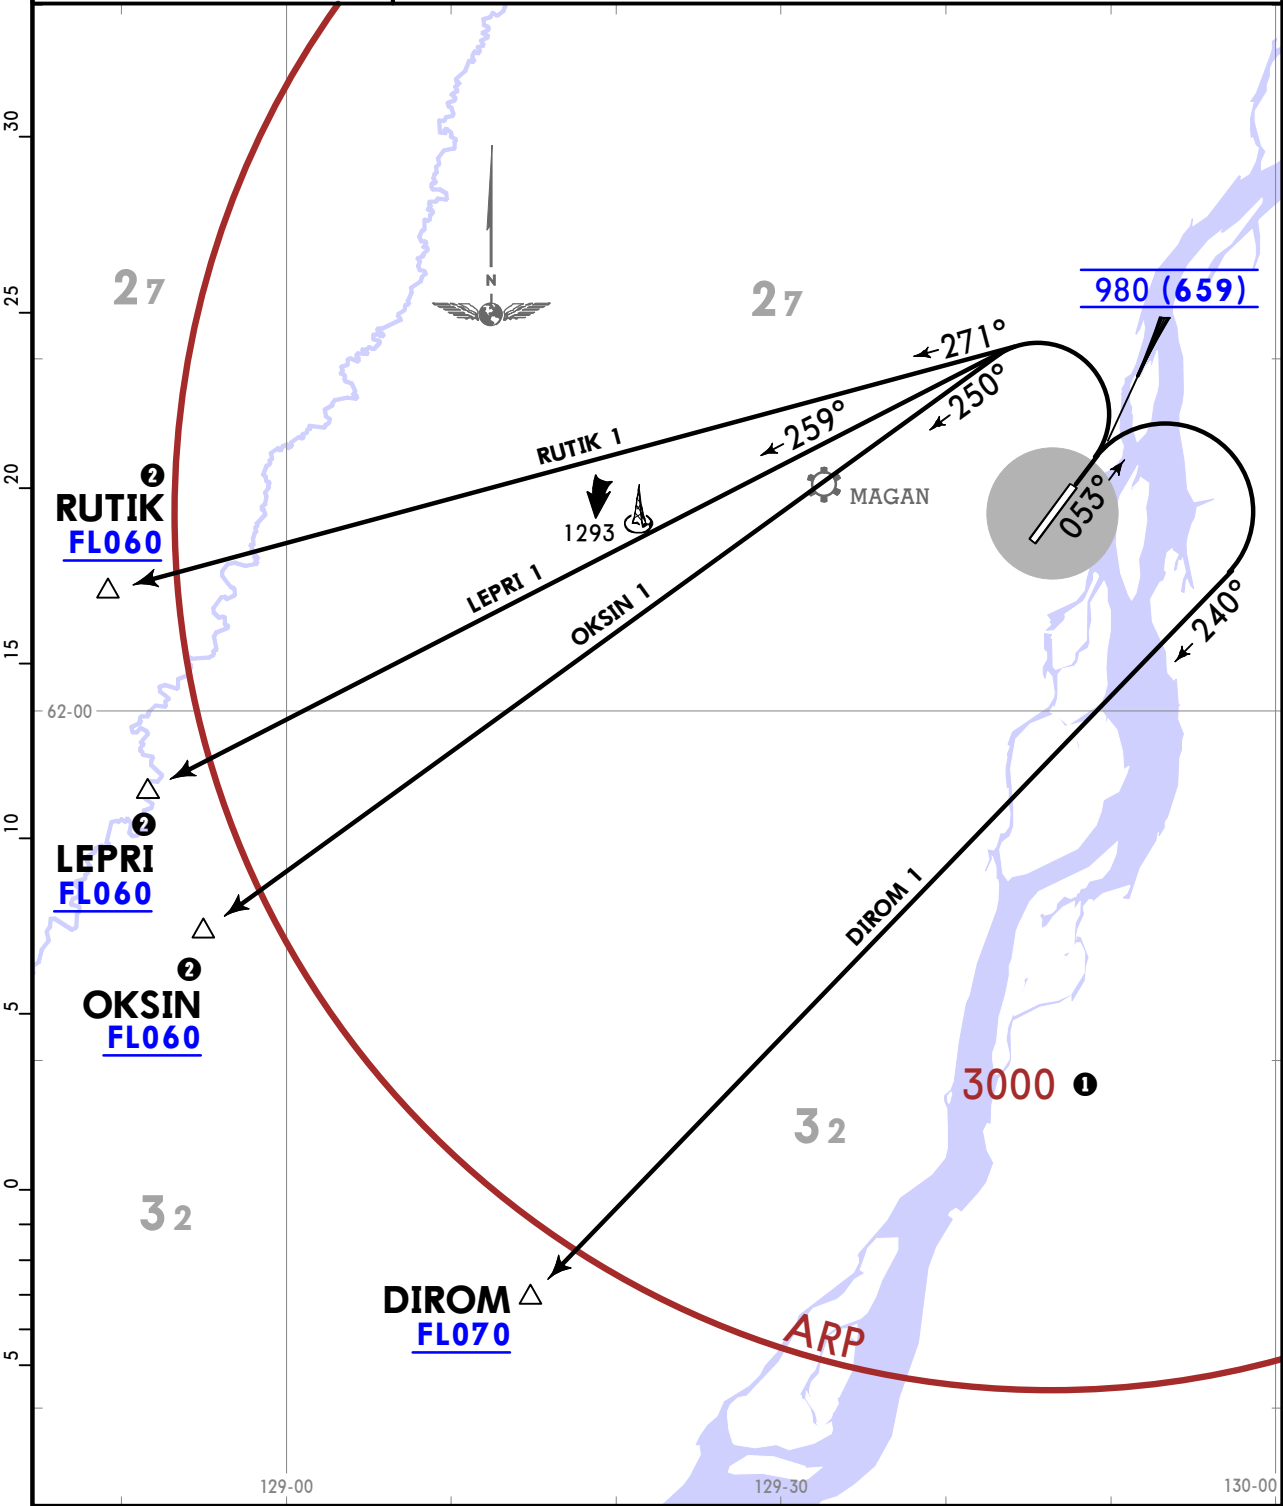

UEEE/YKS
YAKUTSK

JEPPESEN
2 FEB 24 (10-3V)

YAKUTSK, RUSSIA
SID


Apt Elev
328

QNH on request (QFE)
Trans alt: 3940 (3625)
1. EXPECT close-in obstacles.
2. Crossing altitudes at AWY entry points by ATC.
3. RIGHT turns by ATC due to Magan APT area.

DIROM 3, LEPRI 3
OKSIN 3, RUTIK 3
DEPARTURES
(RWY 23)

ALT/HEIGHT CONVERSION
QNH (QFE)
1700' (1385' - 420m)
3940' (3625' - 1100m)

- ① Computed for surface air temperature at ARP -53.8°C.
② LEFT turn to LEPRI, OKSIN, RUTIK by ATC.

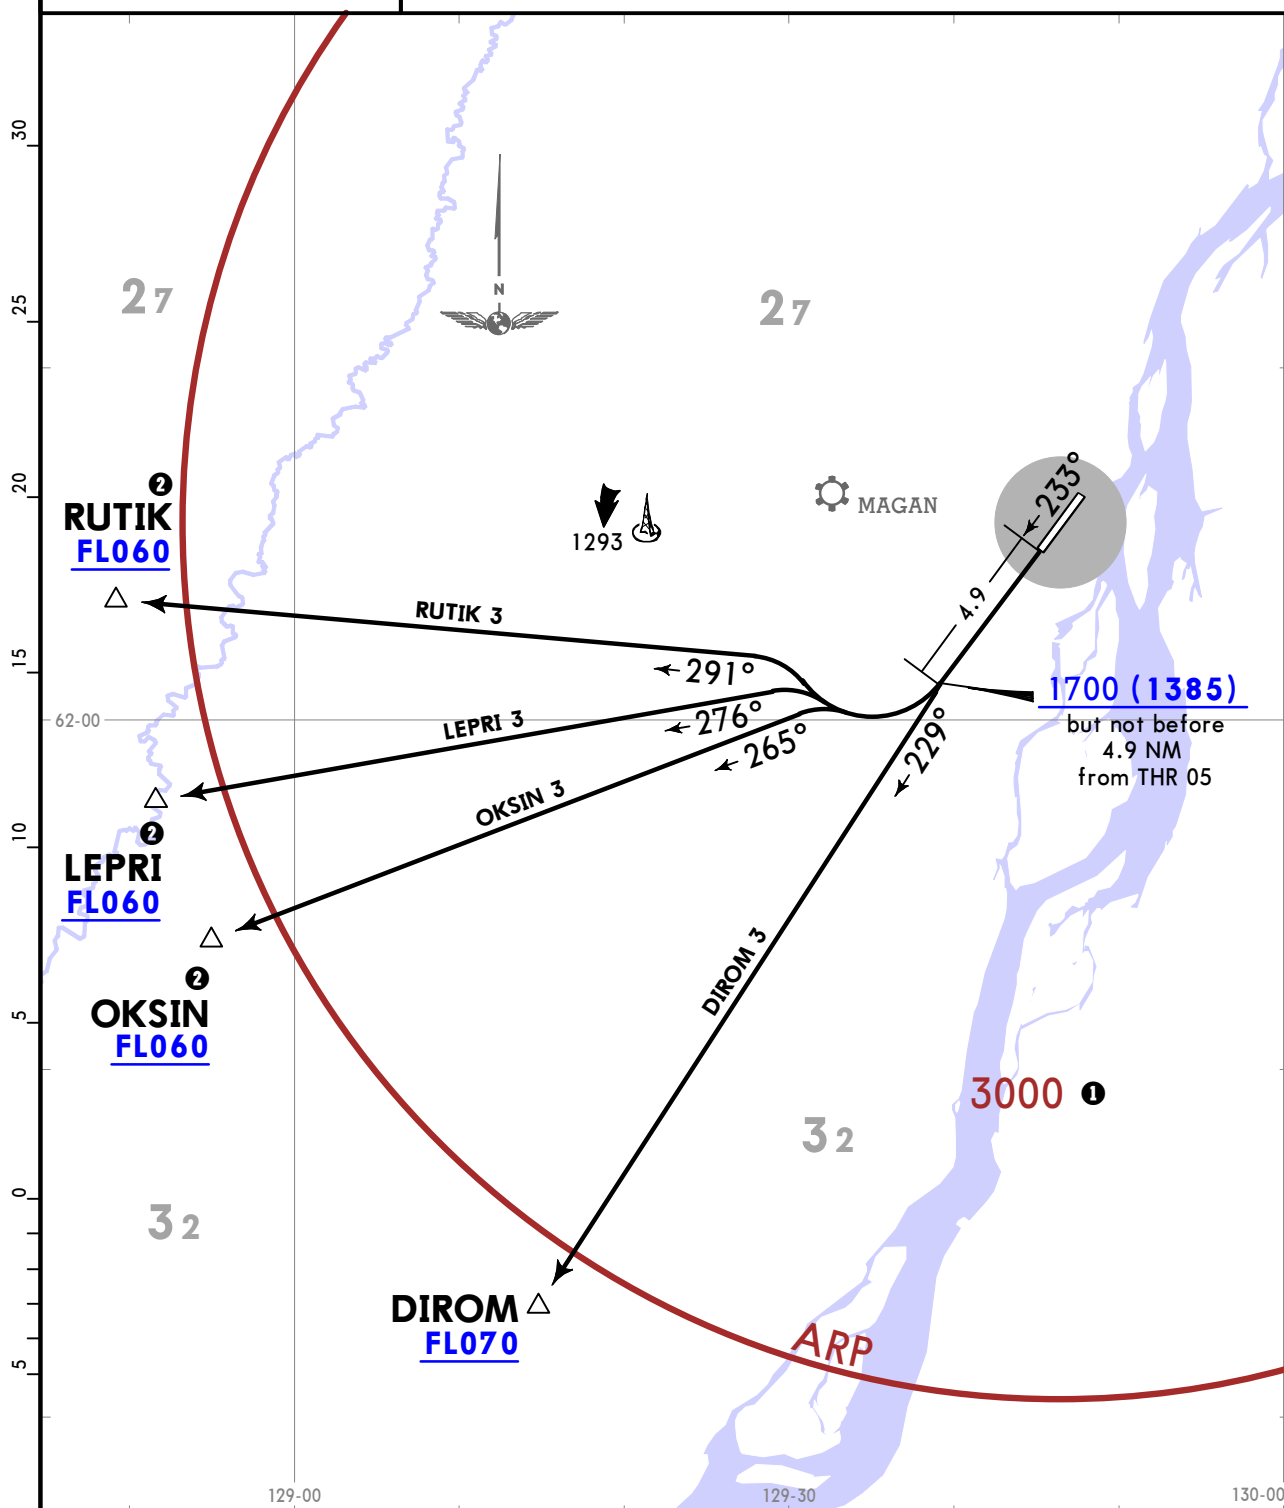

UEEE/YKS
YAKUTSK


JEPPESEN
2 FEB 24 10-3W

YAKUTSK, RUSSIA
SID

Apt Elev 328	QNH on request (QFE) Trans alt: 3940 (3619) 1. Crossing altitudes at AWY entry points by ATC. 2. LEFT turns by ATC due to Magan APT area.
-----------------	--

ABGUR 1, BAGUS 1
NIBES 1, REDKA 1
DEPARTURES
(RWY 05)


ALT/HEIGHT CONVERSION QNH (QFE) 980' (659' - 200m) 3940' (3619' - 1100m)	① Computed for surface air temperature at ARP -53.8°C. ② RIGHT turn to ABGUR, BAGUS, NIBES, REDKA by ATC.
---	--

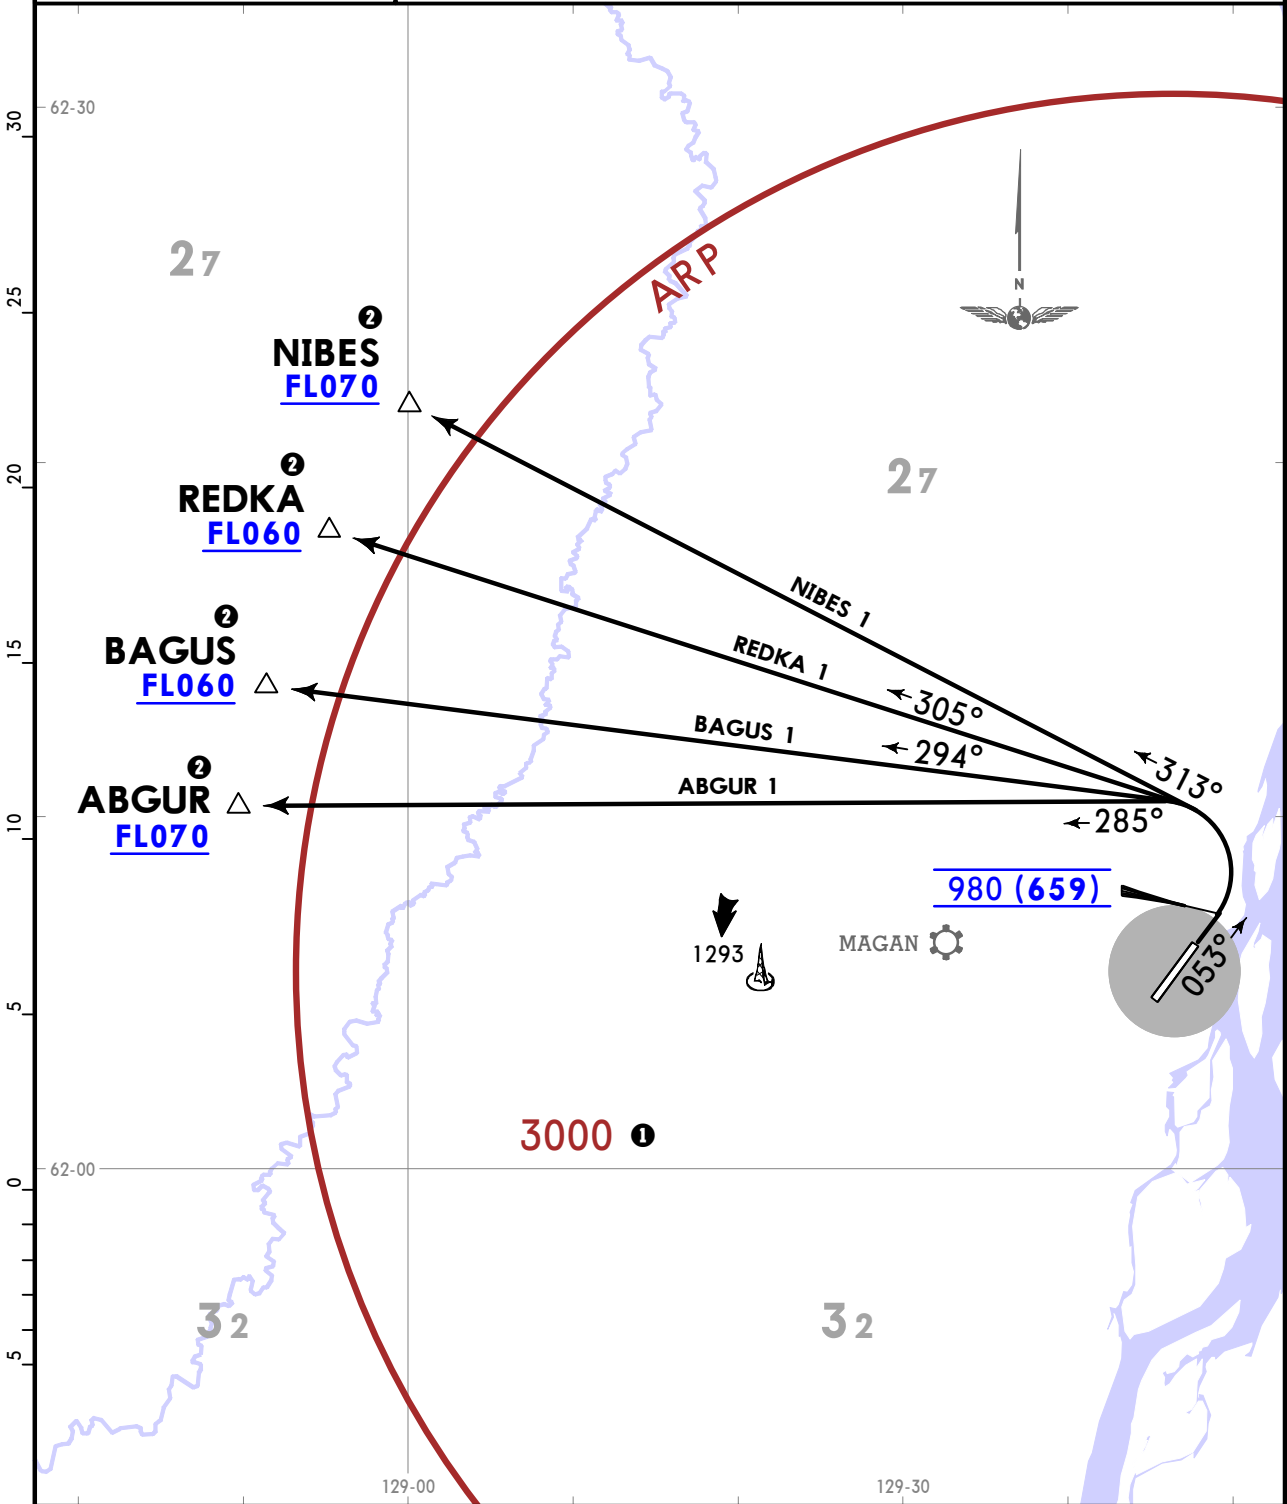

UEEE/YKS
YAKUTSK

JEPPESEN
2 FEB 24 (10-3X)

YAKUTSK, RUSSIA
SID

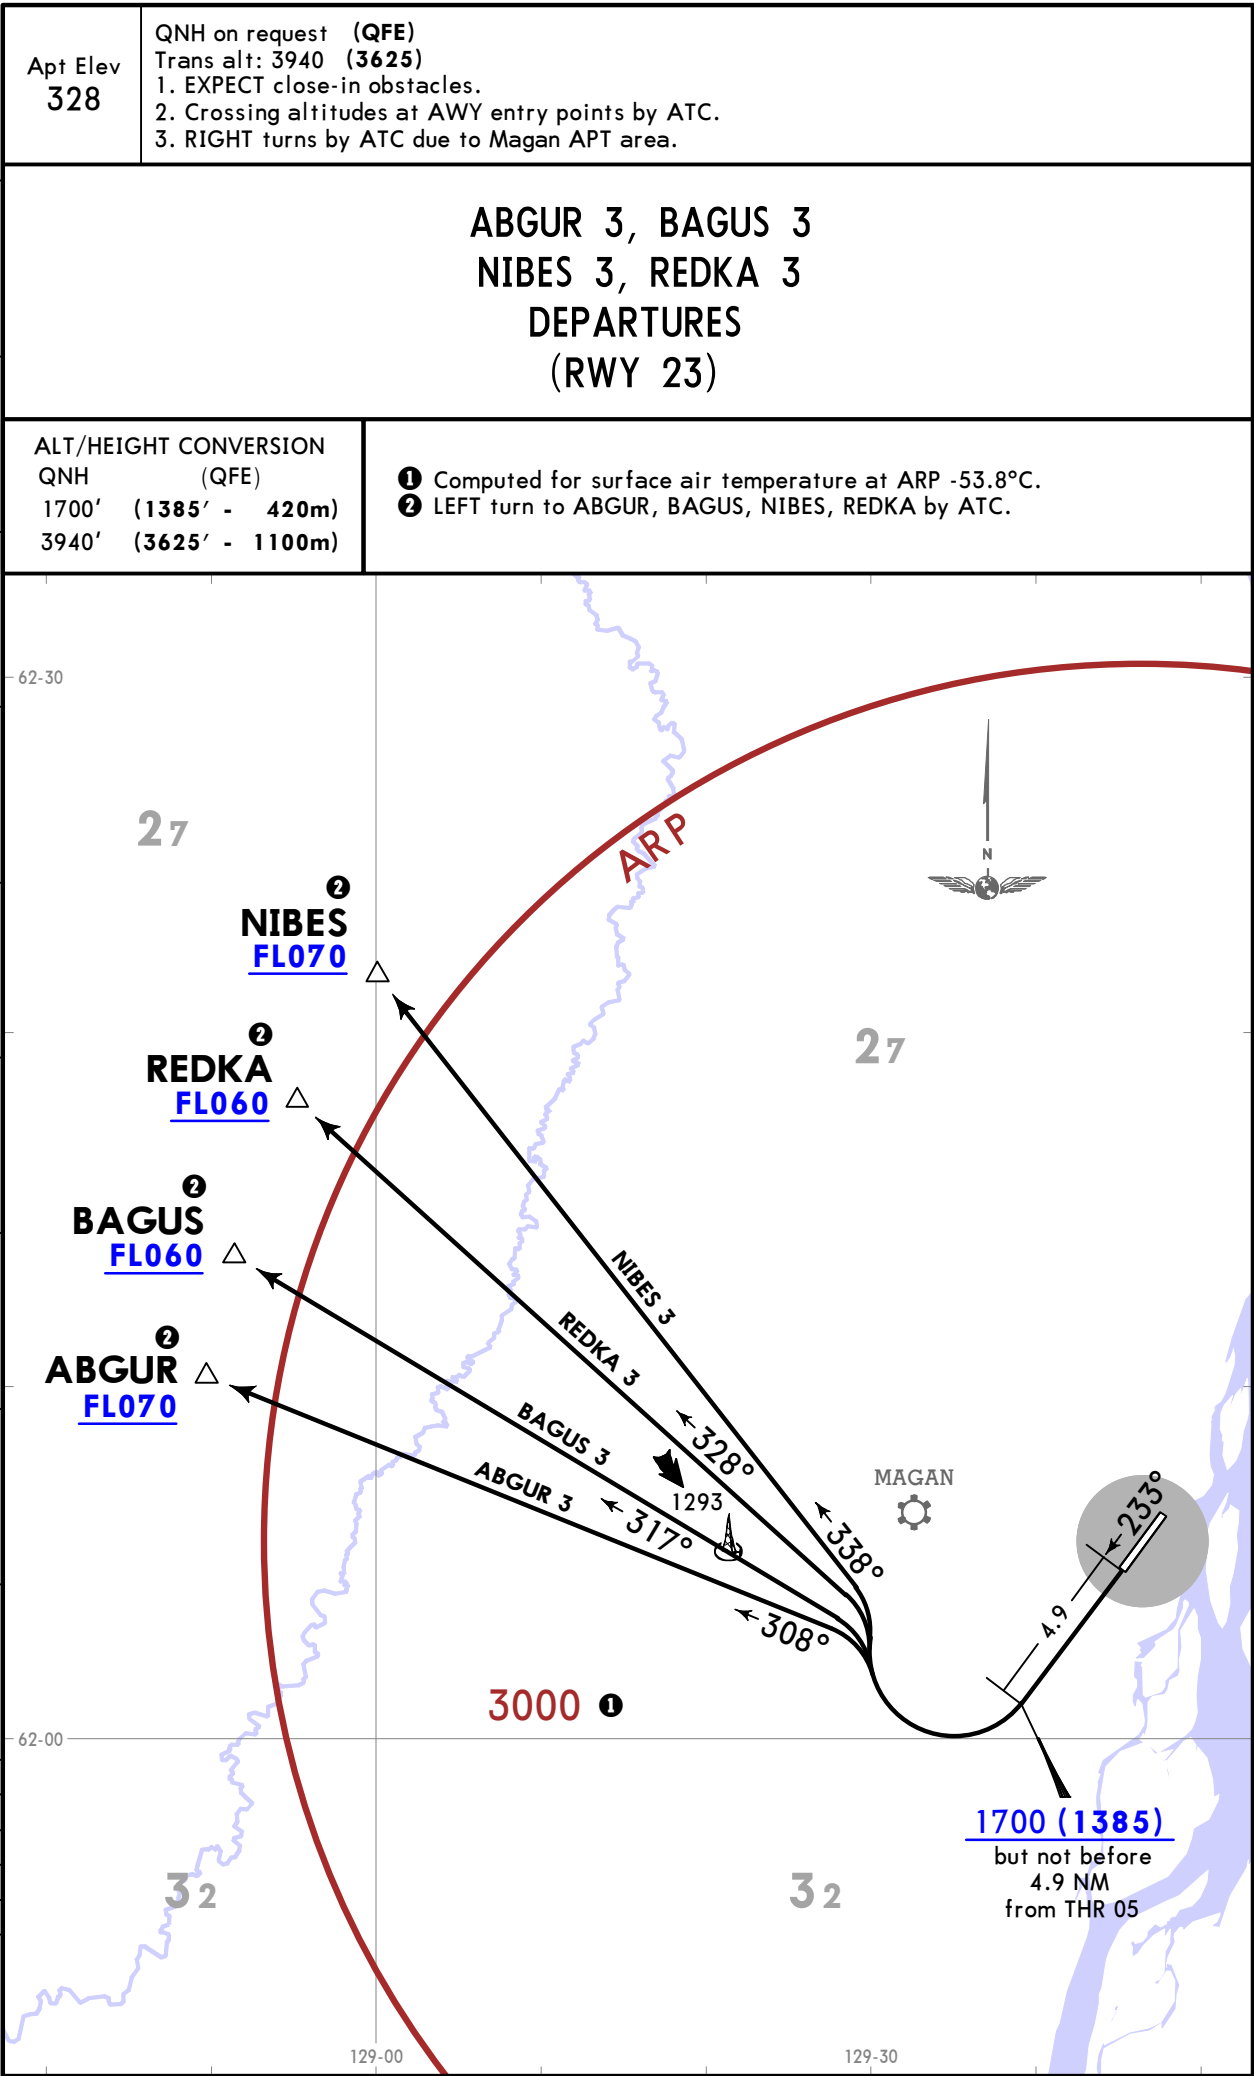

UEEE/YKS
YAKUTSK



2 FEB 24 10-3X1

YAKUTSK, RUSSIA

SID


Apt Elev
328

QNH on request (QFE)
Trans alt: 3940 (3619)
1. Crossing altitudes at AWY entry points by ATC.
2. LEFT turns by ATC due to Magan APT area.

GOBON 1, TEGMA 1
TUROP 1
DEPARTURES
(RWY 05)

ALT/HEIGHT CONVERSION
QNH (QFE)
980' (659' - 200m)
3940' (3619' - 1100m)

- ① Computed for surface air temperature at ARP -53.8°C.
② RIGHT turn to TEGMA by ATC.

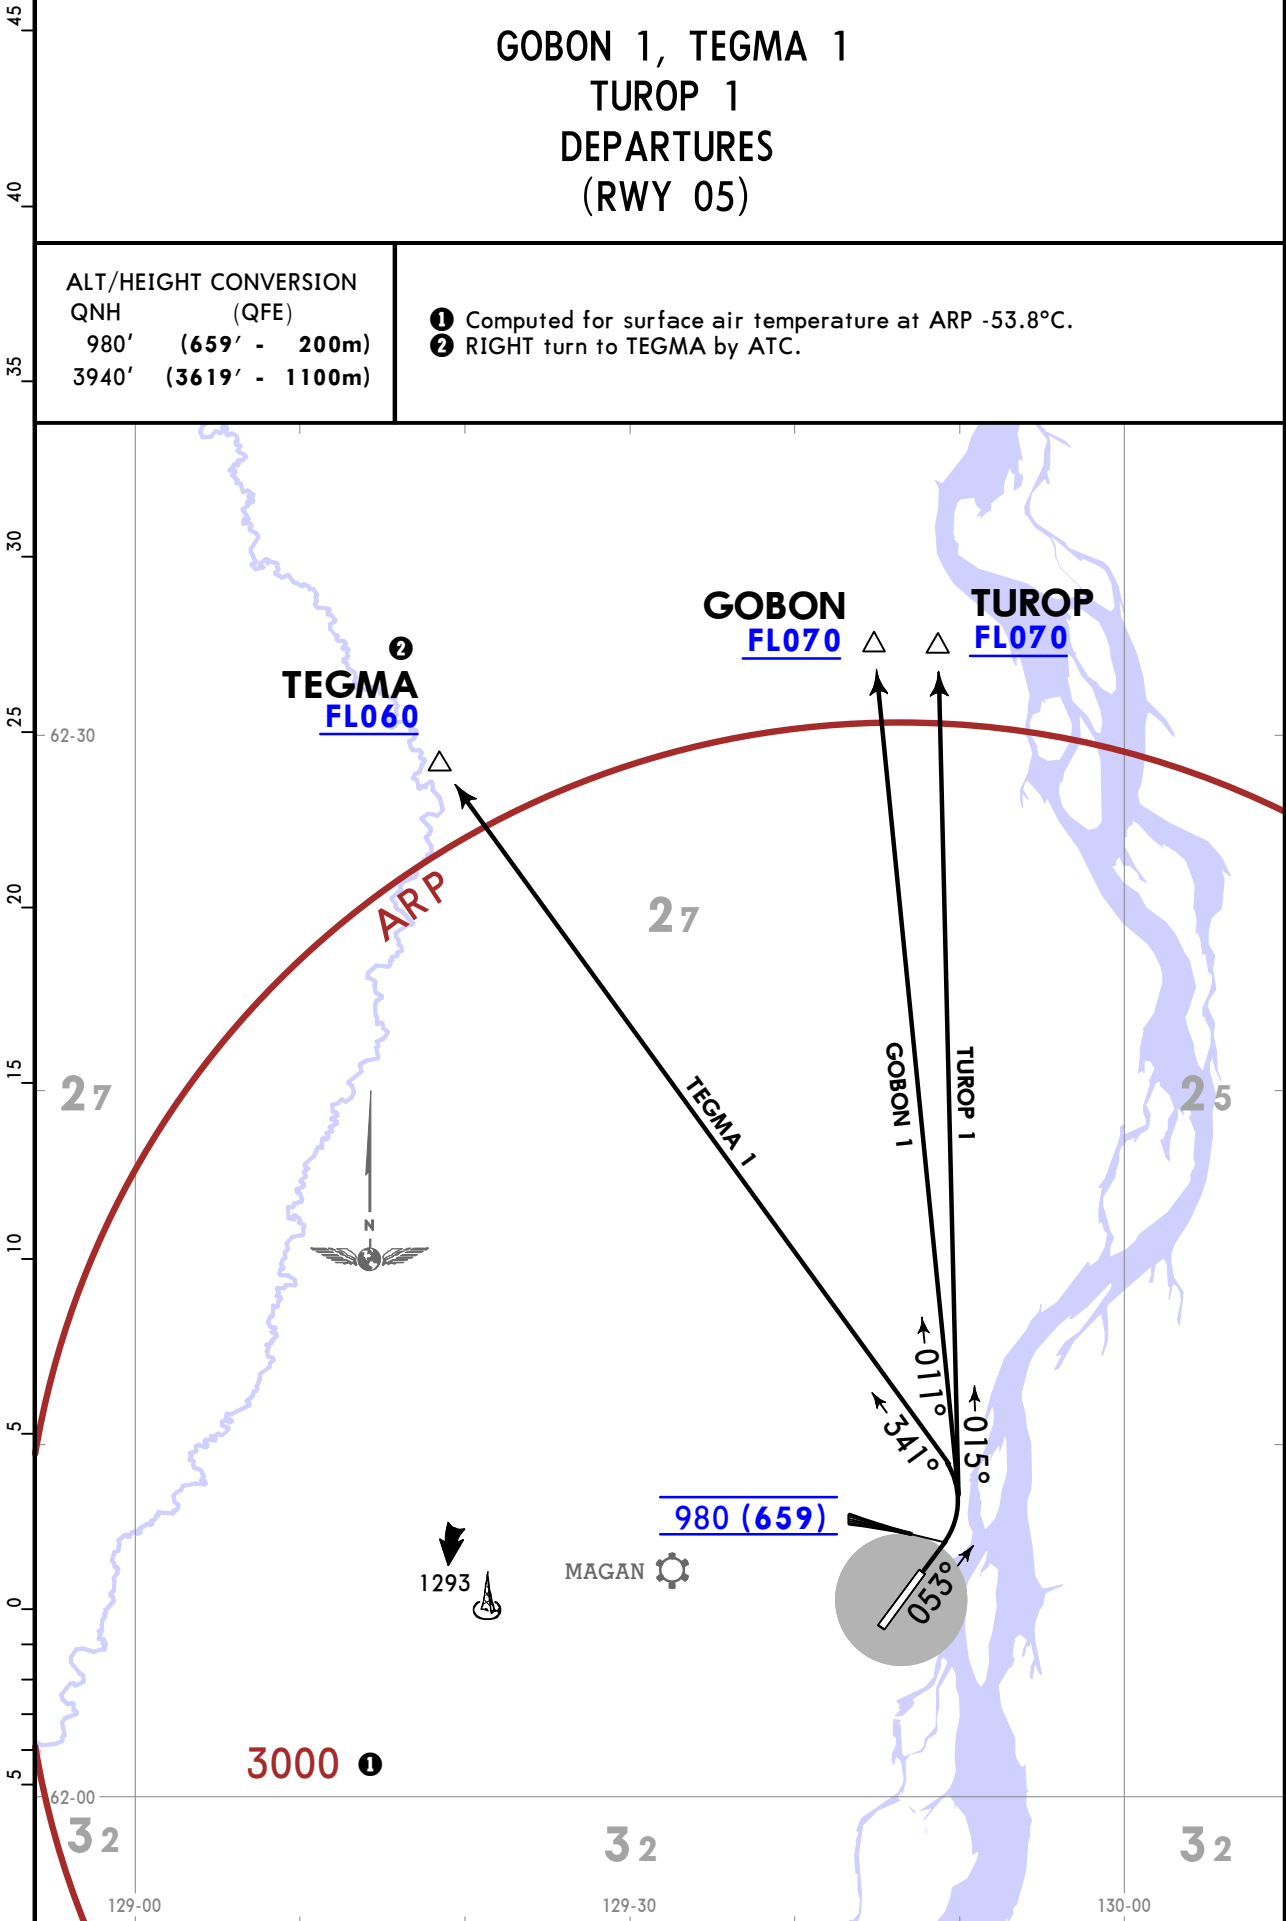

UEEE/YKS
YAKUTSK


JEPPESEN
2 FEB 24 10-3X2

YAKUTSK, RUSSIA
SID

Apt Elev 328	QNH on request (QFE) Trans alt: 3940 (3625) 1. EXPECT close-in obstacles. 2. Crossing altitudes at AWY entry points by ATC. 3. RIGHT turns by ATC due to Magan APT area.
-----------------	--

GOBON 3, TEGMA 3
TUROP 3
DEPARTURES
(RWY 23)

ALT/HEIGHT CONVERSION QNH (QFE) 1700' (1385' - 420m) 3940' (3625' - 1100m)	① Computed for surface air temperature at ARP -53.8°C. ② LEFT turn to TEGMA by ATC.
---	--

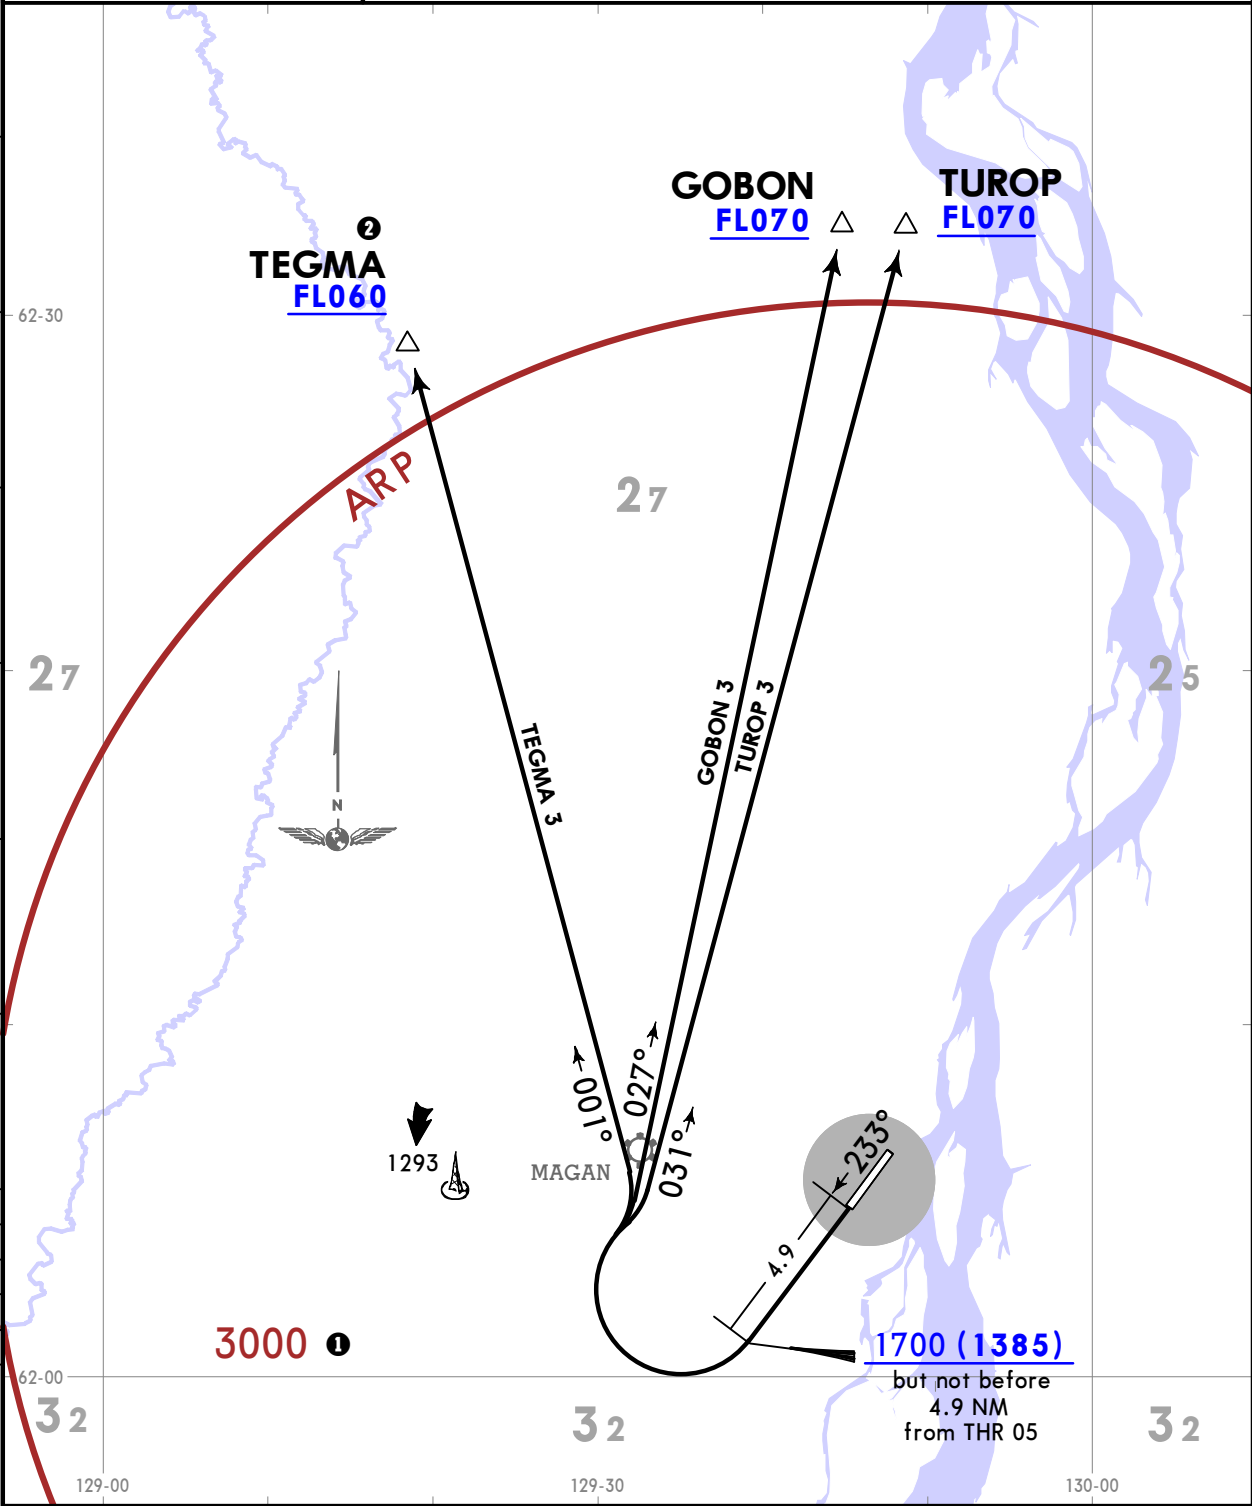

UEEE/YKS
YAKUTSK

JEPPESSEN
 8 DEC 23 **10-4**
YAKUTSK, RUSSIA
NOISE**NOISE ABATEMENT**

LT minus 9 HOURS = UTC (Z)

GENERAL

Noise abatement procedures during take-off, climb and approach shall be executed by all ACFT at night-time from 2300 till 0600 LT.

Deviations from the indicated procedures are permitted only to ensure safety of flight operations, or in case the procedures contradict the requirements of the Aeroplane Flight Manual.

ATS unit determines RWY direction in order to minimise noise impact during the initial departure and final approach phases of flight.

Noise abatement shall not be a determining factor under the following circumstances:

1. Runway is covered with snow, slush, ice, etc.
2. During landing, when the height of cloud base is not less than 830' (502' - 150 m), or during landing and take-off, when horizontal visibility is less than 1.9 km.
3. When crosswind component, including gusts, exceeds 15 KT (28 km/h).
4. When tailwind component, including gusts, exceeds 5 KT (9 km/h).
5. When wind shear is forecasted or reported, or it is expected that thunderstorms may affect aircraft approach or departure.

TAKE-OFF RESTRICTIONS

During take-off and climb to 1810' (1482' - 450 m) the following is required:

- set take-off power of all engines;
- set flaps to take-off configuration;
- climb at speed $V_2 + 20$ -40 km/h;

Turns of ACFT at altitude/height from 710' (382' - 115 m) to 990' (662' - 200 m) shall be executed with a bank of 15°, above 990' (662' - 200 m) - with a bank of 25°.

Engine power shall be reduced to rated power at 1810' (1482' - 450 m) maintaining a positive rate of climb.

Climb from 1810' (1482' - 450 m) to 3290' (2962' - 900 m) shall be executed at speed $V_2 + 20$ -40 km/h.

At 3290' (2962' - 900 m) ACFT shall be accelerated to the indicated airspeed of high-lift device retraction.

Climb shall be continued in accordance with the Aeroplane Flight Manual.

PREFERENTIAL RWY SYSTEM

If meteorological conditions and traffic situation permits, RWYs are used as follows:

- RWY 05 is preferential for take-off;
When executing take-off from RWY 23, CAT C & D ACFT must take-off from the RWY beginning according to requirements in the Aeroplane Flight Manual;
- RWY 23 is preferential for landing.

UEEE/YKS

Apt Elev 328'

N62 05.6 E129 46.3

JEPPESSEN


9 MAY 25

10-9

Eff 15 May

YAKUTSK, RUSSIA

YAKUTSK

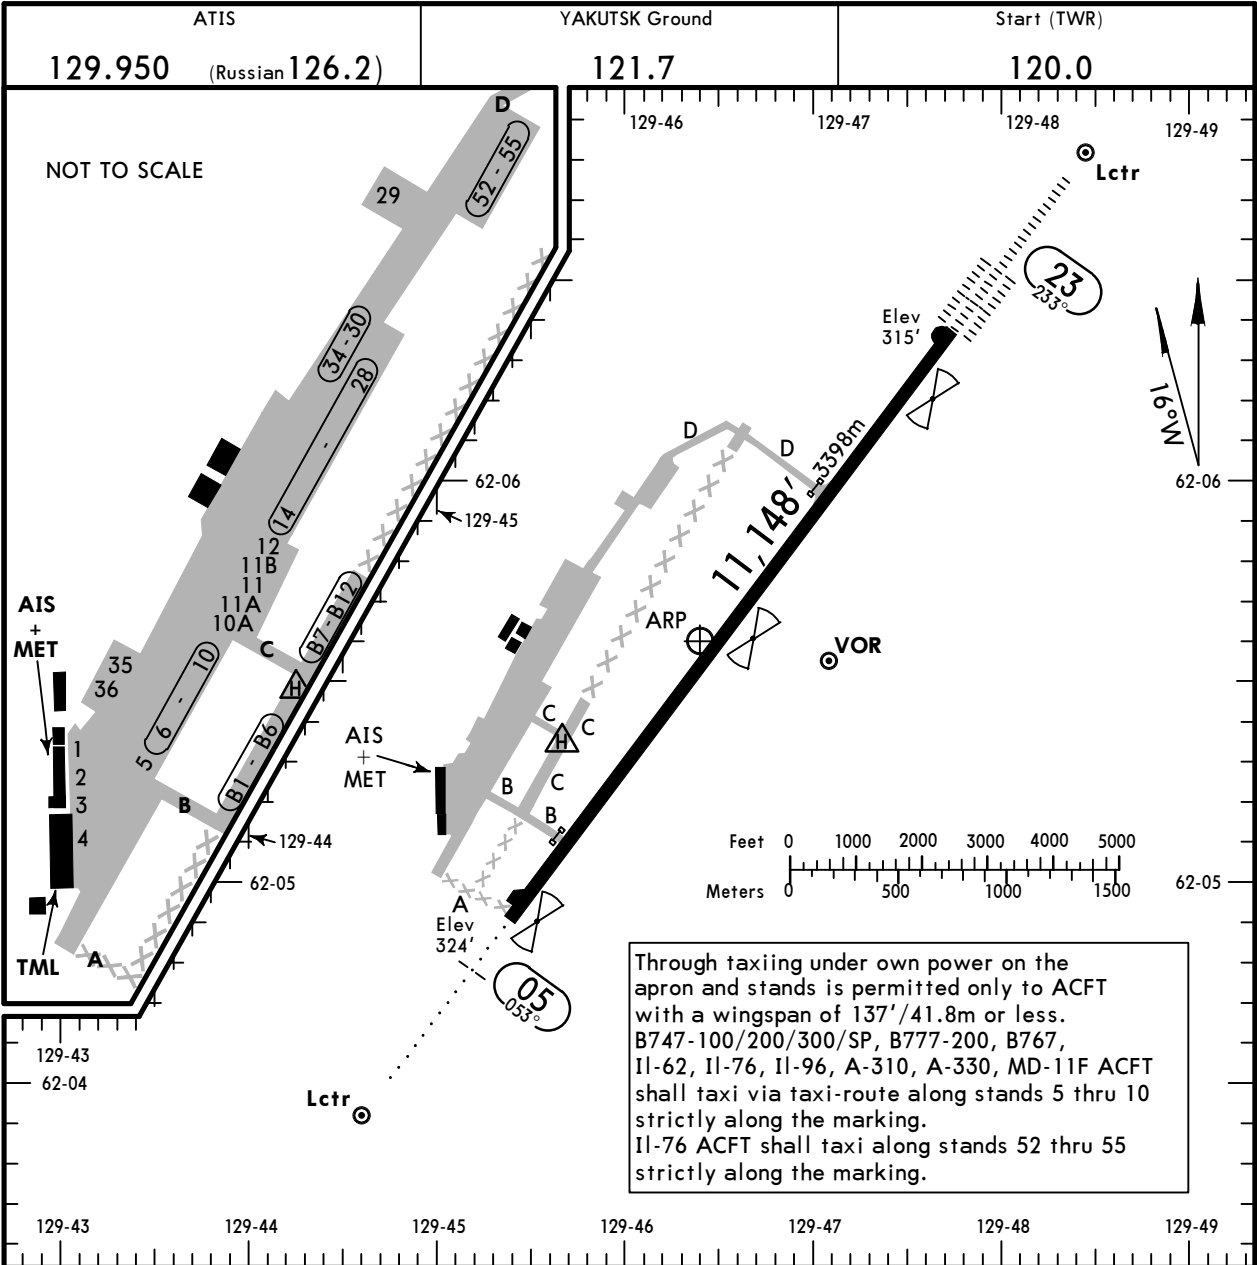

ADDITIONAL RUNWAY INFORMATION							
RWY					USABLE LENGTHS		
					LANDING BEYOND	TAKE-OFF	WIDTH
					Threshold	Glide Slope	
05	HIRL (60m)	CL (15m)	① ALS	②	RVR		⑥
23	HIRL (60m)	CL (15m)	④ HIALS-II	TDZ ⑤	③ RVR	10,177' 3102m	

- ① length 910m
② PAPI-L (angle 3.10°)
③ OFZ
④ length 900m
⑤ PAPI-L (angle 3.00°)

- ⑥ TAKE-OFF RUN AVAILABLE
RWY 05: From rwy head 11,148' (3398m)
twy B int 9770' (2978m)
RWY 23: From rwy head 11,148' (3398m)
twy D int 8068' (2459m)

Std TAKE-OFF					
RL & CL & relevant RVR	RL & CL	① RL & RCLM	① RL or RCLM	Adequate Vis Ref	
				DAY	NIGHT
TDZ R150m Mid R150m Rollout R150m	R/V200m	R/V300m	R/V400m	R/V500m	NA
① For NIGHT operations, at least RL or CL and RENL are required.					

UEEE/YKS


JEPPesen
9 MAY 25 **10-9S** Eff 15 May

EASA AIR OPS
YAKUTSK, RUSSIA
YAKUTSK

STRAIGHT-IN RWY		A	B	C	D
05	GLS	524'(200') R1000m	524'(200') R1000m	524'(200') R1000m	524'(200') R1000m
	ALS out	R1200m	R1200m	R1200m	R1200m
	① RNP LNAV	830'(506') R1500m	830'(506') R1500m	830'(506') R2100m	830'(506') R2100m
	ALS out	R1500m	R1500m	R2400m	R2400m
	① 2 NDB with FAF	810'(486') R1500m	810'(486') R1500m	810'(486') R2100m	810'(486') R2100m
	ALS out	R1500m	R1500m	R2300m	R2300m
	① 2 NDB w/o FAF	1420'(1096') R1500m	1420'(1096') R1500m	1420'(1096') R2400m	1420'(1096') R2400m
	① V Lctr with FAF	1280'(956') R1500m	1280'(956') R1500m	1280'(956') R2400m	1280'(956') R2400m
23	① V Lctr w/o FAF	1320'(996') R1500m	1320'(996') R1500m	1320'(996') R2400m	1320'(996') R2400m
	CAT 2 ILS	415'(100') RA105' R300m	415'(100') RA105' R300m	415'(100') RA105' R300m	415'(100') RA105' ② R300m
	ILS	515'(200') R550m	515'(200') R550m	515'(200') R550m	515'(200') R550m
	TDZ or CL out	③ R550m	③ R550m	③ R550m	③ R550m
	ALS out	R1200m	R1200m	R1200m	R1200m
	④ GLS	515'(200') R550m	515'(200') R550m	515'(200') R550m	515'(200') R550m
	TDZ or CL out	③ R550m	③ R550m	③ R550m	③ R550m
	ALS out	R1200m	R1200m	R1200m	R1200m
	⑤ GLS	532'(217') R550m	542'(227') R550m	552'(237') R550m	562'(247') R550m
	TDZ or CL out	③ R550m	③ R550m	③ R550m	③ R550m
	ALS out	R1200m	R1200m	R1200m	R1300m
	RNP LNAV/VNAV	673'(358') R900m	689'(374') R1000m	689'(374') R1000m	722'(407') R1200m
	TDZ or CL out	R900m	R1000m	R1000m	R1200m
	ALS out	R1500m	R1500m	R1700m	R1900m
	① RNP LNAV	690'(375') R1000m	690'(375') R1000m	710'(395') R1100m	740'(425') R1300m
	TDZ or CL out	R1000m	R1000m	R1100m	R1300m
	ALS out	R1500m	R1500m	R1800m	R2000m
	① 2 NDB	660'(345') R900m	660'(345') R900m	660'(345') R900m	660'(345') R900m
	TDZ or CL out	R900m	R900m	R900m	R900m
	ALS out	R1500m	R1500m	R1600m	R1600m

① Continuous Descent Final Approach.

② CAT D requires autoland or HUDLS, otherwise: R350m.

③ R750m when a Flight Director or Autopilot or HUDLS to DA is not used.

④ Missed apch climb gradient mim 3.0%.

⑤ Missed apch climb gradient mim 2.5%.

UEEE/YKS

EASA AIR OPS

YAKUTSK, RUSSIA
YAKUTSK

CIRCLE-TO-LAND	100 KT	135 KT	180 KT	205 KT
After GLS 05 or RNP 05	830'(502') V1500m	1070'(742') V1600m	1680'(1352') V2400m	1680'(1352') V3600m
After GLS 23 or RNP 23	860'(532') V1500m	1070'(742') V1600m	1680'(1352') V2400m	1680'(1352') V3600m



TAKE-OFF							
Low Visibility Procedures required				RCLM or RL or CL	RL or CL	Adequate Vis Ref	
Approval for Low Visibility Take-off required							
RCLM & RL & CL (spacing 15m or less) & RVR	RCLM & RL & CL & RVR	RCLM & RL & RVR	RCLM & RVR & RL or CL	DAY	NIGHT	DAY	NIGHT
		DAY	NIGHT				
R125m	R150m	R300m		R/V400m		R/V500m	NA

UEEE/YKS
YAKUTSK

JEPPESEN
9 MAY 25 11-1 Eff 15 May

YAKUTSK, RUSSIA
ILS Rwy 23

BRIEFING STRIP™	ATIS (Russian) 129.95 126.2)		YAKUTSK Approach 129.3	YAKUTSK Radar (APP/TWR) 120.3	YAKUTSK Start (TWR) 120.0	Ground 121.7
	LOC IMF 111.7	Final Apch Crs 233°	D5.8 UTS 1960'(1645')	ILS DA(H) 515'(200')	Apt Elev 328' Rwy 315'	3000 MSA ARP ❶
	MISSED APCH: Climb on 233° to 1700'(1385') or above, then turn LEFT onto 053° climbing to 2620'(2305'), then as directed.					
	Alt Set: MM (hPa on req) QNH on req (QFE) Trans level: FL050 ❷ Trans alt: 3940'(3625')					

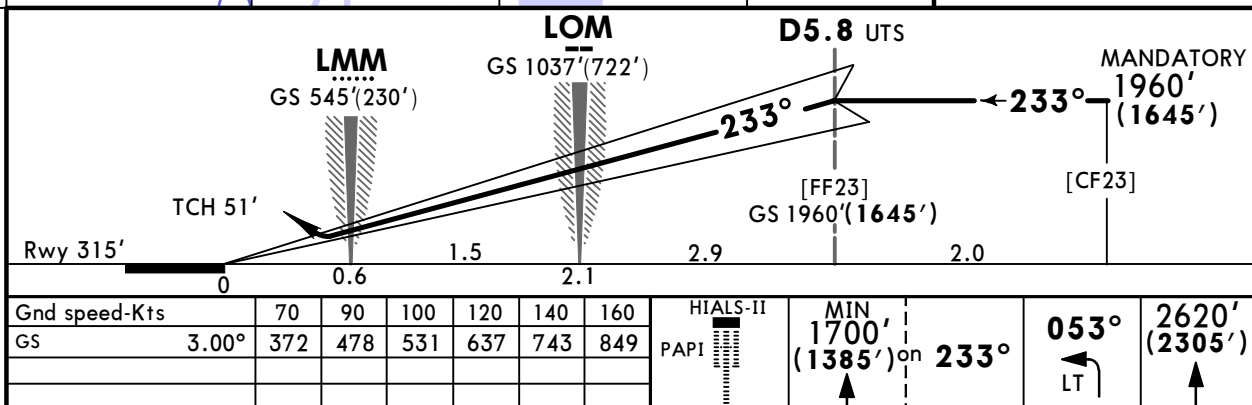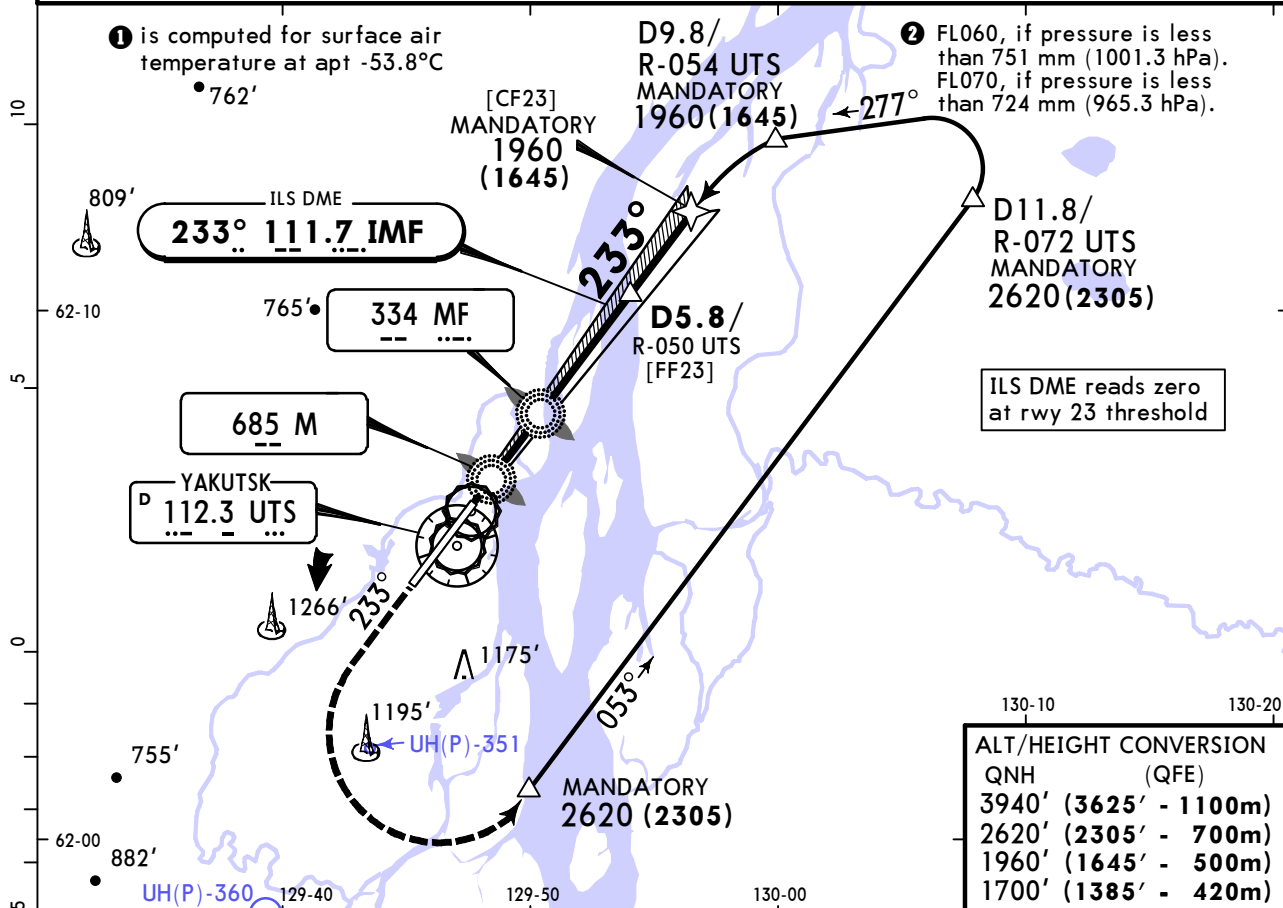

Std STRAIGHT-IN LANDING		
ILS DA(H) 515' (200')		
	TDZ or CL out	ALS out
A		
B		
C	R550m	R1200m
D		
R750m when a Flight Director or Autopilot or HUD to DA is not used.		



UEEE/YKS
YAKUTSK

JEPPESSEN
9 MAY 25 **(11-1A)** **Eff 15 May**

YAKUTSK, RUSSIA
CAT II ILS Rwy 23

BRIEFING STRIP

ATIS (Russian) 129.95 126.2		YAKUTSK Approach 129.3	YAKUTSK Radar (APP/TWR) 120.3	YAKUTSK Start (TWR) 120.0	Ground 121.7
LOC IMF 111.7	Final Apch Crs 233°	D5.8 UTS 1960'(1645')	CAT II ILS RA 105' DA(H) 415'(100')	Apt Elev 328' Rwy 315'	3000 MSA ARP ❶
MISSED APCH: Climb on 233° to 1700'(1385') or above, then turn LEFT onto 053° climbing to 2620'(2305'), then as directed.					
Alt Set: MM (hPa on req)		QNH on req (QFE)	Trans level: FL050 ❷	Trans alt: 3940'(3625')	
1. Special Aircrew and Acft Certification Required.			2. ILS DME reads zero at Rwy 23 threshold.		

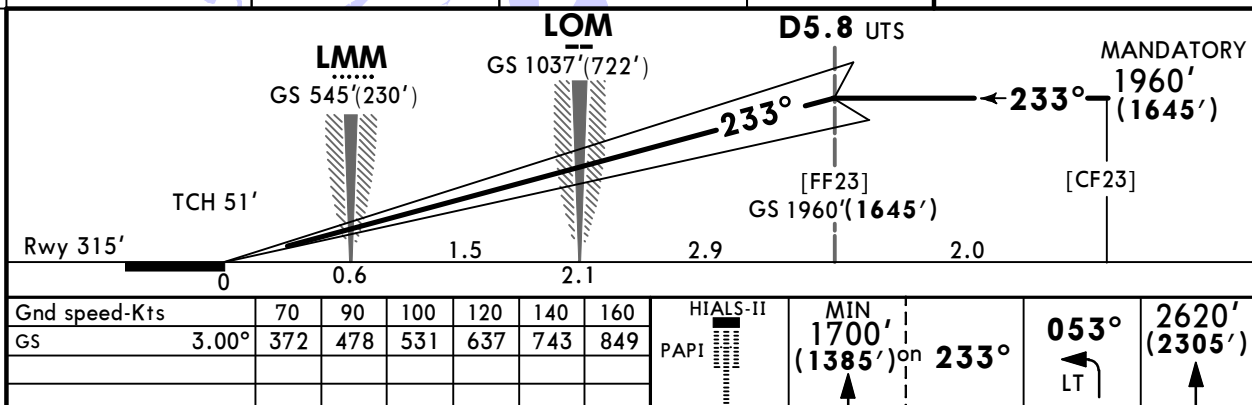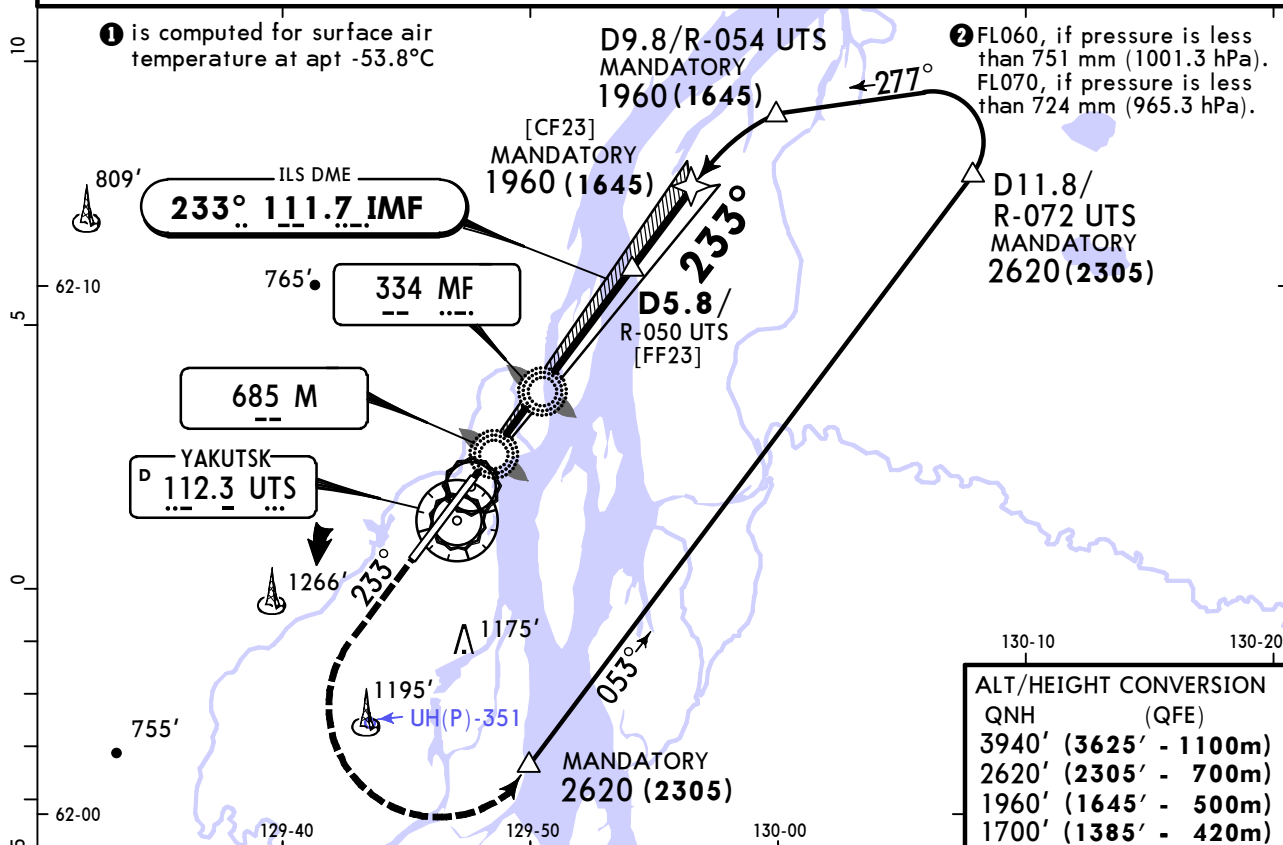



Std	STRAIGHT-IN LANDING	
	CAT II ILS	
	ABCD	
	RA 105'	
	DA(H) 415' (100')	
R300m		
CAT D without autoland: R350m.		

UEEE/YKS
YAKUTSK

JEPPESSEN
9 MAY 25 **(12-1)** Eff 15 May

YAKUTSK, RUSSIA
RNP Rwy 05

BRIEFING STRIP™	ATIS (Russian) 129.95 126.2		YAKUTSK Approach 129.3	YAKUTSK Radar (APP/TWR) 120.3	YAKUTSK Start (TWR) 120.0	Ground 121.7
	RNAV	Final Apch Crs 053°	EE079 MANDATORY 2630'(2306')	LNAV DA/MDA(H) 830'(506')	Apt Elev 328' Rwy 324'	3000 MSA ARP ①
	MISSED APCH: Climb on 053° to 1640'(1316') or above, then turn RIGHT to EE008, then proceed to EE001 climbing to 2950'(2626') or above, then as directed.					
	Alt Set: MM (hPa on req) QNH on req (QFE) Trans level: FL050 ② Trans alt: 3940'(3616')					

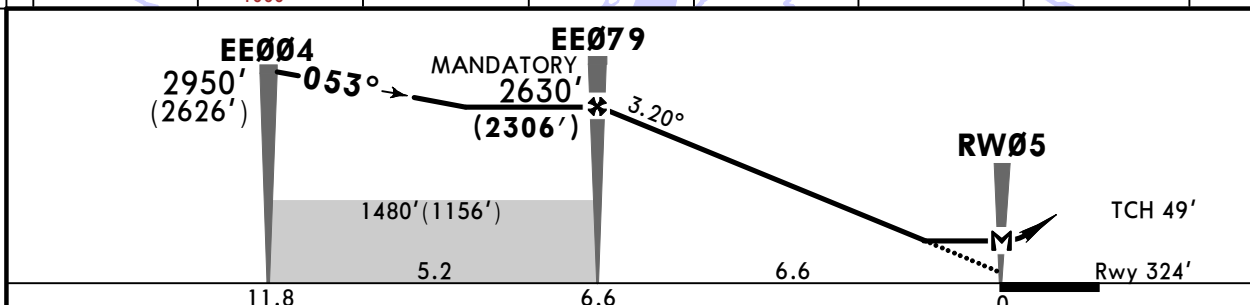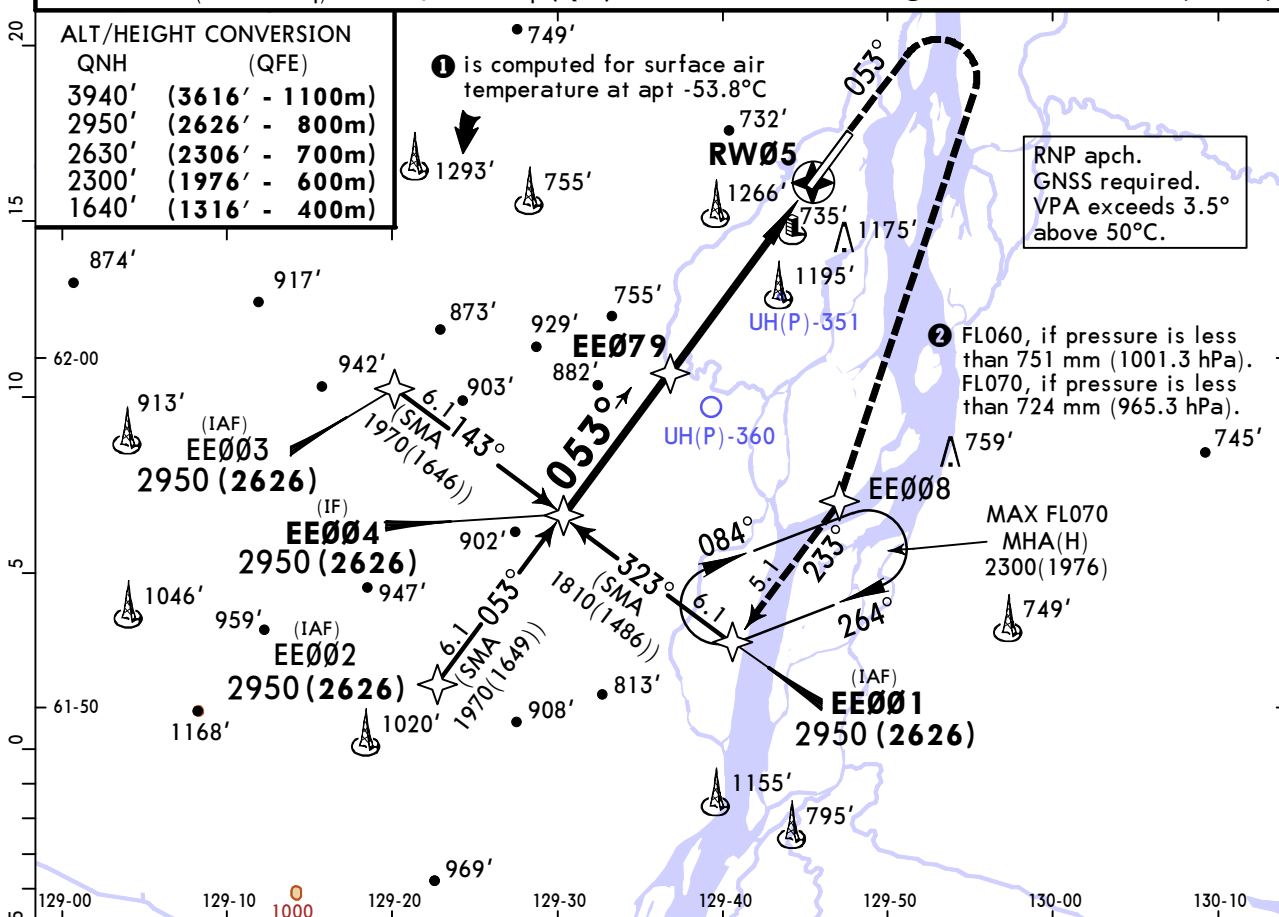


Gnd speed-Kts	70	90	100	120	140	160
Descent Angle	3.20°	396	510	566	679	793
MAP at RW05						

PANS OPS	STRAIGHT-IN LANDING		CIRCLE-TO-LAND	
	LNAV CDFA		MDA(H)	
A	R1500m		100	830' (502') V1500m
B	R1500m		135	1070' (742') V1600m
C	R2100m		180	1680' (1352') V2400m
D	R2400m		205	1680' (1352') V3600m

① VNAV DA(H) in lieu of MDA(H) depends on operator policy.

CHANGES: Rwy elev, procedure, minimums.

© JEPPESSEN, 2011, 2025. ALL RIGHTS RESERVED.


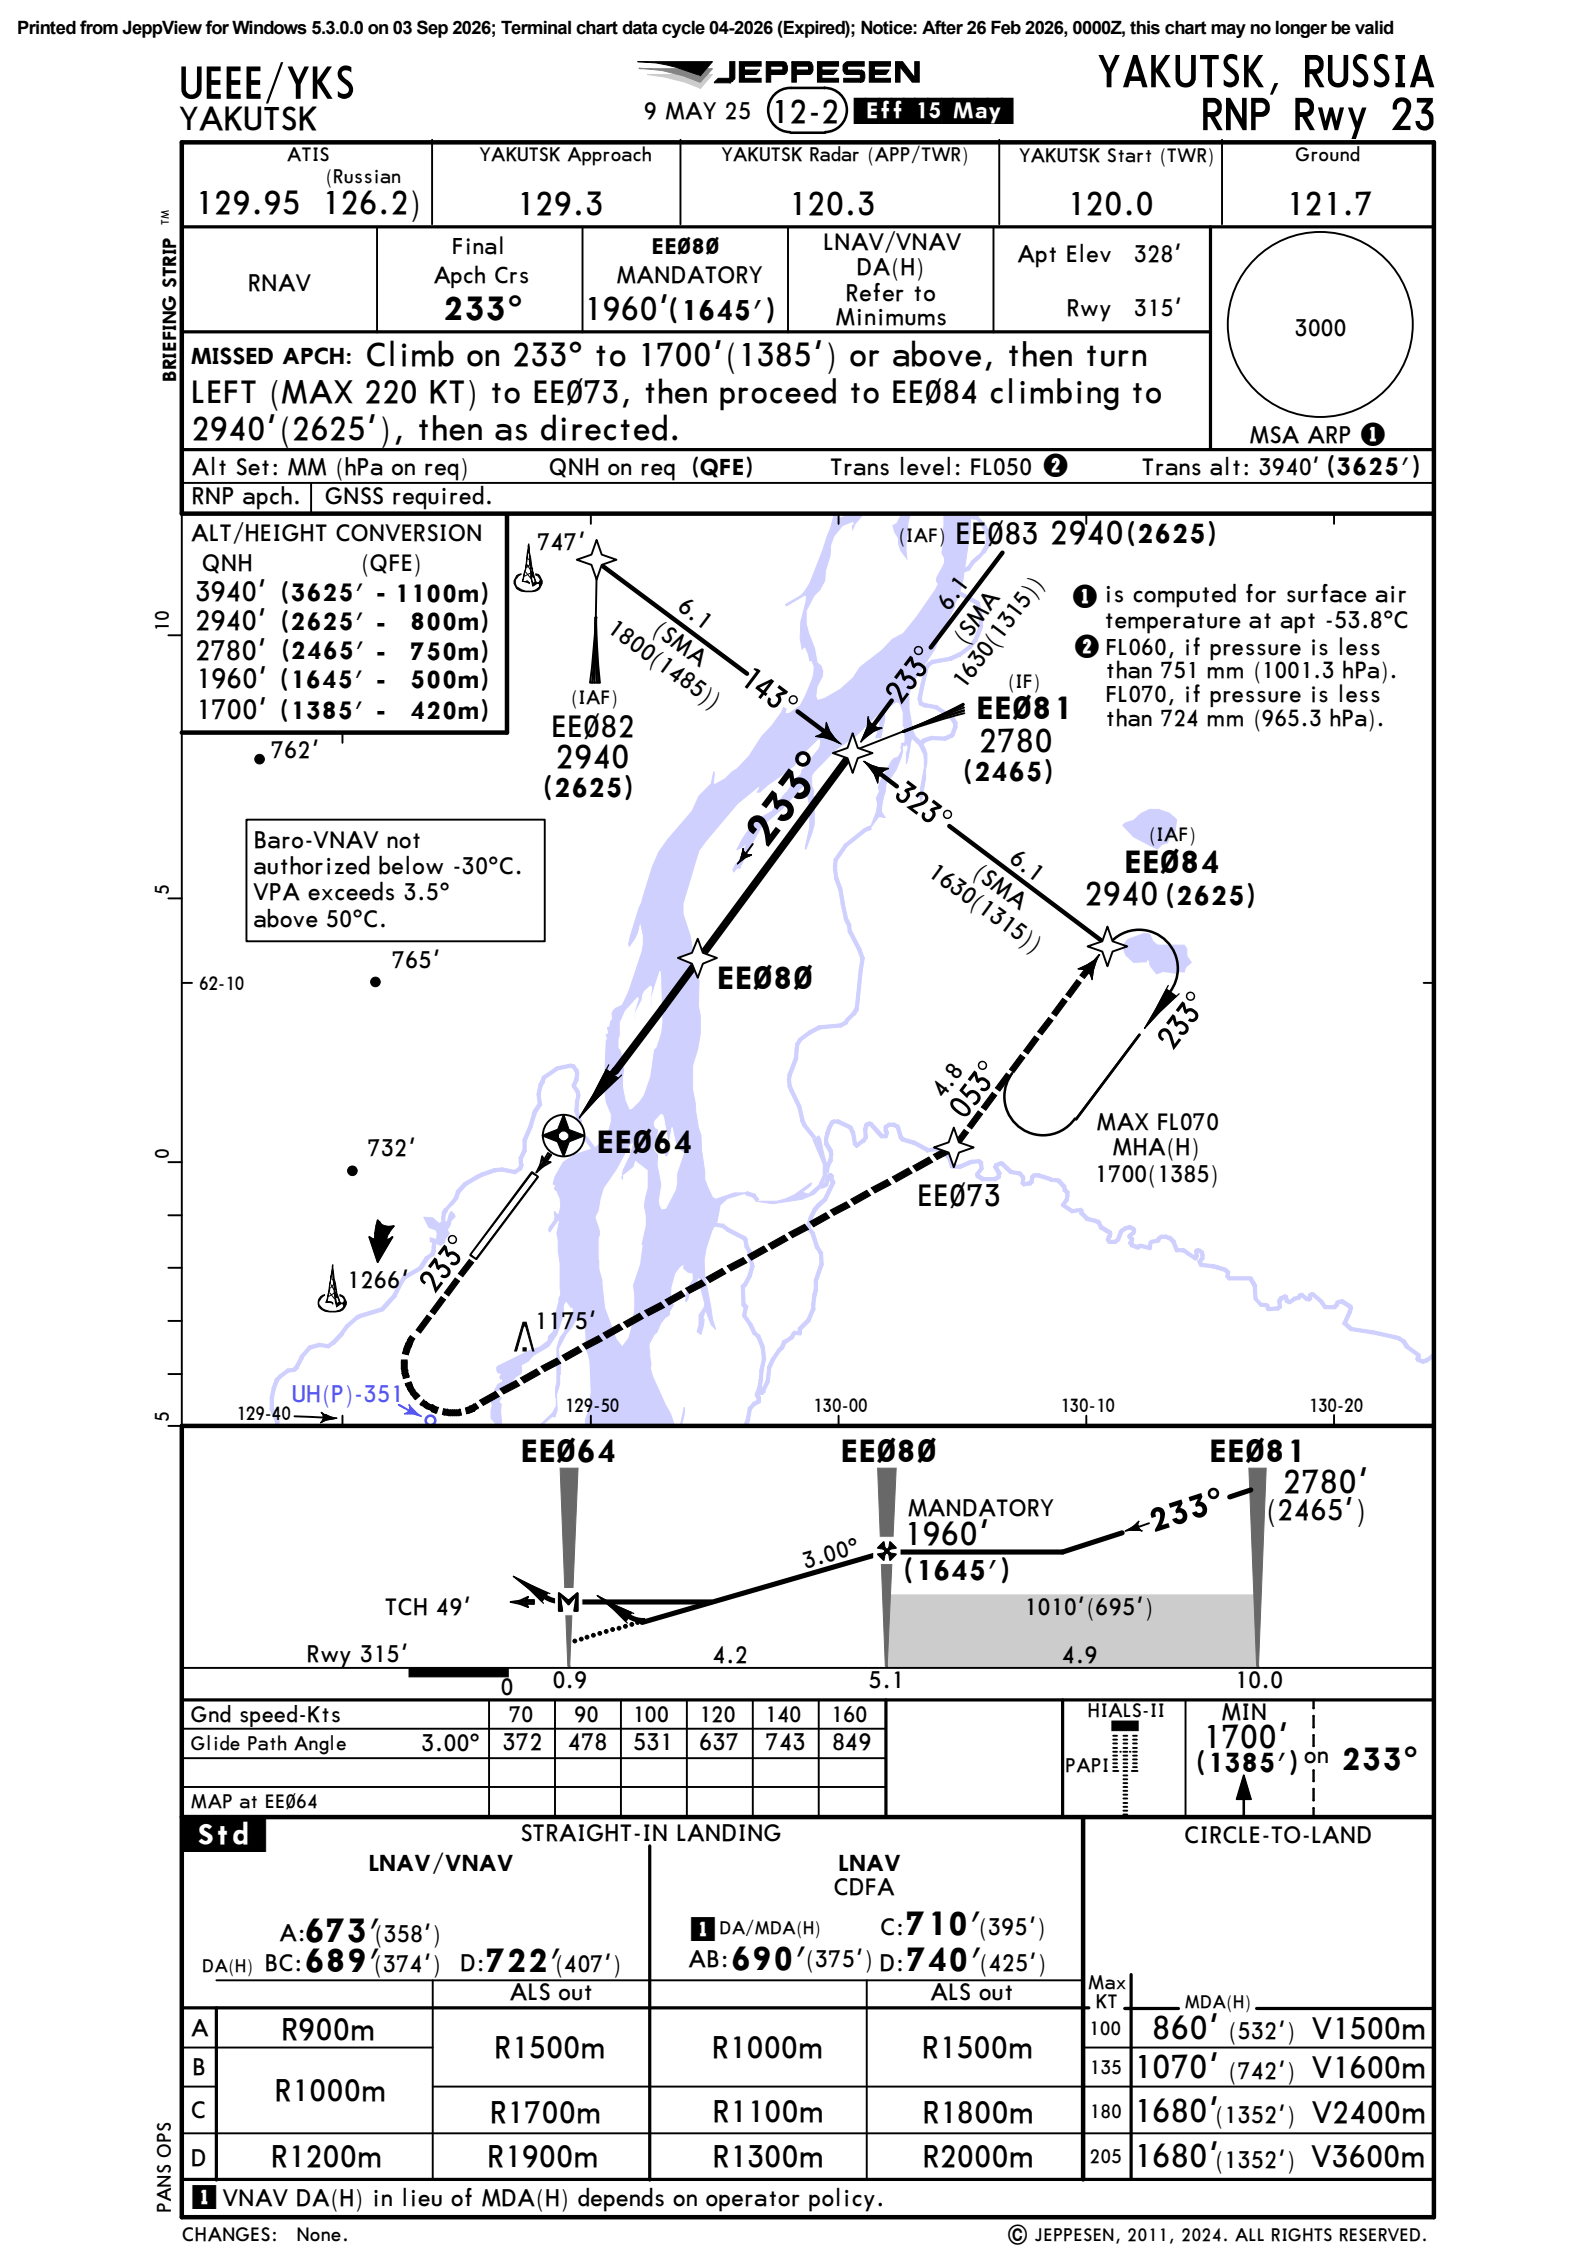


UEEE/YKS
YAKUTSK

JEPPESEN
9 MAY 25 12-40 Eff 15 May

YAKUTSK, RUSSIA
GLS Rwy 05

ATIS (Russian) 129.95 126.2)	YAKUTSK Approach 129.3	YAKUTSK Radar (APP/TWR) 120.3	YAKUTSK Start (TWR) 120.0	Ground 121.7
GBAS Ch 20665 G05A	Final Apch Crs 053°	EE079 MANDATORY 2630'(2306')	GLS DA(H) 524'(200')	Apt Elev 328' Rwy 324'
MISSED APCH: Climb on 053° to 1640'(1316') or above, then turn RIGHT to EE008, then proceed to EE001 climbing to 2950'(2626') or above, then as directed.				3000 MSA ARP ①
Alt Set: MM (hPa on req)		QNH on req (QFE)		Trans level: FL050 ②
Trans alt: 3940'(3616')				

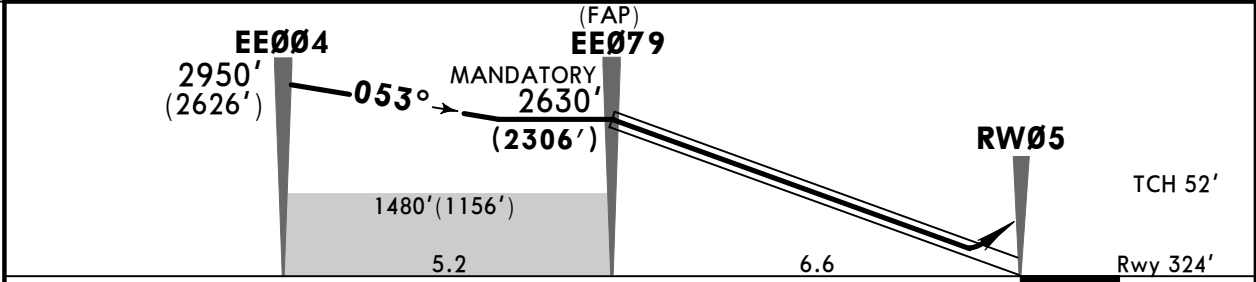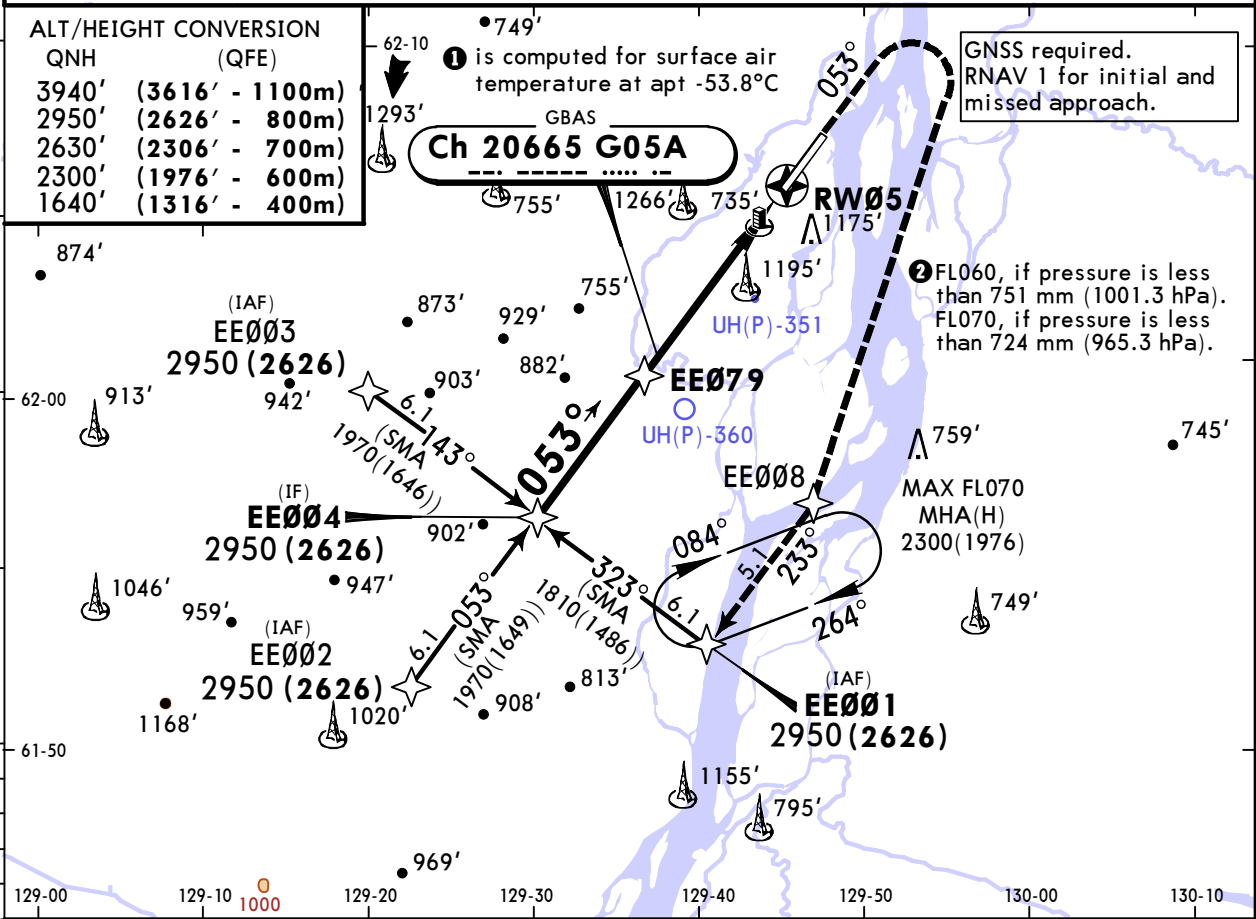

Gnd speed-Kts	70	90	100	120	140	160	ALS	MIN 1640'(1316') on 053°	EE008
Glide Path Angle	3.20°	396	510	566	679	793	PAPI		RT

STRAIGHT-IN LANDING			CIRCLE-TO-LAND		
GLS					
DA(H) 524'(200')					
ALS out			Max KT	MDA(H)	
A	R1000m	R1200m	100	830'(502')	V1500m
B			135	1070'(742')	V1600m
C			180	1680'(1352')	V2400m
D			205	1680'(1352')	V3600m



CHANGES: Rwy elev, procedure, minimums.

© JEPPESEN, 2018, 2025. ALL RIGHTS RESERVED.

YAKUTSK, RUSSIA
GLS Rwy 23

BRIEFING STRIP	ATIS (Russian) 129.95 126.2)		YAKUTSK Approach 129.3	YAKUTSK Radar (APP/TWR) 120.3	YAKUTSK Start (TWR) 120.0	Ground 121.7
	GBAS Ch 21076 G23A	Final Apch Crs 233°	EE080 MANDATORY 1960'(1645')	GLS DA(H) Refer to Minimums	Apt Elev 328' Rwy 315'	3000 MSA ARP ①
	MISSED APCH: Climb on 233° to 1700'(1385') or above, then turn LEFT (MAX 220 KT) to EE073, then proceed to EE084 climbing to 2940'(2625'), then as directed.					
	Alt Set: MM (hPa on req) QNH on req (QFE) Trans level: FL050 ② Trans alt: 3940'(3625')					
	RNAV 1 for initial and missed approach.		GNSS required.			

ALT/HEIGHT CONVERSION	
QNH	(QFE)
3940'	(3625' - 1100m)
2940'	(2625' - 800m)
2780'	(2465' - 750m)
1960'	(1645' - 500m)
1700'	(1385' - 420m)

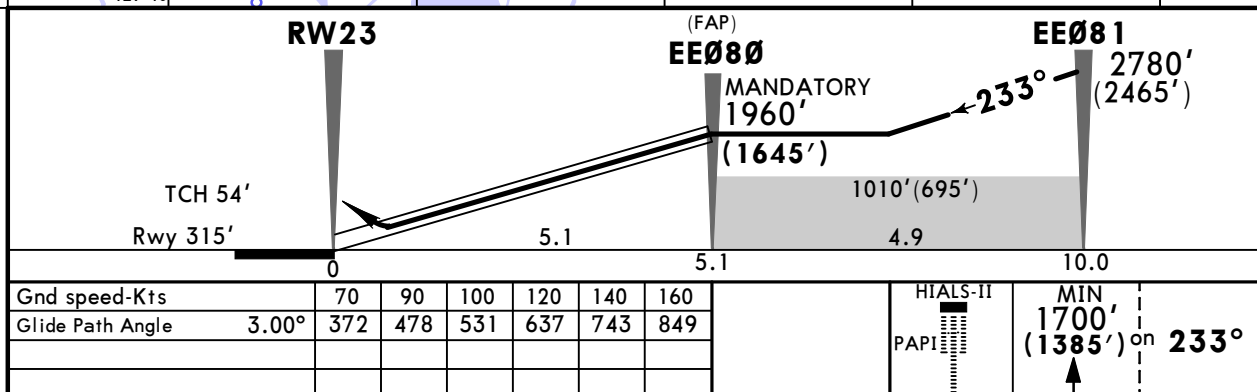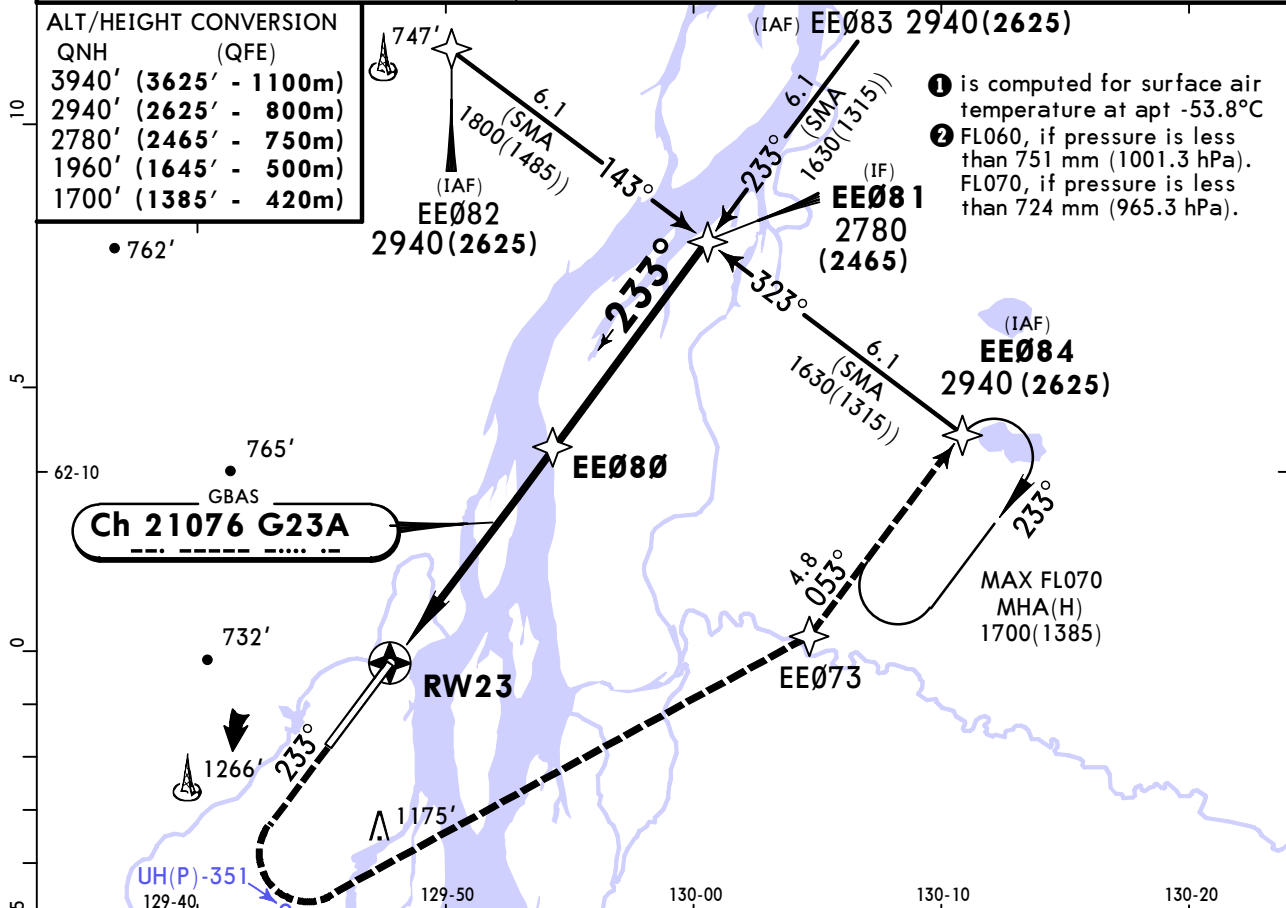

Std		STRAIGHT-IN LANDING						CIRCLE-TO-LAND	
Missed apch climb gradient min 3.0%				GLS		Missed apch climb gradient min 2.5%			
DA(H) 515' (200')				DA(H)		A: 532' (217') B: 542' (227') C: 552' (237') D: 562' (247')			
		TDZ or CL out	ALS out			TDZ or CL out	ALS out	Max KT	MDA(H)
A	R550m	1 R550m	R1200m	R550m	1 R550m	R1200m		100	860' (532') V1500m
B								135	1070' (742') V1600m
C								180	1680' (1352') V2400m
D								205	1680' (1352') V3600m



1 R750m when a Flight Director or Autopilot or HUD to DA is not used.

UEEE/YKS
YAKUTSK

JEPPESSEN
9 MAY 25
Eff 15 May 16-1

YAKUTSK, RUSSIA
2 NDB or NDB Rwy 05

ATIS (Russian) 129.95 126.2)	YAKUTSK Approach 129.3	YAKUTSK Radar (APP/TWR) 120.3	YAKUTSK Start (TWR) 120.0	Ground 121.7
2 NDB NDB VD 334	NDB Lctr V 685	Final Apch Crs 053°	D7.6 MANDATORY 2630' (2306')	DA/MDA(H) Refer to Minimums
Apt Elev 328' Rwy 324'				3000 MSA ARP ①
MISSED APCH: Climb on 053° to 1120' (796'), then turn RIGHT onto 233° climbing to 2630' (2306'), then as directed.				
Alt Set: MM (hPa on req)	QNH on req (QFE)	Trans level: FL050 ②	Trans alt: 3940' (3616')	

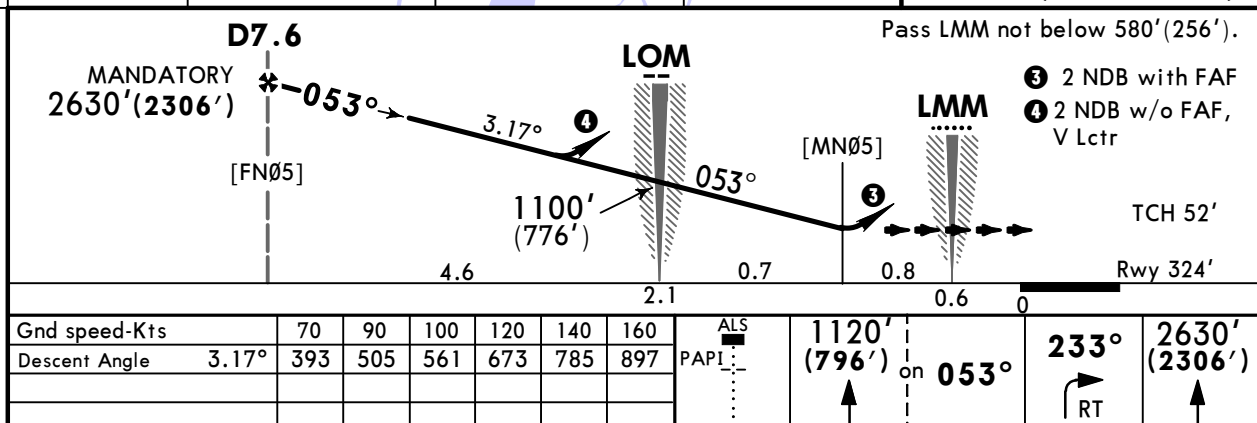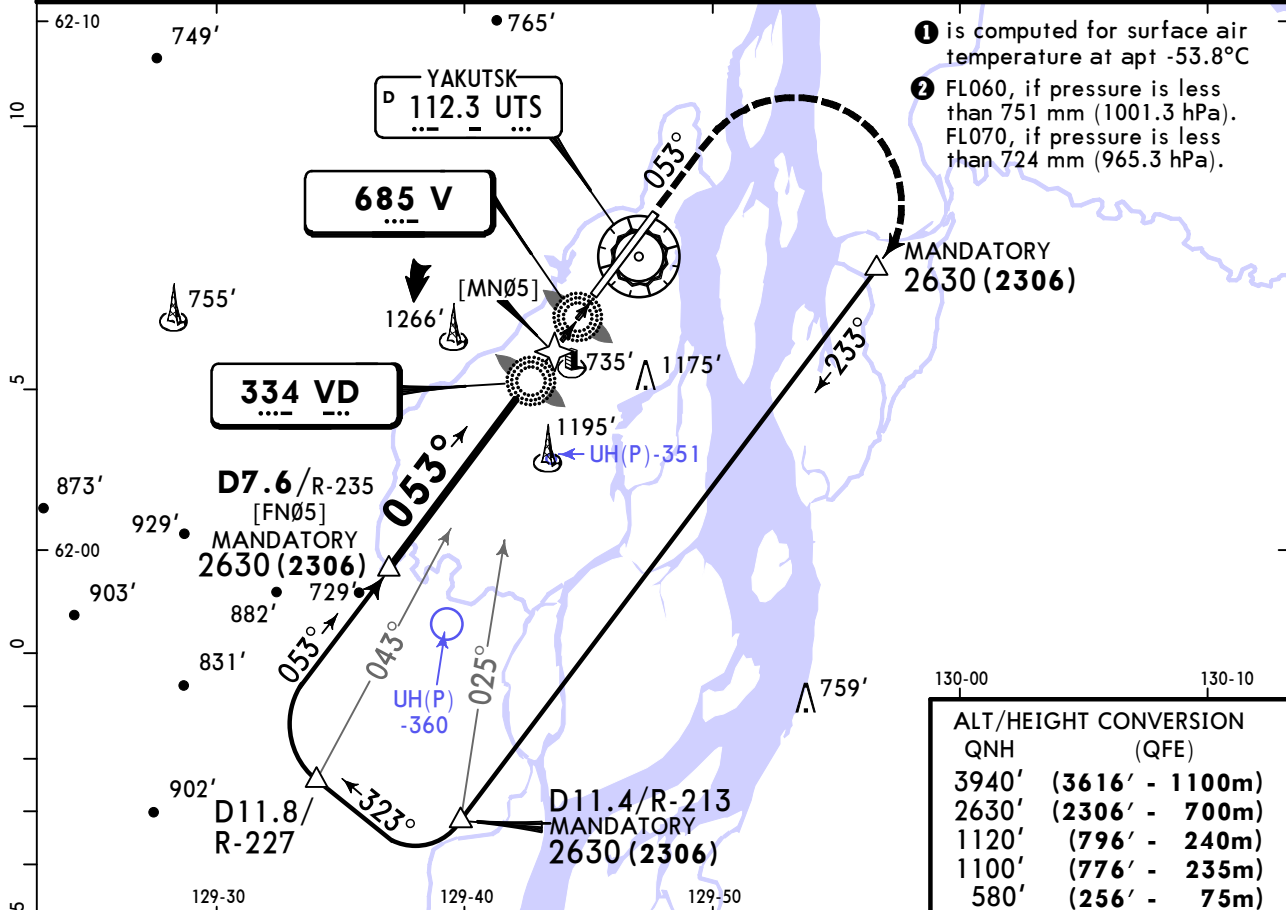

STRAIGHT-IN LANDING							
2 NDB		V Lctr		2 NDB		V Lctr	
with FAF CDFA DA/MDA(H) 810' (486')		w/o FAF CDFA DA/MDA(H) 1420' (1096')		with FAF CDFA DA/MDA(H) 1280' (956')		w/o FAF CDFA DA/MDA(H) 1320' (996')	
ALS out		ALS out		ALS out		ALS out	
R1500m		R1500m		R1500m		R1500m	
R2100m		R2300m		R2400m		R2400m	
R2100m		R2400m		R2400m		R2400m	

① VNAV DA(H) in lieu of MDA(H) depends on operator policy.

CHANGES: RWY elev, procedure, missed approach.



© JEPPESSEN, 1998, 2025. ALL RIGHTS RESERVED.

UEEE/YKS
YAKUTSK

JEPPESEN
9 MAY 25 (16-2) Eff 15 May

YAKUTSK, RUSSIA
2 NDB Rwy 23

BRIEFING STRIP™	ATIS (Russian) 129.95 126.2	YAKUTSK Approach 129.3	YAKUTSK Radar (APP/TWR) 120.3	YAKUTSK Start (TWR) 120.0	Ground 121.7
	NDB MF 334	Final Apch Crs 233°	D5.8 MANDATORY 1960' (1645')	DA/MDA(H) 660' (345')	Apt Elev 328' Rwy 315'
	MISSED APCH: Climb on 233° to 1700' (1385') or above, then turn LEFT onto 053° climbing to 2620' (2305'), then as directed.				
Alt Set: MM (hPa on req) QNH on req (QFE) Trans level: FL050 ② Trans alt: 3610' (3296')					MSA ARP ①

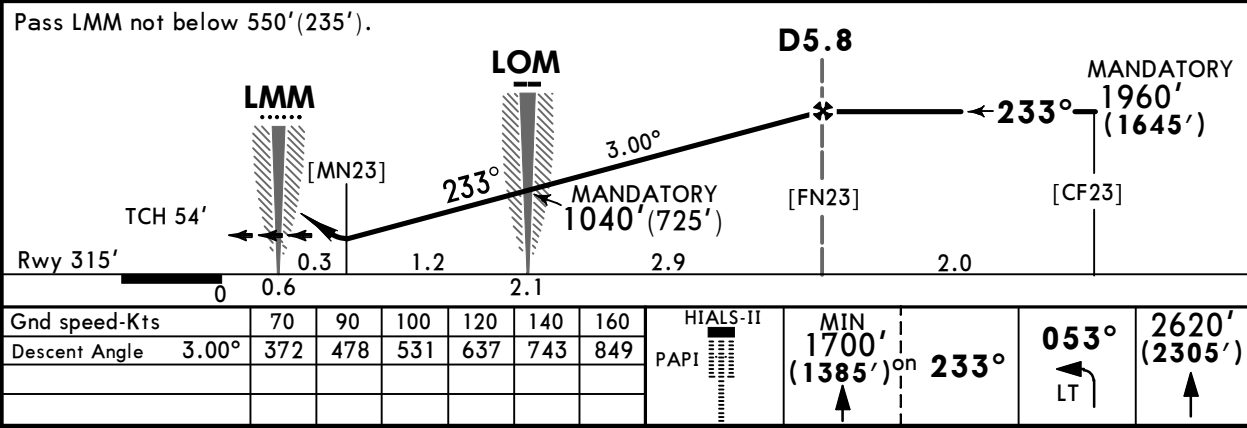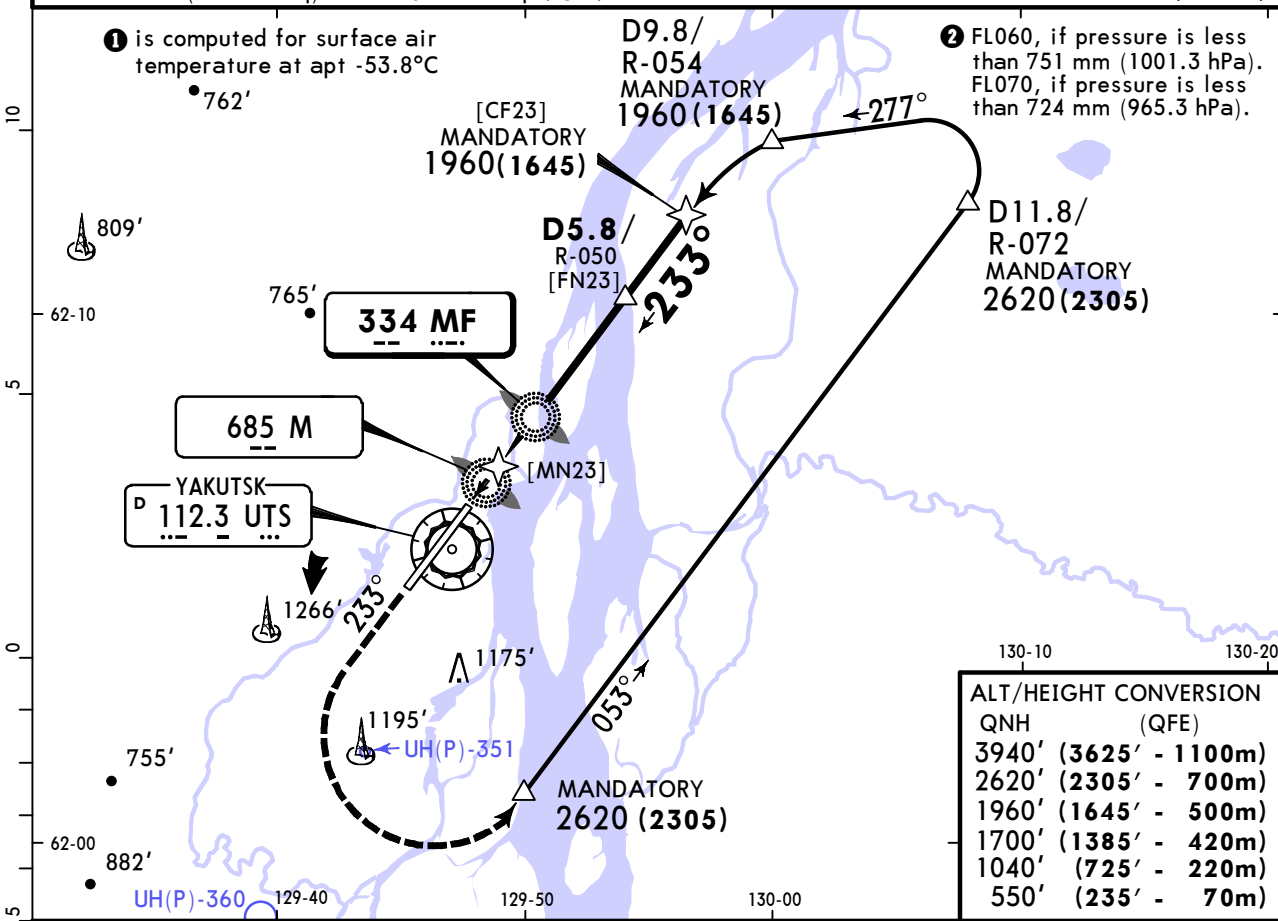

Std STRAIGHT-IN LANDING	
CDFA	
① DA/MDA(H) 660' (345')	
ALS out	
A	R1500m
B	
C	R900m
D	R1600m
① VNAV DA(H) in lieu of MDA(H) depends on operator policy.	