

UZTT/TAS

ISLAM KARIMOV INTL

26 SEP 25

JEPPESEN

10-1P

TASHKENT, UZBEKISTAN

Eff 2 Oct

AIRPORT BRIEFING

1. GENERAL

1.1. ATIS

D-ATIS 126.8

1.2. SPEED RESTRICTION

MAX 250 KT below 10000' MSL or less or by ATC.

1.3. COMMUNICATION FAILURE PROCEDURES

In case of radio communication failure over the Republic of Uzbekistan choose between following options:

- Continue flight according FPL until destination;
- Deviate to one of the alternates in the Republic of Uzbekistan indicated in the flight plan;
- Return to origin in the Republic of Uzbekistan.

The decision should be made with respect to flight safety primarily.

1.3.1. MANDATORY PROCEDURES FOR RETURNING, DEVIATION, ARRIVAL APPROACH AND LANDING AT TASHKENT

- Set transponder code 7600 immediately;
- Call ATS unit or another ACFT on last frequency, on 121.5 or other VHF/HF frequencies available in the current area;
- Follow via SID, STAR, AIRWAY or as cleared;
- Reach and maintain last cleared flight level or minimum safe level for the sector/airway segment whichever is higher;
- Avoid any deviation from prescribed track and do not initiate level change within 3 minutes after:
 1. the reaching of last cleared flight level; or
 2. transponder code 7600 activation; or
 3. failed position report, whichever occurred later;
- Depending on the flight direction, perform a turn to the STASR WP (TT201, TT233, TT234, ERWET), adhering to STAR, maintaining the occupied flight level (altitude) to descend to the altitude indicated in the STAR;
- Identify active RWY for landing as practicable (consider RWYs 08L/R are priority RWYs for landing);
- Enter the holding area over corresponding STAR WP and descend to the published holding area altitude;
- Make approach and landing according to published approach procedures.

Note: Initiate go-around if unacceptable conditions occur during approach (tail wind, windshear, RWY occupation, etc.). After go-around, it is recommended to make another instrument or visual approach for the opposite RWY.

1.4. LOW VISIBILITY PROCEDURES (LVP)

1.4.1. GENERAL

LVP will be used if visibility is 550m and less.

The flight crew will be informed by ATIS by phrase: "Low visibility procedure in progress."

UZTT/TAS

ISLAM KARIMOV INTL

26 SEP 25

JEPPESEN

10-1P1

TASHKENT, UZBEKISTAN

Eff 2 Oct

AIRPORT BRIEFING

1. GENERAL

1.4.2. ARRIVAL

The crew must advise TWR when landing is fully completed and when RWY vacated.

This can be done when ACFT completely leaves the RWY and is positioned on TWY not closer than 394'/120m from RWY centerline. ACFT must wait for Follow-me car.

Follow-me car will be available from TWYs 1, 2, 2A, 3, 4 and 5.

1.4.3. DEPARTURE

Taxiing via apron and TWYs must be conducted behind Follow-me car via taxi routes assigned by ATC.

1.5. TAXI PROCEDURES

CAT C and D ACFT have to use stands with two engines IDLE power only and IDLE engines power is required when ACFT is turning out when leaving parking positions.

Taxiing ACFT with four engines on TWY 13 only under inner engines power.

Pilots must contact Delivery controller not earlier than 15 minutes before start-up for ATC clearance.

TWY B segment between stands B11 and B17, Main TWY segment behind stands B11 and B12 and TWY H segment between stands B17 and H43 are restricted for taxi of ACFT with wingspan more than 157'/48,06m.

Taxiing into stand B11A from TWY 2 via MAIN TWY strictly along the dashed line with MAX wingspan of 198'/60.3m. MAX ACFT length 208.6'/63.6m.

Taxiing from stand B11A by own power to TWY B then along the dashed line to TWY 1 and TWY 2 without ACFT on stand B8A. Stand B18 is prohibited for ACFT to stand during taxiing into stand B11A.

1.6. PARKING INFORMATION

Stands B1, B2, B5 and B6 equipped with docking guidance system AGNIS.

UZTT/TAS

ISLAM KARIMOV INTL

26 SEP 25

JEPPESEN

10-1P2

Eff 2 Oct

TASHKENT, UZBEKISTAN

AIRPORT BRIEFING

2. ARRIVAL

2.1. CAT II OPERATIONS

RWY 08L approved for CAT II operations.

2.2. RWY OPERATIONS

2.2.1. MINIMUM RWY OCCUPANCY TIME

Pilots are requested to vacate the RWYs 08L/26R or 08R/26L in the shortest possible time, except in LVP conditions, by using the earliest TWY available in compliance with safety or by ATC.

2.3. TAXI PROCEDURES

2.3.1. STANDARD TAXI ROUTES

Taxi Route Designator	ACFT Stands	Taxi Route Details
A 01	Stands B1, B3 thru B5	TWY 4, MAIN TWY, TWY H, TWY B
A 02	Stands B1, B3 thru B5	TWY 5, TWY 6, MAIN TWY, TWY H, TWY B
A 03	Stands B8 thru B17, B19	TWY 4, MAIN TWY
A 04	Stands C15 thru C41, H48 thru H52, B6	TWY 5, TWY 6, MAIN TWY, TWY H
A 05	Stands C15 thru C41, H48 thru H52, B6	TWY 4, MAIN TWY, TWY H
A 06	Stands B8 thru B17, B19	TWY 5, TWY 6, MAIN TWY
A 07	Stands H43 thru H47	TWY 4, MAIN TWY, TWY H, TWY H1
A 08	Stands H43 thru 47	TWY 5, TWY 6, MAIN TWY, TWY H, TWY H1

UZTT/TAS

ISLAM KARIMOV INTL

26 SEP 25

JEPPESEN

10-1P3

Eff 2 Oct

TASHKENT, UZBEKISTAN

AIRPORT BRIEFING

3. DEPARTURE

3.1. TAXI PROCEDURES

3.1.1. STANDARD TAXI ROUTES

Taxi Route Designator	ACFT Stands and Engine Start-up Points	Taxi Route Details
EAST 01	Stands C15 thru C41, B6, H43 thru H52, start-up point 11	TWY H, MAIN TWY, TWY 6, TWY 5
EAST 02	Stands B1, B3 thru B5, B8 thru B17, start-up points 2, 3	TWY B, TWY H, MAIN TWY, TWY 6, TWY 5
EAST 03	Stands C15 thru C41, B6, H43 thru H52, start-up point 11	TWY H, MAIN TWY, TWY 4
EAST 04	Stands B18 thru B20, start-up points 4, 5	MAIN TWY, TWY 6, TWY 5
EAST 05	Stands B1, B3 thru B5, B8 thru B17, start-up points 2, 3	TWY B, TWY H, MAIN TWY, TWY 4
WEST 01	Stands C15 thru C41, B6, H43 thru H52, start-up point 11	TWY H, TWY B, TWY 1
WEST 02	Stands C15 thru C41, B6, H43 thru H52, start-up point 11	TWY H, MAIN TWY, TWY 2
WEST 03	Stands C15 thru C41, B6, H43 thru H52, start-up point 11	TWY H, TWY B, TWY 2

3.2. RWY OPERATIONS


3.2.1. MINIMUM RWY OCCUPANCY TIME

To optimize the RWY utilization, flight crew shall complete all checklists prior to line-up clearance and be ready for immediate take-off. Pilots are expected to react take-off clearance within 10 seconds.

The crew shall request line-up clearance only after being fully prepared for take off.

3.3. ENGINE FAILURE PROCEDURE DURING TAKE-OFF AND INITIAL CLIMB

ACFT operators must not plan engine failure procedures with ACFT deviation to the North of extended RCL. Do not plan to penetrate prohibited areas in all cases.

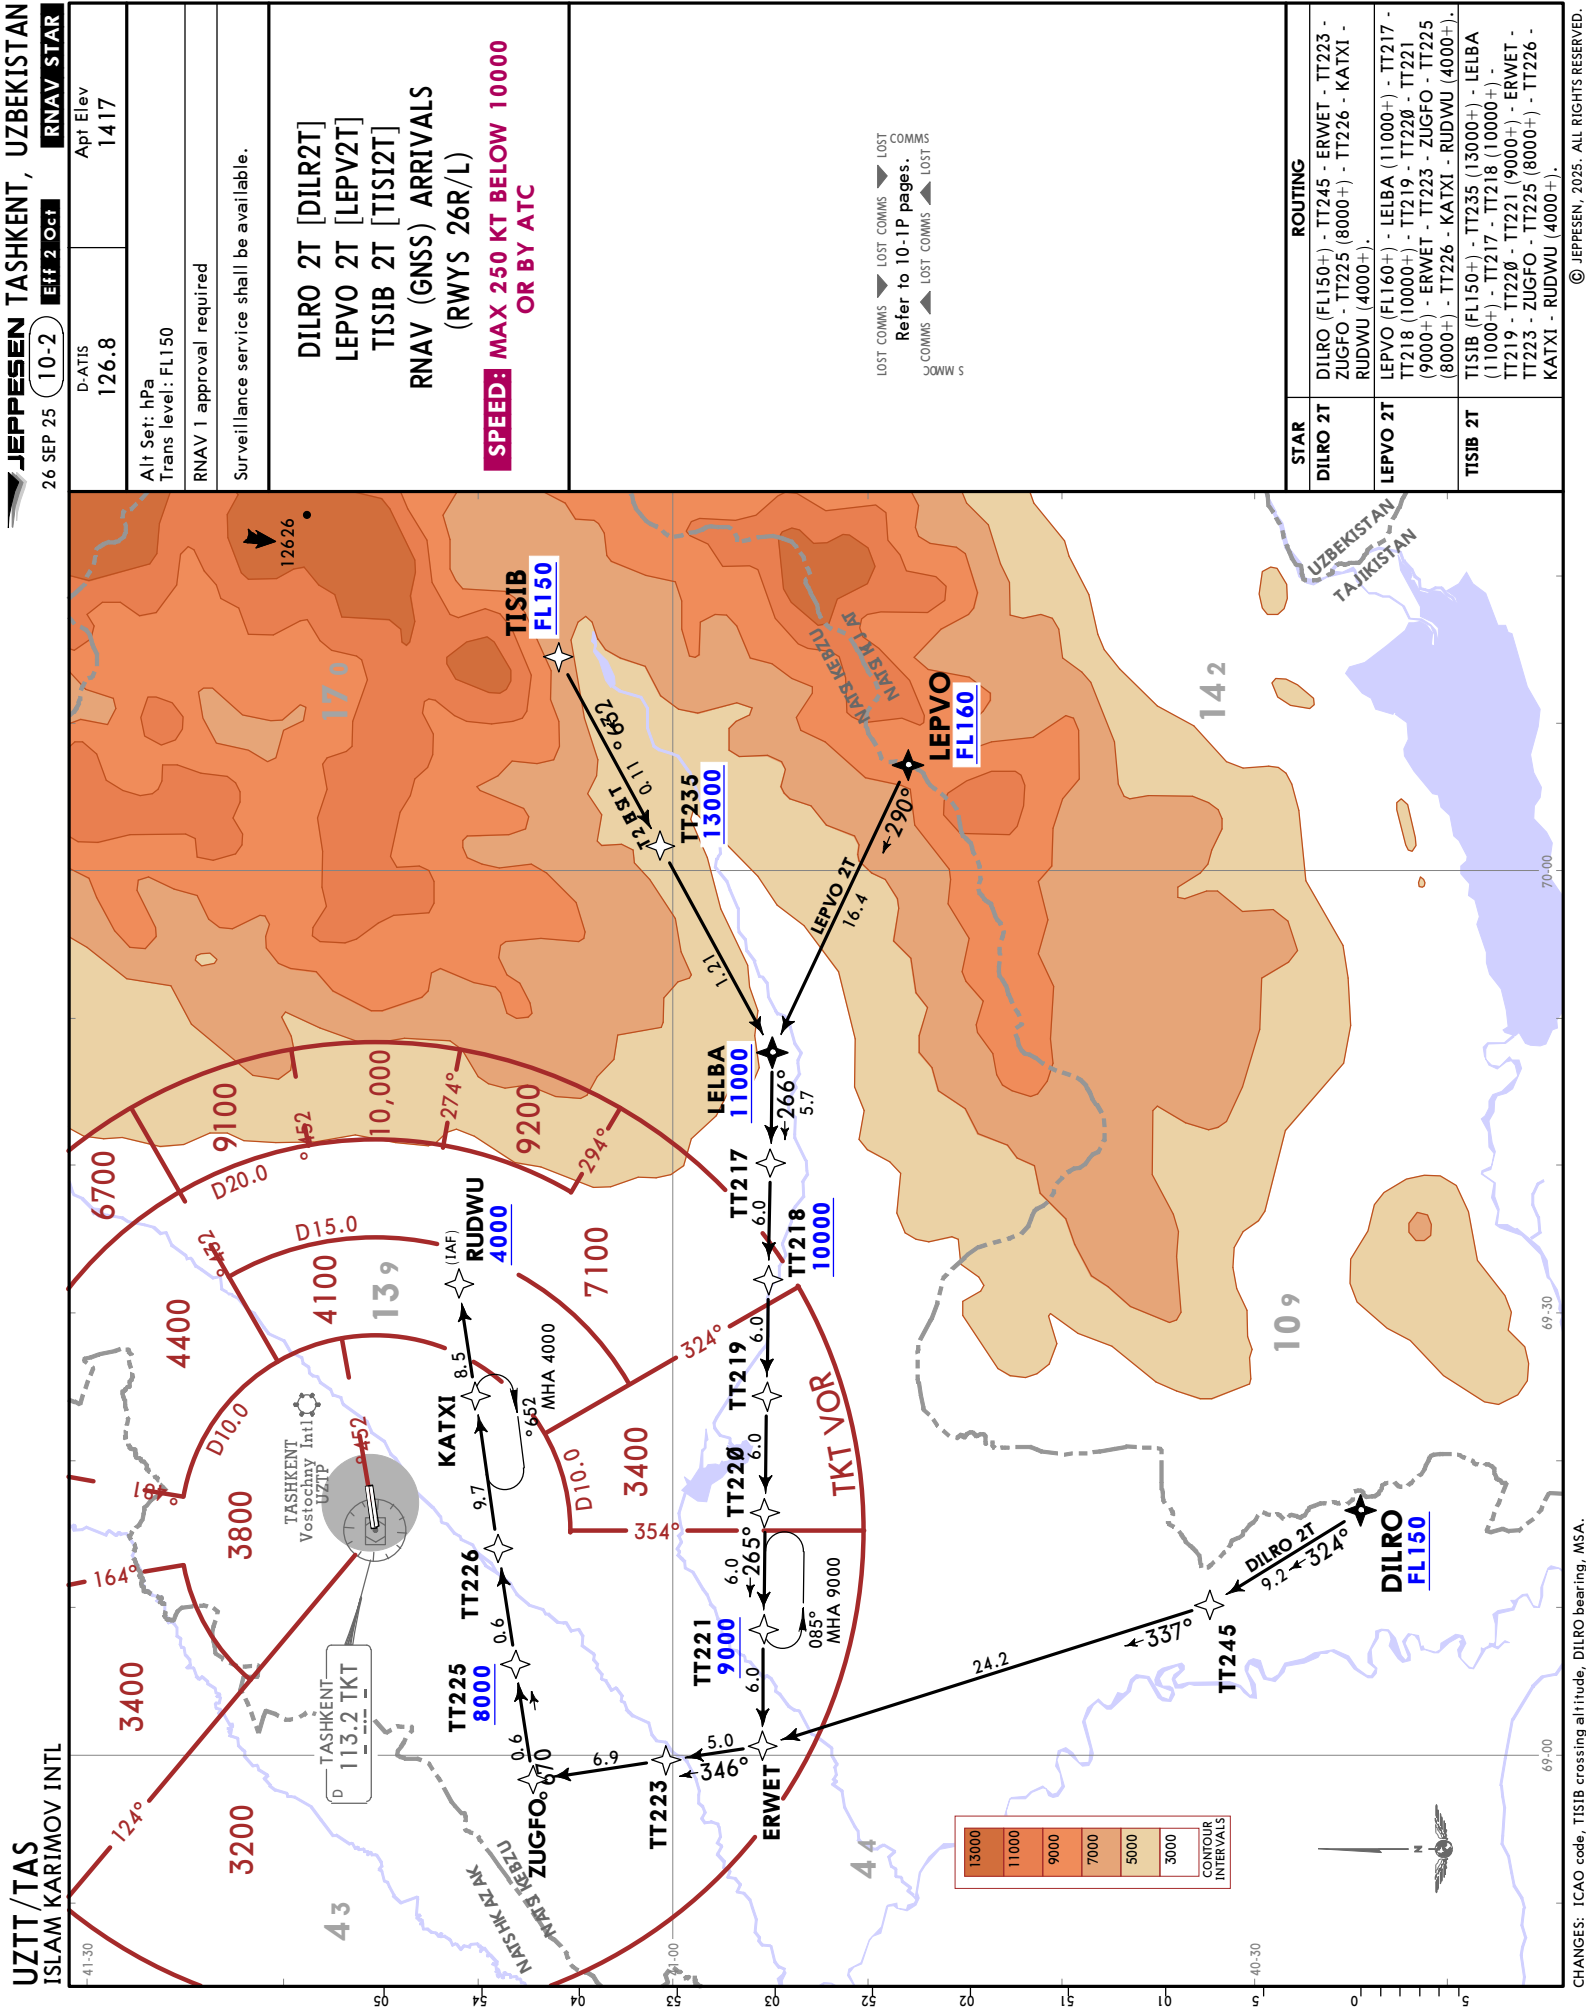



26 SEP 25 10-2B


0-2B

RNAV STAR


D-ATIS 126.8	Apt Elev 1417
Alt Set: hPa Trans level: FL150	
RNAV 1 approval required	
Surveillance service shall be available.	
DOSOR 2T [DOS02T] MIKNO 2T [MIKN2T] NIMAG 2T [NIMA2T] RNAV (GNSS) ARRIVALS (RWYS 26R/L) SPEED: MAX 250 KT BELOW 10000 OR BY ATC	
LOST COMMS ➡ LOST COMMS ➡ LOST COMMS COMMS ➡ LOST COMMS ➡ LOST COMMS ROUTING DOSOR 2T DOSOR (FL250+) - TT228 (FL150+) - TT230 - TT231 (11000+) - MEWOW - TT225 (8000+) - TT226 - KATXI - RUDWU (4000+). MIKNO 2T MIKNO (FL250+) - TT228 (FL150+) - TT230 - TT231 (11000+) - MEWOW - TT225 (8000+) - TT226 - KATXI - RUDWU (4000+). NIMAG 2T NIMAG (FL250+) - TT228 (FL150+) - TT230 - TT231 (11000+) - MEWOW - TT225 (8000+) - TT226 - KATXI - RUDWU (4000+).	

13000	11000	9000	7000	5000	3000
-------	-------	------	------	------	------

CONTOUR INTERVALS

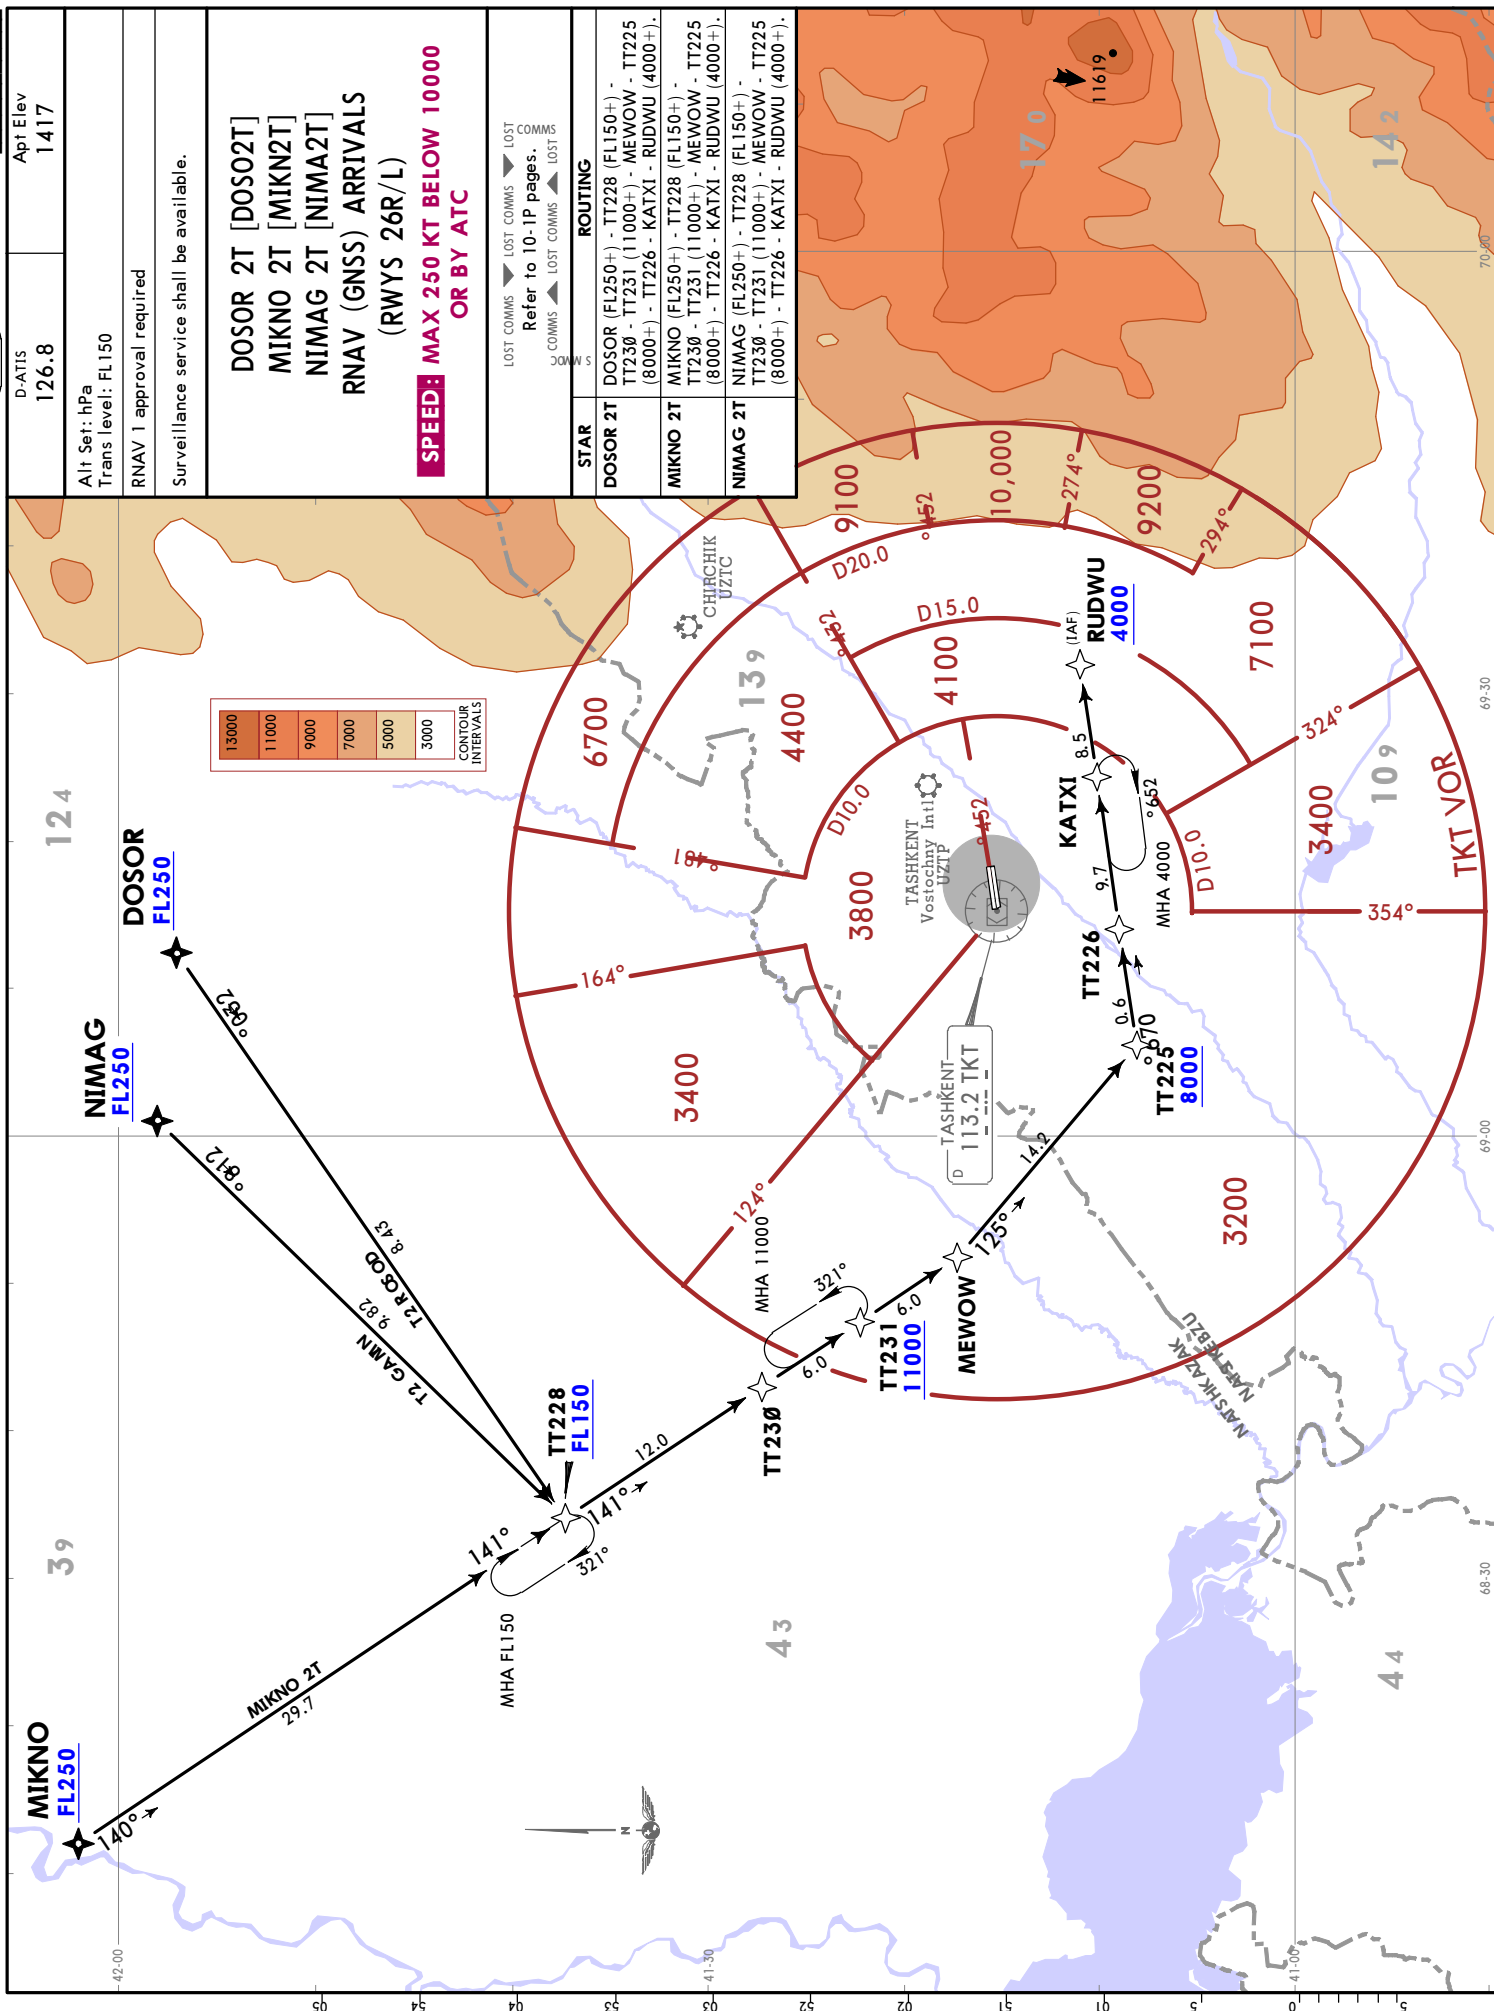

© JEPPESEN 2005. ALL RIGHTS RESERVED.
CHANGES: 18 AUG 2006 MSB



LOST COMMS ▶ LOST COMMS ▶ LOST COMMS
Refer to 10-1P pages.
 COMMS ▶ LOST COMMS ▶ LOST
 5 MMDC

STAR	ROUTING
DILRO 2W	DILRO (FL150+) - TT245 - TT211 (K230+; 7000) - TT212 (K230; 7000) - TT213 (K230; 7000) - TT214 (K230; 7000) - TT215 (K230; 7000) - TT216 (K230; 7000) - FIDFI (4000+).
LEPVO 2W	LEPVO (FL160+) - LELBA (3000+) - TT217 - TT218 (10000+) - TT219 - TT220 - TT221 (9000+) - ERWET (7000+) - TT211 (K230; 7000) - TT212 (K230; 7000) - TT213 (K230; 7000) - TT214 (K230; 7000) - TT215 (K230; 7000) - TT216 (K230; 7000) - FIDFI (4000+).
TTISB 2W	TTISB (FL150+) - TT235 (FL150+) - LELBA (3000+) - TT217 - TT218 (10000+) - TT219 - TT220 - TT221 (9000+) - ERWET (7000+) - TT211 (K230; 7000) - TT212 (K230; 7000) - TT213 (K230; 7000) - TT214 (K230; 7000) - TT215 (K230; 7000) - TT216 (K230; 7000) - FIDFI (4000+).

26 SEP 25 10-2D

Eff 2 Oct

RNAV STAR

D-ATIS	Apt Elev
126.8	1417

Alt Set: hPa
Trans level: FL150

RNAV 1 approval required

Surveillance service shall be available.

**KUFIM 2W [KUF12W]
RNAV (GNSS) ARRIVAL
(RWYS 08L/R)**

**SPEED: MAX 250 KT BELOW 10000
OR BY ATC**


Refer to 10-1P pages.

ROUTING

KUFIM (13000+; 9000+) - TT211 (K230; 7000) - TT212 (K230; 7000) - TT213 (K230; 7000) - TT214 (K230; 7000) - TT215 (K230; 7000) - TT216 (K230; 7000) - FIDFI (4000+).

CHANGES: ICAO code: MSA.

© JEPPESEN, 2025. ALL RIGHTS RESERVED.

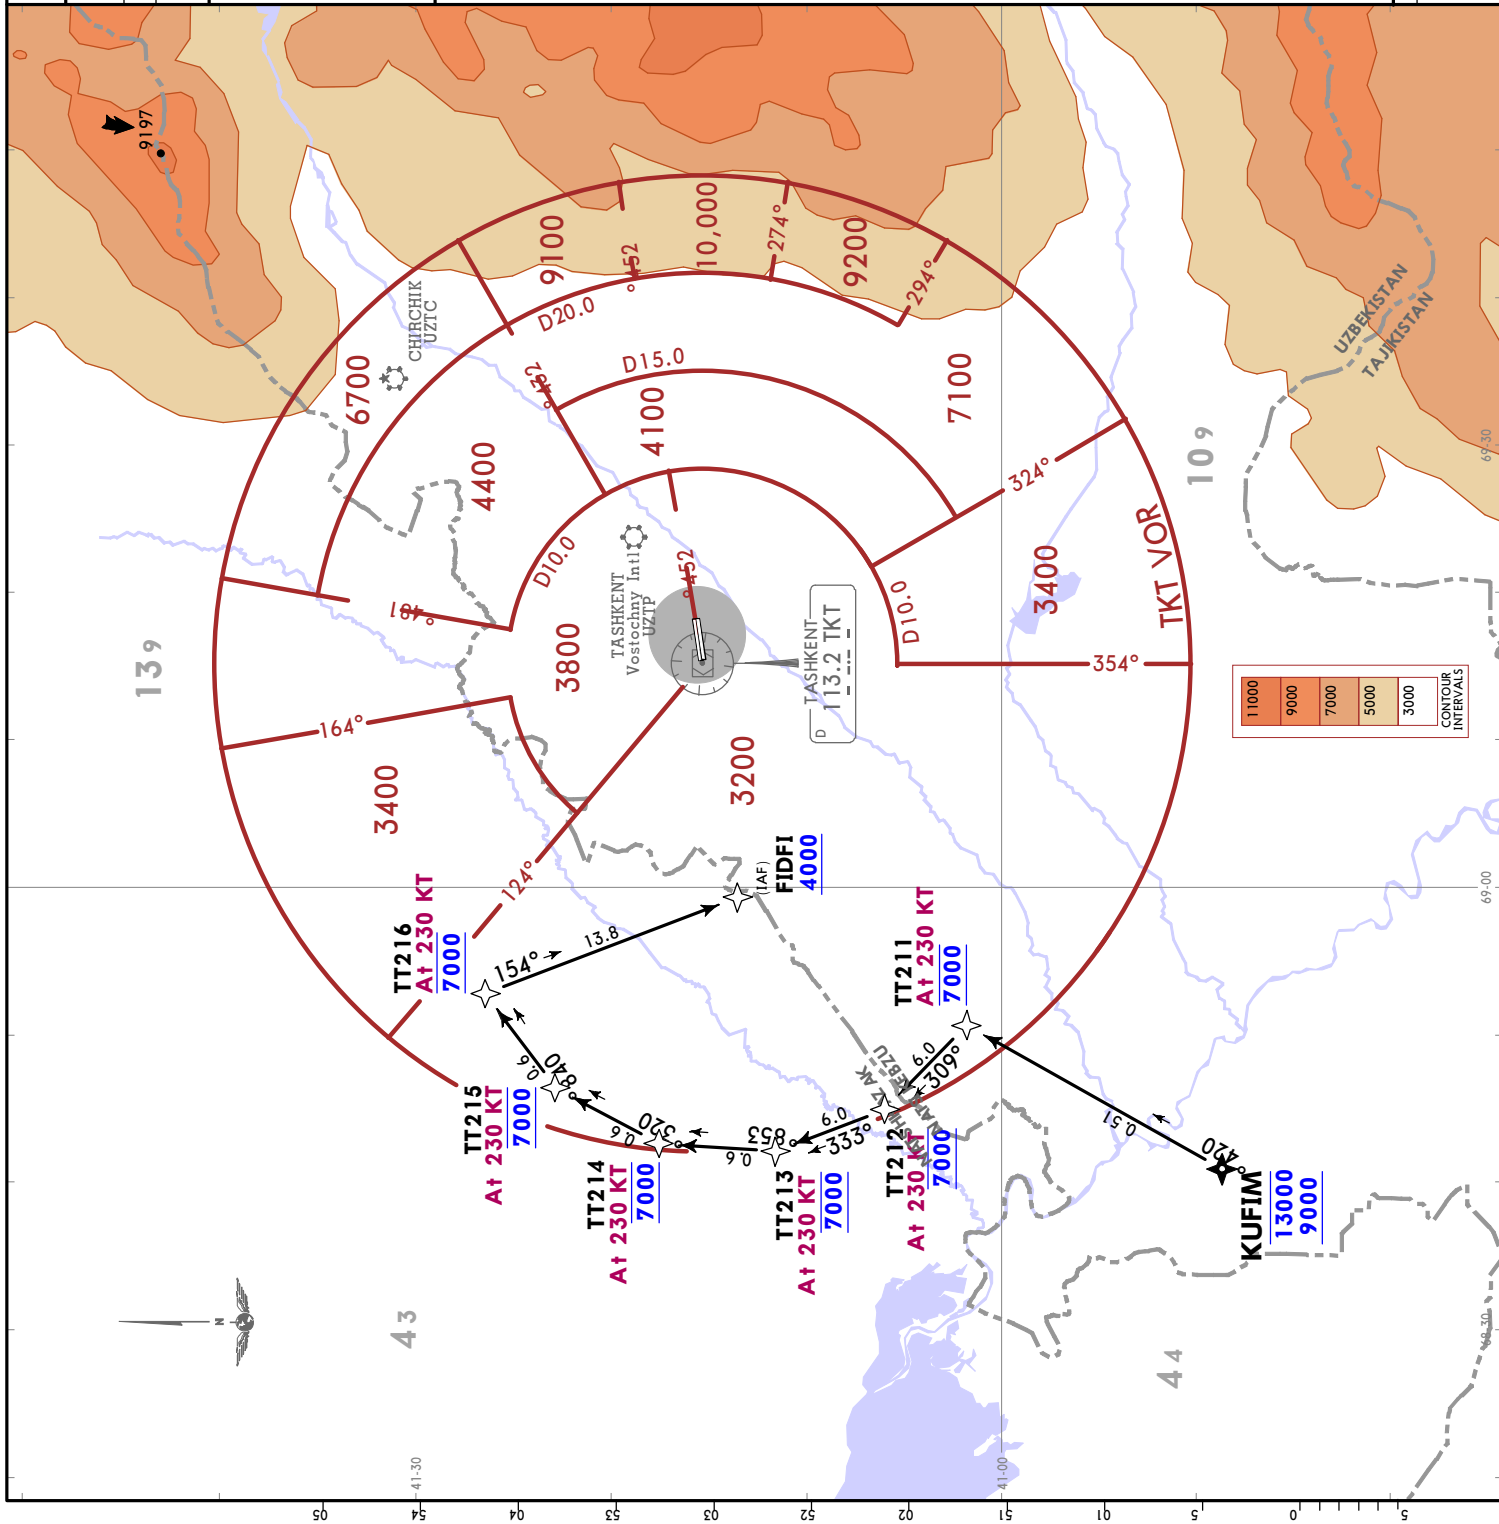



26 SEP 25 (10-2F) Eff 2 Oct

10-2F

Eff 2 Oct


STAR

Apt Elev
1417

D-ATIS
126.8Alt Set: hPa
Trans level: F


LEPVO 2S [LEPV2S]
TISIB 2S [TISI2S]
ARRIVALS
(RWYS 26R/L)
MAX 250 KT BELOW
OR BY ATC

Refer to 10-1P pages.

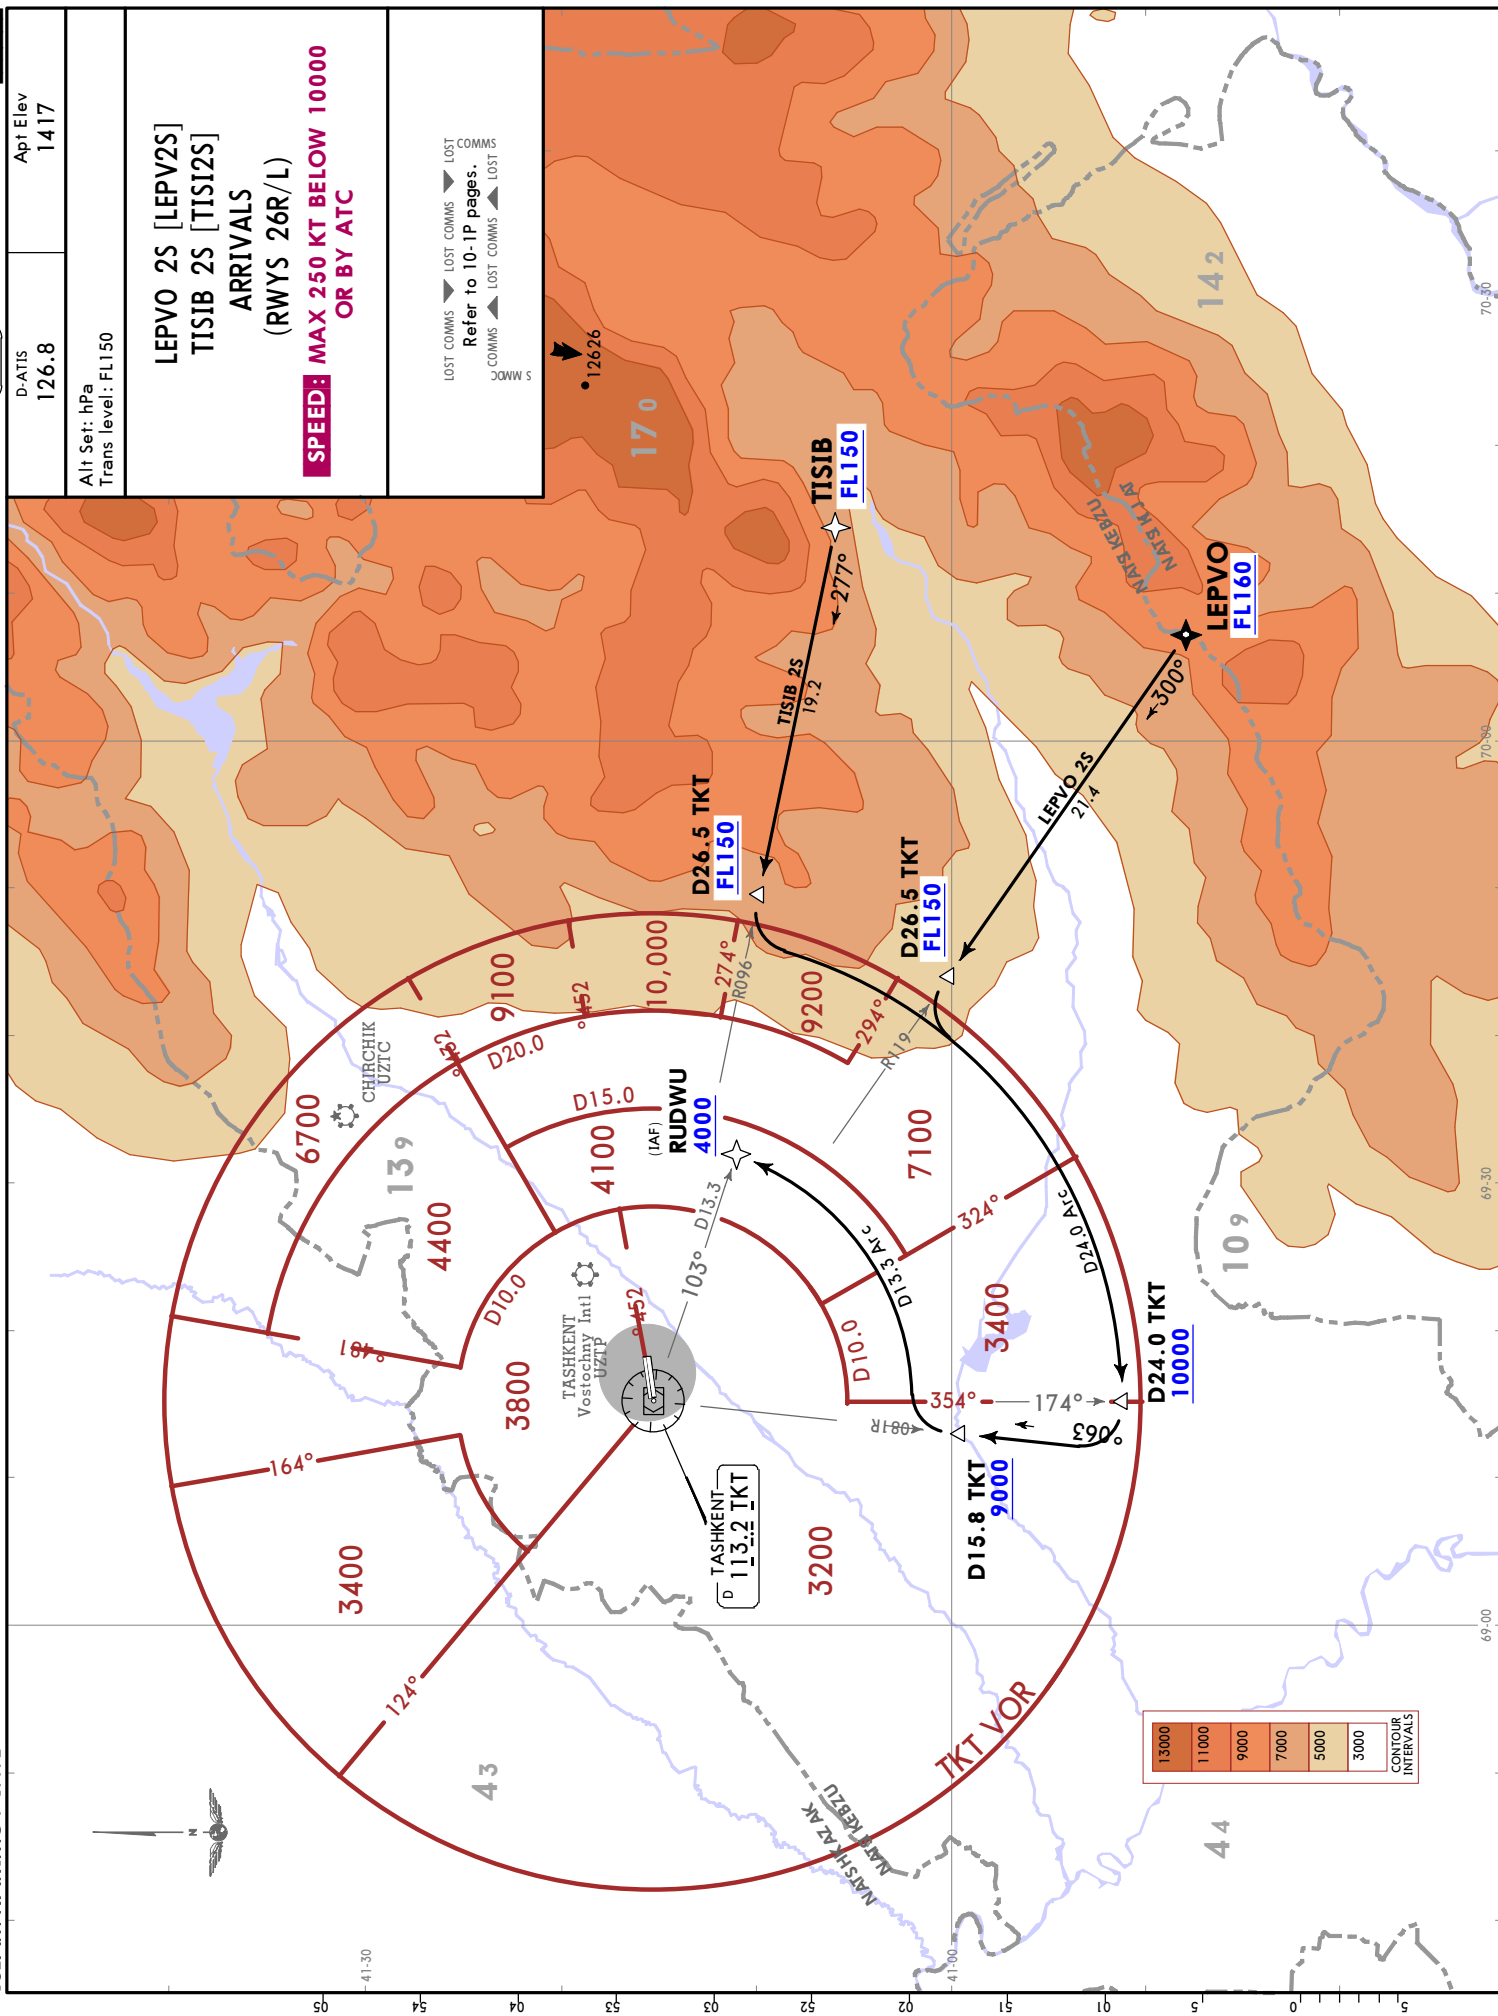


CHANGES: ICAO code, TISIB crossing altitude, bearings, holding withdrawn, MSA.


© JEPPESEN, 2025. ALL RIGHTS RESERVED.

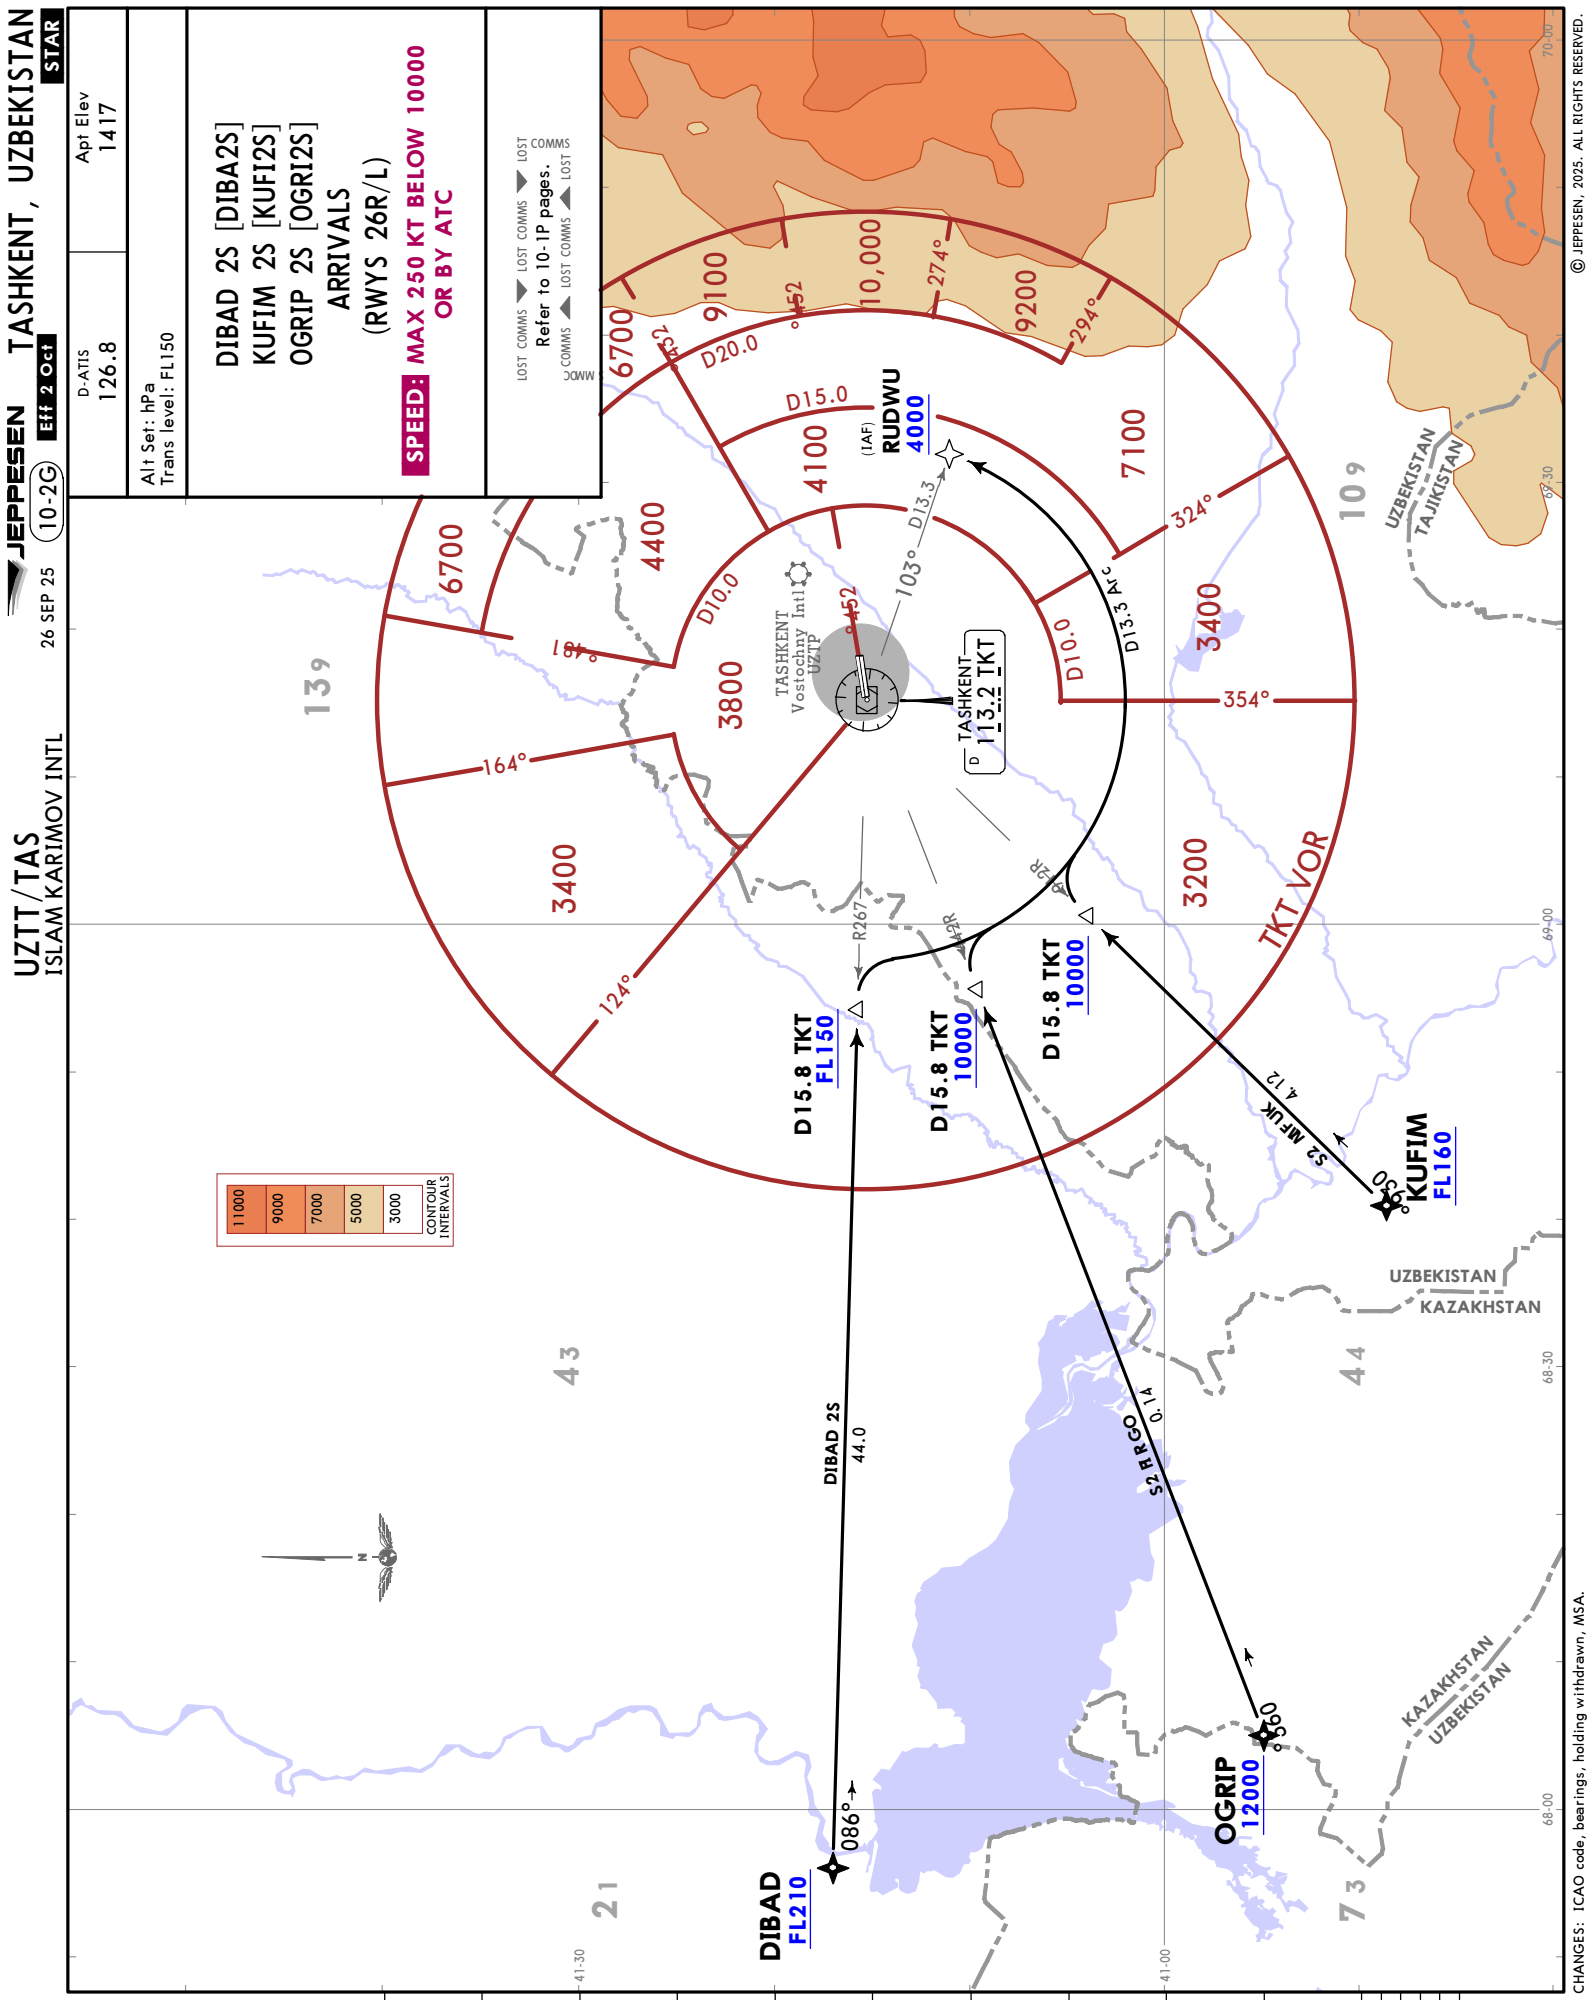



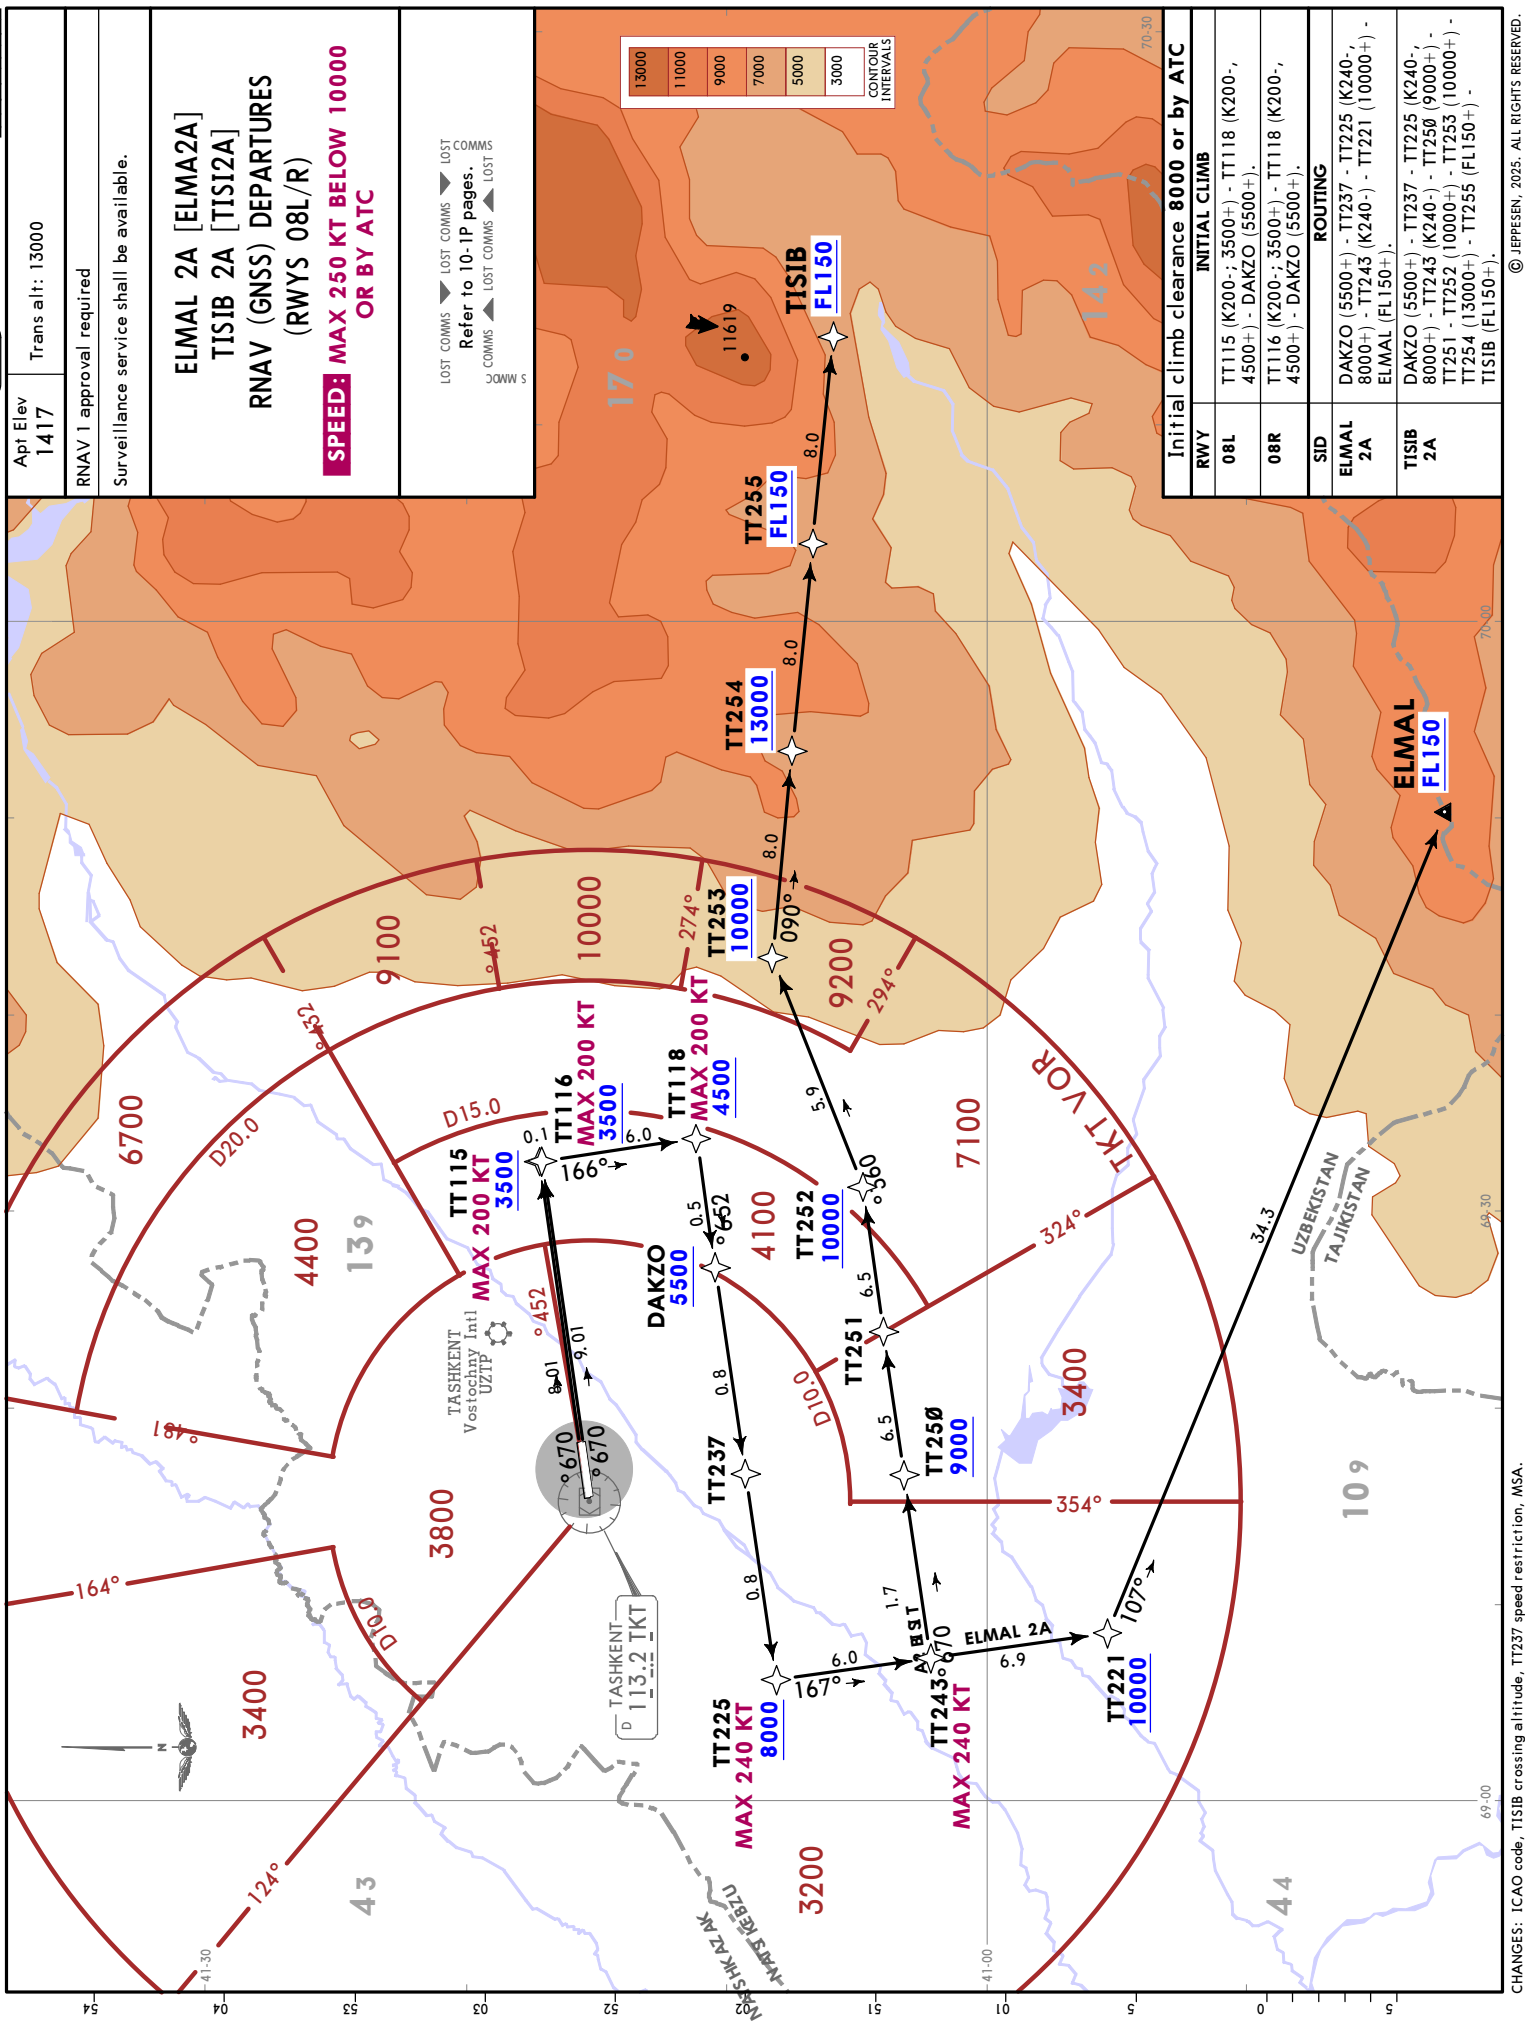

JEPPESSEN **TASHKENT, UZBEKISTAN**
UZZT/TAS **ISLAM KARIMOV INTL**
26 SEP 25 (10-3A) Eff: 2 Oct
RNAV SID

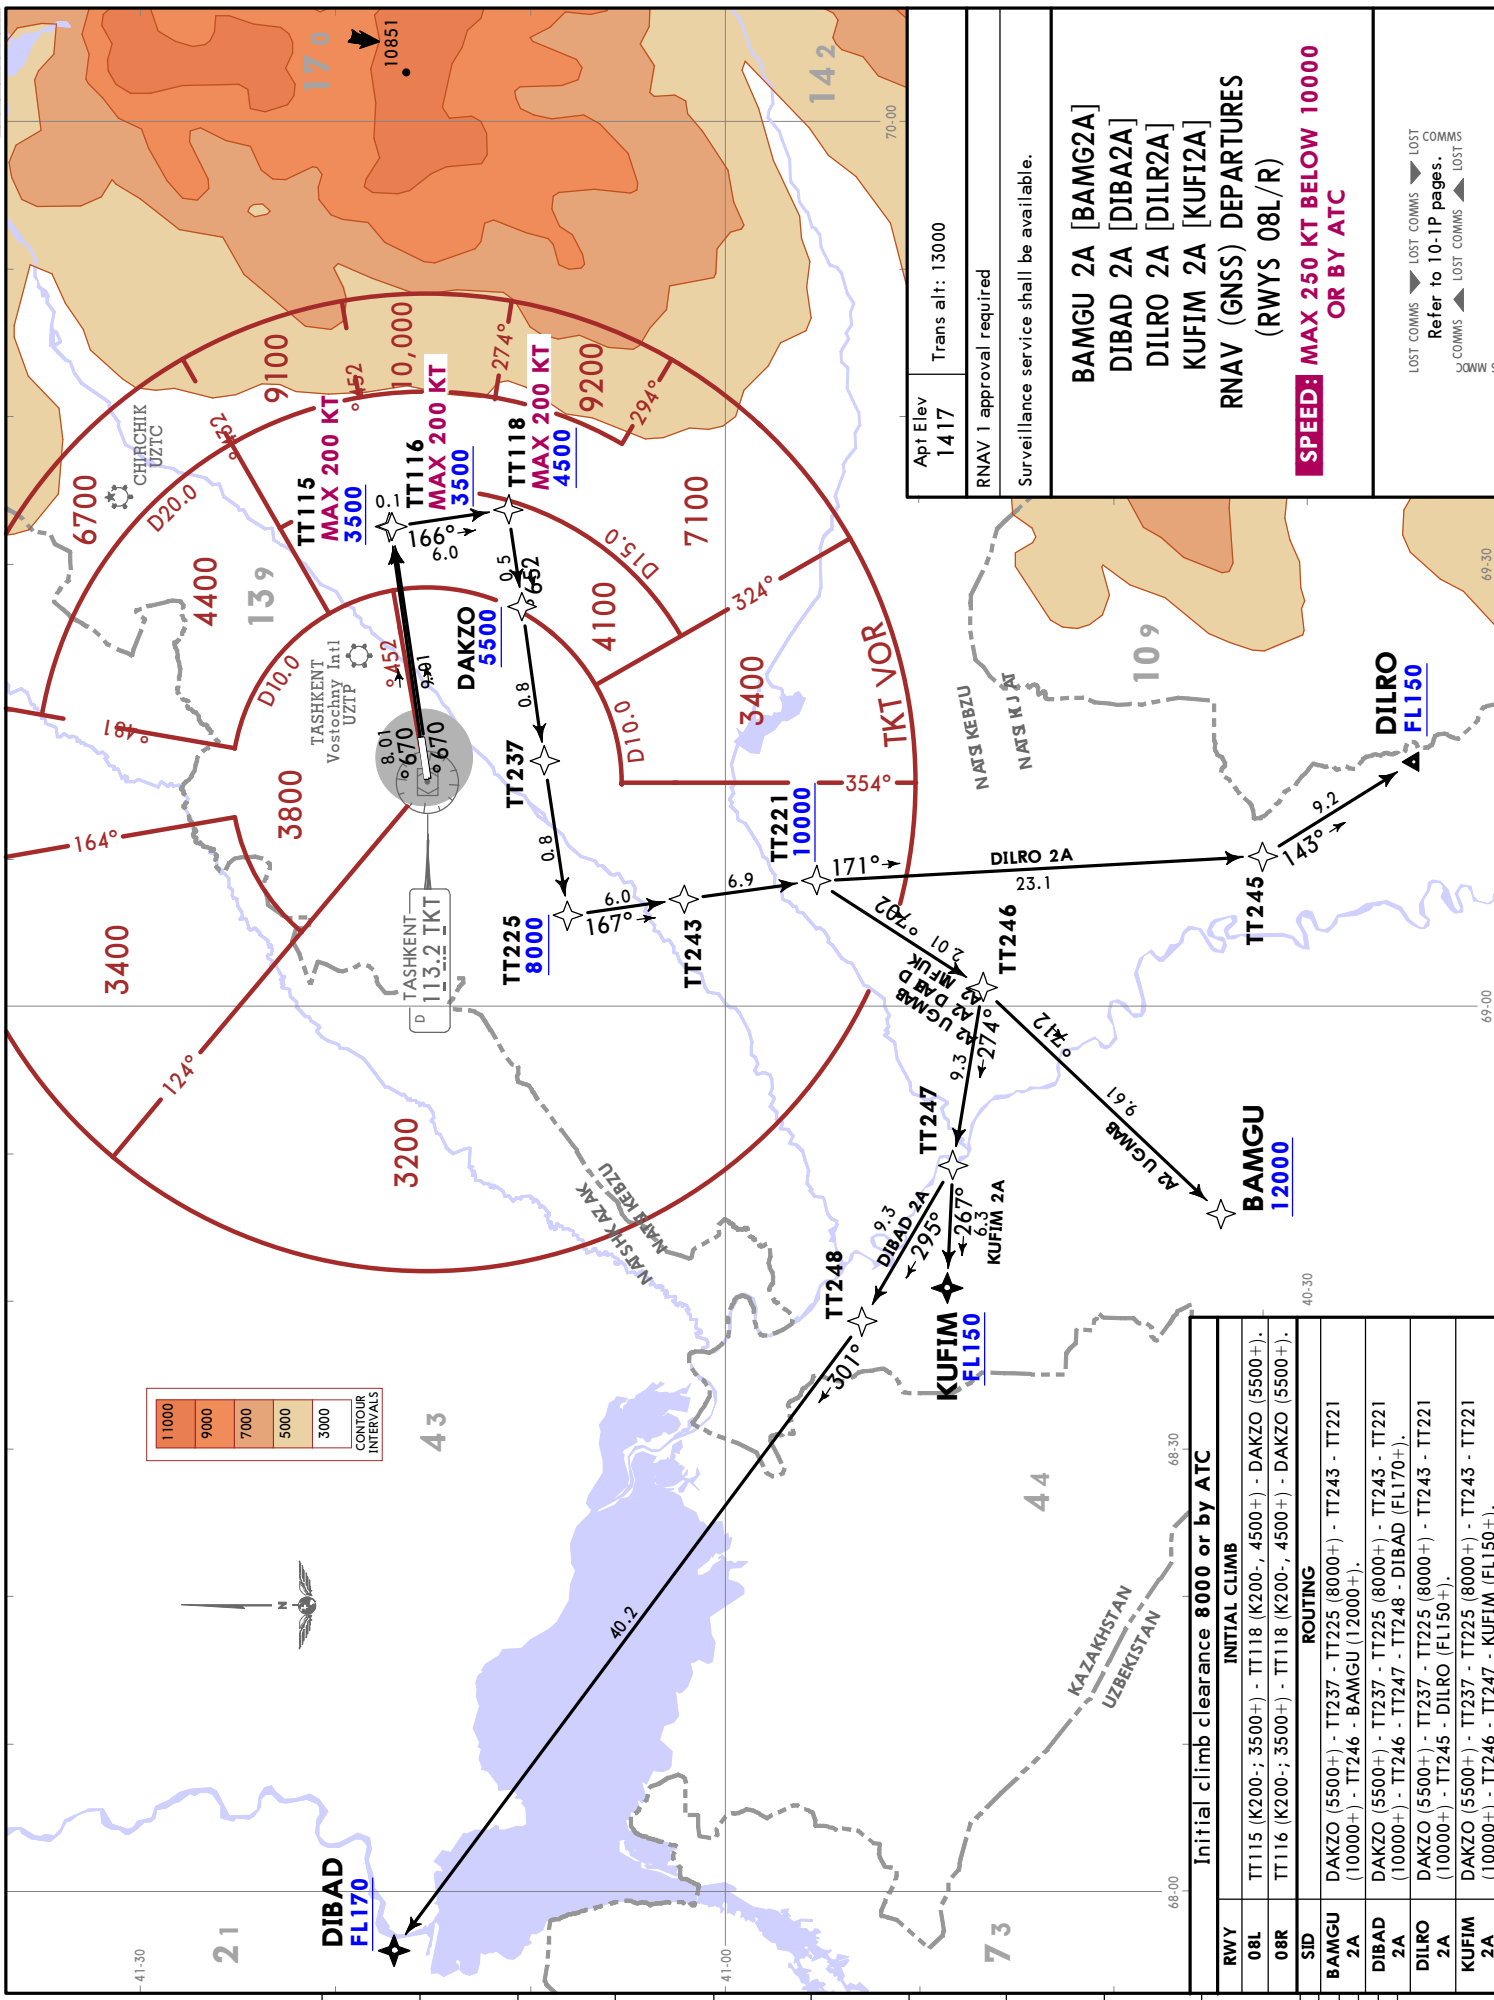

11000
9000
7000
5000
3000

CONTOUR INTERVALS



Initial climb clearance 8000 or by ATC		
RWY	INITIAL CLIMB	
08L	TT1115 (K200+; 3500+) - TT1118 (K200+; 4500+) - DAKZO (5500+).	
08R	TT1116 (K200+; 3500+) - TT1118 (K200+; 4500+) - DAKZO (5500+).	
SID	ROUTING	
BAMGU 2A	DAKZO (5500+) - TT237 - TT225 (8000+) - TT243 - TT221 (10000+) - TT246 - BAMGU (12000+).	
DIBAD 2A	DAKZO (5500+) - TT237 - TT225 (8000+) - TT243 - TT221 (10000+) - TT246 - TT247 - TT248 - DIBAD (FL170+).	
DILRO 2A	DAKZO (5500+) - TT237 - TT225 (8000+) - TT243 - TT221 (10000+) - TT245 - DILRO (FL150+).	
KUFIM 2A	DAKZO (5500+) - TT237 - TT225 (8000+) - TT243 - TT221 (10000+) - TT246 - TT247 - KUFIM (FL150+).	

Apt Elev 1417	Trans alt: 13000
RNAV 1 approval required	
Surveillance service shall be available.	

BAMGU 2A [BAMG2A]
DIBAD 2A [DIBA2A]
DILRO 2A [DILR2A]
KUFIM 2A [KUF12A]
RNAV (GNSS) DEPARTURES
(RWYS 08L/R)

**SPEED: MAX 250 KT BELOW 10000
OR BY ATC**

LOST COMMS ► LOST COMMS ► LOST COMMS
COMMS ► LOST COMMS ► LOST COMMS
Refer to 10-IP pages.


JEPPESSEN TASHKENT, UZBEKISTAN
26 SEP 25 **10-3B** **Eff 2 Oct** **RNAV SID**

Apt Elev
1417
Trans alt: 13000
RNAV 1 approval required
Surveillance service shall be available.


BAMUT 2A [BAMU2A]
MIKNO 2A [MIKN2A]
ODORI 2A [ODOR2A]
RNAV (GNSS) DEPARTURES
(RWYS 08L/R)
**SPEED: MAX 250 KT BELOW 10000
OR BY ATC**


LOST COMMS $\blacktriangleright$ LOST COMMS $\blacktriangleright$ LOST
COMMS $\blacktriangleleft$ LOST COMMS $\blacktriangleleft$ LOST
Refer to 10-IP pages.
S MDC

Initial climb clearance 8000 or by ATC	INITIAL CLIMB
RWY	TT115 (K200+ - 3500+) - TT118 (K200+ - 4500+) - DAKZO (5500+).
08L	TT116 (K200+ - 3500+) - TT118 (K200+ - 4500+) - DAKZO (5500+).
08R	TT115 (K200+ - 3500+) - TT118 (K200+ - 4500+) - DAKZO (5500+).
SID	ROUTING
BAMUT 2A	DAKZO (5500+) - TT237 - TT225 (8000+) - ANWAT (9000+) - WIKWI - BAMUT (FL150+).
MIKNO 2A	DAKZO (5500+) - TT237 - TT225 (8000+) - ANWAT (9000+) - WIKWI - TT240 - TT241 - TT242 - MIKNO (FL190+).
ODORI 2A	DAKZO (5500+) - TT237 - TT225 (8000+) - ANWAT (9000+) - WIKWI - TT240 - ODORI (FL150+).

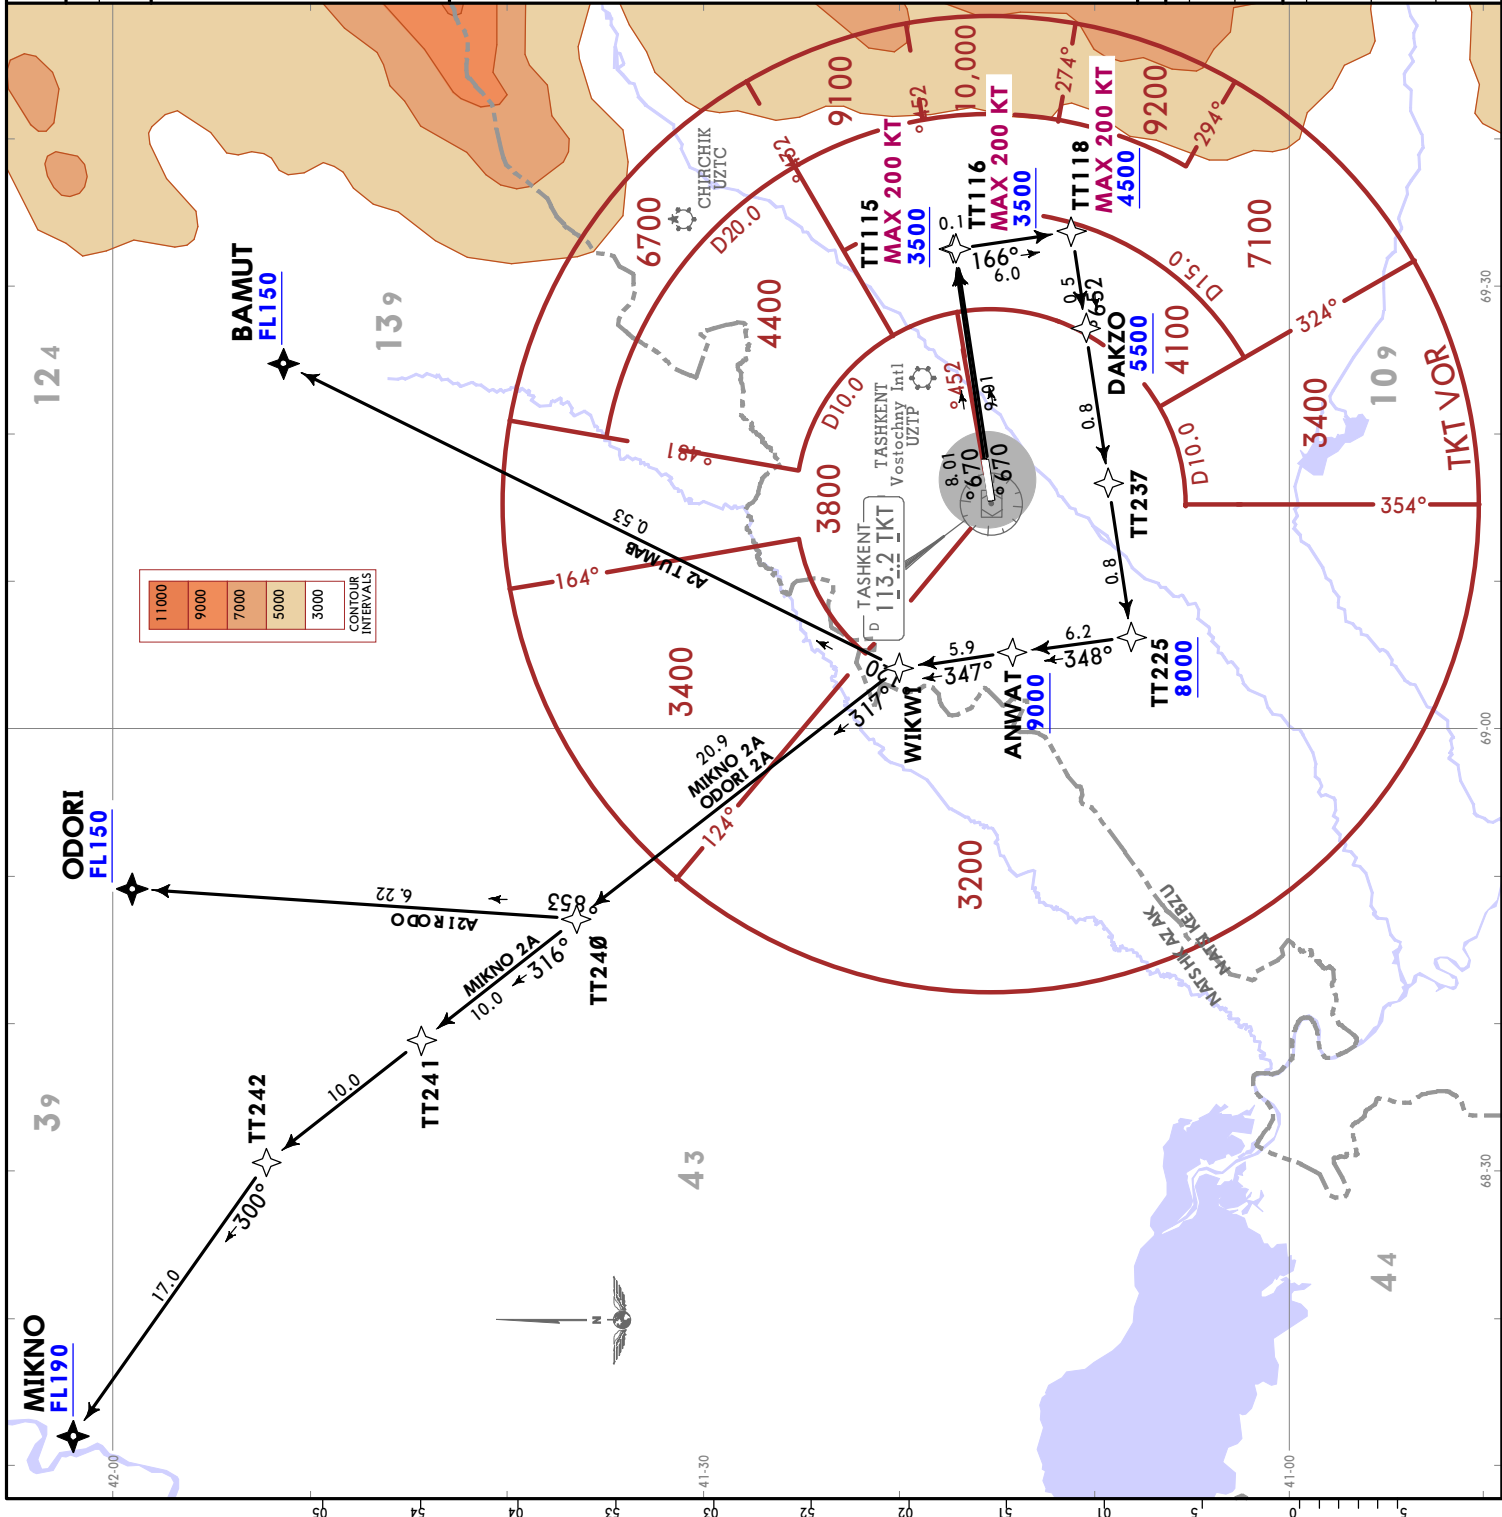

UZTT/TAS
ISLAM KARIMOV INTL

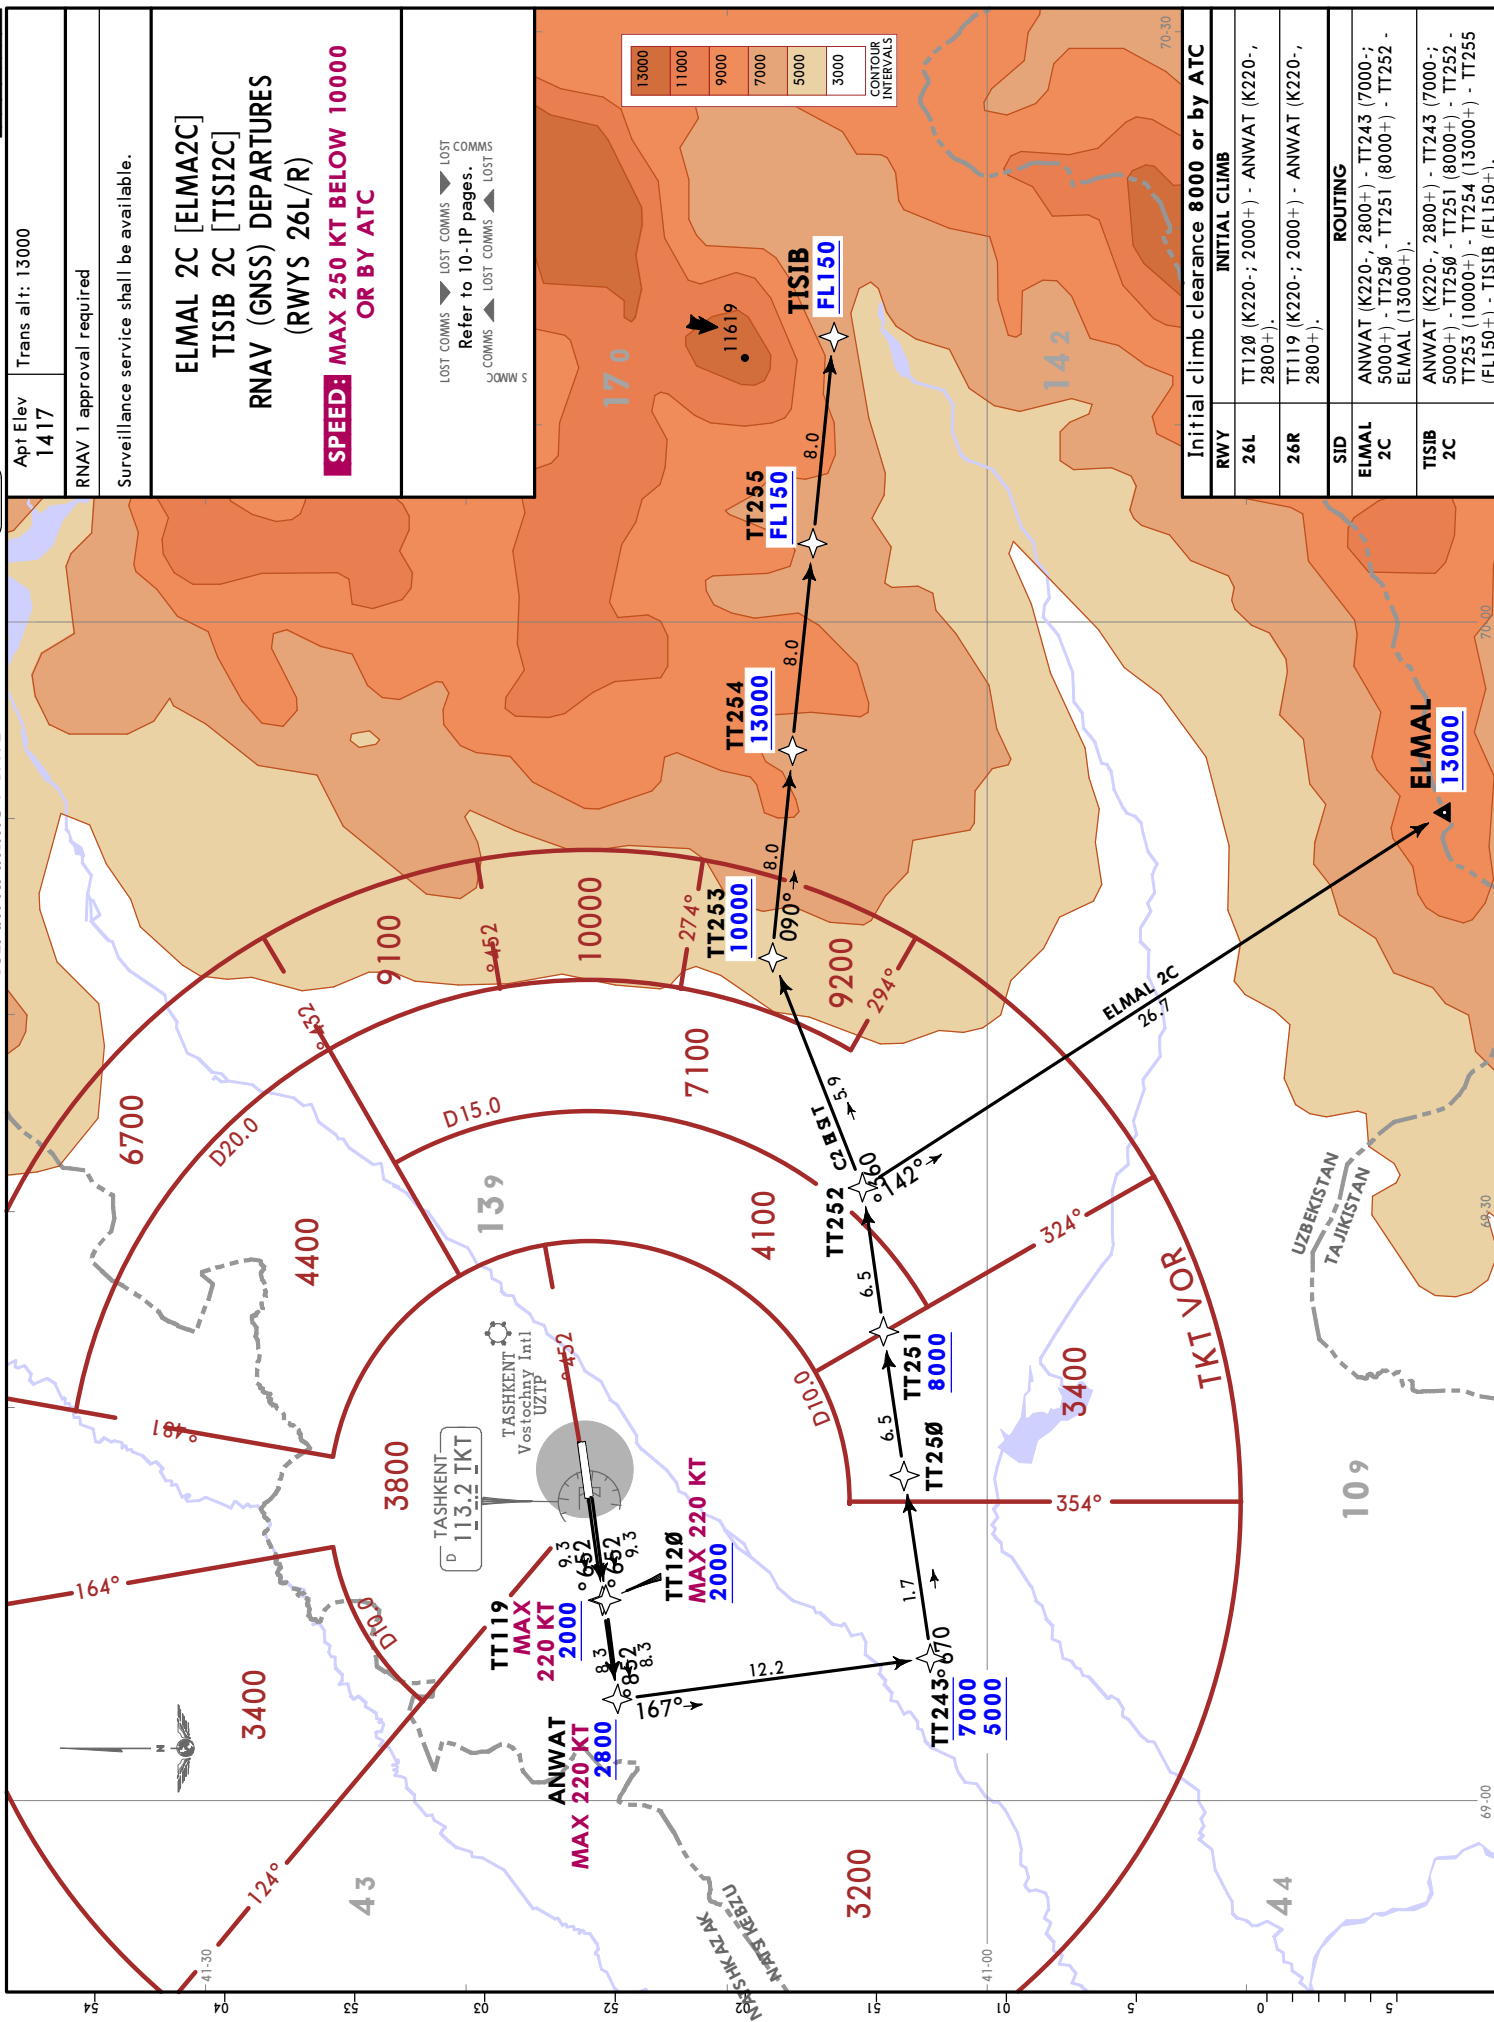

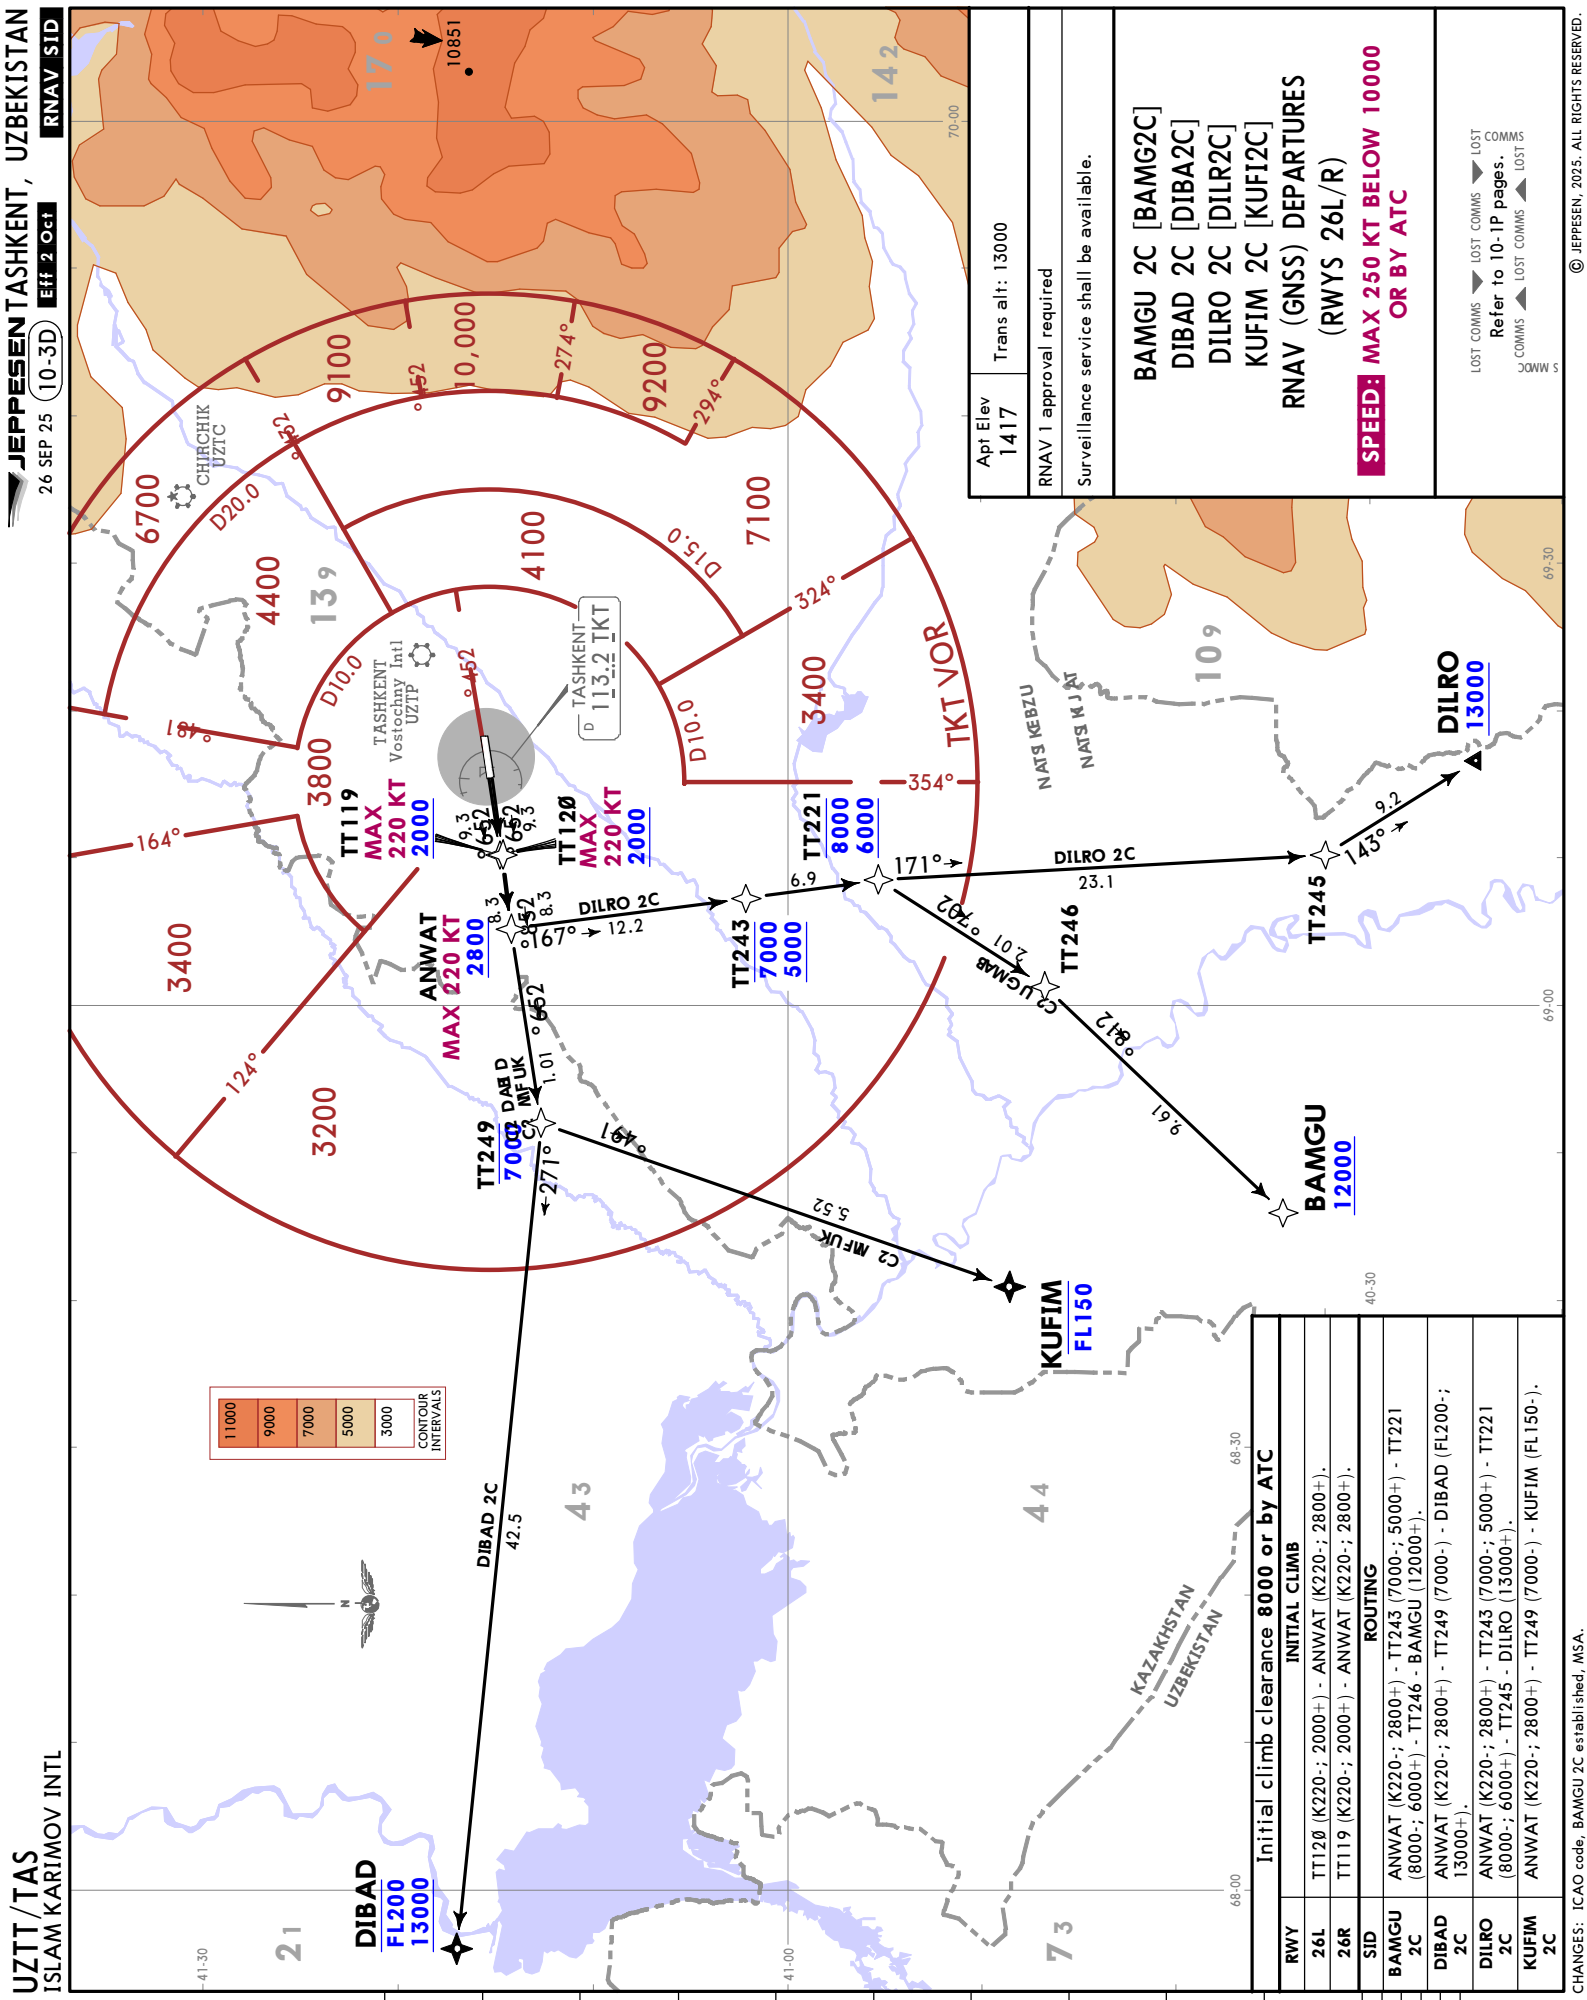

UZTT/TAS
ISLAM KARIMOV INTL

26 SEP 25 (10-3D) Eff 2 Oct

RNAV SID

Initial climb clearance 8000 or by ATC		Initial climb	
RWY	Initial climb	RWY	Initial climb
26L	TT120 (K220-; 2000+)- ANWAT (K220-; 2800+).	26L	TT120 (K220-; 2000+)- ANWAT (K220-; 2800+).
26R	TT119 (K220-; 2000+)- ANWAT (K220-; 2800+).	26R	TT119 (K220-; 2000+)- ANWAT (K220-; 2800+).
SID		ROUTING	
BAMGU 2C	ANWAT (K220-; 2800+)- TT243 (7000-; 5000+)- TT221 (8000-; 6000+)- TT246 - BAMGU (12000+).	BAMGU 2C	ANWAT (K220-; 2800+)- TT243 (7000-; 5000+)- TT221 (8000-; 6000+)- TT246 - BAMGU (12000+).
DIBAD 2C	ANWAT (K220-; 2800+)- TT249 (7000-; 5000+)- DIBAD (FL200-; 13000+).	DIBAD 2C	ANWAT (K220-; 2800+)- TT249 (7000-; 5000+)- DIBAD (FL200-; 13000+).
DILRO 2C	ANWAT (K220-; 2800+)- TT243 (7000-; 5000+)- TT221 (8000-; 6000+)- TT245 - DILRO (13000+).	DILRO 2C	ANWAT (K220-; 2800+)- TT243 (7000-; 5000+)- TT221 (8000-; 6000+)- TT245 - DILRO (13000+).
KUFIM 2C	ANWAT (K220-; 2800+)- TT249 (7000-; 5000+)- KUFIM (FL150-).	KUFIM 2C	ANWAT (K220-; 2800+)- TT249 (7000-; 5000+)- KUFIM (FL150-).


RNAV SID

RNAV 1 approval required

Surveillance service shall be available.

BAMGU 2C [BAMG2C]
DIBAD 2C [DIBA2C]
DILRO 2C [DILR2C]
KUFIM 2C [KUF12C]
RNAV (GNSS) DEPARTURES
(RWYS 26L/R)
SPEED: MAX 250 KT BELOW 10000
OR BY ATC

LOST COMMS
LOST COMMS
LOST COMMS
Refer to 10-IP pages.
COMMS
LOST COMMS
LOST COMMS

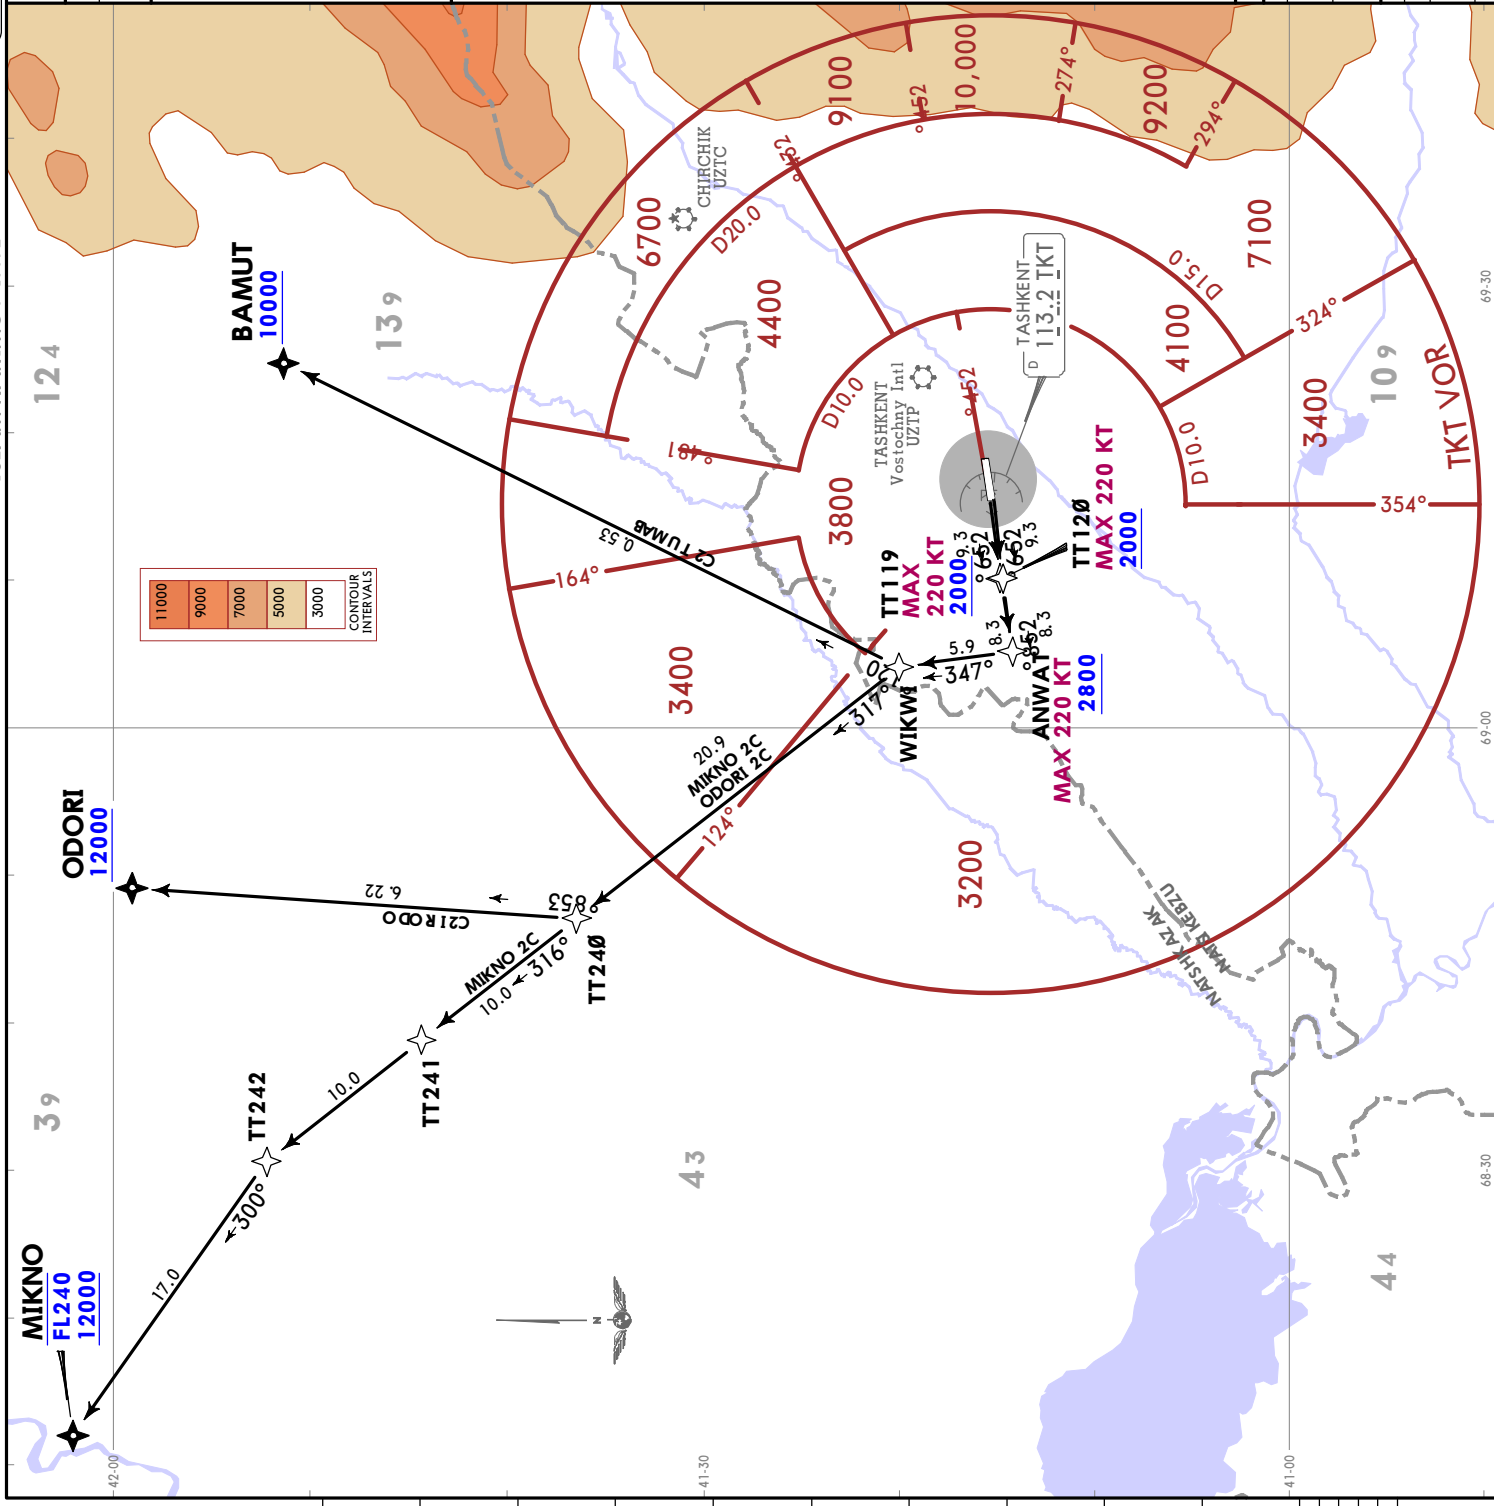

Initial climb clearance 8000 or by ATC	
RWY	INITIAL CLIMB
26L	TT120 (K220-; 2000+)- ANWAT (K220-; 2800+)- WIKWI.
26R	TT119 (K220-; 2000+)- ANWAT (K220-; 2800+)- WIKWI.
SID	ROUTING
BAMUT 2C	WIKWI - BAMUT (10000+).
MIKNO 2C	WIKWI - TT240 - TT241 - TT242 - MIKNO (FL240-; 12000+).
ODORI 2C	WIKWI - TT240 - ODORI (12000+).

Apt Elev
1417


Trans alt: 13000

RNAV 1 approval required

Surveillance service shall be available.

TISIB 2E [TISI2E]
TISIB 2F [TISI2F]
RNAV (GNSS) DEPARTURES
(RWYS 08L/R)
**SPEED: MAX 250 KT BELOW 10000
OR BY ATC**

LOST COMMS
Refer to 10-1P pages.
LOST COMMS
LOST COMMS

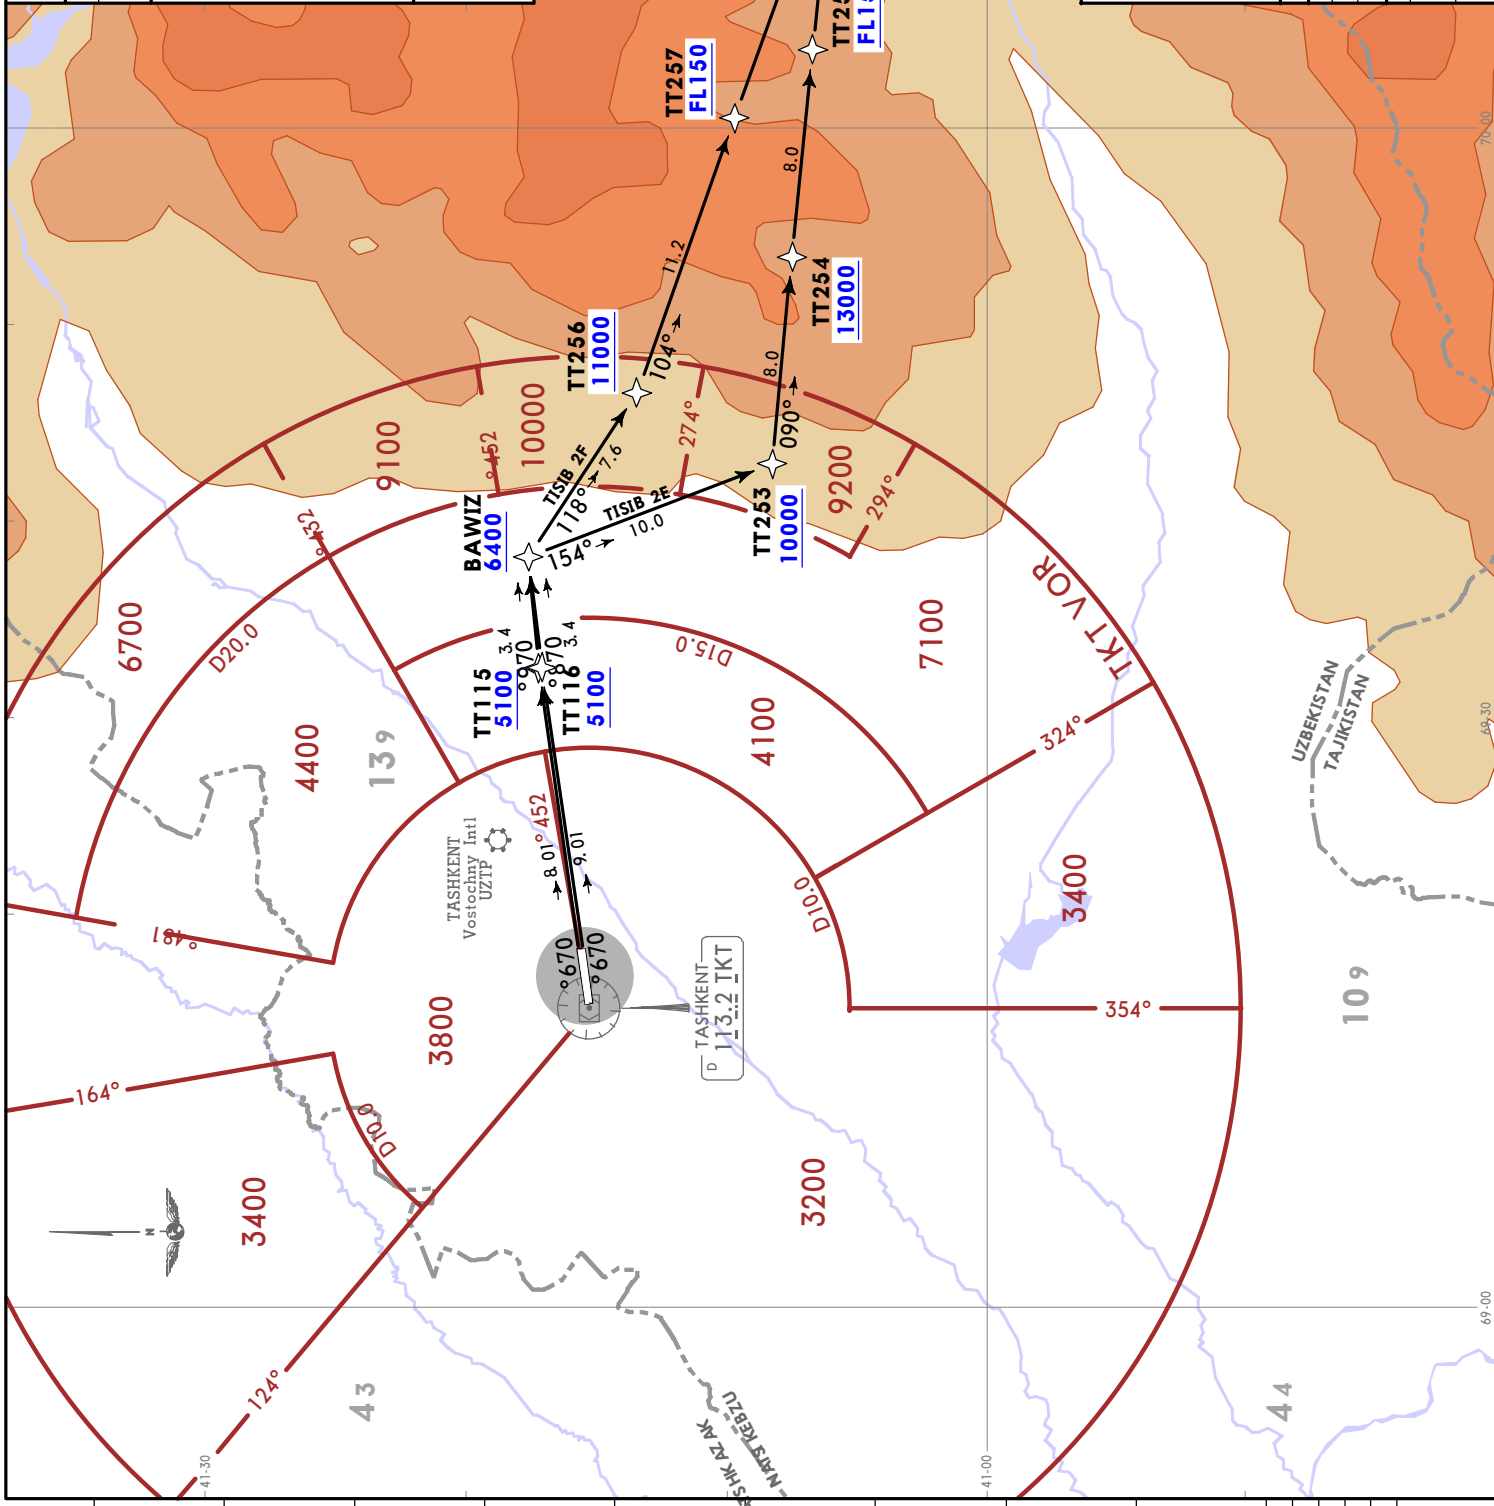

These SIDs require minimum climb gradients of
TISIB 2E: 5.2% up to FL150 due to mountain area.
TISIB 2F: 5.6% up to FL150 due to mountain area.


Gnd speed-KT	75	100	150	200	250	300
5.2% V/V (fpm)	395	527	790	1053	1316	1580
5.6% V/V (fpm)	425	567	851	1134	1418	1701

If unable advise ATC before start-up of engines.

Initial climb clearance FL150 or by ATC	
RWY	INITIAL CLIMB
08L	TT115 (5100+) - BAWIZ (6400+).
08R	TT116 (5100+) - BAWIZ (6400+).
SID	ROUTING
TISIB 2E	BAWIZ (6400+) - TT253 (10000+) - TT254 (13000+) - TT255 (FL150+) - TISIB (FL150+)
TISIB 2F	BAWIZ (6400+) - TT256 (11000+) - TT257 (FL150+) - TISIB (FL150+).

© JEPPESEN, 2025. ALL RIGHTS RESERVED.



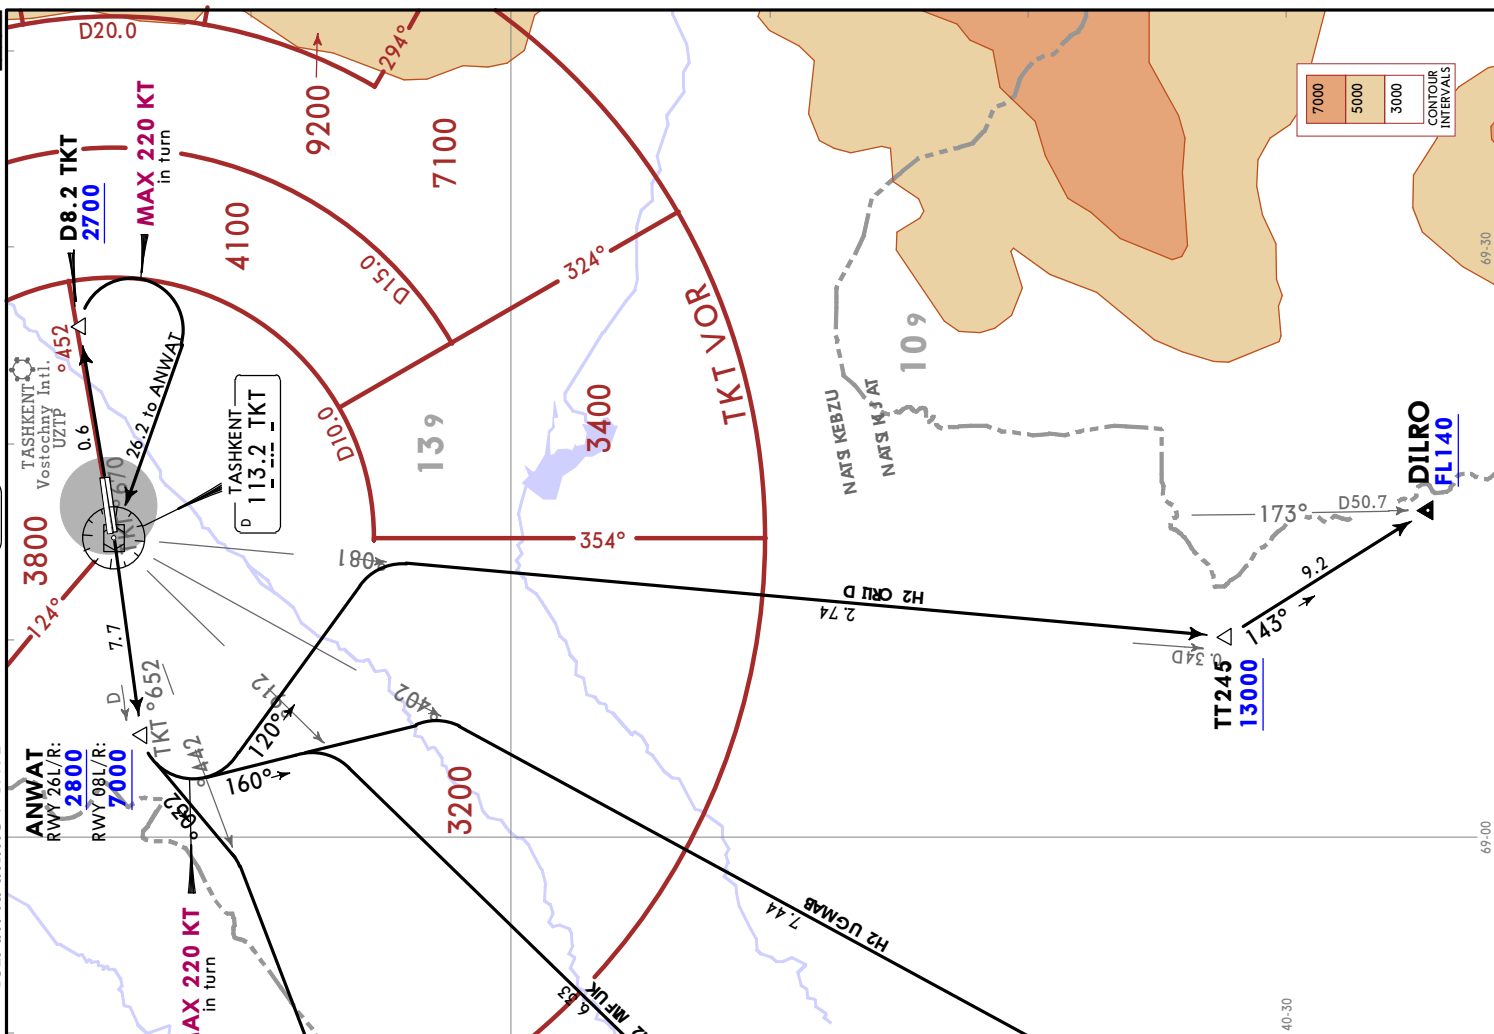

CHANGES: New chart

© IEDPSEN 2005. ALL RIGHTS RESERVED

TASHKENT, UZBEKISTAN

UZTT/TAS
ISLAM KARIMOV INTL

24 OCT 25 (10-3K) EIf 30 Oct

JEPPESSEN

24 OCT 25 (10-3K) EIf 30 Oct

Apt Elev
1417

Trans alt: 13000

DIBAD 2H [DIBA2H], MIKNO 2H [MIKNO2H]
ODORI 2H [ODIR2H]
DEPARTURES
(ALL RWYS)
DVOR DME
**SPEED: MAX 250 KT BELOW 10000
OR BY ATC**

LOST COMMS
LOST COMMS
LOST COMMS

Refer to 10-IP pages.

LOST COMMS
LOST COMMS
LOST COMMS

The chart displays the Tashkent, Uzbekistan terminal area. Key features include:


- Obstacles:** Obstacle symbols with MSL and AGL altitudes. Notable ones include DIBAD (FL170, 1417 MSL), MIKNO (FL150, 13000 MSL), and ODORI (FL150, 13000 MSL).
- Navigation Aids:** Tashkent VORTAC (Vostochny Intl. UZTTP) and Tashkent VOR (TKT VOR).
- Altitude Contours:** Red contour lines at 3000, 4000, 5000, and 6000 feet.
- Flight Paths:** Departure paths for DIBAD, MIKNO, and ODORI. DIBAD path includes a turn at 267° and 353°. MIKNO path includes a turn at 124° and 164°. ODORI path includes a turn at 181°.
- Communication:** Frequencies for Tashkent (113.2 TKT) and ANWAT (2800, 7000).
- Geographic Features:** Rivers and terrain contours are shown in blue and green.

Initial climb clearance 8000 or by ATC	
RWY	INITIAL CLIMB
08L/R	Climb on TKT R076 to D8.2 TKT, turn RIGHT to TKT, TKT R256 to ANWAT.
26L/R	Climb on TKT R256 to ANWAT.
ROUTING	
DIBAD 2H	At ANWAT turn RIGHT, 280° track, intercept TKT R267 to DIBAD.
MIKNO 2H	At ANWAT turn RIGHT, 353° track, intercept TKT R309 to MIKNO.
ODORI 2H	At ANWAT turn RIGHT, 020° track, intercept TKT R330 to ODORI.

CHANGES: New chart.

© JEPPESEN, 2025. ALL RIGHTS RESERVED.

Apt Elev 1417	Trans alt: 13000
BAMUT 2H [BAMU2H], DOSOR 2H [DOSO2H] NIMAG 2H [NIMA2H] DEPARTURES (ALL RWYS) DVOR DME SPEED: MAX 250 KT BELOW 10000 OR BY ATC	
LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ Refer to 10-1P pages. LOST COMMS ▲ LOST COMMS ▲ LOST COMMS ▲	

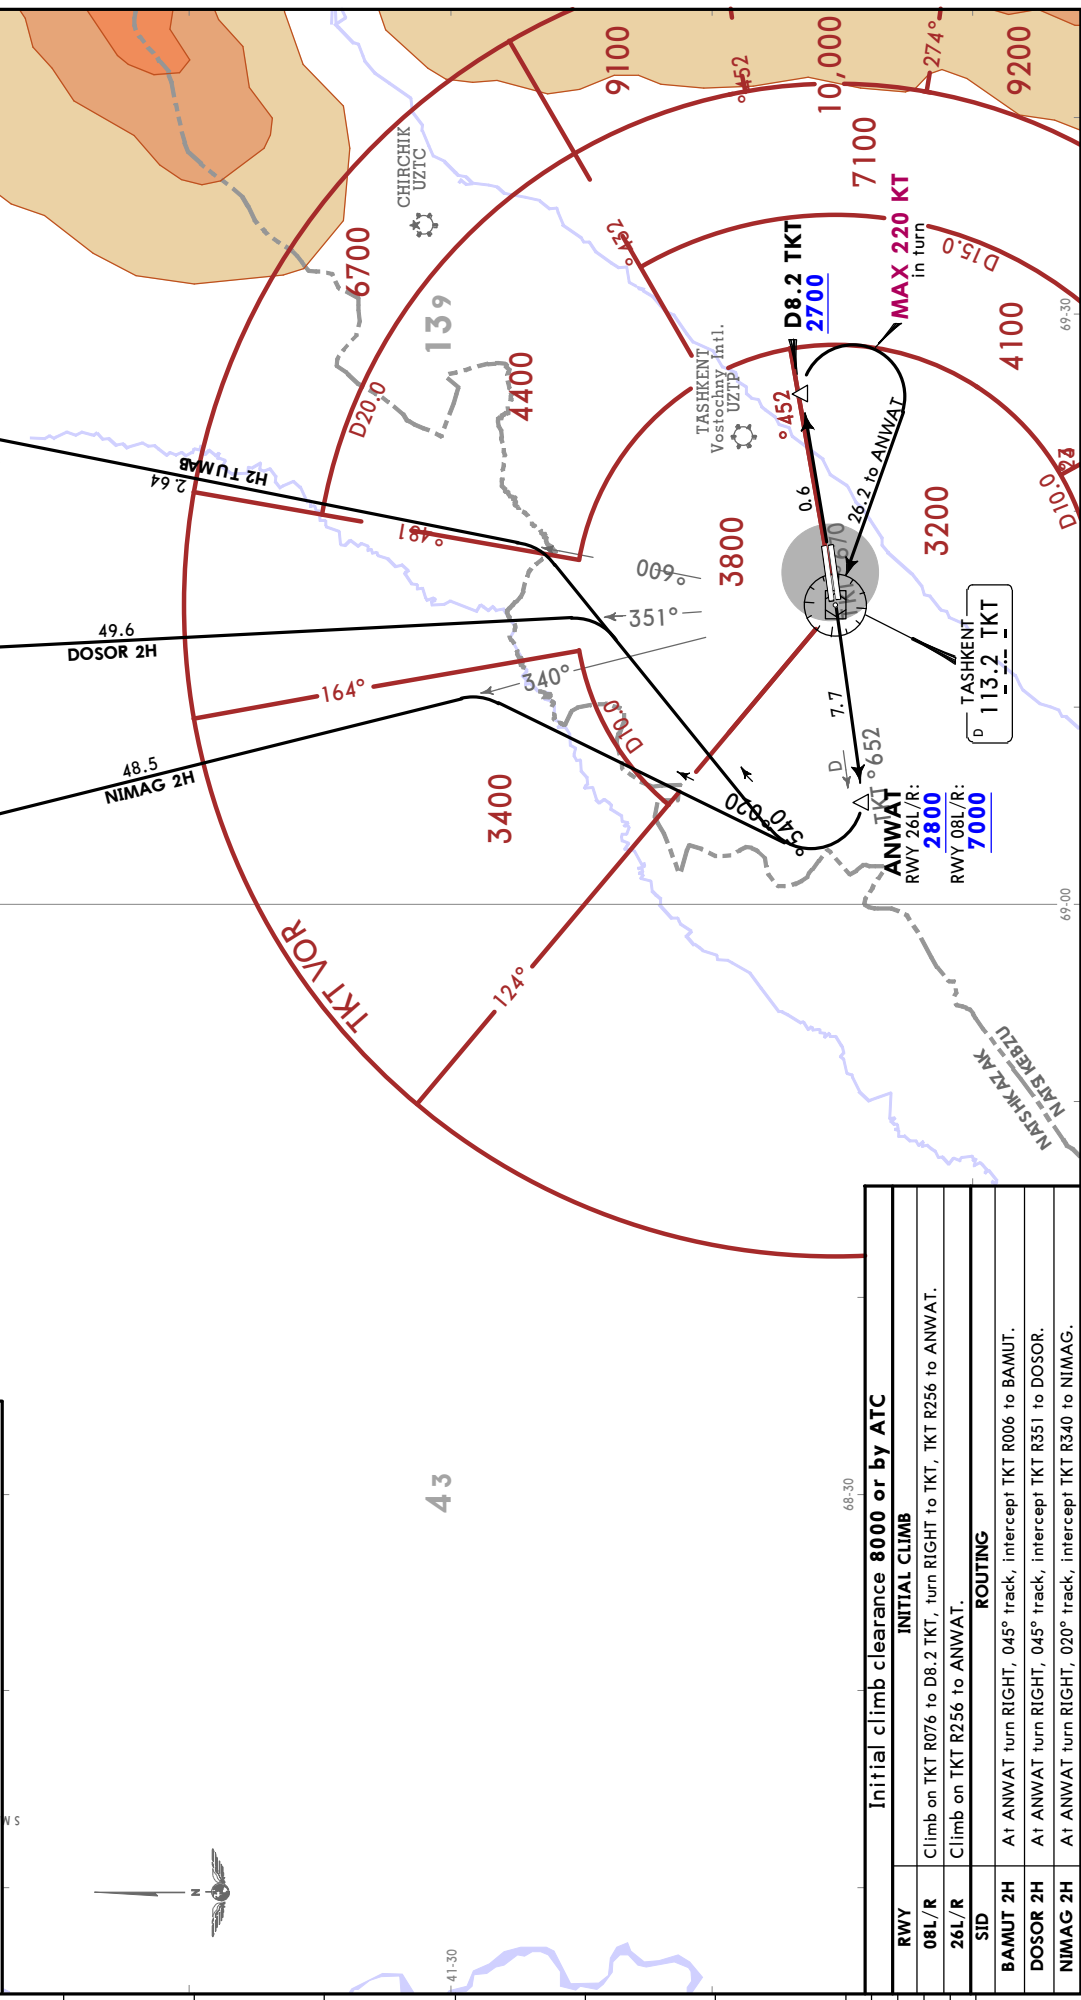

Initial climb clearance 8000 or by ATC	
RWY	INITIAL CLIMB
08L/R	Climb on TKT R076 to D8.2 TKT, turn RIGHT to TKT, TKT R256 to ANWAT.
26L/R	Climb on TKT R256 to ANWAT.
SID	ROUTING
BAMUT 2H	At ANWAT turn RIGHT, 045° track, intercept TKT R006 to BAMUT.
DOSOR 2H	At ANWAT turn RIGHT, 045° track, intercept TKT R351 to DOSOR.
NIMAG 2H	At ANWAT turn RIGHT, 020° track, intercept TKT R340 to NIMAG.

UZTT/TAS

Apt Elev 1417'
N41 15.4 E069 16.9




JEPPESSEN

TASHKENT, UZBEKISTAN

26 SEP 25 10-9 Eff 2 Oct

ISLAM KARIMOV INTL

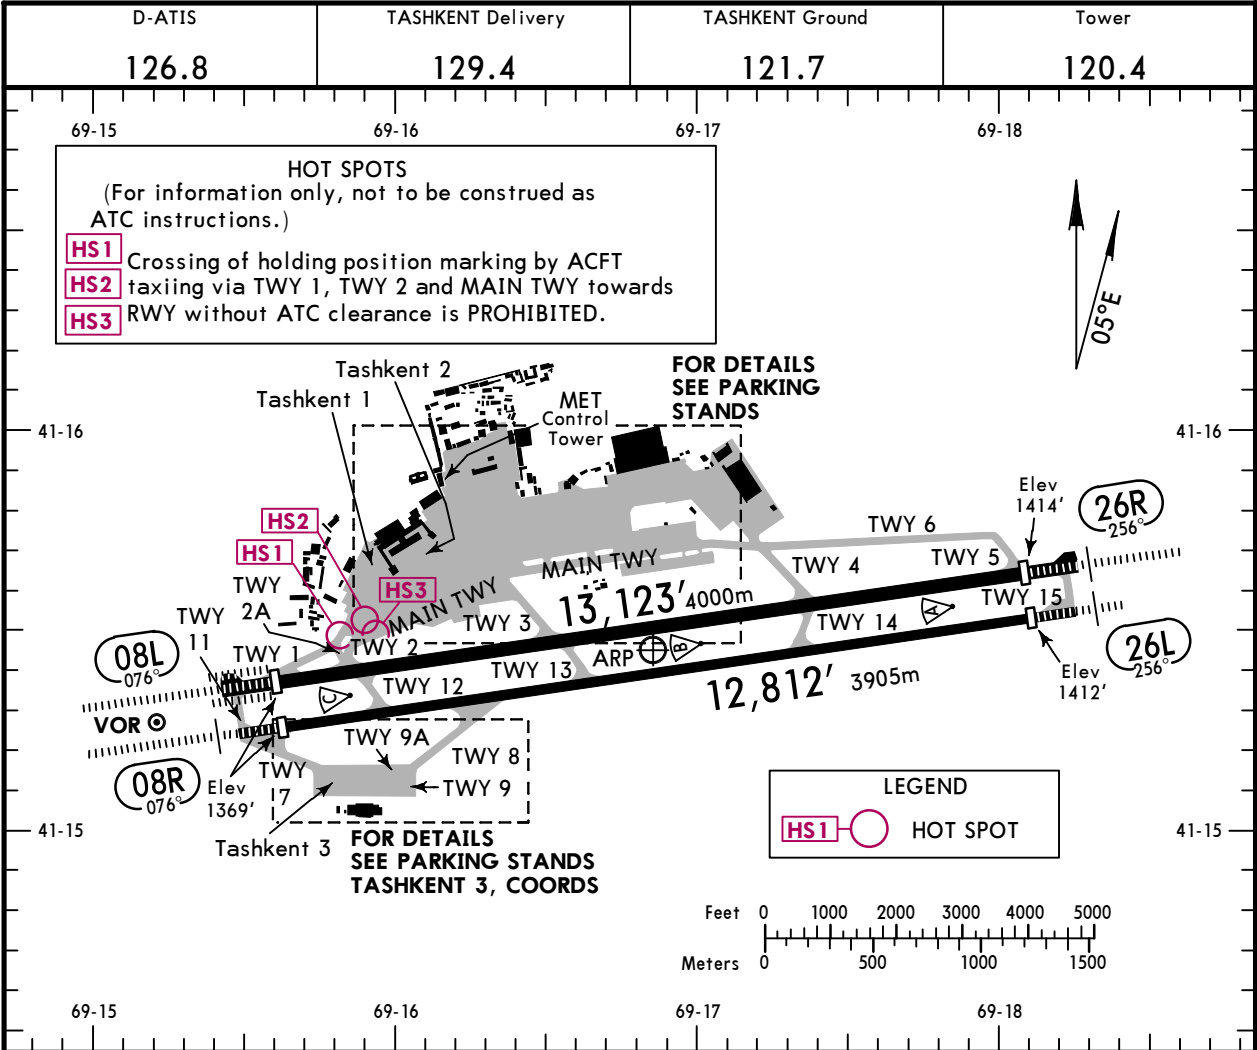

ADDITIONAL RUNWAY INFORMATION							
RWY				USABLE LENGTHS			
				Threshold	Glide Slope	TAKE-OFF	WIDTH
08L	HIRL (60m)	CL (15m)	① PALS CAT II (LIH)	RVR	11,270' 3435m	③	197'
	PAPI-L(3.0°)	TDZ					
26R	HIRL (60m)	CL (15m)	② PALS CAT I (LIH)	RVR	10,784' 3287m		60m
	PAPI-L(3.0°)						

① length 900m		② length 720m	
③ TAKE-OFF RUN AVAILABLE			
RWY 08L:		RWY 26R:	
From rwy head	13,123'(4000m)	From rwy head	13,123'(4000m)
twy 2 int	11,352'(3460m)	twy 4 int	8940'(2725m)
twy 3 int	7956'(2425m)	twy 3 int	3937'(1200m)


08R	HIRL (60m)	④ PALS CAT I (LIH)	PAPI-L(3.0°)	RVR	11,663' 3555m	10,692' 3259m	⑥	148'
	26L	HIRL (60m)	⑤ MIALS	PAPI-L(3.0°)	RVR	12,139' 3700m		

④ length 900m		⑤ length 420m	
⑥ TAKE-OFF RUN AVAILABLE			
RWY 08R:		RWY 26L:	
From rwy head	12,320'(3755m)	From rwy head	12,812'(3905m)
twy 12 int	10,089'(3075m)	twy 14 int	7710'(2350m)
twy 8 int	8268'(2520m)	twy 13 int	4265'(1300m)
twy 13 int	6890'(2100m)		

State					TAKE-OFF				
A B C D	Rwy 08L/26R		All Rwys						
	HIRL & CL & RENL & RVR	HIRL & RENL & RCLM	HIRL & RCLM		Rwy markings				
			DAY		DAY				
	R/V125m		R/V250m		R/V250m		R/V500m		
R/V150m		R/V300m		R/V300m					

UZTT/TAS

JEPPesen TASHKENT, UZBEKISTAN
26 SEP 25 10-9A Eff 2 Oct ISLAM KARIMOV INTL

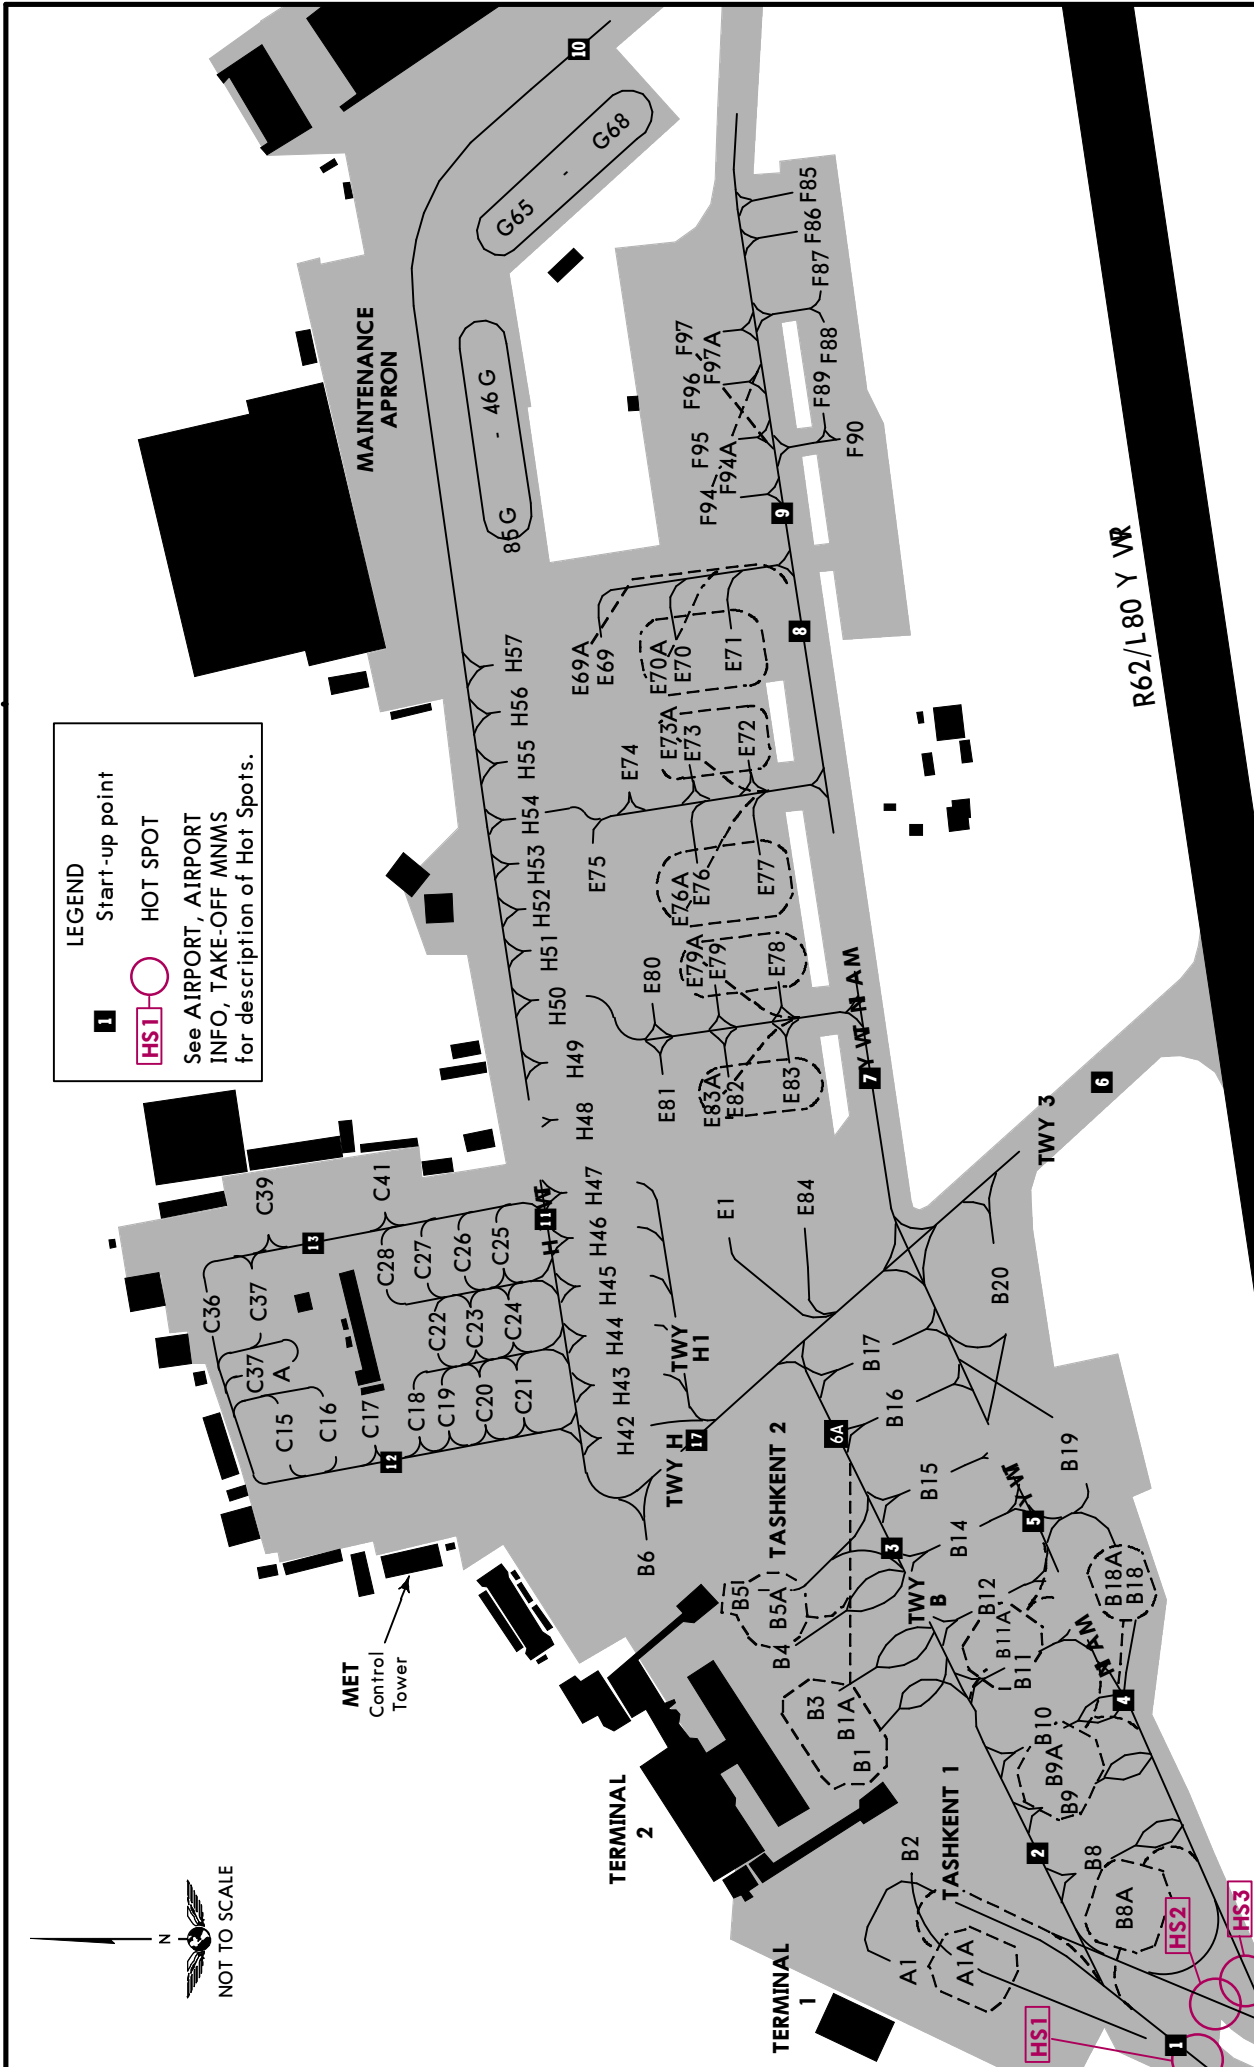


UZTT/TAS

26 SEP 25

10-9B

Eff 2 Oct

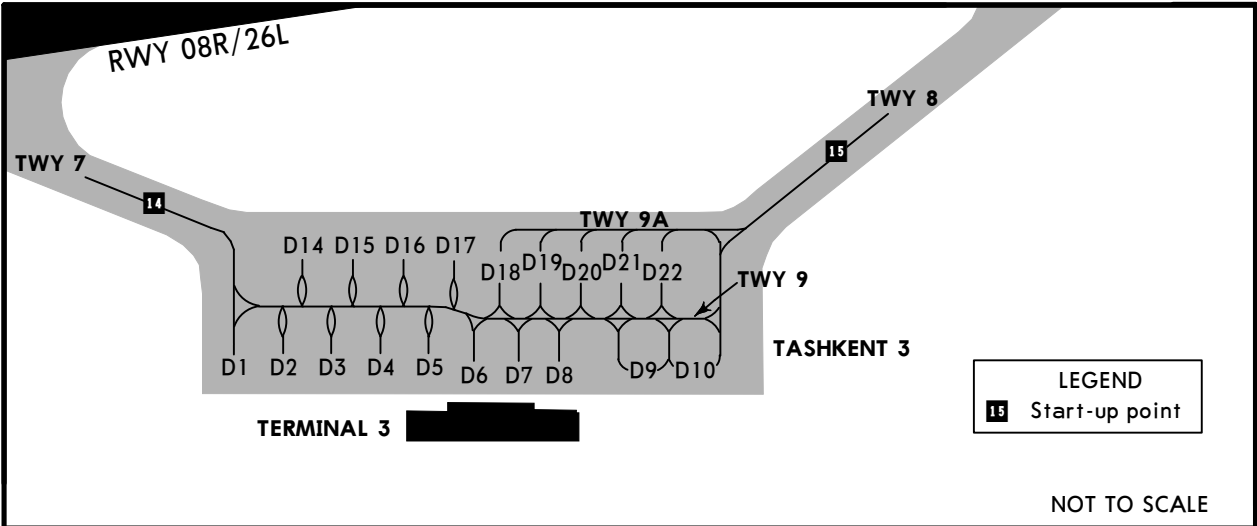

INS COORDINATES		INS COORDINATES	
STAND No.	COORDINATES	STAND No.	COORDINATES
A1, A1A	N41 15.6 E069 15.9	D1	N41 15.1 E069 15.7
B1, B1A	N41 15.7 E069 16.0	D2 thru D4	N41 15.1 E069 15.8
B2	N41 15.6 E069 16.0	D5 thru D8	N41 15.1 E069 15.9
B3 thru B5A	N41 15.7 E069 16.1	D9, D10	N41 15.1 E069 16.0
B6	N41 15.8 E069 16.1	D14, D15	N41 15.2 E069 15.8
B8	N41 15.6 E069 16.0	D16, D17	N41 15.2 E069 15.9
B8A	N41 15.5 E069 15.9	D18, D19	N41 15.1 E069 15.9
B9 thru B10	N41 15.6 E069 16.0	D20 thru D22	N41 15.1 E069 16.0
B11 thru B12	N41 15.6 E069 16.1	E1	N41 15.7 E069 16.4
B14 thru B16	N41 15.6 E069 16.2	E69, E69A	N41 15.8 E069 16.7
B17	N41 15.7 E069 16.3	E70	N41 15.7 E069 16.7
B18 thru B19	N41 15.5 E069 16.2	E70A	N41 15.8 E069 16.7
B20	N41 15.6 E069 16.3	E71 thru E73A	N41 15.7 E069 16.7
C15 thru C17	N41 15.9 E069 16.2	E74	N41 15.8 E069 16.7
C18, C19	N41 15.9 E069 16.3	E75	N41 15.8 E069 16.6
C20, C21	N41 15.8 E069 16.3	E76 thru E79A	N41 15.7 E069 16.6
C22	N41 15.9 E069 16.3	E80	N41 15.8 E069 16.5
C23, C24	N41 15.8 E069 16.3	E81 thru E84	N41 15.7 E069 16.4
C25	N41 15.8 E069 16.4	F85 thru F87	N41 15.7 E069 17.0
C26	N41 15.8 E069 16.3	F88 thru F90	N41 15.7 E069 16.9
C27, C28	N41 15.9 E069 16.3	F94, F94A	N41 15.7 E069 16.8
C36	N41 16.0 E069 16.3	F95, F96	N41 15.8 E069 16.9
C37, C37A	N41 15.9 E069 16.3	F97, F97A	N41 15.8 E069 17.0
C39, C41	N41 15.9 E069 16.4	H42	N41 15.8 E069 16.2
D1	N41 15.1 E069 15.7	H43 thru H45	N41 15.8 E069 16.3
		H46 thru H48	N41 15.8 E069 16.4
		H49 thru H51	N41 15.8 E069 16.5
		H52 thru H54	N41 15.8 E069 16.6
		H55 thru H57	N41 15.8 E069 16.7

UZTT/TAS

EASA AIR OPS
TASHKENT, UZBEKISTAN
ISLAM KARIMOV INTL

STRAIGHT-IN RWY		A	B	C	D
08L	CAT 2 ILS	1469' (100') RA 105' R300m	1469' (100') RA 105' R300m	1469' (100') RA 105' R300m	1469' (100') RA 105' ① R300m
	ILS	1578' (209') R550m	1591' (222') R550m	1599' (230') R550m	1609' (240') R550m
	TDZ or CL out	R800m	R800m	R800m	R800m
	ALS out	R/V1200m	R/V1200m	R/V1200m	R/V1200m
	② LOC	1810' (441') R1400m	1810' (441') R1400m	1810' (441') R1400m	1810' (441') R1400m
	TDZ or CL out	R1400m	R1400m	R1400m	R1400m
	ALS out	③ R/V2100m	③ R/V2100m	③ R/V2100m	③ R/V2100m
	RNP LNAV/VNAV	1685' (316') R700m	1697' (328') R800m	1705' (336') R800m	1716' (347') R900m
	TDZ or CL out	R1000m	R1100m	R1100m	R1200m
	ALS out	R/V1400m	R/V1500m	R/V1500m	R/V1600m
08R	RNP ② LNAV	1810' (441') R1400m	1810' (441') R1400m	1810' (441') R1400m	1810' (441') R1400m
	TDZ or CL out	R1400m	R1400m	R1400m	R1400m
	ALS out	③ R/V2100m	③ R/V2100m	③ R/V2100m	③ R/V2100m
	② VOR DME	1900' (531') R1700m	1900' (531') R1700m	1900' (531') R1700m	1900' (531') R1700m
	TDZ or CL out	R1700m	R1700m	R1700m	R1700m
	ALS out	③ R/V2400m	③ R/V2400m	③ R/V2400m	③ R/V2400m
	ILS	1569' (200') R800m	1573' (204') R800m	1581' (212') R800m	1591' (222') R800m
	ALS out	R/V1200m	R/V1200m	R/V1200m	R/V1200m
	② LOC	1810' (441') R1700m	1810' (441') R1700m	1810' (441') R1700m	1810' (441') R1700m
	ALS out	③ R/V2100m	③ R/V2100m	③ R/V2100m	③ R/V2100m
26L	RNP LNAV/VNAV	1685' (316') R1000m	1697' (328') R1100m	1705' (336') R1100m	1716' (347') R1200m
	ALS out	R/V1400m	R/V1500m	R/V1500m	R/V1600m
	RNP ② LNAV	1810' (441') R1700m	1810' (441') R1700m	1810' (441') R1700m	1810' (441') R1700m
	ALS out	③ R/V2100m	③ R/V2100m	③ R/V2100m	③ R/V2100m
	② VOR DME	1900' (531') R2000m	1900' (531') R2000m	1900' (531') R2000m	1900' (531') R2000m
	ALS out	③ R/V2400m	③ R/V2400m	③ R/V2400m	③ R/V2400m
	RNP LNAV/VNAV	1706' (294') R1200m	1718' (306') R1200m	1726' (314') R1200m	1736' (324') R1300m
	ALS out	R/V1400m	R/V1400m	R/V1400m	R/V1500m
	RNP ② LNAV	1890' (478') C2000m	1890' (478') C2000m	1890' (478') C2000m	1890' (478') C2000m
	ALS out	③ R/V2200m	③ R/V2200m	③ R/V2200m	③ R/V2200m
26L	② VOR DME	1940' (523') R2200m	1940' (523') R2200m	1940' (523') R2200m	1940' (523') R2200m
	ALS out	③ R/V2400m	③ R/V2400m	③ R/V2400m	③ R/V2400m

① CAT D requires autoland or HUDLS, otherwise: R350m.

② Continuous Descent Final Approach.

③ PAPI out: V2400m.

UZTT/TAS

**JEPPesen**

26 SEP 25
Eff 2 Oct

(10-9S)

EASA AIR OPS

TASHKENT, UZBEKISTAN

ISLAM KARIMOV INTL

STRAIGHT-IN RWY		A	B	C	D
26R	ILS	1614'(200') R550m	1614'(200') R550m	1616'(202') R550m	1626'(212') R550m
	CL out	R750m	R750m	R750m	R800m
	ALS out	R/V1200m	R/V1200m	R/V1200m	R/V1200m
	① LOC	1880'(466') R1500m	1880'(466') R1500m	1880'(466') R1500m	1880'(466') R1500m
	ALS out	② R/V2200m	② R/V2200m	② R/V2200m	② R/V2200m
	RNP LNAV/VNAV	1708'(294') R650m	1720'(306') R700m	1728'(314') R700m	1738'(324') R800m
	CL out	R900m	R1000m	R1000m	R1100m
	ALS out	R/V1400m	R/V1400m	R/V1400m	R/V1500m
	RNP ① LNAV	1880'(466') R1500m	1880'(466') R1500m	1880'(466') R1500m	1880'(466') R1500m
	ALS out	② R/V2200m	② R/V2200m	② R/V2200m	② R/V2200m
	① VOR DME	1940'(523') R1700m	1940'(523') R1700m	1940'(523') R1700m	1940'(523') R1700m
	ALS out	② R/V2400m	② R/V2400m	② R/V2400m	② R/V2400m

- ① Continuous Descent Final Approach.
- ② PAPI out: V2400m.

TAKE-OFF


	Rwy 08L/26R	All Rwys		
	HIRL & CL & RENL & RVR	HIRL & RENL & RCLM	HIRL & RCLM	Rwy markings
			DAY	DAY
A	R/V125m	R/V250m	R/V250m	R/V500m
B				
C				
D	R/V150m	R/V300m	R/V300m	

UZTT/TAS
ISLAM KARIMOV INTL

JEPPesen
26 SEP 25 11-0A Eff 2 Oct

TASHKENT, UZBEKISTAN

MSA TKT VOR

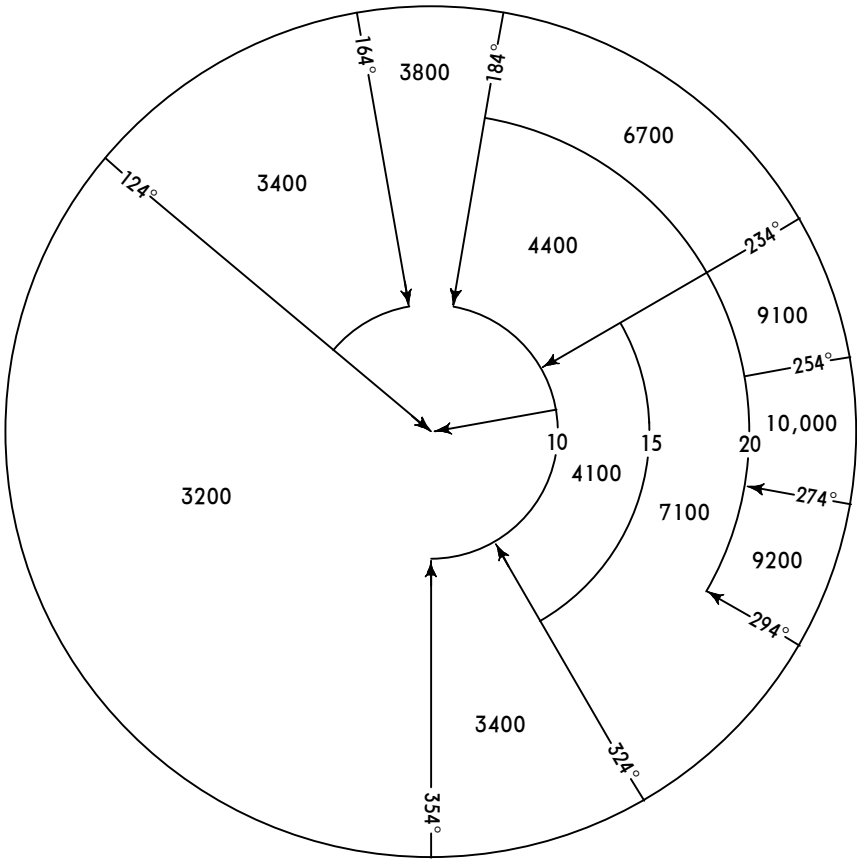


UZTT/TAS
ISLAM KARIMOV INTL


26 SEP 25 11-1 Eff 2 Oct

TASHKENT, UZBEKISTAN
ILS or LOC Rwy 08L

D-ATIS		TASHKENT Approach		TASHKENT Tower		Ground			
126.8		119.4 122.9		120.4		121.7			
LOC ING 110.5	Final Apch Crs 076°	IZFUT MANDATORY 3000' (1631')		ILS DA(H) Refer to Minimums	Apt Elev 1417' Rwy 1369'	For MSA refer to chart MSA TKT VOR (11-0A).			
MISSED APCH: Climb to 4000' via route TT111 (MAX 220 KT, MIN 2600') to DAKZO (MAX 220 KT, MIN 3400') to ERWET (MIN 4000'). Hold over ERWET or follow ATC instructions.									
Alt Set: hPa		Rwy Elev: 49 hPa		Trans level: FL150				Trans alt: 13000'	
RNAV 1 required for Initial and Missed apch.									

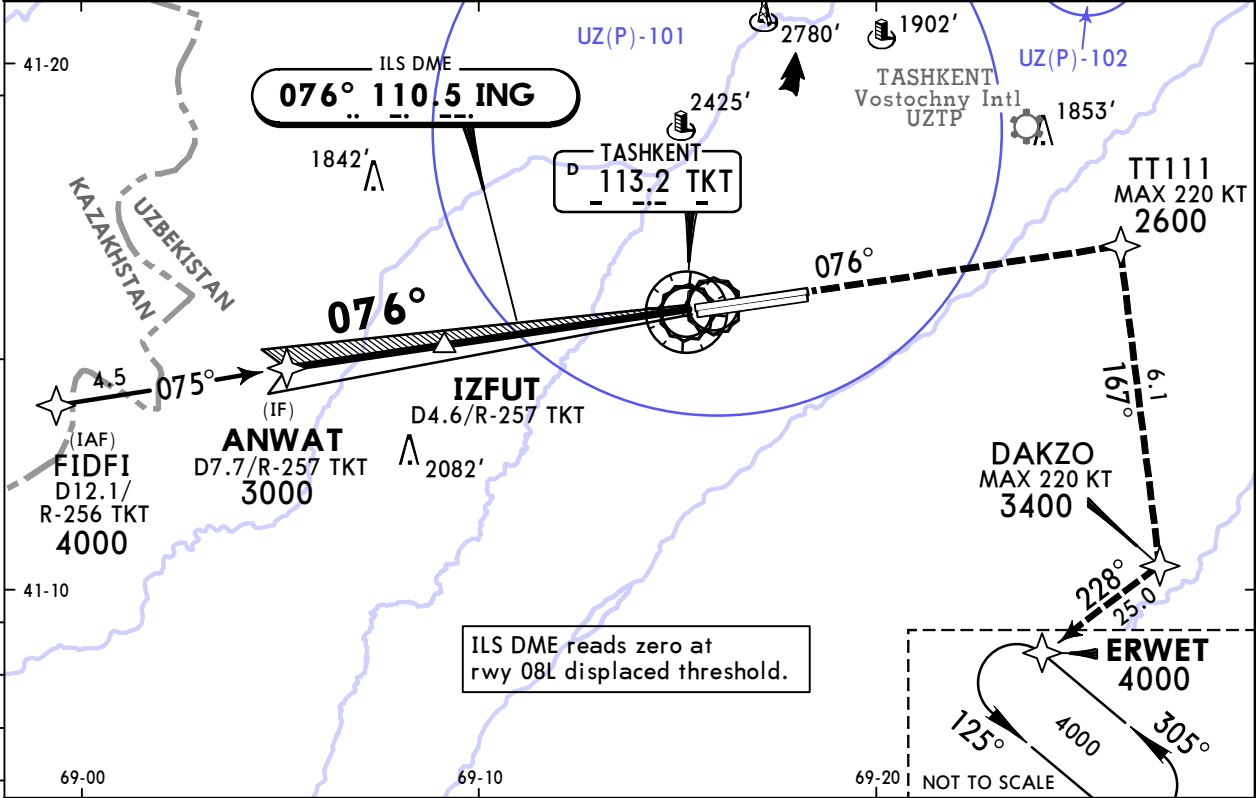

ING DME	4.0	3.0	2.0	1.0
TKT DME	3.7	2.7	1.7	0.7
ALTITUDE	2643'	2325'	2006'	1687'

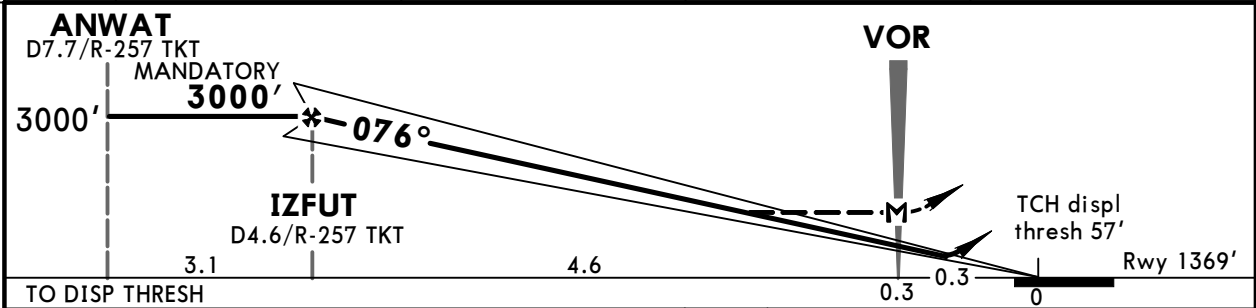

Gnd speed-Kts	70	90	100	120	140	160	PALS CAT II PAPI 220 KT MAX 2600' MIN TT111
ILS GS or LOC Descent Angle	3.00°	372	478	531	637	743	
MAP at VOR							
IZFUT to MAP	4.6	3:57	3:04	2:46	2:18	1:58	


State		STRAIGHT-IN LANDING			
ILS			LOC (GS out)		
DA(H) A: 1578' (209') C: 1599' (230') B: 1591' (222') D: 1609' (240')			MDA(H) 1810' (441')		
		CL out	ALS out		ALS out
A	R550m	R800m	V1200m	R1400m	I V2100m
B					
C					
D					
I PAPI out: V2400m.					

UZTT/TAS
ISLAM KARIMOV INTL


26 SEP 25 11-1A Eff 2 Oct

TASHKENT, UZBEKISTAN
CAT II ILS Rwy 08L

D-ATIS		TASHKENT Approach		TASHKENT Tower		Ground		
126.8		119.4 122.9		120.4		121.7		
LOC ING 110.5	Final Apch Crs 076°	IZFUT MANDATORY 3000' (1631')	CAT II ILS RA 105' DA(H) 1469' (100')		Apt Elev 1417' Rwy 1369'		For MSA refer to chart MSA TKT VOR (11-0A).	
MISSED APCH: Climb to 4000' via route TT111 (MAX 220 KT, MIN 2600') to DAKZO (MAX 220 KT, MIN 3400') to ERWET (MIN 4000'). Hold over ERWET or follow ATC instructions.								
Alt Set: hPa		Rwy Elev: 49 hPa		Trans level: FL150		Trans alt: 13000'		
RNAV 1 required for Initial and Missed apch.								

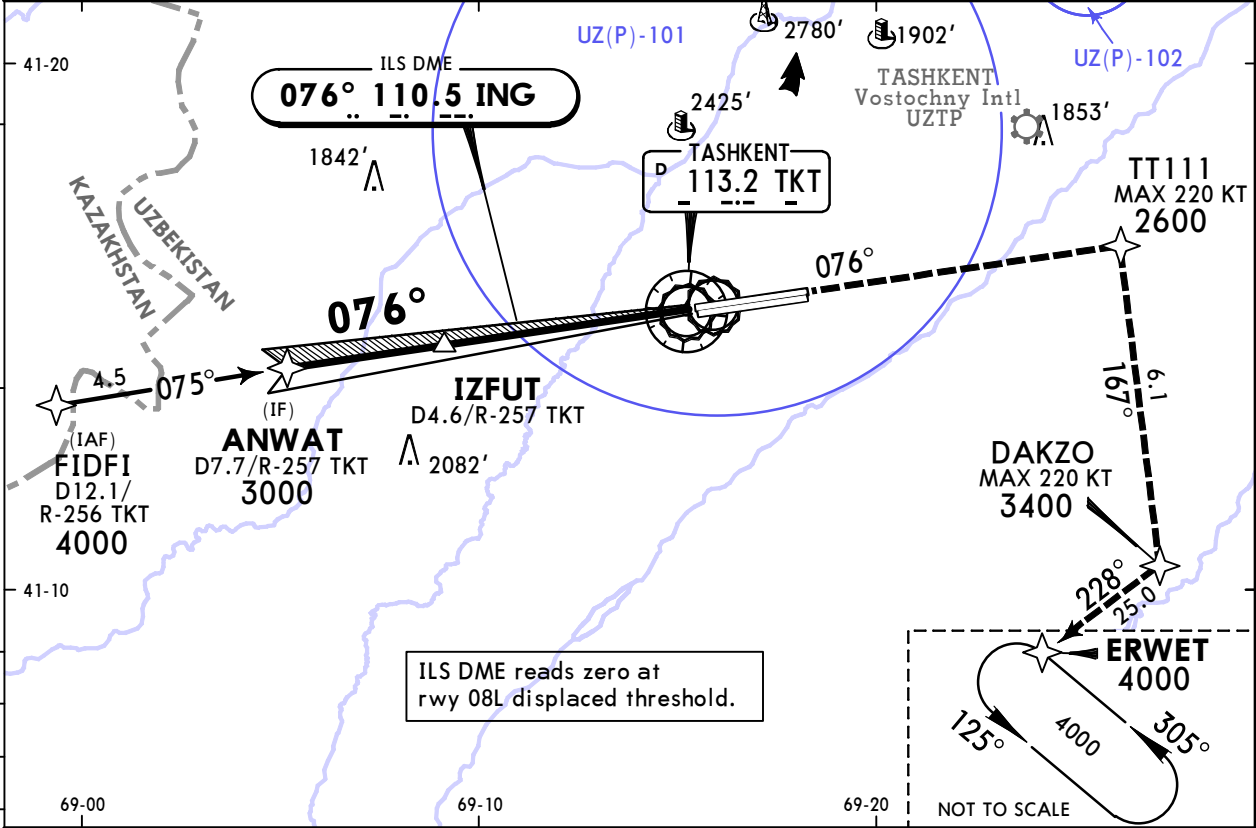

ING DME	4.0	3.0	2.0	1.0
TKT DME	3.7	2.7	1.7	0.7
ALTITUDE	2643'	2325'	2006'	1687'

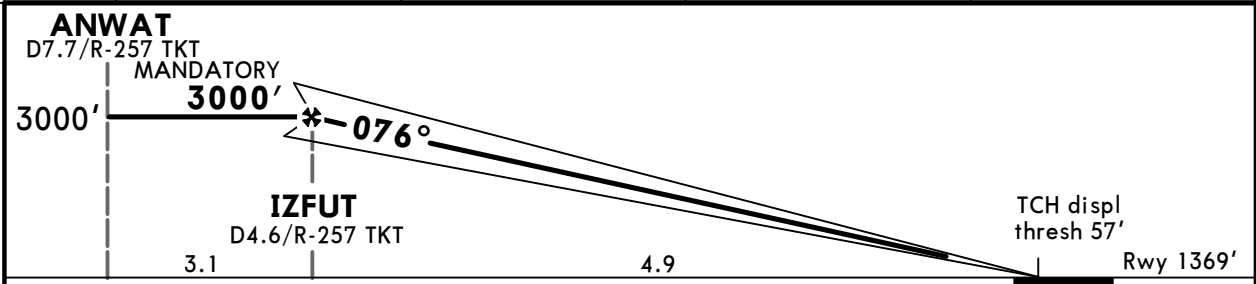

Gnd speed-Kts	70	90	100	120	140	160	PALS CAT II PAPI	220 KT MAX	2600' MIN	TT111 ↑
GS	3.00°	372	478	531	637	743				


State	STRAIGHT-IN LANDING	
	CAT II ILS	
	RA 105'	
	DA(H) 1469'(100')	
	R300m	

UZTT/TAS
ISLAM KARIMOV INTL


26 SEP 25 11-2 Eff 2 Oct

TASHKENT, UZBEKISTAN
ILS or LOC Rwy 08R

D-ATIS		TASHKENT Approach		TASHKENT Tower		Ground		
126.8		119.4 122.9		120.4		121.7		
LOC IZW 111.7	Final Apch Crs 076°	VOTBE MANDATORY 3000' (1631')	ILS DA(H) Refer to Minimums	Apt Elev 1417' Rwy 1369'		For MSA refer to chart MSA TKT VOR (11-0A).		
MISSED APCH: Climb to 4000' via route TT112 (MAX 220 KT, MIN 2600') to DAKZO (MAX 220 KT, MIN 3400') to ERWET (MIN 4000'). Hold over ERWET or follow ATC instructions.								
Alt Set: hPa		Rwy Elev: 49 hPa	Trans level: FL150		Trans alt: 13000'			
RNAV 1 required for Initial and Missed apch.								

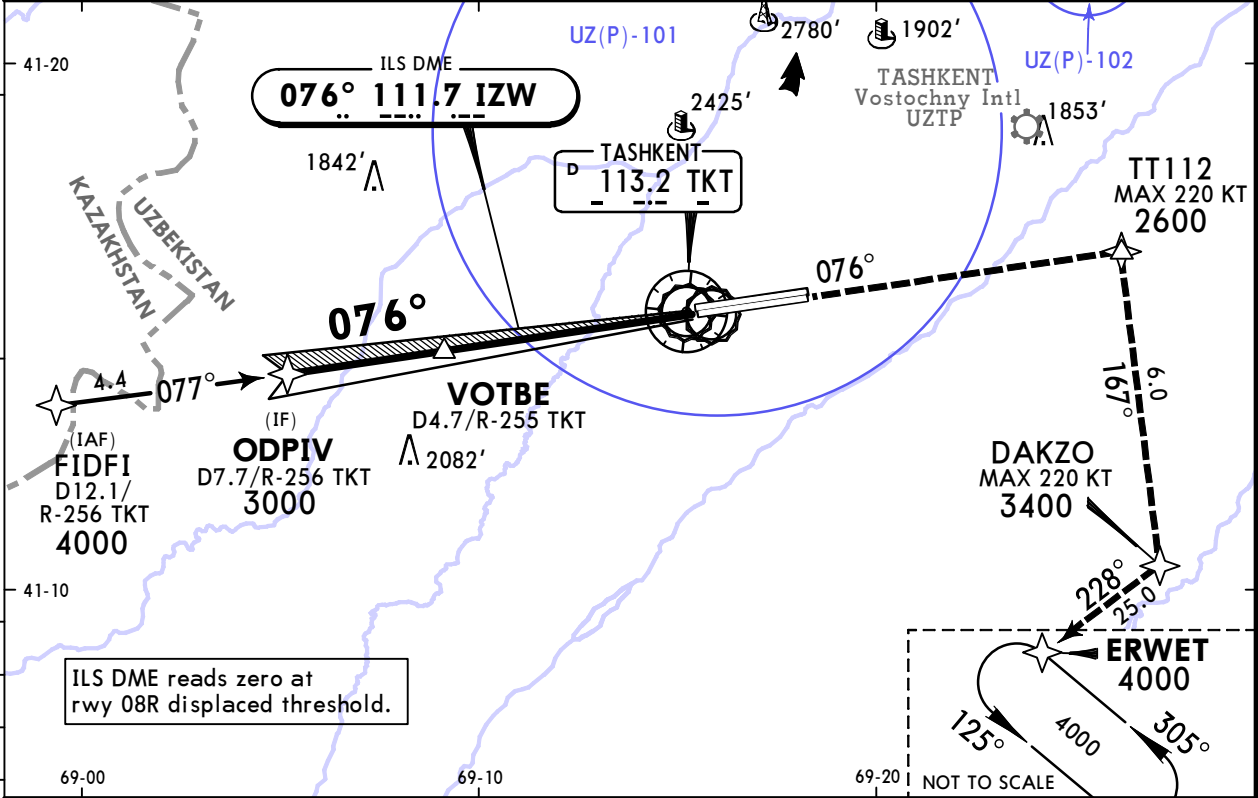

IZW DME	4.0	3.0	2.0	1.0
TKT DME	3.7	2.7	1.7	0.7
ALTITUDE	2643'	2325'	2006'	1687'

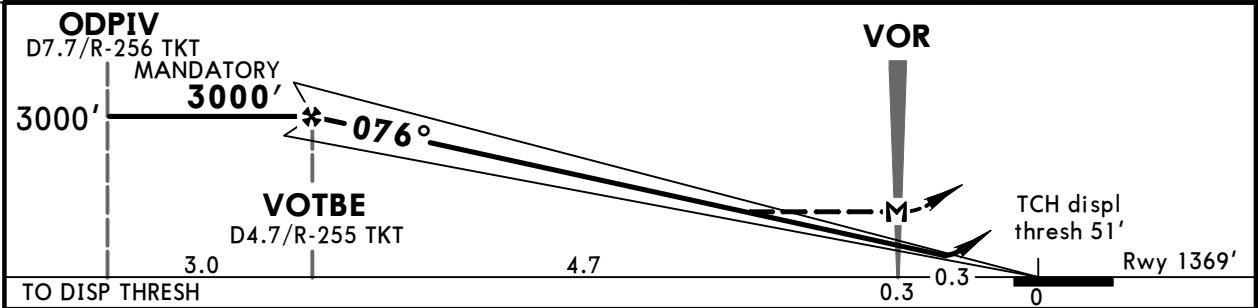

Gnd speed-Kts	70	90	100	120	140	160	PALS CAT I PAPI	220 KT MAX	2600' MIN	TT112 ↑
ILS GS or LOC Descent Angle 3.00°	372	478	531	637	743	849				
MAP at VOR										
VOTBE to MAP 4.7	4:02	3:08	2:49	2:21	2:01	1:46				


State		STRAIGHT-IN LANDING	
ILS		LOC (GS out)	
DA(H) A: 1569' (200') C: 1581' (212') B: 1573' (204') D: 1591' (222')		MDA(H) 1810' (441')	
ALS out		ALS out	
A	R800m	V1200m	R1700m I V2100m
B			
C			
D			
I PAPI out: V2400m.			

UZTT/TAS
ISLAM KARIMOV INTL


26 SEP 25 11-3 Eff 2 Oct

TASHKENT, UZBEKISTAN
ILS or LOC Rwy 26R

D-ATIS		TASHKENT Approach		TASHKENT Tower		Ground	
126.8		119.4 122.9		120.4		121.7	
LOC IFD 108.5	Final Apch Crs 256°	HENME MANDATORY 3000' (1586')	ILS DA(H) Refer to Minimums	Apt Elev 1417' Rwy 1414'		For MSA refer to chart MSA TKT VOR (11-0A).	
MISSED APCH: Climb to 4000' via route ANWAT (MAX 200 KT, MIN 3100') to TT225 (MAX 200 KT, MIN 3800') to KATXI (MIN 4000'). Hold over KATXI or follow ATC instructions.							
Alt Set: hPa		Rwy Elev: 51 hPa		Trans level: FL150 Trans alt: 13000'			
RNAV 1 required for Initial and Missed apch.			ILS DME reads zero at rwy 26R displaced threshold.				

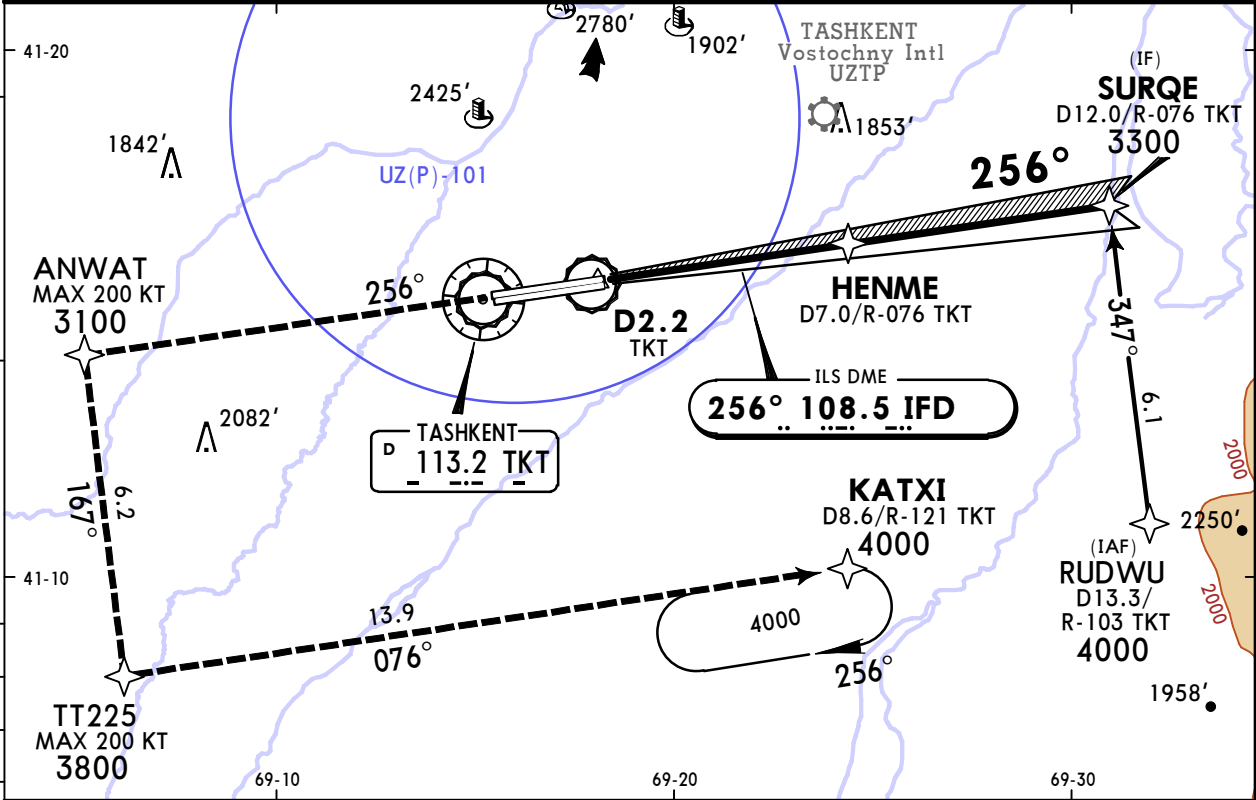

IFD DME	0.5	1.0	2.0	3.0	4.0
TKT DME	2.4	2.9	3.9	4.9	5.9
ALTITUDE	1547'	1707'	2026'	2345'	2664'

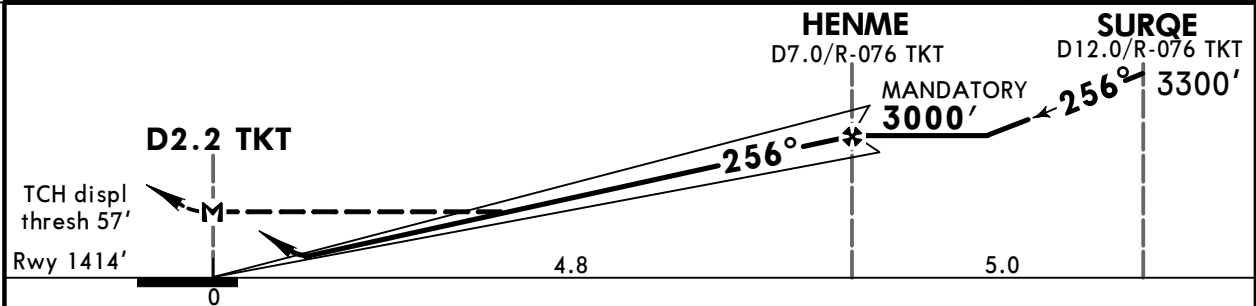

Gnd speed-Kts	70	90	100	120	140	160	PALS CAT I PAPI	200 KT MAX	3100' MIN	ANWAT ↑	
ILS GS or LOC Descent Angle	3.00°	372	478	531	637	743					849
MAP at D2.2 TKT											
HENME to MAP	4.8	4:07	3:12	2:53	2:24	2:03					1:48


State		STRAIGHT-IN LANDING			
ILS			LOC (GS out)		
DA(H) AB: 1614' (200') C: 1616' (202') D: 1626' (212')			MDA(H) 1880' (466')		
		CL out	ALS out		ALS out
A	R550m	R750m	V1200m	R1500m	1 V2200m
B					
C		R800m			
D					
1 PAPI out: V2400m.					

UZTT/TAS
ISLAM KARIMOV INTL


JEPPESSEN
26 SEP 25 (12-1) Eff 2 Oct

TASHKENT, UZBEKISTAN
RNP Rwy 08L

D-ATIS 126.8		TASHKENT Approach 119.4 122.9		TASHKENT Tower 120.4	Ground 121.7	
RNAV	Final Apch Crs 076°	IZFUT MANDATORY 3000' (1631')		LNAV/VNAV DA(H) Refer to Minimums	Apt Elev 1417' Rwy 1369'	For MSA refer to chart MSA TKT VOR (11-0A).
MISSED APCH: Climb to 4000' via route TT111 (MAX 220 KT, MIN 2600') to DAKZO (MAX 220 KT, MIN 3400') to ERWET (MIN 4000'). Hold over ERWET or follow ATC instructions.						
Alt Set: hPa		Rwy Elev: 49 hPa		Trans level: FL150 Trans alt: 13000'		
RNP apch.	Baro-VNAV not authorized below -25°C and +50°C.					

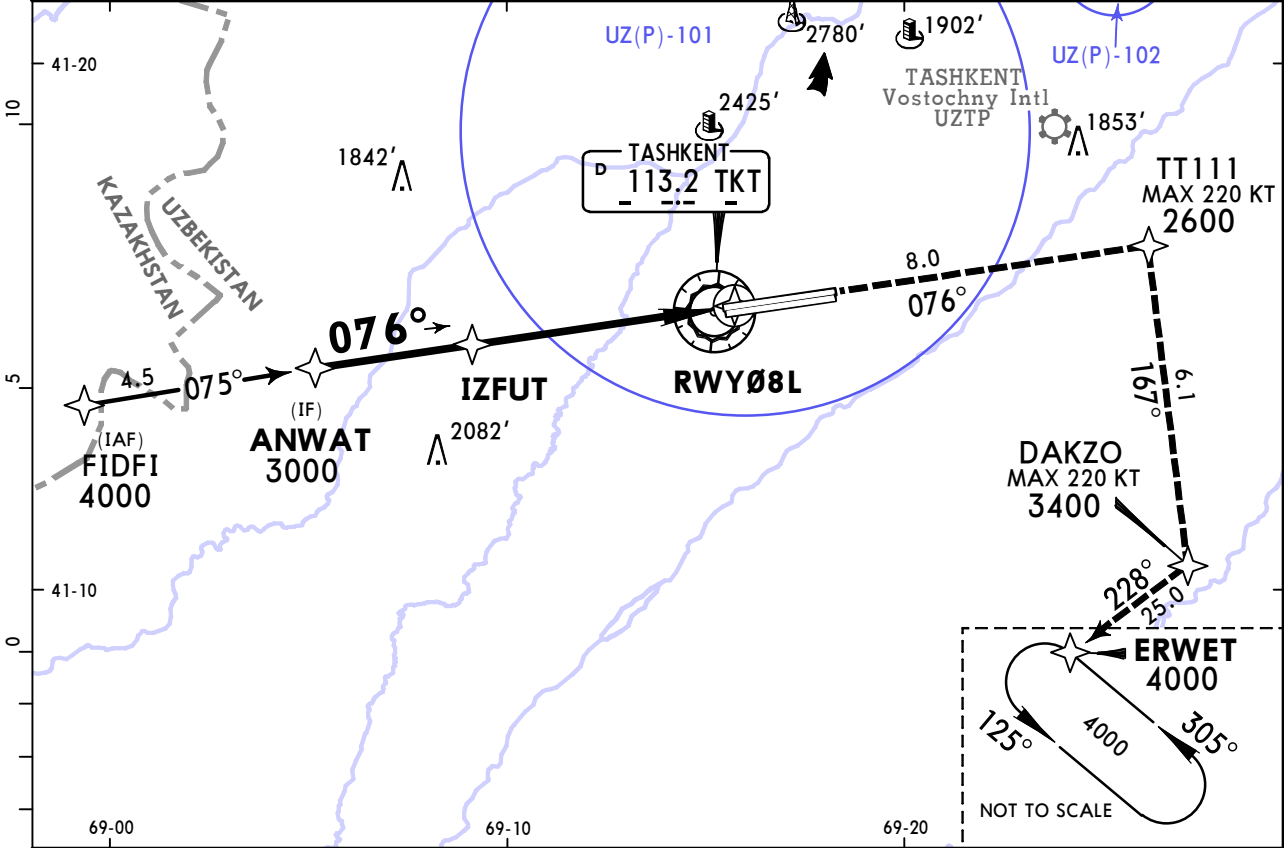

DIST to RWY08L	4.0	3.0	2.0	1.0
ALTITUDE	2643'	2325'	2006'	1687'

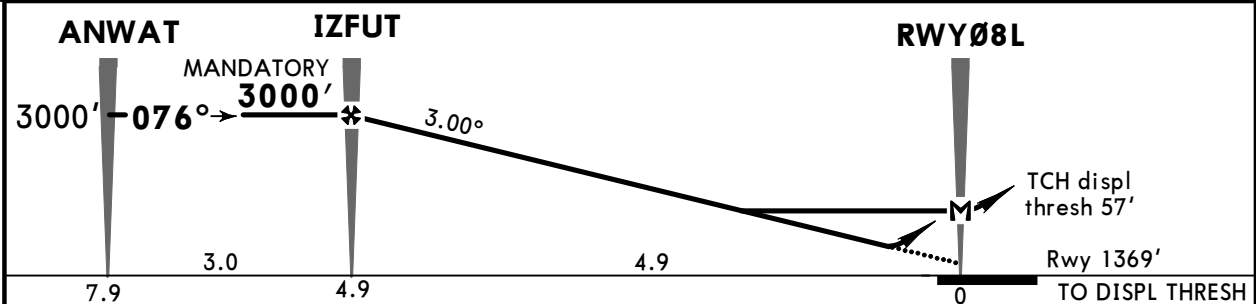

Gnd speed-Kts	70	90	100	120	140	160	PALS CAT II PAPI
---------------	----	----	-----	-----	-----	-----	--


State		STRAIGHT-IN LANDING	
LNAV/VNAV		LNAV	
DA(H) A: 1685' (316') C: 1705' (336') B: 1697' (328') D: 1716' (347')		MDA(H) 1810' (441')	
CL out		ALS out	
A	R700m	R1000m	V1400m
B	R800m	R1100m	V1500m
C			
D	R900m	R1200m	V1600m
1 PAPI out: V2400m.			

UZTT/TAS
ISLAM KARIMOV INTL


26 SEP 25 (12-2) Eff 2 Oct

TASHKENT, UZBEKISTAN
RNP Rwy 08R

D-ATIS 126.8		TASHKENT Approach 119.4 122.9		TASHKENT Tower 120.4	Ground 121.7
RNAV	Final Apch Crs 076°	VOTBE MANDATORY 3000' (1631')	LNAV/VNAV DA(H) Refer to Minimums	Apt Elev 1417' Rwy 1369'	For MSA refer to chart MSA TKT VOR (11-0A).
MISSED APCH: Climb to 4000' via route TT112 (MAX 220 KT, MIN 2600') to DAKZO (MAX 220 KT, MIN 3400') to ERWET (MIN 4000'). Hold over ERWET or follow ATC instructions.					
Alt Set: hPa		Rwy Elev: 49 hPa	Trans level: FL150	Trans alt: 13000'	
RNP apch.	Baro-VNAV not authorized below -25°C and +50°C.				

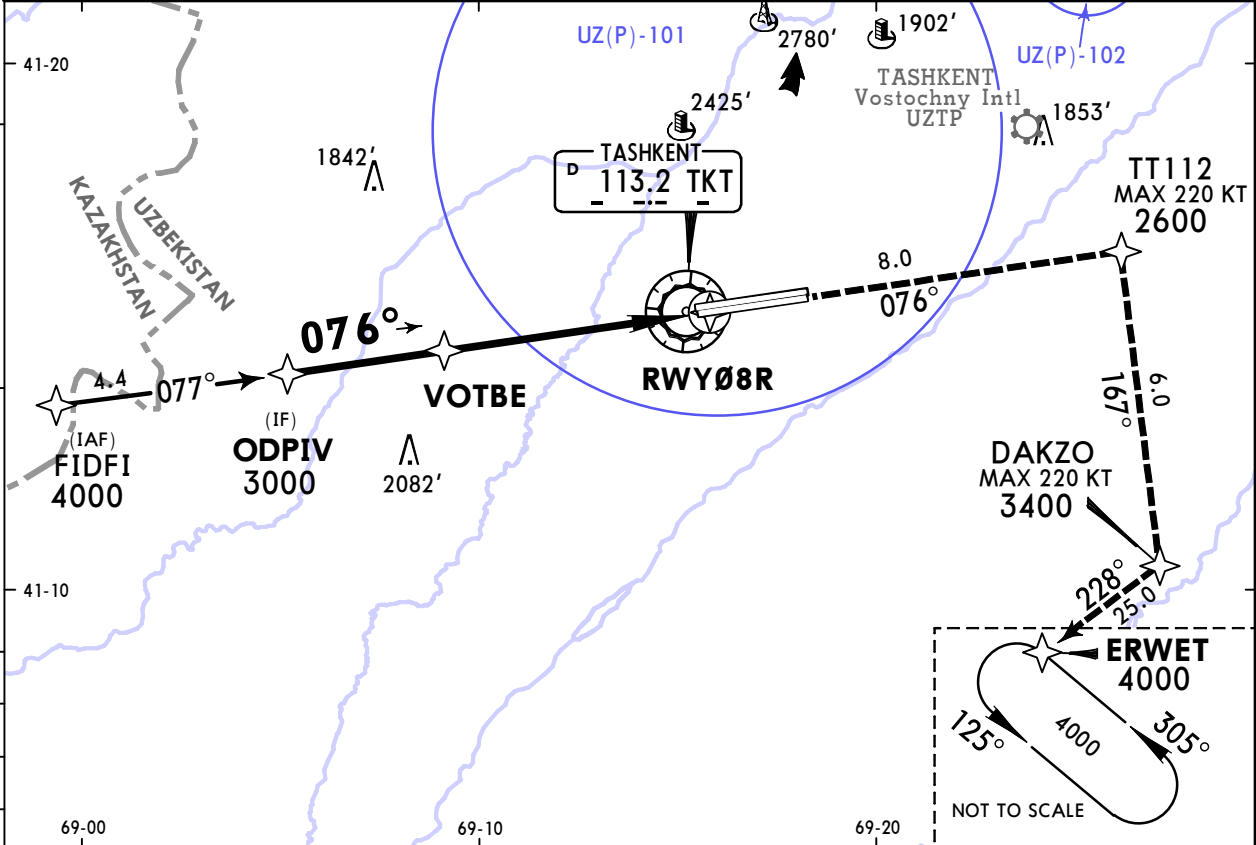

DIST to RWY08R	4.0	3.0	2.0	1.0
ALTITUDE	2643'	2325'	2006'	1687'

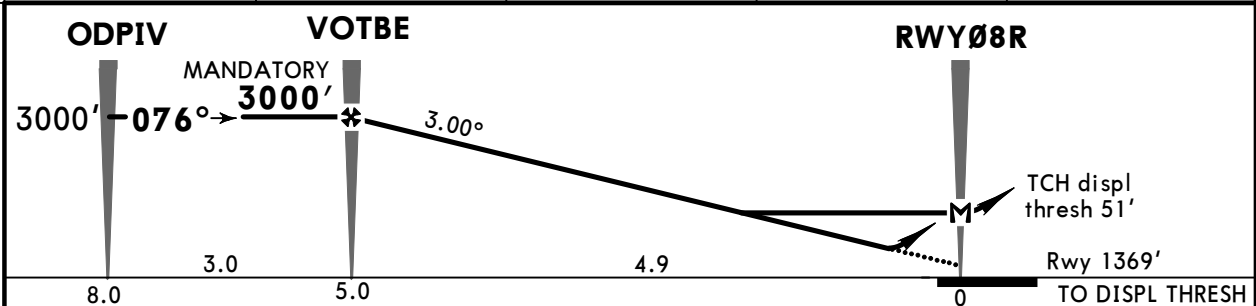

Gnd speed-Kts	70	90	100	120	140	160	PALS CAT I PAPI	220 KT MAX	2600' MIN	TT112 ↑
Glide Path Angle	3.00°	372	478	531	637	743				
MAP at RWY08R										
VOTBE to MAP	4.9	4:12	3:16	2:56	2:27	2:06	1:50			


State		STRAIGHT-IN LANDING	
LNAV/VNAV		LNAV	
DA(H) A: 1685' (316') C: 1705' (336') B: 1697' (328') D: 1716' (347')		MDA(H) 1810' (441')	
ALS out		ALS out	
A	R1000m	V1400m	R1700m 1 V2100m
B	R1100m	V1500m	
C			
D	R1200m	V1600m	
1 PAPI out: V2400m.			

UZTT/TAS
ISLAM KARIMOV INTL


26 SEP 25 (12-3) Eff 2 Oct

TASHKENT, UZBEKISTAN
RNP Rwy 26L

D-ATIS 126.8		TASHKENT Approach 119.4 122.9		TASHKENT Tower 120.4	Ground 121.7
RNAV	Final Apch Crs 256°	TT303 MANDATORY 3000' (1588')	LNAV/VNAV DA(H) Refer to Minimums	Apt Elev 1417' Rwy 1412'	For MSA refer to chart MSA TKT VOR (11-0A).
MISSED APCH: Climb to 4000' via route ODPIV (MAX 200 KT, MIN 3100') to TT225 (MAX 200 KT, MIN 3800') to KATXI (MIN 4000'). Hold over KATXI or follow ATC instructions.					
Alt Set: hPa		Rwy Elev: 51 hPa	Trans level: FL150	Trans alt: 13000'	
RNP apch.	Baro-VNAV not authorized below -25°C and +50°C.				

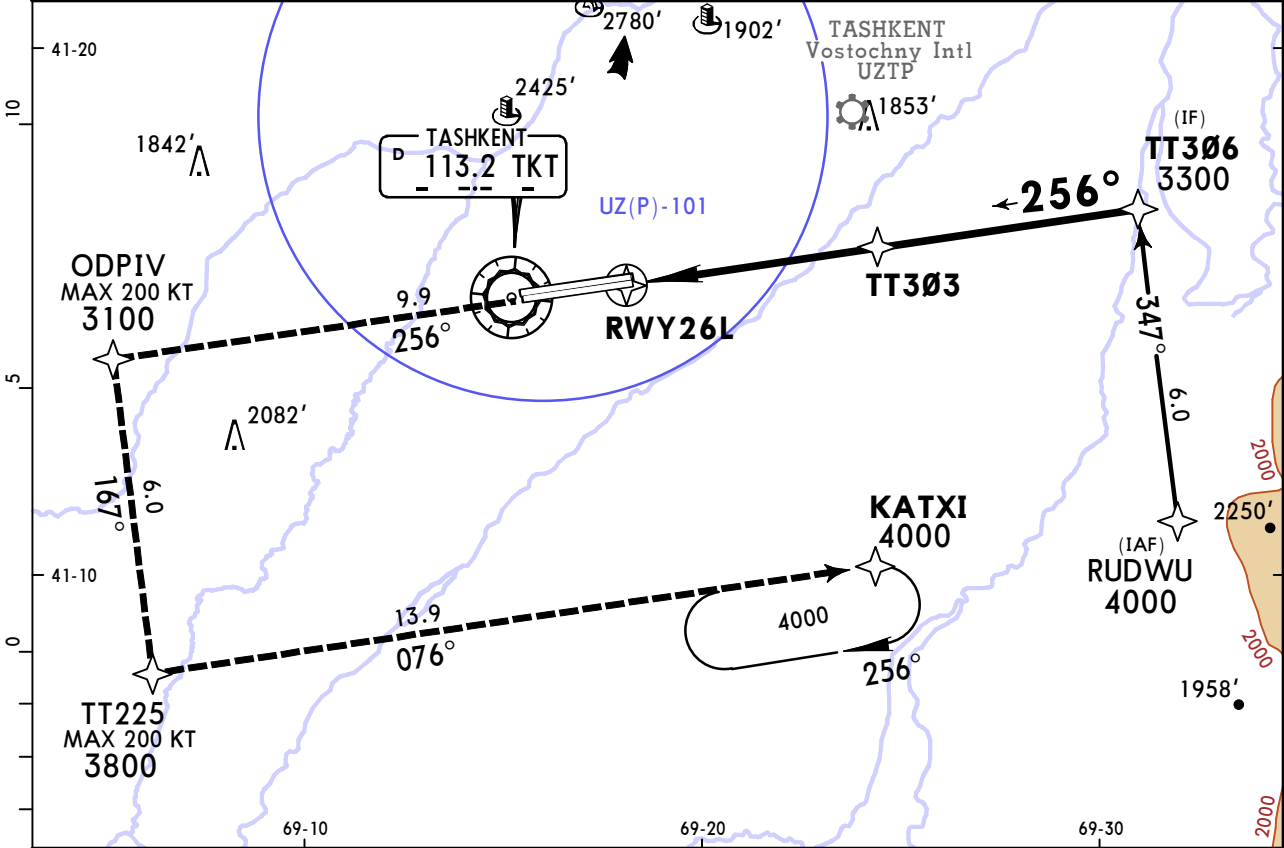

DIST to RWY26L	0.5	1.0	2.0	3.0	4.0
ALTITUDE	1622'	1782'	2100'	2418'	2744'

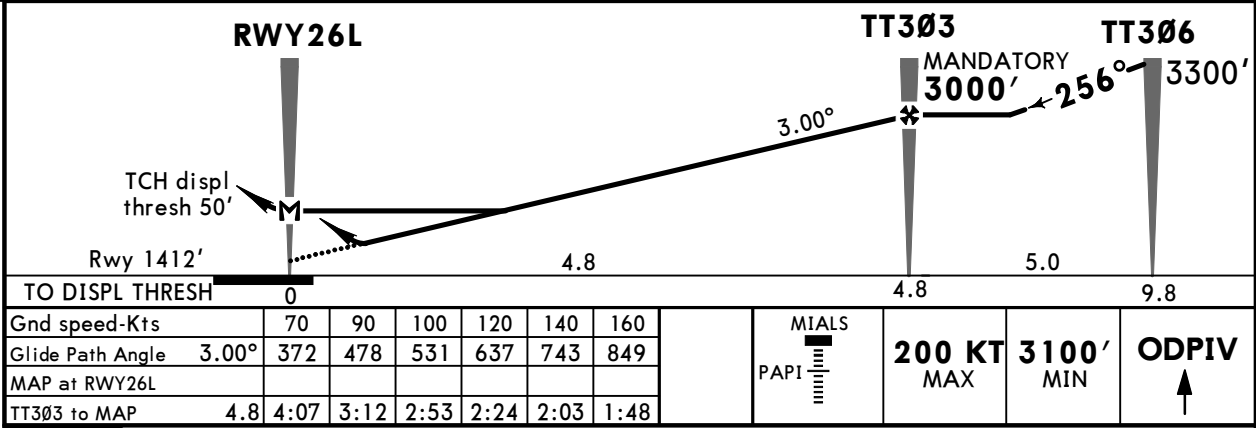


State		STRAIGHT-IN LANDING		
LNAV/VNAV		LNAV		
DA(H) A: 1706' (294') C: 1726' (314') B: 1718' (306') D: 1736' (324')		MDA(H) 1890' (478')		
ALS out		ALS out		
A	R1200m	V1400m	C2000m	V2200m
B				
C				
D	R1300m	V1500m		
PAPI out: V2400m.				

UZTT/TAS
ISLAM KARIMOV INTL


26 SEP 25 (12-4) Eff 2 Oct

TASHKENT, UZBEKISTAN
RNP Rwy 26R

D-ATIS 126.8		TASHKENT Approach 119.4 122.9		TASHKENT Tower 120.4	Ground 121.7
RNAV	Final Apch Crs 256°	HENME MANDATORY 3000' (1586')	LNAV/VNAV DA(H) Refer to Minimums	Apt Elev 1417' Rwy 1414'	For MSA refer to chart MSA TKT VOR (11-0A).
MISSED APCH: Climb to 4000' via route ANWAT (MAX 200 KT, MIN 3100') to TT225 (MAX 200 KT, MIN 3800') to KATXI (MIN 4000'). Hold over KATXI or follow ATC instructions.					
Alt Set: hPa		Rwy Elev: 51 hPa	Trans level: FL150	Trans alt: 13000'	
RNP apch.	Baro-VNAV not authorized below -25°C and +50°C.				

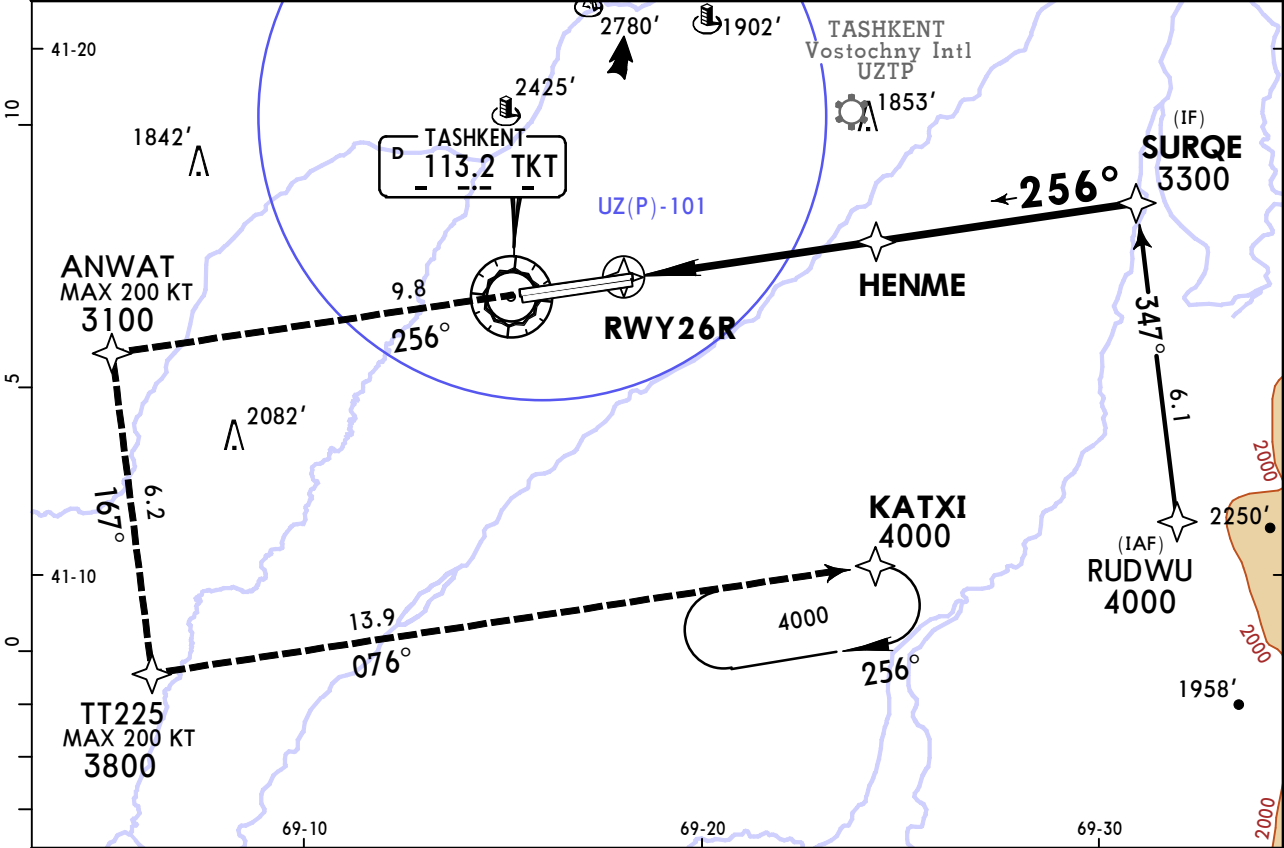


DIST to RWY26R	0.5	1.0	2.0	3.0	4.0
ALTITUDE	1622'	1782'	2100'	2418'	2744'

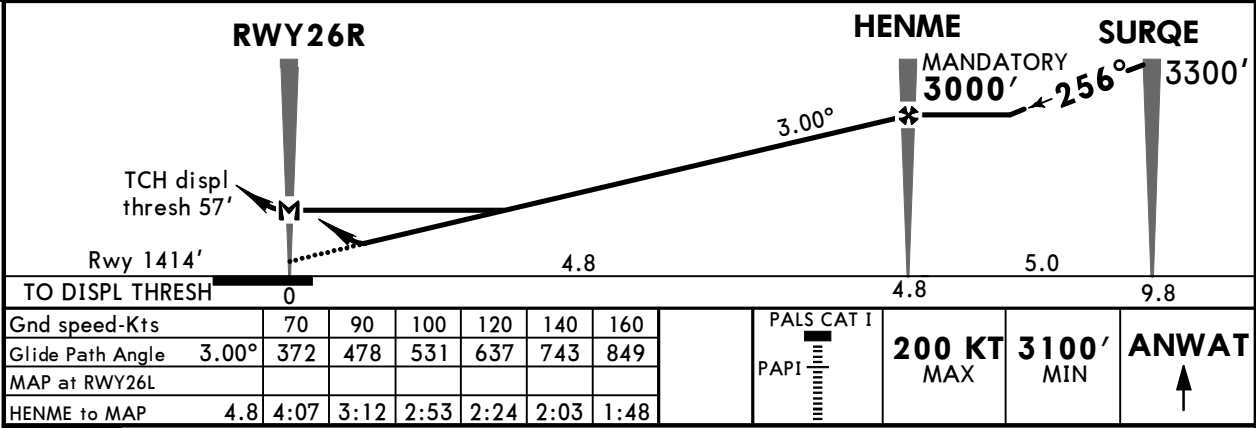

State		STRAIGHT-IN LANDING			
LNAV/VNAV			LNAV		
DA(H) A: 1708' (294') C: 1728' (314') B: 1720' (306') D: 1738' (324')			MDA(H) 1880' (466')		
		CL out	ALS out		ALS out
A	R650m	R900m	V1400m	R1500m	1 V2200m
B	R700m	R1000m			
C					
D	R800m	R1100m	V1500m		
1 PAPI out: V2400m.					

UZTT/TAS
ISLAM KARIMOV INTL

JEPPESEN TASHKENT, UZBEKISTAN
24 OCT 25 (13-1) Eff 30 Oct VOR DME Rwy 08L/R

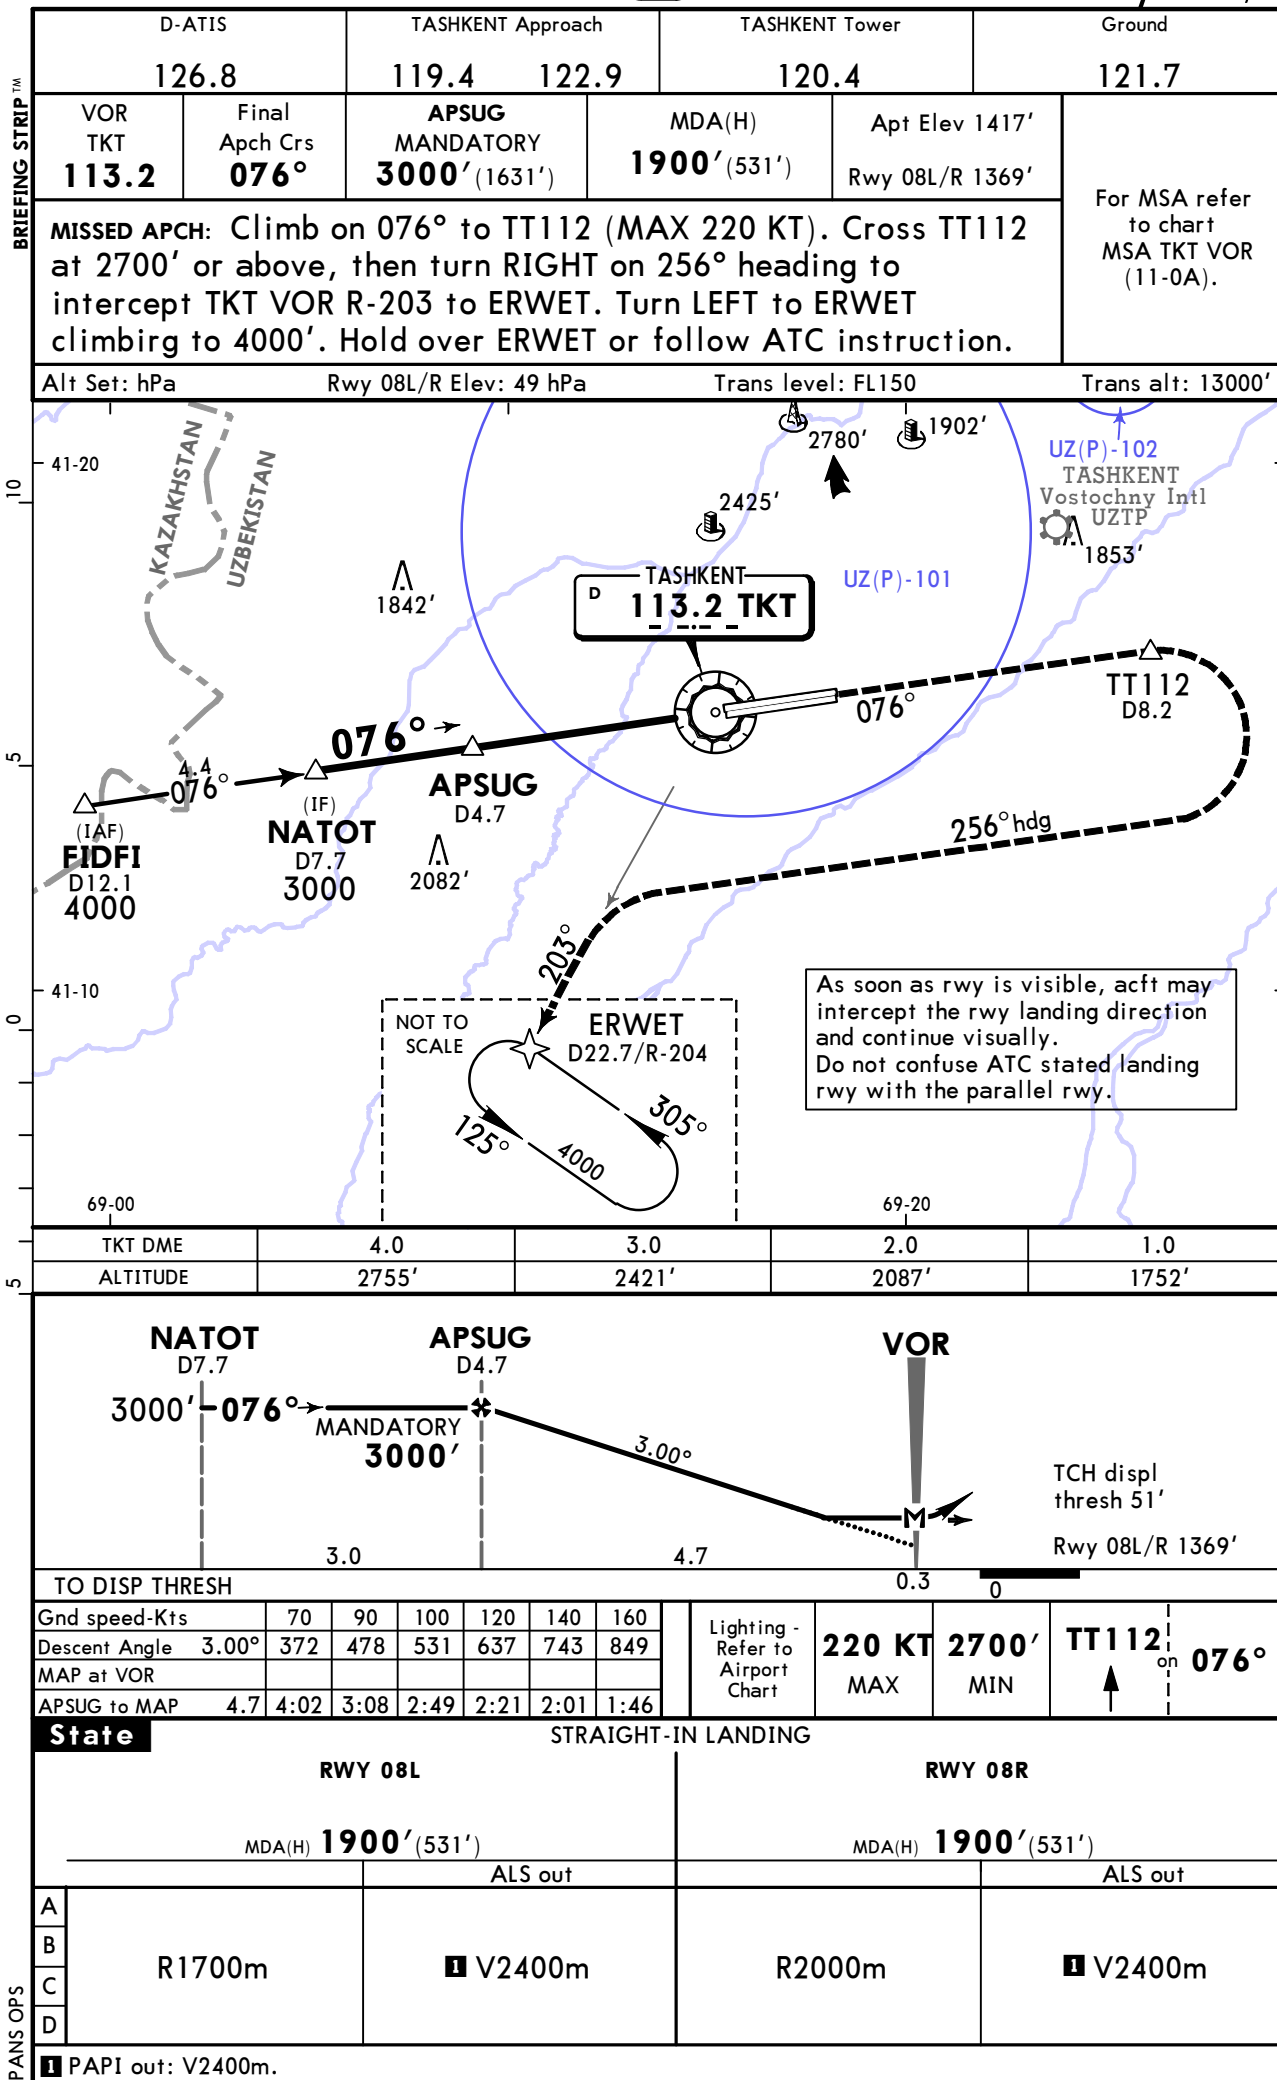


UZTT/TAS

ISLAM KARIMOV INTL

JEPPESSEN

24 OCT 25

(13-2)

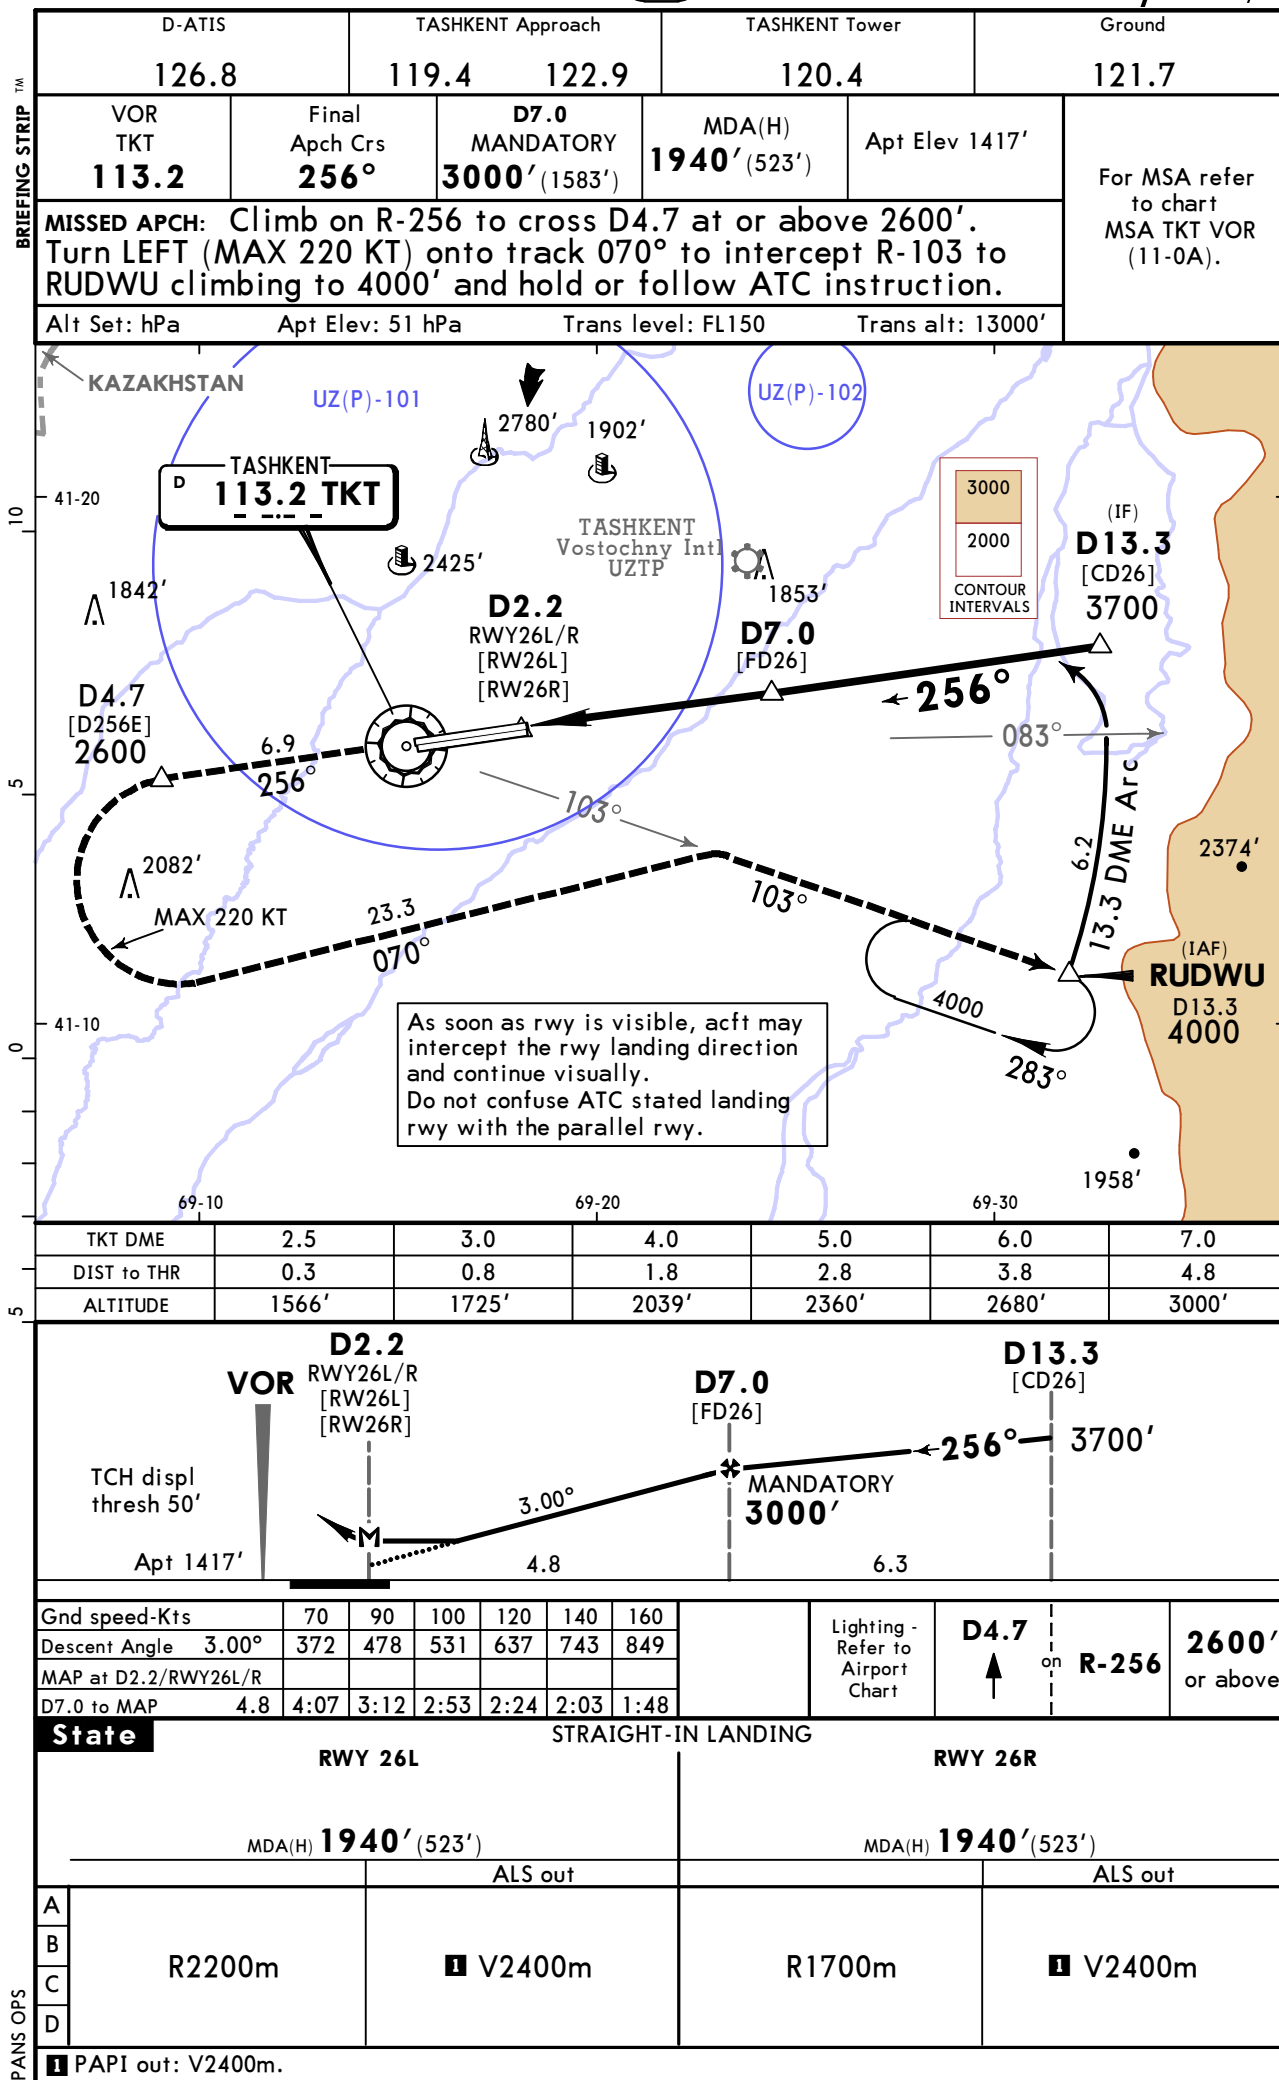Eff 30 Oct
TASHKENT, UZBEKISTAN
VOR DME Rwy 26L/R


CHANGES: Procedure, recommended altitudes, missed apch.

© JEPPESSEN, 2015, 2025. ALL RIGHTS RESERVED.