Karix SMS JSON API Specification

Table of Contents

1. Overview 3
2. JSON API DETAILS 3
2.1 Feature supported by this API 3
2.2. JSON API Parameter specification 3
2.3. Parameters supported by the JSON API call include 4
3. Content Types 8
4. Header Format 9
5. Request Format 9
6. One 2 One (Single message to Single recipient) 10
7. One 2 Many (Single message to Multiple recipients) 15
8. Many 2 Many (Multiple set of specific messages to specific single number) 20
9. Many 2 Many (Multiple messages to multiple recipients in a single batch) 25
10. Status Codes Reference for response 31
10.1 Response Format 31
10.2 Sample Success Response Format 31
10.3 Sample Failure Response Format 32
11. Status codes and Error codes 32

1. Overview

The purpose of this document is to outline the technical functionality required to send SMS messages through JSON protocol. This document is intended for third-party application developers.

This guide provides specifications of the JSON based API connectivity provided by Karix to its customers to subscribe to Karix's SMS Service. This guide is intended for developers planning on integrating their systems with Karix's SMS service. This guide assumes that you are familiar with and have experience in applying the following technologies and concepts.

- Invoking the HTTP API request using JSON payload

2. JSON API DETAILS

2.1 Feature supported by this API

The features supported by XML API are as follows:

- We are supporting simple authentication protocol in header.
- One 2 One (single message to single recipient).
- One 2 Many (single message to multiple recipients).
- Many 2 Many (multiple set of messages to multiple set of recipients in a single batch)
- Many 2 Many (multiple messages to multiple recipients in a single batch)

2.2. JSON API Parameter specification

JSON API should include the following parameters as per the requirement. Any invalid parameters will be ignored.

Note: For authentication, the authorization parameter and its value can be passed via header or request body

For header:

Key	Value
Authorization	Basic encoded value

Encoded Value: Value = encodedBase64 (Username:AccessKey)

For request body:

Key	Value
Key	AccessKey

2.3. Parameters supported by the JSON API call include

Parameter	Description	Type	Mandatory/ Optional	Notes
ver	To specify the version of this XML API	String	Mandatory	- Default value : 1.0. - Valid values: 1.0, 2.0
key	A unique key to identify the customer	String	Mandatory	This will be available in a separate table to map the user and the access key. **Key will be provided by Karix**.
encrpt	To decrypt the message and mobile number after receiving	String	Optional	The decryption based on the unique Customer's Key provided by Karix. (*This will be deprecated in the future versions Should use* _encrypt_) - Default value : 0 - Valid values: 0, 1
sch_at	To specify the schedule time for the message to be sent out	String	Optional	- String representing the date and time in the following format yyyy-MM-dd HH:mm:ss - Minimum Schedule time is CurrentTime + 15 Minutes - Maximum Schedule time is

				CurrentDate + 3 Months - Supported time zones are IST & UTC
messages	Array of Messages	Array	Mandatory	
{messages}/dest	To specify the mobile number	Array	Mandatory	The mobile numbers will be represented as JSON array For example, ["919999999999","919999999999"] Not supporting the E.164 format
{messages}/text	Message to be sent out	String	Mandatory	No limitation for the number of characters in the message
{messages}/send	To specify the Sender ID	String	Mandatory	Max Length = 15
{messages}/type	Content Type of the message	String	Mandatory	- Default value : PM (Data Coding Schema (DCS), UDHI are inter related) - Valid values: FLASH-FL; PLAIN-PM; UNICODE-UC; BINARY-BM; FLASH UNICODE-FU; SPECIFIC PORT- SP; SPECIFIC PORT UNICODE-SPU; ADVANCE-AD
{messages}/dlt_entity_id	The Entity ID registered with the DLT platform.	String	Optional	
{messages}/dlt_template_id	The Template ID registered	String	Optional	

	with the DLT platform for the Entity ID			
{messages}/dcs	To specify the DCS Value.	String	Optional	- Content Type, Data Coding Schema (DCS), UDHI are inter related - Applicable only for the 'ADVANCE' content type.
{messages}/udhi_inc	To specify whether the message is having UDH values	String	Optional	- Default value : 0 - Valid values: 0, 1 - Content Type, Data Coding Schema (DCS), UDHI are inter related - Applicable only for the 'ADVANCE' content type.
{messages}/port	To specify the specific Ports to deliver the messages on those ports (As provided by Client)	String	Optional	Max Length = 5, Min Value = 0 , Max Value = 65535
{messages}/vp	To specify the validity period for this message request.	String	Optional	The value will be treated in minutes. Minimum = 1, Maximum = 1440 (one day)
{messages}/app_country	To specify to prefix the default country code in case mobile number length is matching with the length specified in	String	Optional	- Default value : 0 - Valid values: 0, 1

	the table for that account			
{messages}/country_cd	In case of append_country is set to 1 and wanted to override the country code specified in the table, when the mobile number length is match with the table value	String	Optional	
{messages}/template_id	To use a specific template for this customer for this message.	String	Optional	Supported only for Plain messages
{messages}/template_values	The template values (dynamic values) to be used for the given template ID	String	Optional	Supported only for Plain messages. Supports maximum of 10 dynamic parameters.
{messages}/cust_ref	An unique id send by the customer for every message	String	Optional	Max Length = 50
{messages}/tag	To specify the Message tag	String	Optional	Max Length = 50
{messages}/tag1	To specify the Message tag 1	String	Optional	Max Length = 100

{messages}/tag2	To specify the Message tag 2	String	Optional	Max Length = 100
{messages}/tag3	To specify the Message tag 3	String	Optional	Max Length = 100
{messages}/tag4	To specify the Message tag 4	String	Optional	Max Length = 200
{messages}/tag5	To specify the Message tag 5	String	Optional	Max Length = 200

3. Content Types

1. By default, the API assume that the incoming request is on UTF-8 charset. If the customer wants to send in a different charset, then they must specify the charset in the http request's content-type.
2. The content type (type parameter) can be any one of the following.

Parameter Type	Content Type	Value
a	Flash	FL
b	Plain	PM
c	UNICODE	UC
d	BINARY	BM
e	FLASH UNICODE	FU
f	SPECIFIC PORT	SP
g	SPECIFIC PORT UNICODE	SPU
h	ADVANCE	AD

3. In case of the type 'a', 'b', 'c', 'd' there is no need to set the DCS value and the udhi_inc value.
4. When the type is 'e', then the customers must specify the DCS value based on the industry standard. The same will sent to the SMSCs.
5. When the type is 'e', and the udhi_inc is '0' then API will split the message and append the respective UDH value with the corresponding split message
6. When the type is 'e', and the udhi_inc is '1' then there is no need to do anything for the message and must process the message as it is.

4. Header Format

Constraints on declaring the authorization:

- The authentication value should be declared in the header (as authorization) or in the request body (as key tag)
- In case, if both the values such as key tag (in the request body) and authorization value (in the header) are declared, then the key tag will be considered as primary
- The authentication value in the header should be in the below mentioned format

Header:

Key	Value
Authorization	Basic encoded value

Encoded Value: Value = encodedBase64 (Username:AccessKey)

5. Request Format

The JSON API allows sending SMS in the JSON format to our Gateway.
The recommended submission methods are GET / POST.

For GET Method:

Request type	**Value**
Request URL	**http://host:port/httpapi/JsonReceiver**
Request Parameter key	**JSON**
Request Value	**< Actual Input JSON content >**

For POST Method:

Request type	Value
Request URL	http://host:port/httpapi/JsonReceiver
Request Value	< Actual Input JSON content >

Sample Requests

The sample requests of tis JSON API will be as follows

6. One 2 One (Single message to Single recipient)

- It refers specifically to the sending of single message to a single recipient

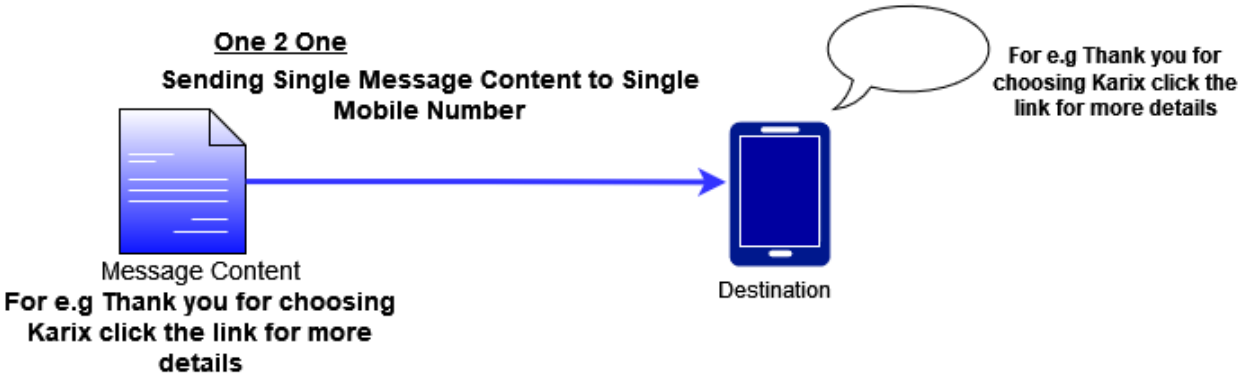

Post: https://japi.instaalerts.zone/httpapi/JsonReceiver

HEADERS

Content-Type	**application/json**

POST BODY

```
{
    "ver": "1.0",
    "key": "xxxxxxxxxxxxxxxxxxxxx",
    "encrpt": "0",
    "sch_at": "yyyy-MM-dd HH:mm:ss",
    "messages": [
      {
```

```
        "dest": [
            "123456789"
        ],
        "text": "Sample Text 1",
        "send": "Send 1",
        "type": "PM",
        "dlt_entity_id": "1234567",
        "dlt_template_id": "987654321",
        "dcs": "0",
        "udhi_inc": "0",
        "port": "0",
        "vp": "15",
        "app_country": "1",
        "country_cd": "001",
        "template_id": "12",
        "template_values": [
            "4617",
            "OTP"
        ],
        "cust_ref": "34343",
        "tag": "tag",
        "tag1": "tag1",
```

```
            "tag2": "tag2",
            "tag3": "tag3",
            "tag4": "tag4",
            "tag5": "tag5"
        }
    ]
}
```

Example Request

```
curl --location 'https://japi.instaalerts.zone/httpapi/JsonReceiver' \
--data '{
    "ver": "1.0",
    "key": "xxxxxxxxxxxxxxxxxxxxxx",
    "encrpt": "0",
    "sch_at": "yyyy-MM-dd HH:mm:ss",
    "messages": [
        {
            "dest": [
                "123456789"
            ],
            "text": "Sample Text 1",
            "send": "Send 1",
            "type": "PM",
```

```
        "dlt_entity_id": "1234567",
        "dlt_template_id": "987654321",
        "dcs": "0",
        "udhi_inc": "0",
        "port": "0",
        "vp": "15",
        "app_country": "1",
        "country_cd": "001",
        "template_id": "12",
        "template_values": [
            "4617",
            "OTP"
        ],
        "cust_ref": "34343",
        "tag": "tag",
        "tag1": "tag1",
        "tag2": "tag2",
        "tag3": "tag3",
        "tag4": "tag4",
        "tag5": "tag5"
    }
]
```

```
}'
```

Example Response

```
{
  "ackid": "<ackid>",
  "time": "yyyy-MM-dd HH:mm:ss",
  "status": {
    "code": "200",
    "desc": "Request accepted"
  }
}
```

7. One 2 Many (Single message to Multiple recipients)

- One 2 Many SMS is basically a type of group SMS in which same message is broadcasted to many recipients
- This feature enables the user to send a single message content to the multiple mobile numbers. In this scenario, all the predetermined mobile numbers will receive the same format of message content
- The mobile numbers will be represented as JSON array [“mobile1", "mobile2", "mobile3"]. For example, ["923456789","987654321"]

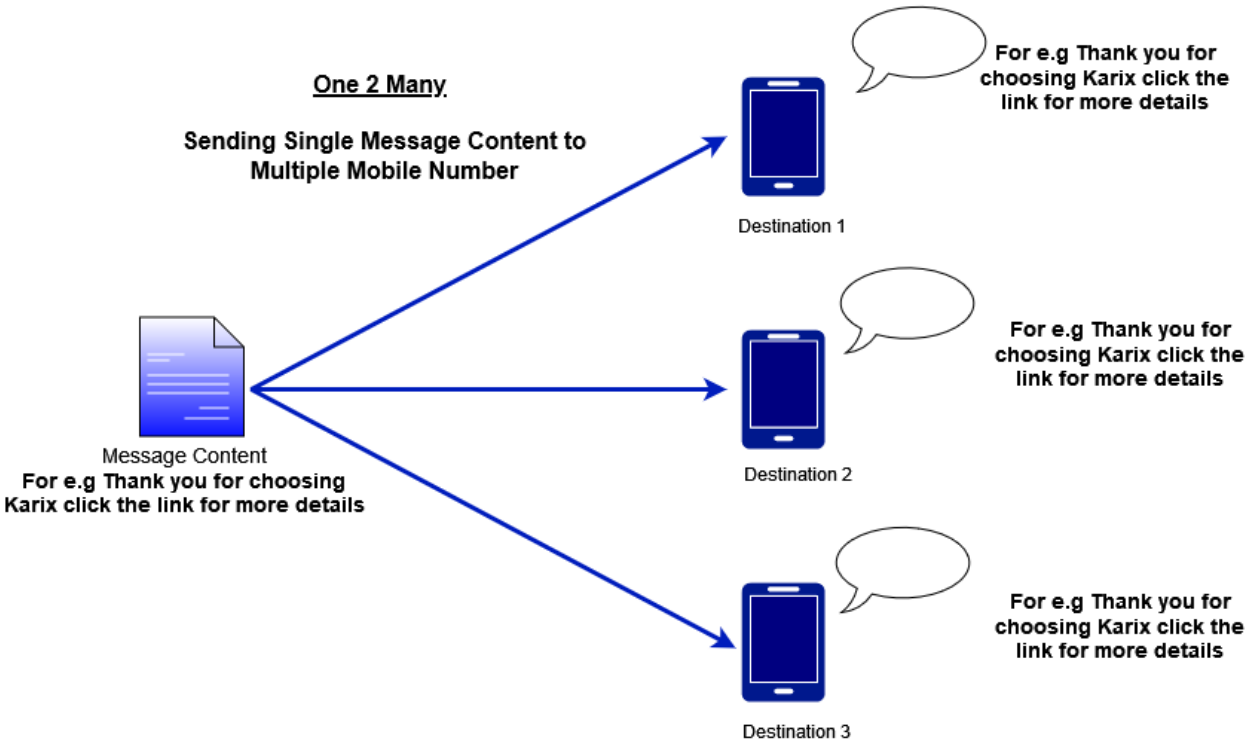

Post:

https://japi.instaalerts.zone/httpapi/JsonReceiver

HEADERS

Content-Type	application/json

POST BODY

```
{
    "ver": "1.0",
    "key": "xxxxxxxxxxxxxxxxxxxxx",
    "encrpt": "0",
    "sch_at": "yyyy-MM-dd HH:mm:ss",
    "messages": [
      {
        "dest": [
          "12345",
          "67890",
          "43567646",
          "5437548"
        ],
        "text": "Sample Text 1",
        "send": "Send 1",
        "type": "PM",
        "dlt_entity_id": "1234567",
        "dlt_template_id": "987654321",
        "dcs": "0",
```

```
        "udhi_inc": "0",
        "port": "0",
        "vp": "15",
        "app_country": "1",
        "country_cd": "001",
        "template_id": "12",
        "template_values": [
            "4617",
            "OTP"
        ],
        "cust_ref": "34343",
        "tag": "tag",
        "tag1": "tag1",
        "tag2": "tag2",
        "tag3": "tag3",
        "tag4": "tag4",
        "tag5": "tag5"
    }
  ]
}
```

Example Request

```
curl --location 'https://japi.instaalerts.zone/httpapi/JsonReceiver' \
--data '{
    "ver": "1.0",
    "key": "xxxxxxxxxxxxxxxxxxxxxx",
    "encrpt": "0",
    "sch_at": "yyyy-MM-dd HH:mm:ss",
    "messages": [
        {
            "dest": [
                "12345",
                "67890",
                "43567646",
                "5437548"
            ],
            "text": "Sample Text 1",
            "send": "Send 1",
            "type": "PM",
            "dlt_entity_id": "1234567",
            "dlt_template_id": "987654321",
            "dcs": "0",
            "udhi_inc": "0",
```

```
        "port": "0",
        "vp": "15",
        "app_country": "1",
        "country_cd": "001",
        "template_id": "12",
        "template_values": [
            "4617",
            "OTP"
        ],
        "cust_ref": "34343",
        "tag": "tag",
        "tag1": "tag1",
        "tag2": "tag2",
        "tag3": "tag3",
        "tag4": "tag4",
        "tag5": "tag5"
    }
  ]
}'
```

Example Response

```
{
  "ackid": "<ackid>",
  "time": "yyyy-MM-dd HH:mm:ss",
  "status": {
    "code": "200",
    "desc": "Request accepted"
  }
}
```

8. Many 2 Many (Multiple set of specific messages to specific single number)

1. This feature enables the user to send a specific message content to a specific mobile number and another specific message content to another corresponding mobile number.
2. In other words, it is way of putting the multiple set of one to one message in to a single JSON API snippet

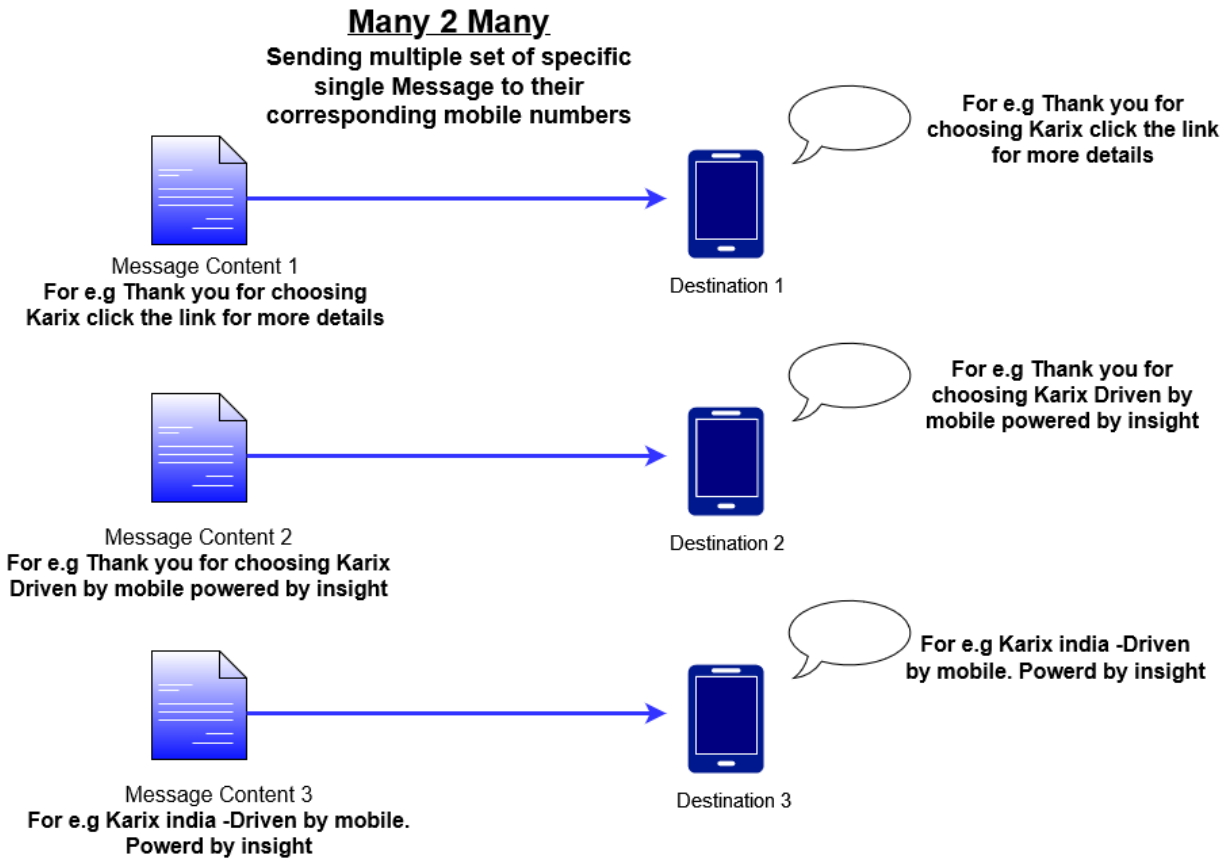

POST:

https://japi.instaalerts.zone/httpapi/JsonReceiver

HEADERS

Content-Type	application/json

Body

```
{
    "ver": "1.0",
    "key": "xxxxxxxxxxxxxxxxxxxx",
    "encrpt": "0",
    "sch_at": "yyyy-MM-dd HH:mm:ss",
    "messages": [
        {
            "dest": [
                "1234567890"
            ],
            "text": "Sample Text 1",
            "send": "Send 1",
            "type": "PM",
            "dlt_entity_id": "1234567",
            "dlt_template_id": "987654321",
            "dcs": "0",
            "udhi_inc": "0",
            "port": "0",
            "vp": "15",
            "app_country": "1",
            "country_cd": "001",
            "template_id": "18",
            "template_values": [
                "4814",
                "passcode"
            ],
            "cust_ref": "34343",
            "tag": "tag",
            "tag1": "tag1",
            "tag2": "tag2",
            "tag3": "tag3",
            "tag4": "tag4",
            "tag5": "tag5"
        },
```

```
35.     {
36.         "dest": [
37.             "12345678905"
38.         ],
39.         "text": "Sample Text 2",
40.         "send": "Send 2",
41.         "type": "PM",
42.         "dlt_entity_id": "56789123",
43.         "dlt_template_id": "123456789",
44.         "dcs": "0",
45.         "udhi_inc": "0",
46.         "port": "0",
47.         "vp": "15",
48.         "app_country": "1",
49.         "country_cd": "91",
50.         "cust_ref": "34343222",
51.         "tag": "tag",
52.         "tag1": "tag1",
53.         "tag2": "tag2",
54.         "tag3": "tag3",
55.         "tag4": "tag4",
56.         "tag5": "tag5"
57.     },
58.     {
59.         "dest": [
60.             "1234567890"
61.         ],
62.         "text": "Sample Text 3",
63.         "send": "Send 3",
64.         "type": "PM",
65.         "dcs": "0",
66.         "udhi_inc": "0",
67.         "port": "0",
68.         "vp": "15",
69.         "app_country": "1",
70.         "country_cd": "92",
71.         "cust_ref": "3434322211",
72.         "tag": "tag",
73.         "tag1": "tag1",
74.         "tag2": "tag2",
75.         "tag3": "tag3",
76.         "tag4": "tag4",
77.         "tag5": "tag5"
78.     }
```

```
    ]

}
```

Example Request

```
curl --location 'https://japi.instaalerts.zone/httpapi/JsonReceiver' \
--data '{
    "ver": "1.0",
    "key": "xxxxxxxxxxxxxxxxxxxxx",
    "encrpt": "0",
    "sch_at": "yyyy-MM-dd HH:mm:ss",
    "messages": [
        {
            "dest": [
                "1234567890"
            ],
            "text": "Sample Text 1",
            "send": "Send 1",
            "type": "PM",
            "dlt_entity_id": "1234567",
            "dlt_template_id": "987654321",
            "dcs": "0",
            "udhi_inc": "0",
            "port": "0",
            "vp": "15",
            "app_country": "1",
            "country_cd": "001",
            "template_id": "18",
            "template_values": [
                "4814",
                "passcode"
            ],
            "cust_ref": "34343",
            "tag": "tag",
            "tag1": "tag1",
            "tag2": "tag2",
            "tag3": "tag3",
            "tag4": "tag4",
            "tag5": "tag5"
        },
        {
            "dest": [
                "12345678905"
```

```
            39.         ],
            40.         "text": "Sample Text 2",
            41.         "send": "Send 2",
            42.         "type": "PM",
            43.         "dlt_entity_id": "56789123",
            44.         "dlt_template_id": "123456789",
            45.         "dcs": "0",
            46.         "udhi_inc": "0",
            47.         "port": "0",
            48.         "vp": "15",
            49.         "app_country": "1",
            50.         "country_cd": "91",
            51.         "cust_ref": "34343222",
            52.         "tag": "tag",
            53.         "tag1": "tag1",
            54.         "tag2": "tag2",
            55.         "tag3": "tag3",
            56.         "tag4": "tag4",
            57.         "tag5": "tag5"
            58.     },
            59.     {
            60.         "dest": [
            61.             "1234567890"
            62.         ],
            63.         "text": "Sample Text 3",
            64.         "send": "Send 3",
            65.         "type": "PM",
            66.         "dcs": "0",
            67.         "udhi_inc": "0",
            68.         "port": "0",
            69.         "vp": "15",
            70.         "app_country": "1",
            71.         "country_cd": "92",
            72.         "cust_ref": "3434322211",
            73.         "tag": "tag",
            74.         "tag1": "tag1",
            75.         "tag2": "tag2",
            76.         "tag3": "tag3",
            77.         "tag4": "tag4",
            78.         "tag5": "tag5"
            79.     }
            80. ]

}'
```

Example Response

```
{
  "ackid": "<ackid>",
  "time": "yyyy-MM-dd HH:mm:ss",
  "status": {
    "code": "200",
    "desc": "Request accepted"
  }

}
```

9. Many 2 Many (Multiple messages to multiple recipients in a single batch)

- It refers specifically to the sending of multiple messages to the mobile numbers of a predetermined group of recipients

- This feature enables the user to send the multiple message content to the corresponding multiple mobile numbers

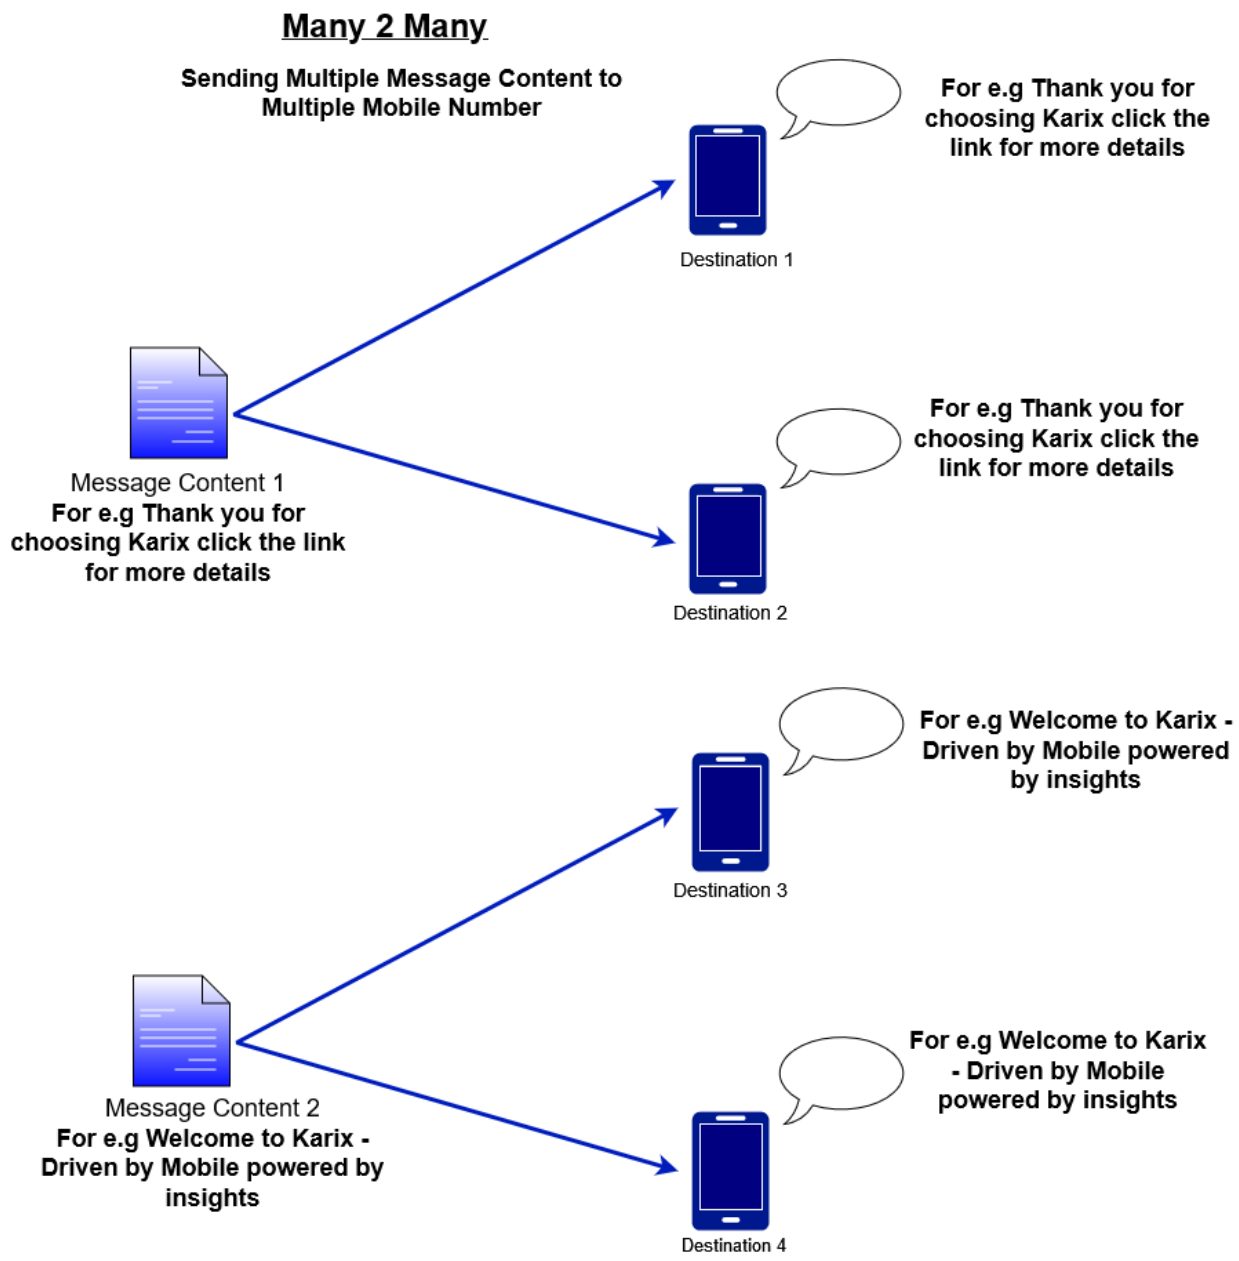

POST:
https://japi.instaalerts.zone/httpapi/JsonReceiver

HEADERS

Content-Type	**application/json**

POST BODY

```
{
    "ver": "1.0",
    "key": "xxxxxxxxxxxxxxxxxxxxx",
    "encrpt": "0",
    "sch_at": "yyyy-MM-dd HH:mm:ss",
    "messages": [
        {
            "dest": [
                "12345",
                "67890"
            ],
            "text": "Sample Text 1",
            "send": "Send 1",
            "type": "PM",
            "dlt_entity_id": "1234567",
            "dlt_template_id": "987654321",
            "dcs": "0",
            "udhi_inc": "0",
            "port": "0",
            "vp": "15",
            "app_country": "1",
            "country_cd": "001",
            "cust_ref": "34343",
            "tag": "tag",
            "tag1": "tag1",
            "tag2": "tag2",
            "tag3": "tag3",
            "tag4": "tag4",
            "tag5": "tag5"
        },
        {
            "dest": [
                "12345",
                "67890"
            ],
            "text": "Sample Text 2",
            "send": "Send 2",
            "type": "PM",
            "dcs": "0",
            "udhi_inc": "0",
            "port": "0",
            "vp": "15",
```

```
            "app_country": "1",
            "country_cd": "91",
            "template_id": "12",
            "cust_ref": "34343222",
            "tag": "tag",
            "tag1": "tag1",
            "tag2": "tag2",
            "tag3": "tag3",
            "tag4": "tag4",
            "tag5": "tag5"
        },
        {
            "dest": [
                "12345",
                "67890"
            ],
            "text": "Sample Text 3",
            "send": "Send 3",
            "type": "PM",
            "dlt_entity_id": "56789123",
            "dlt_template_id": "123456789",
            "dcs": "0",
            "udhi_inc": "0",
            "port": "0",
            "vp": "15",
            "app_country": "1",
            "country_cd": "92",
            "cust_ref": "3434322211",
            "tag": "tag",
            "tag1": "tag1",
            "tag2": "tag2",
            "tag3": "tag3",
            "tag4": "tag4",
            "tag5": "tag5"
        }
    ]

}
```

Example Request

```
curl --location 'https://japi.instaalerts.zone/httpapi/JsonReceiver' \
--data '{
    "ver": "1.0",
    "key": "xxxxxxxxxxxxxxxxxxxxx",
    "encrpt": "0",
    "sch_at": "yyyy-MM-dd HH:mm:ss",
    "messages": [
        {
            "dest": [
                "12345",
                "67890"
            ],
            "text": "Sample Text 1",
            "send": "Send 1",
            "type": "PM",
            "dlt_entity_id": "1234567",
            "dlt_template_id": "987654321",
            "dcs": "0",
            "udhi_inc": "0",
            "port": "0",
            "vp": "15",
            "app_country": "1",
            "country_cd": "001",
            "cust_ref": "34343",
            "tag": "tag",
            "tag1": "tag1",
            "tag2": "tag2",
            "tag3": "tag3",
            "tag4": "tag4",
            "tag5": "tag5"
        },
        {
            "dest": [
                "12345",
                "67890"
            ],
            "text": "Sample Text 2",
            "send": "Send 2",
            "type": "PM",
            "dcs": "0",
            "udhi_inc": "0",
            "port": "0",
```

```
            "vp": "15",
            "app_country": "1",
            "country_cd": "91",
            "template_id": "12",
            "cust_ref": "34343222",
            "tag": "tag",
            "tag1": "tag1",
            "tag2": "tag2",
            "tag3": "tag3",
            "tag4": "tag4",
            "tag5": "tag5"
        },
        {
            "dest": [
                "12345",
                "67890"
            ],
            "text": "Sample Text 3",
            "send": "Send 3",
            "type": "PM",
            "dlt_entity_id": "56789123",
            "dlt_template_id": "123456789",
            "dcs": "0",
            "udhi_inc": "0",
            "port": "0",
            "vp": "15",
            "app_country": "1",
            "country_cd": "92",
            "cust_ref": "3434322211",
            "tag": "tag",
            "tag1": "tag1",
            "tag2": "tag2",
            "tag3": "tag3",
            "tag4": "tag4",
            "tag5": "tag5"
        }
    ]

}'
```

Example Response

```
1. {
2.   "ackid": "<ackid>",
3.   "time": "yyyy-MM-dd HH:mm:ss",
4.   "status": {
5.     "code": "200",
6.     "desc": "Request accepted"
7.   }

}
```

10. Status Codes Reference for response

10.1 Response Format

The below section outline response format for every request that was successfully received by Karix's messaging platform.

10.2 Sample Success Response Format

The following sample response format would be received when the request was successfully accepted by the platform

```
{

  "status": {

    "code": "200",

    "desc": "Request Accepted"

  },

  "ackid": "23423412341234",

  "time": "yyyy-MM-dd HH:mm:ss"

}
```

10.3 Sample Failure Response Format

The following sample response format would be received when the request was not accepted by the platform.

```
{
  "status": {
    "code": "-106",
    "desc": "Invalid credentials"
  },
  "ackid": "N/A",
  "time": "yyyy-MM-dd HH:mm:ss"
}
```

Note: All the error responses will be moreover the same, but only the status code and error description will differ from one another.

11. Status codes and Error codes

The following API status and errors codes that you may get in case there is a wrong parameter entered or issue with the account:

Code	Description	Comment
200	MSG_ACCEPTED	Request accepted
-999	INTERNAL_ERROR	Internal Error
-101	API_VERSION_INVALID	Invalid API version
-102	INVALID_JSON	Invalid JSON
-105	IP_RESTRICTED	IP restricted
-106	ACCOUNT_EXPIRED	Account expired
-107	ACCOUNT_INACTIVE	Account deactivated
-108	ACCOUNT_INVALID_CREDENTIALS	Invalid Credentials
-109	ENCRYPTION_OPTION_INVALID	Invalid encryption option
-110	SCHEDULE_OPTION_DISABLE	Scheduling feature disabled
-111	SCHEDULE_INVALID_TIME	Invalid schedule time

-112	SCHEDULE_TIME_BEYOND_TIME_BOUND	Schedule time is beyond the time bound
-113	DESTINATION_EMPTY	Empty mobile number
-114	DESTINATION_INVALID	Invalid mobile number
-115	MESSAGE_EMPTY	Empty message content
-116	INVALID_MSGTYPE	Invalid message type
-117	PORT_INVALID	Invalid Port
-118	DLRTYPE_INVALID	Invalid DLR type
-119	EXPIRY_MINUTES_INVALID	Invalid Expiry Minutes
-120	EXPIRY_MINUTES_BEYOUND_TIME_BOUND	Expiry time is beyond the time bound
-121	COUNTRY_CODE_INVALID_APPEND	Invalid append country code option
-122	URLTRACK_INVALID_OPTION	Invalid URL tracking option
-123	CUST_REFERENCE_ID_INVALID	Invalid customer reference id
-124	CUST_REFERENCE_ID_INVALID_LENGTH	Invalid customer reference id length
-125	TRAI_BLOCKOUT_TIME	Cannot send message in TRAI blockout time
-126	SCHEDULE_TRAI_BLOCKOUT_TIME	Cannot Schedule the message delivery time to TRAI blockout time
-127	DCS_INVALID	Invalid DCS value
-128	UDHI_INVALID	Invalid UDHI
-129	SENDER_ID_EMPTY	Empty senderId
-130	INVALID_SENDERID	Invalid senderId
-131	INVALID_TEMPLATEID	Invalid TemplateId
-132	TEMPLATE_VALUES_EMPTY	Empty TemplateId
-142	ACCESS_VIOLATION	Access violation
-143	EMPTY_REPORTING_KEY	Empty reporting key
-144	INVALID_BATCH_NO	Invalid batch number