




Response Guide - AC Transit Hydrogen Fuel Cell



- High-Pressure Hydrogen Lines**
- High Voltage Lines**
- PRD (Pressure Release Device) Hydrogen Vent Lines
- ESD (Emergency Shut Down Device)
- Presurized Hydrogen Storage**
- High Voltage Box**

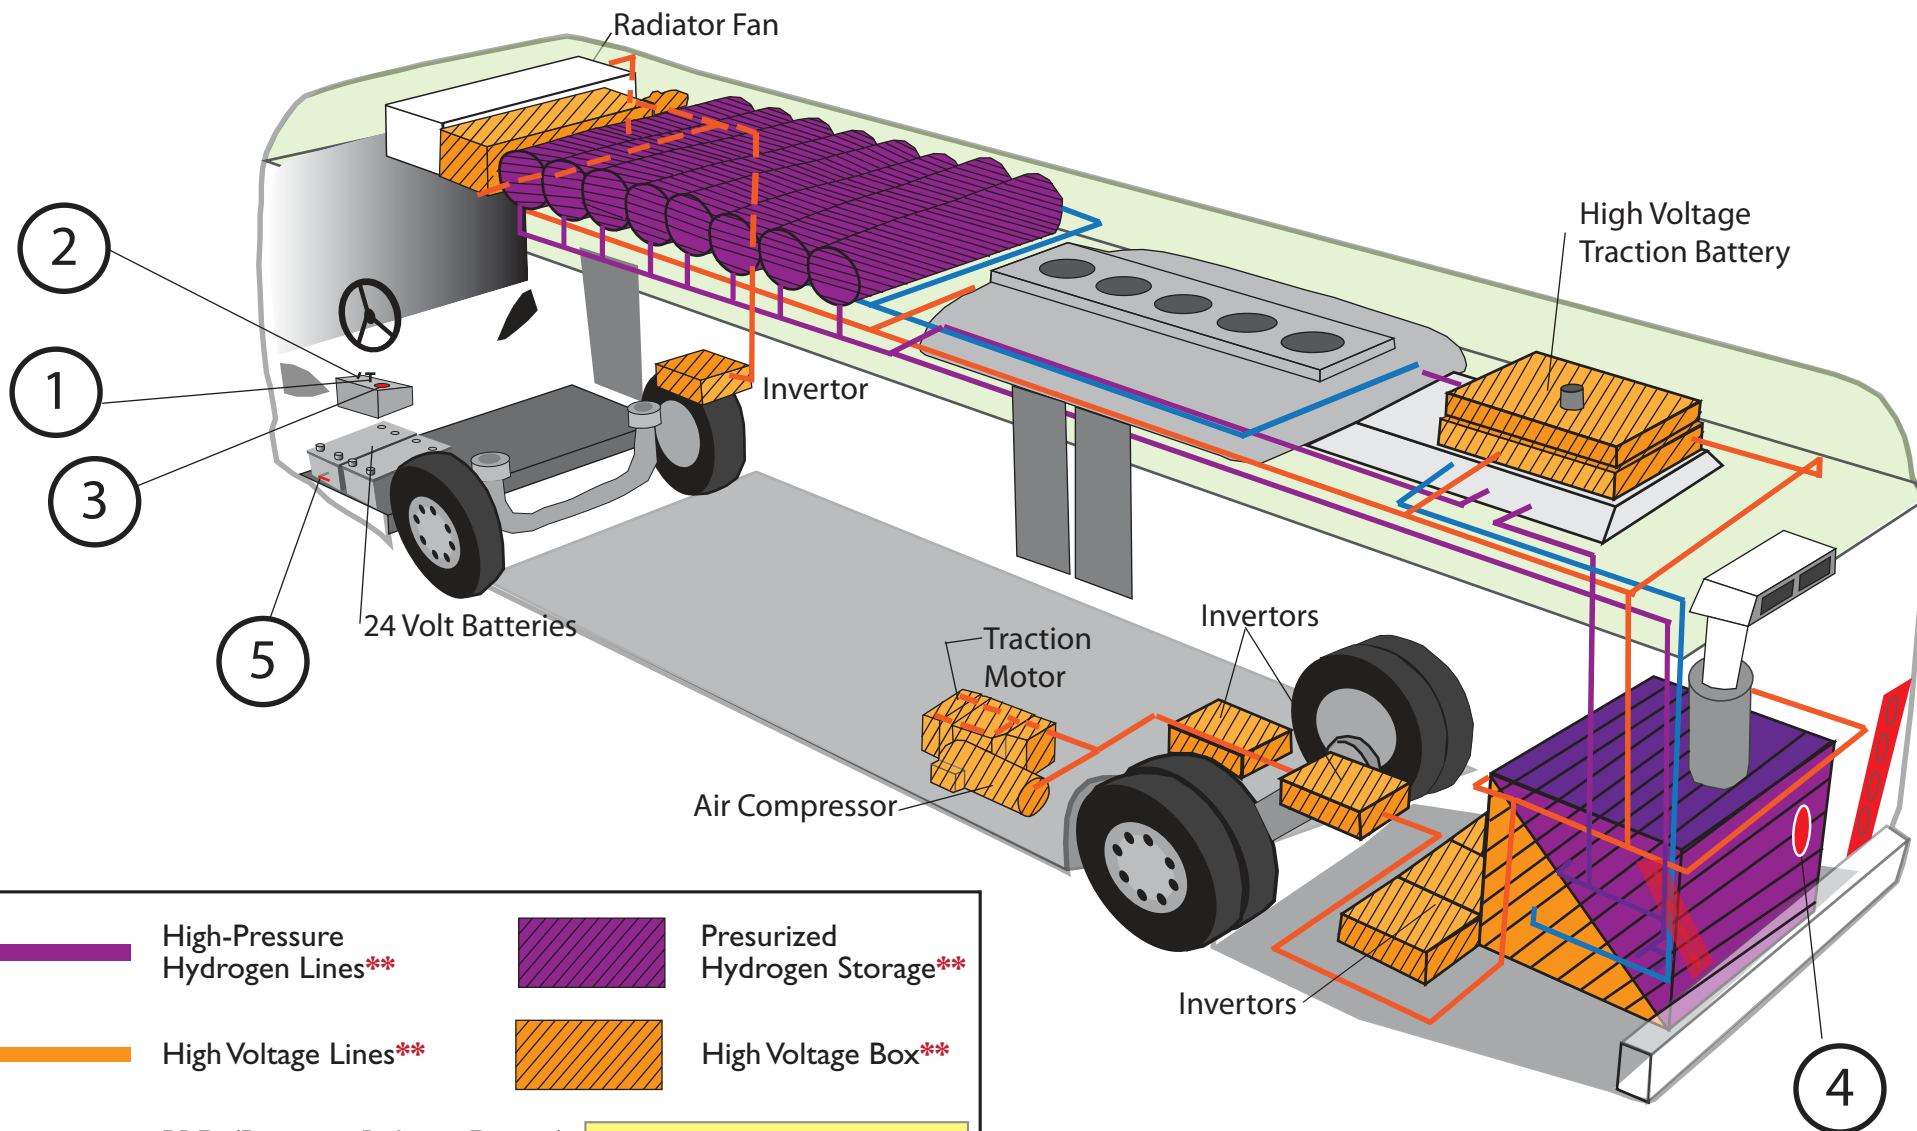

WARNING

** Never cut for any reason or personal injury may result.



Response Guide - AC Transit Hydrogen Fuel Cell

The following options will shut down the bus electrical and hydrogen systems in an emergency:

Option

A

(#1 and #2)

OR

Option

B

(#1 and #3)

OR

Option

C

(#4)


OR

Option

D

(#5)

1. Set Parking Brake by pulling up on yellow diamond shaped lever.
2. Turn Master Run Switch to **OFF**.
3. Open Bright Orange Switch Guard labeled "**Emergency Power OFF**." Flip switch towards driver's side window.
4. Press in the "**ESD***" Red Button on fuel cell in engine compartment, located at the back of the bus.
5. Turn 24V Battery Switch **OFF** by turning a quarter turn counterclockwise, located in the outside compartment at the front of the bus on the left hand side, directly below drivers window.

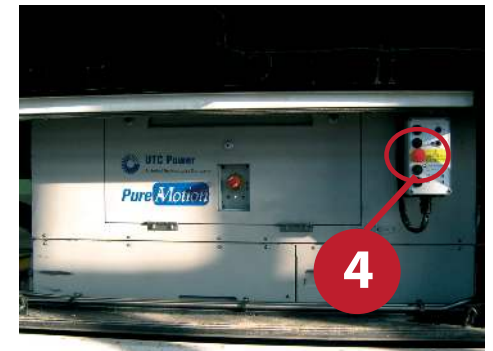

***ESD= Emergency Shut Down Device**