

#### Positive voltage regulator for battery charger

#### **Features**

- Reverse leakage current less than 10 µA
- Three terminal fixed version (13.7 V) output current in excess of 1.5 A
- Available in ± 1 % (AC) selection at 25 °C
- Typical dropout voltage 2 V
- Temperature range 0 to 150 °C

#### **Description**

The PB137 is a positive voltage regulator able to provide 1.5 A, at  $V_O=13.7$  V and is intended as a charger for lead acid battery. The main feature is a reverse leakage current (Max 10  $\mu A$  at  $T_J=0$  to 40 °C  $V_I=$  floating and  $V_O=13.7$  V). It is available in TO-220 and it employs internal current limiting, thermal shut-down and safe area protection, making it essentially indestructible. If adequate heat-sinking is provided, they can deliver over 1 A output current.




Table 1. Device summary

Order code	Package	Output voltage	
PB137ACV	TO-220	1.5 V	

Contents PB137


### **Contents**

1	Diagram3
2	Pin configuration4
3	Application
4	Maximum ratings
5	Electrical characteristics
6	Typical characteristics 8
7	Package mechanical data
В	Revision history

PB137 Diagram

## 1 Diagram


Figure 1. Schematic diagram

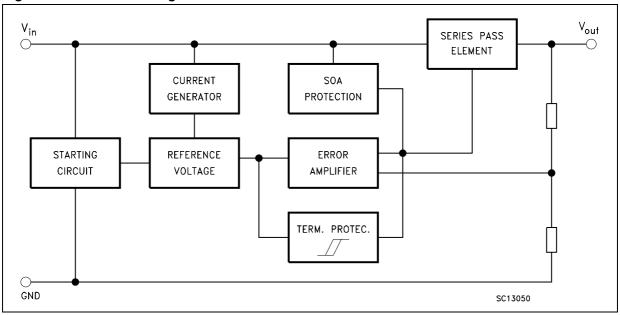

Pin configuration PB137

# 2 Pin configuration


Figure 2. Pin connections (top view)

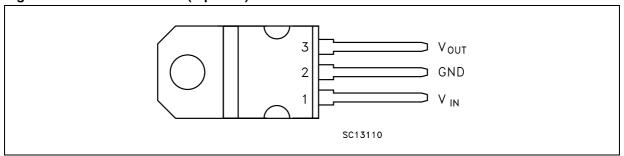

PB137 Application

# 3 Application

Figure 3. Application circuit

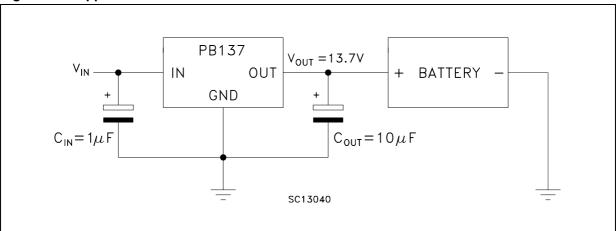

Maximum ratings PB137

# 4 Maximum ratings

Table 2. Absolute maximum ratings

Symbol	Parameter	Value	Unit
V <sub>I</sub>	DC input voltage	40	V
I <sub>O</sub>	Output current	Internally limited	mA
P <sub>TOT</sub>	Power dissipation	Internally limited	mW
T <sub>STG</sub>	Storage temperature range	- 65 to 150	°C
T <sub>OP</sub>	Operating junction temperature range	0 to 150	°C

Note:

Absolute maximum ratings are those values beyond which damage to the device may occur. Functional operation under these condition is not implied.

Table 3. Thermal data

Symbol	Parameter	Value	Unit
R <sub>thJC</sub>	Thermal resistance junction-case	5	°C/W
R <sub>thJA</sub>	Thermal resistance junction-ambient	50	°C/W

### 5 Electrical characteristics

Refer to the test circuits,  $V_I$  = 18 V,  $I_O$  = 500 mA,  $T_J$  = 0 to 150 °C,  $C_O$  = 10  $\mu F$  unless otherwise specified.

Table 4. Electrical characteristics

Symbol	Parameter	Test conditions	Min.	Тур.	Max.	Unit
V	Output voltage	T _ 25 °C	13.56	13.7	13.84	V
Vo	Output voltage	T <sub>J</sub> = 25 °C	13.43	13.7	13.97	V
ΔV <sub>O</sub>	Line regulation	V <sub>I</sub> = 16 to 28.7 V, T <sub>J</sub> = 25 °C		60	150	mV
ΔV <sub>O</sub>	Load regulation	$I_O$ = 5 to 1500 mA, $T_J$ = 25 °C		65	100	mV
I <sub>d</sub>	Quiescent current	T <sub>J</sub> = 25 °C		4	8	mA
Δl <sub>d</sub>	Delta quiescent current vs. line	V <sub>I</sub> = 16 to 28.7 V			4	mA
Δl <sub>d</sub>	Delta quiescent current vs. load	I <sub>O</sub> = 5 to 1000 mA			1.2	mA
V <sub>d</sub>	Dropout voltage	I <sub>O</sub> = 1 A, T <sub>J</sub> = 25 °C		2.1	2.6	V
I <sub>sc</sub>	Short circuit current	V <sub>I</sub> - V <sub>O</sub> = 5 V, T <sub>J</sub> = 25 °C		2.2		Α
eN	Output noise voltage	B = 10 Hz to 10 kHz, $T_J$ = 25 °C		300		μVrms
SVR	Supply voltage rejection	f = 120 Hz, T <sub>J</sub> = 25 °C		58		dB
I <sub>REV</sub>	Reverse leakage current	$V_O = 13.7 \text{ V}, V_I = \text{floating}, T_J = 0 \text{ to } 40 ^{\circ}\text{C}$		0.1	10	μΑ
S	Long term stability	T <sub>J</sub> = 125 °C, 1000 Hrs			0.5	%

#### **6** Typical characteristics

 $T_J = 25$ °C.

Figure 4. Output voltage vs. temperature




Figure 5. Output voltage vs. input voltage




Figure 6. Output voltage vs. output current




Figure 7. Load regulation vs. temperature




Figure 8. Line regulation vs. temperature




Figure 9. Dropout voltage vs. temperature




Figure 10. Dropout voltage vs. output current Figure 11. Short circuit current vs. dropout voltage

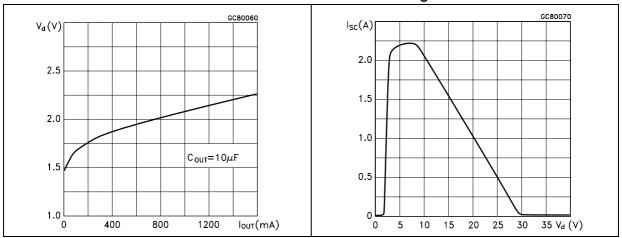


Figure 12. Short circuit current vs. temperature

Figure 13. Reverse leakage current vs. temperature


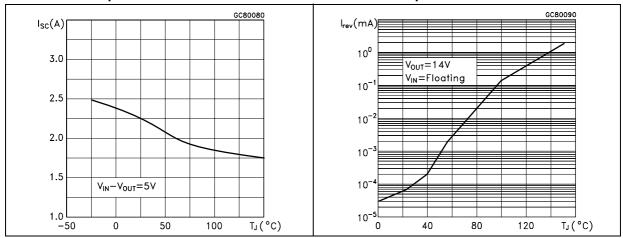


Figure 14. Quiescent current vs. temperature Figure 15. Quiescent current vs. output current

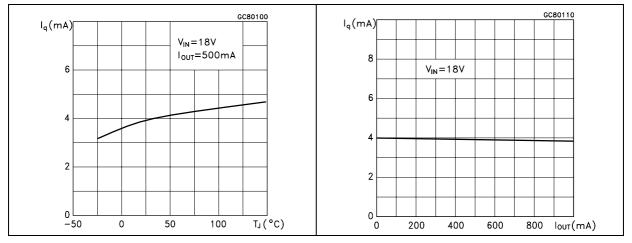

577

Figure 16. Quiescent current vs. input voltage Figure 17. Thermal protection GC80120

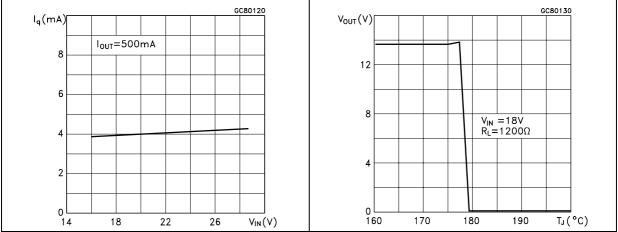


Figure 18. Supply voltage rejection vs. output Figure 19. Supply voltage rejection vs. current temperature

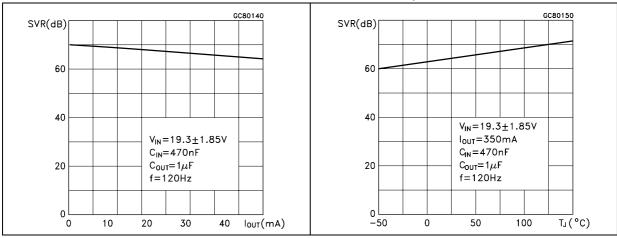



Figure 20. Figure 21. Load transient response Line transient response Tek Run: 5.00MS/s Tek Run: 5.00MS/s Average Average C1 High 28.4V 2→ Ch1 5.00 V @h2 10.0mV√ M 10.0µs Ch1 J @h2 50.0mV√ M 10.0μs Ch1 ✓  $V_I$  = 18 V,  $I_O$  = 5 to 1.5 A,  $C_I$  = 1  $\mu F$ ,  $C_O$  = 10  $\mu F$  $V_I$  = 17 to 28.4 V,  $I_O$  = 0.5 A,  $C_O$  = 10  $\mu F$ 

## 7 Package mechanical data

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK<sup>®</sup> packages, depending on their level of environmental compliance. ECOPACK<sup>®</sup> specifications, grade definitions and product status are available at: <a href="https://www.st.com">www.st.com</a>. ECOPACK<sup>®</sup> is an ST trademark.

<b>TO-220</b>	mechar	nical data
---------------	--------	------------

Dim.		mm.					
	Min.	Тур.	Max.	Min.	Тур.	Max.	
Α	4.40		4.60	0.173		0.181	
С	1.23		1.32	0.048		0.051	
D	2.40		2.72	0.094		0.107	
D1		1.27			0.050		
E	0.49		0.70	0.019		0.027	
F	0.61		0.88	0.024		0.034	
F1	1.14		1.70	0.044		0.067	
F2	1.14		1.70	0.044		0.067	
G	4.95		5.15	0.194		0.203	
G1	2.4		2.7	0.094		0.106	
H2	10.0		10.40	0.393		0.409	
L2		16.4			0.645		
L4	13.0		14.0	0.511		0.551	
L5	2.65		2.95	0.104	0.116		
L6	15.25		15.75	0.600		0.620	
L7	6.2		6.6	0.244		0.260	
L9	3.5		3.93	0.137		0.154	
DIA.	3.75		3.85	0.147		0.151	

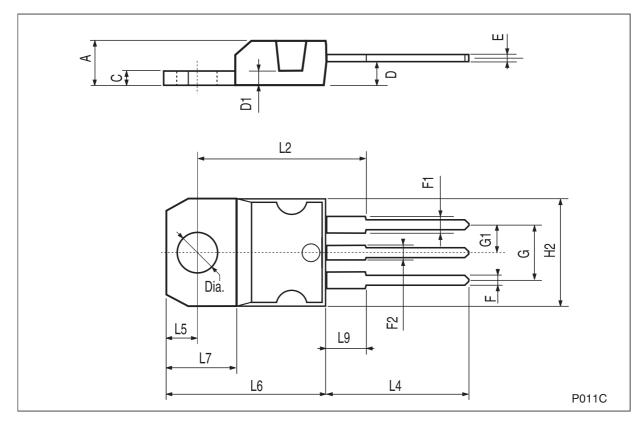

PB137 Revision history

# 8 Revision history

Table 5. Document revision history

Date	Revision	Changes	
21-Jun-2004	4		
18-Nov-2010	5	Modified: R <sub>thJC</sub> value for TO-220 <i>Table 3 on page 6</i> .	

#### Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2010 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com

14/14 Doc ID 6278 Rev 5