Basic Information and Academic Performance

Name: Zishen Chen **Tel:136-0010-8119**

Gender: Male **Email：23zschen@stu.edu.cn**

Date of Birth: July 26, 2004 **github：https://github.com/CHENzishen**



Shantou University

Data Science and Big Data Technology

GPA：4/5

Ranking by grades: Top 10%

Major courses:

Principles of Computer Organization (95)
Data Acquisition Technology (95)
Data Structures and Algorithms (93)
Data Visualization (97)
Human-computer interaction (94)
Web application technology (93)
Cloud computing and data centers (93)
Biological and medical big data (96)

English proficiency:

CET-4, CET-6, IELTS

Research project



HKIE Transactions

Surgi-Diff: A Diffusion-Based Generative Framework for Postoperative Outcome Prediction and Surgical Planning in Adolescent Idiopathic Scoliosis

Journal:	*HKIE Transactions*
Manuscript ID	THIE-2026-0031
Manuscript Type:	The HKIE Outstanding Paper Award for Young Engineers/Researchers 2026
Date Submitted by the Author:	01-Apr-2026
Complete List of Authors:	Meng, Nan; The University of Hong Kong Li Ka Shing Faculty of Medicine, Department of Orthopaedics and Traumatology Chen, Zishen; Shantou University, Shantou University School of Mathematics and Computer Science Zhang, Wentao; Shantou University, Shantou University School of Mathematics and Computer Science Cheung, Jason; The University of Hong Kong Li Ka Shing Faculty of Medicine, Department of Orthopaedics and Traumatology
Keywords:	Adolescent idiopathic scoliosis, Surgical planning, Diffusion model, Postoperative outcome prediction, Deep learning
Abstract:	Preoperative surgical planning for patients with adolescent idiopathic scoliosis (AIS) is inherently complex and remains highly dependent on clinical experience. Existing approaches primarily focus on predicting scalar surgical parameters, but lack imaging-level evidence that can support surgical decision-making. To address this gap, we propose Surgi-Diff, a diffusion-based generative framework for postoperative outcome prediction and surgical planning in AIS. By integrating structural priors from preoperative spinal X-rays and surgical region masks through a Spine Alignment Encoder (SAE), Surgi-Diff generates anatomically consistent postoperative X-rays and simultaneously predicts implant-related structures. The framework was developed and evaluated on a retrospective cohort of 612 AIS patients. Experimental results showed that Surgi-Diff achieved the highest SSIM and competitive PSNR among compared methods, with qualitative results demonstrating strong agreement with ground truth (GT) postoperative morphology and implant layout. These results indicate that Surgi-Diff has potential clinical value for AIS preoperative planning, postoperative outcome prediction, and surgical decision support.

URL: https://mc.manuscriptcentral.com/thie

Title of the paper

Surgi-Diff: A Diffusion-Based Generative Framework for Postoperative Outcome Prediction and Surgical Planning in Adolescent Idiopathic Scoliosis


Research content

This research proposes Surgi-Diff, a diffusion generative framework integrated with a Spine Alignment Encoder, to generate anatomically consistent postoperative spinal X-rays and predict implant structures for automated preoperative surgical planning and postoperative outcome prediction of adolescent idiopathic scoliosis.

Research results


Experiments on a cohort of 612 AIS patients show that Surgi-Diff achieves the highest SSIM among all comparison methods, accurately predicts fusion segments, rods and screw distributions, and generates postoperative X-rays highly consistent with real ground truth, verifying its clinical value for scoliosis surgical decision support.

Research project

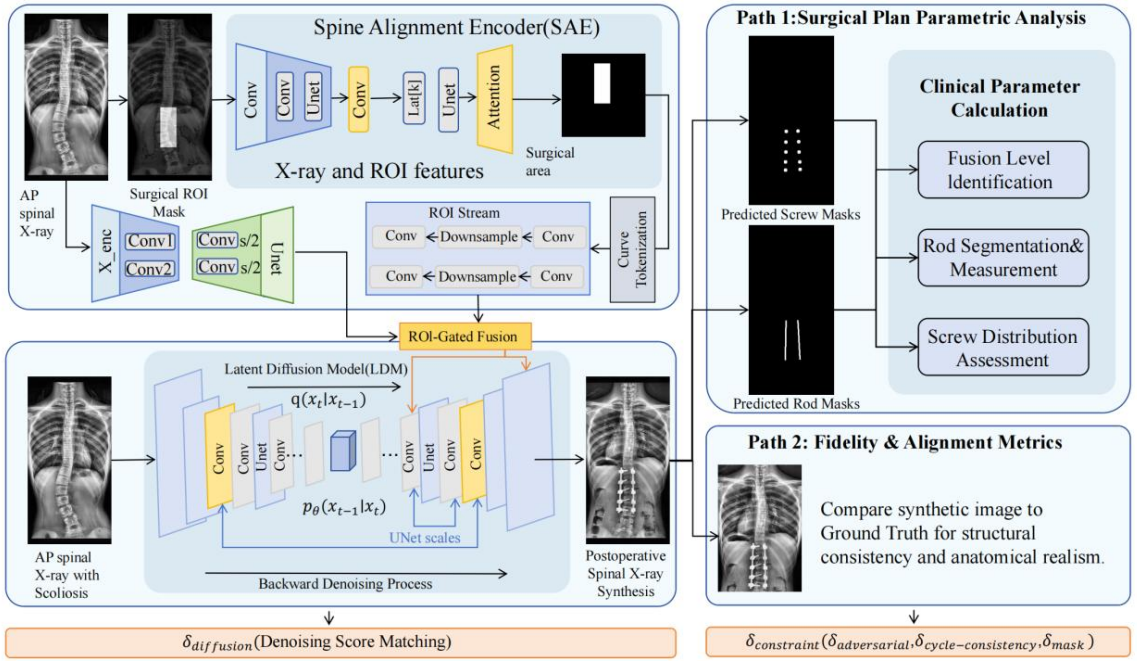


Overview of the proposed Surgi-Diff for surgical parameter prediction and postoperative spinal X-ray synthesis.

The experimental results show that Surgi-Diff achieved the highest SSIM value and competitive PSNR value in the comparison method, and the qualitative results indicate a strong consistency with the actual postoperative morphology and implant layout. These results suggest that Surgi-Diff has potential clinical value in preoperative planning and postoperative management of AIS.

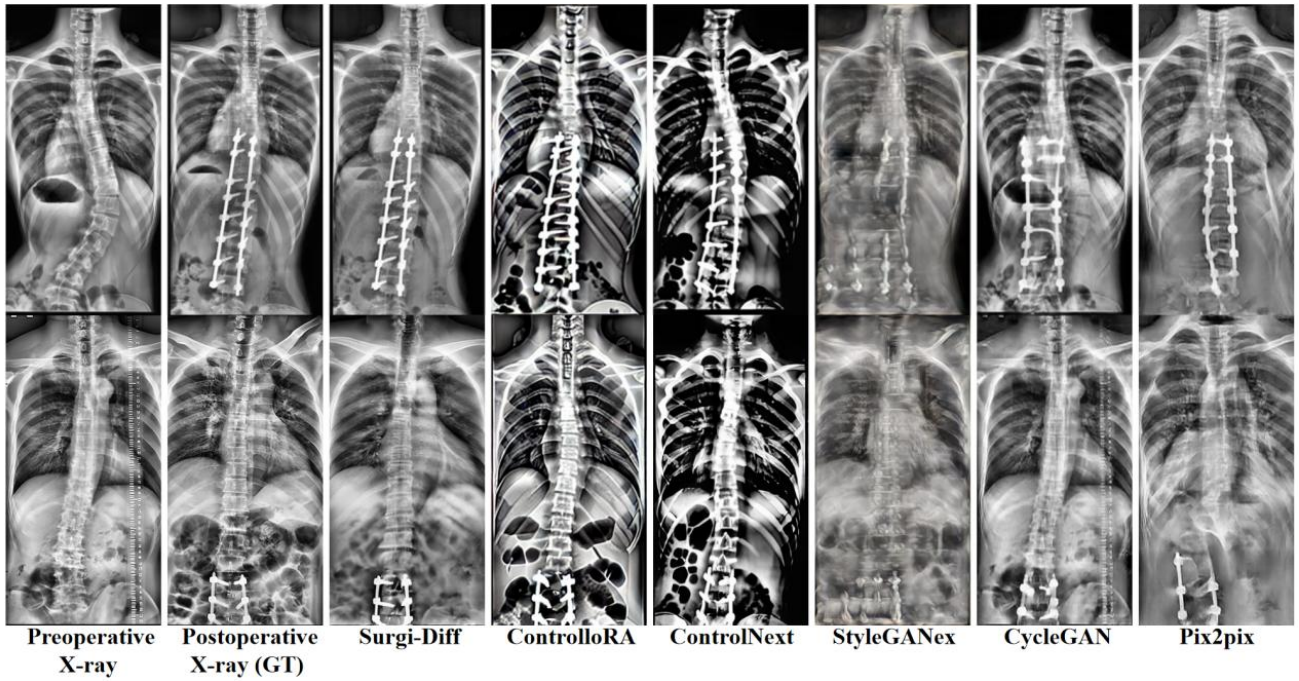

method	PSNR (dB)↑		SSIM↑	
	Mean	SD	Mean	SD
Pix2pix	11.55	1.07	0.19	0.04
CycleGAN	11.49	1.12	0.20	0.05
ControlLoRA	10.05	0.88	0.14	0.03
ControlNet	8.67	0.65	0.11	0.03
StyleGANex	15.64	1.31	0.34	0.05
Surgi-Diff	14.25	2.07	0.35	0.14

Research project

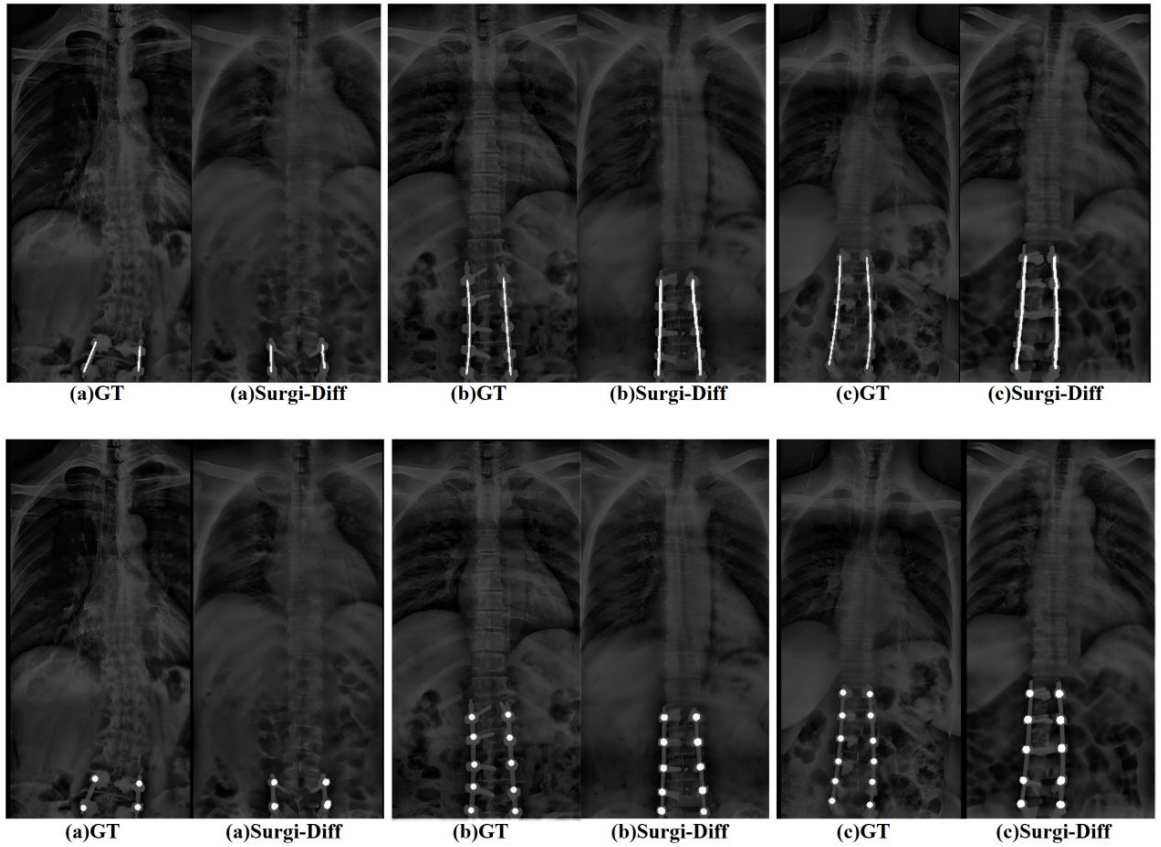

Category	Metric	Symbol	Result
Fusion Level Identification	Accuracy	Acc	75.8%
	Boundary Index Error(UIV)	EUIV	8.40 pixel
	Boundary Index Error(LIV)	ELIV	7.88 pixel
Rod Geometry Measurement	Length Error	EL	19.36 pixel
	Endpoint Error	Eend	4.50 pixel
	Centerline Error	Ecline	2.41 pixel
Screw Distribution	Quantity Error	E#	1.09
	Position Error	Epos	5.49 pixel

In terms of fusion level identification, the proposed Surgi-Diff achieves an accuracy of 75.8% within a 10-pixel tolerance, with boundary index errors of 8.40 pixels for UIV (E_{UIV}) and 7.88 pixels for LIV (E_{LIV}), both below the 10-pixel threshold. For rod geometry measurement, the model delivers precise rod trajectory capture with a centerline error of only 2.41 pixels, despite a relatively large length error (EL=19.36). Regarding screw distribution, it yields an average quantity error of 1.09 and a position error of 5.49 pixels, demonstrating competent performance in localizing spinal implants. Collectively, these results verify that Surgi-Diff establishes a reliable foundation for automated spinal instrumentation analysis.

Research project



Title of the paper

G^2Net: A Geometry-Guided Network for Accurate Spine Morphology Estimation from a Single RGB Image of Human Back

Research content

This study proposes a two-stage geometry-guided G²Net for radiation-free spinal morphology estimation from single back RGB images of AIS patients. It first predicts precise back-surface depth via global-local feature fusion and Mamba modules, then leverages RGB-depth cues to train a LoRA-based conditional diffusion model to generate anatomically consistent spine curves. Experiments on a clinical dataset of 2,213 adolescents validate its superior performance against state-of-the-art methods.

Research results

Experiments on 2,213 clinical samples demonstrate that G²Net surpasses mainstream comparison methods, achieving a spine curve SSIM of 0.950 with low shape errors. Ablation tests verify the necessity of all core modules.

Research project


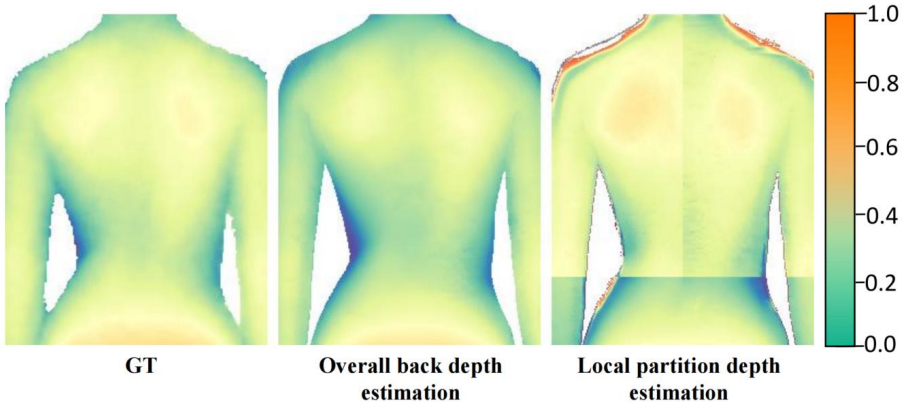



Illustration of regional inconsistency in existing monocular depth estimation methods. From left to right, real depth, overall back depth estimation and depth estimation on each local partition. These results highlight the challenge of achieving both global continuity and local detail preservation when estimating centimeter-scale back-surface depth from RGB images.

- Global depth estimation, on the other hand, can generate smoother and more consistent depth estimation maps, but at the cost of over-smoothing local fluctuations.
- Models trained based on local image blocks can achieve higher regional accuracy, but often introduce discontinuities near the boundaries of image blocks.

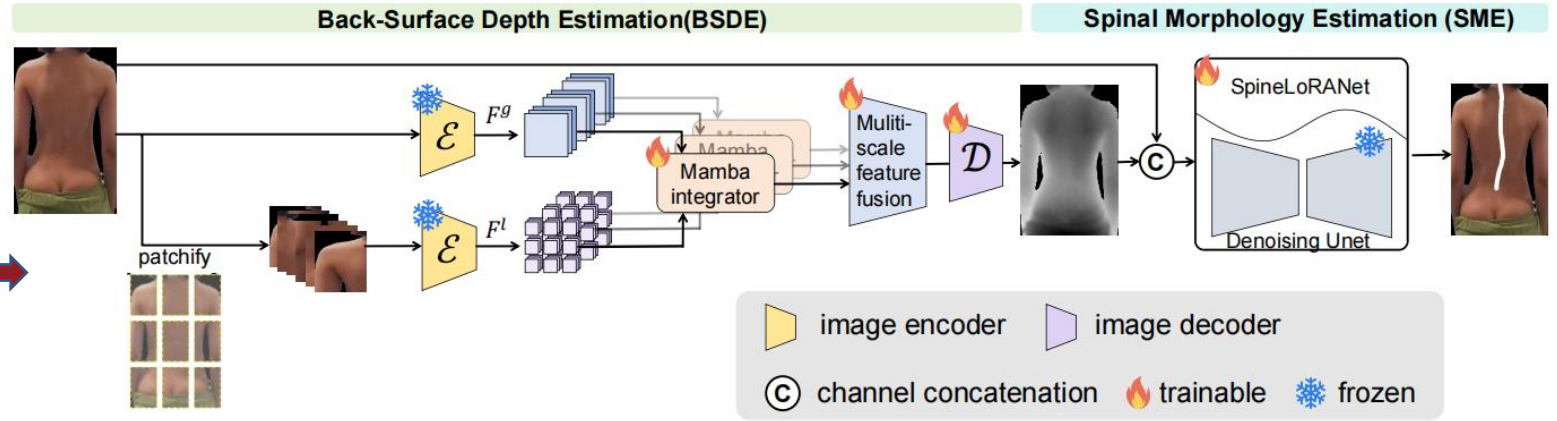


Overview of the proposed G^2Net.

To address these issues, this paper proposes G²Net, a geometric-guided framework that enables non-radiative and accurate spinal shape estimation from a single back surface RGB image. G²Net decomposes spinal shape estimation into two stages:In the first stage, high-fidelity back surface depth estimation is achieved through joint modeling of global continuity and local block-based cues. In the second stage, the estimated depth map and RGB image are used as geometric and appearance conditions to generate a compact spinal curve diagram, thereby characterizing the spinal shape.

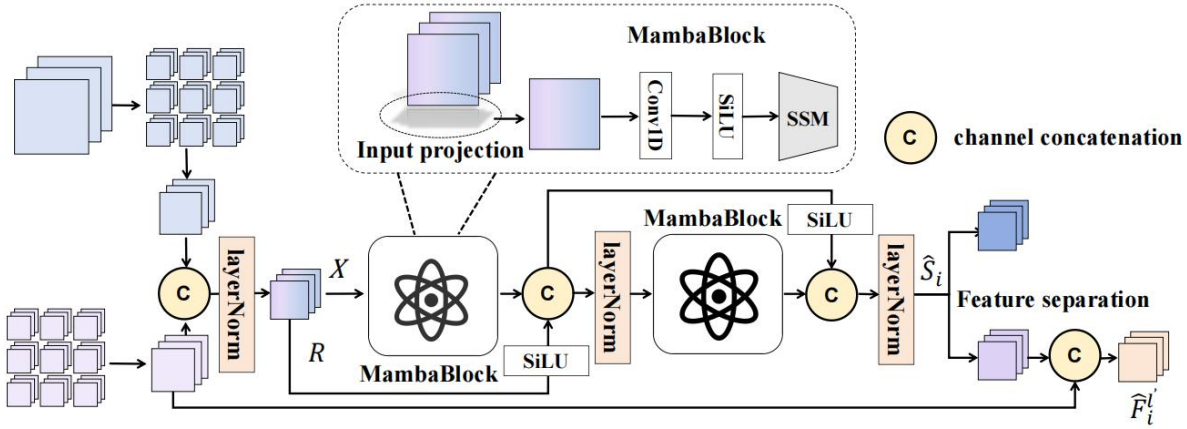


Detailed framework of the Mamba-based feature integrator, where the SSM module adopts the Structured State Space Model formulation derived from classical State Space Model theory.


Research project

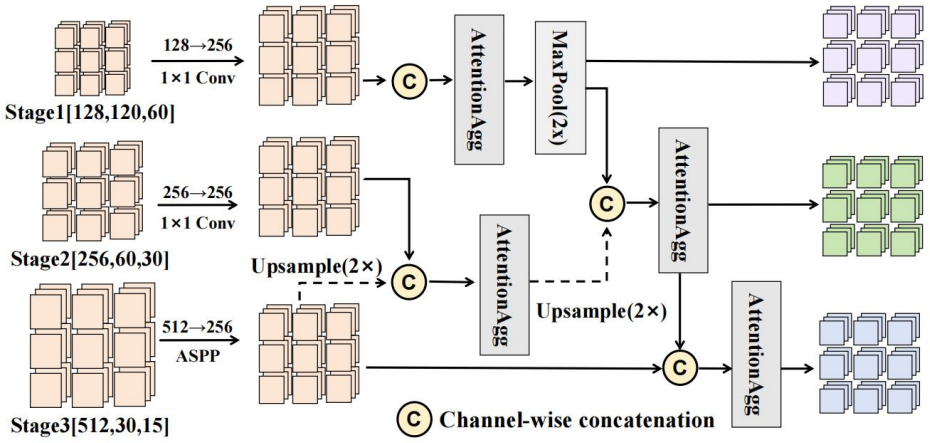

Overview of the Cross-scale Feature Fusion module, where ASPP (Atrous Spatial Pyramid Pooling) is a spatial pyramid module composed of parallel atrous convolutions with different dilation rates for multi-scale representation.

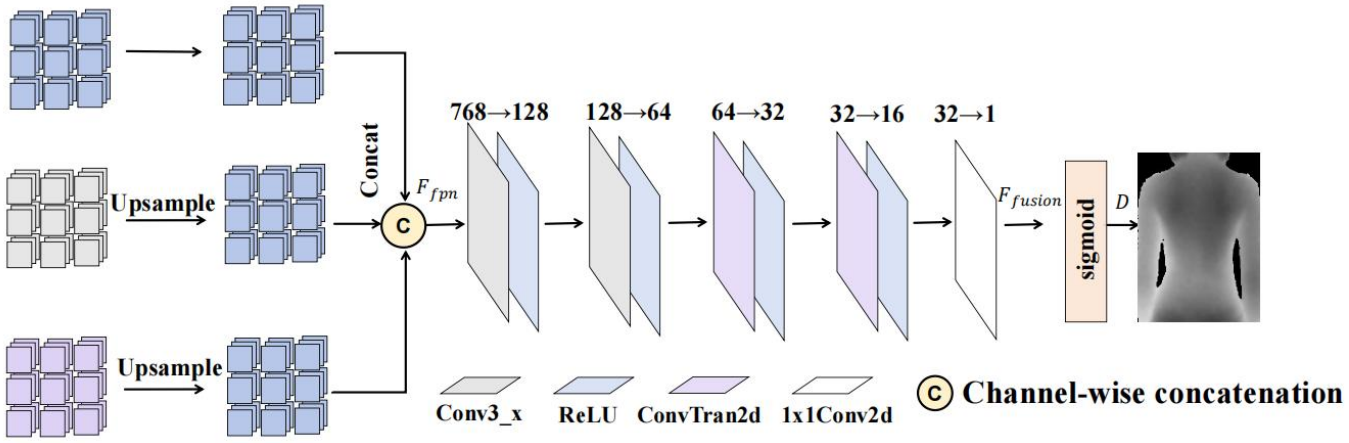


Detailed framework of the cascade upsampling decoder module.

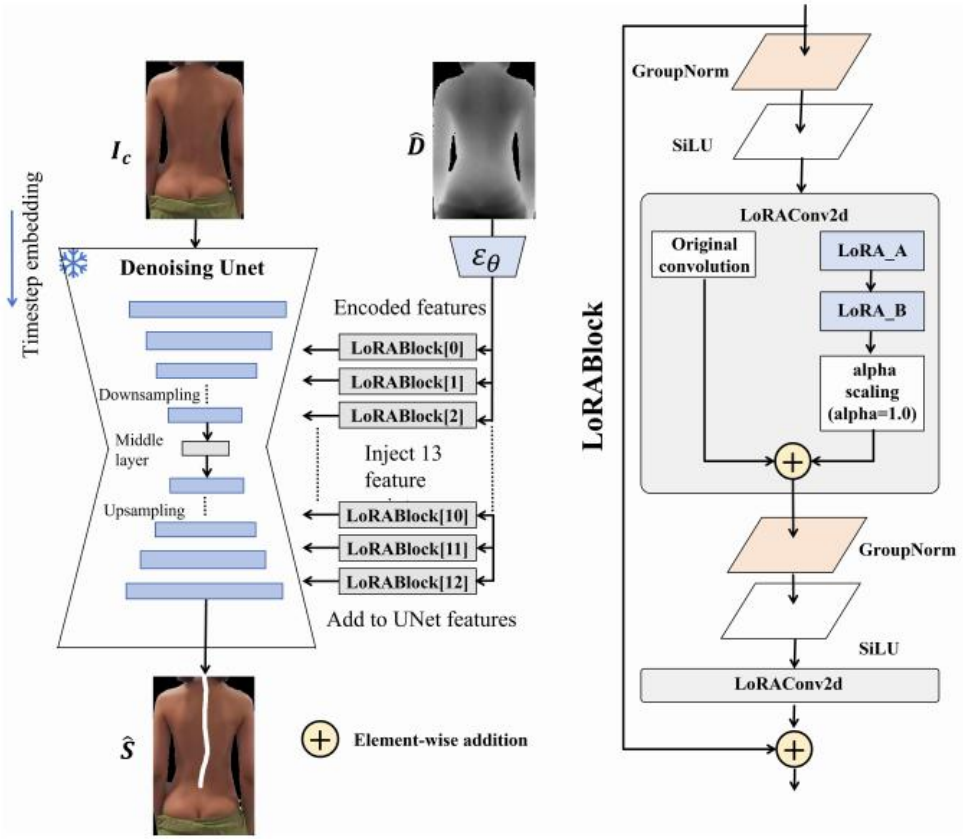


Detailed framework of the SpineLoRANet. The LoRABlock approximates weight updates by introducing two low-rank matrices, LoRA-A and LoRA-B. LoRA-A projects the input into a low-dimensional space, whilst LoRA-B projects it back to the original dimension, thereby enabling parameter-efficient adaptation to downstream tasks

Research project

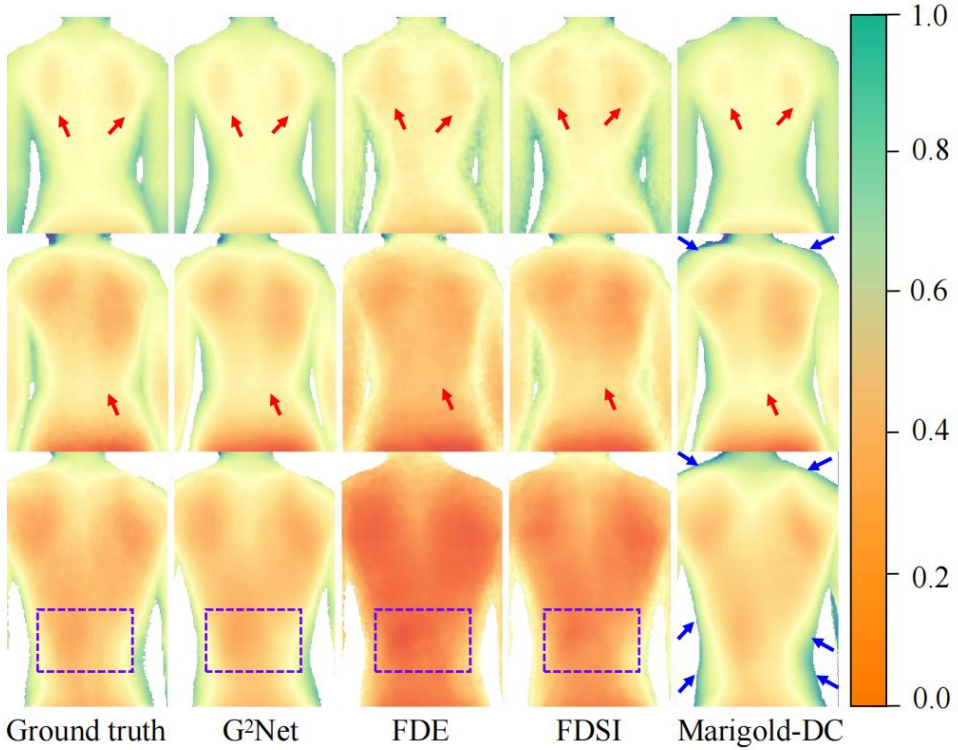

Visual comparison of back-surface depth estimation results.

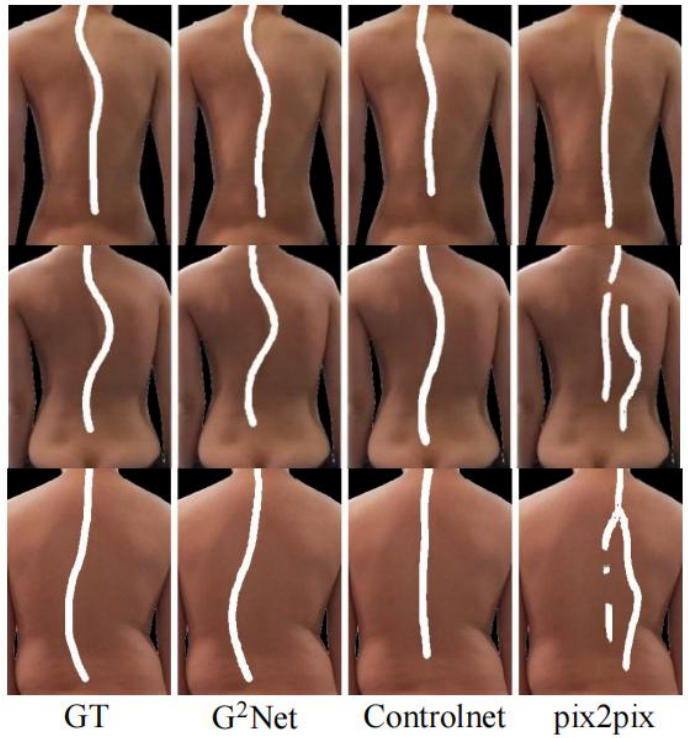

Visual comparison of spinal morphology estimation using different models.


TABLE I: Quantitative Comparison of Monocular Depth Estimation Models

Model	$\epsilon_{\mathrm{ARE}}\downarrow$	$\epsilon_{\mathrm{RMSE}}\downarrow$	$\epsilon_{\mathrm{SRE}}\downarrow$	$\delta_1\uparrow$	$\delta_2\uparrow$	$\delta_3\uparrow$
FDE [56]	0.204	0.129	0.046	0.658	0.877	0.960
FDSI [57]	0.142	0.091	0.028	0.805	0.944	0.985
Marigold-DC [58]	0.193	0.088	0.084	0.930	0.977	0.981
G²Net	**0.053**	**0.048**	**0.006**	**0.962**	**0.990**	**0.993**

TABLE II: Performance Comparison of Spinal Morphology Estimation Models

Model	SSIM↑		Length diff.↓		Curvature diff.↓	
	mean	SD	mean	SD	mean	SD
ControlNet [48]	0.949	0.012	0.131	0.212	0.051	0.175
pix2pix [59]	0.914	0.015	0.196	0.167	0.030	0.021
G²Net	**0.950**	**0.013**	**0.079**	**0.148**	**0.028**	**0.112**

Research project

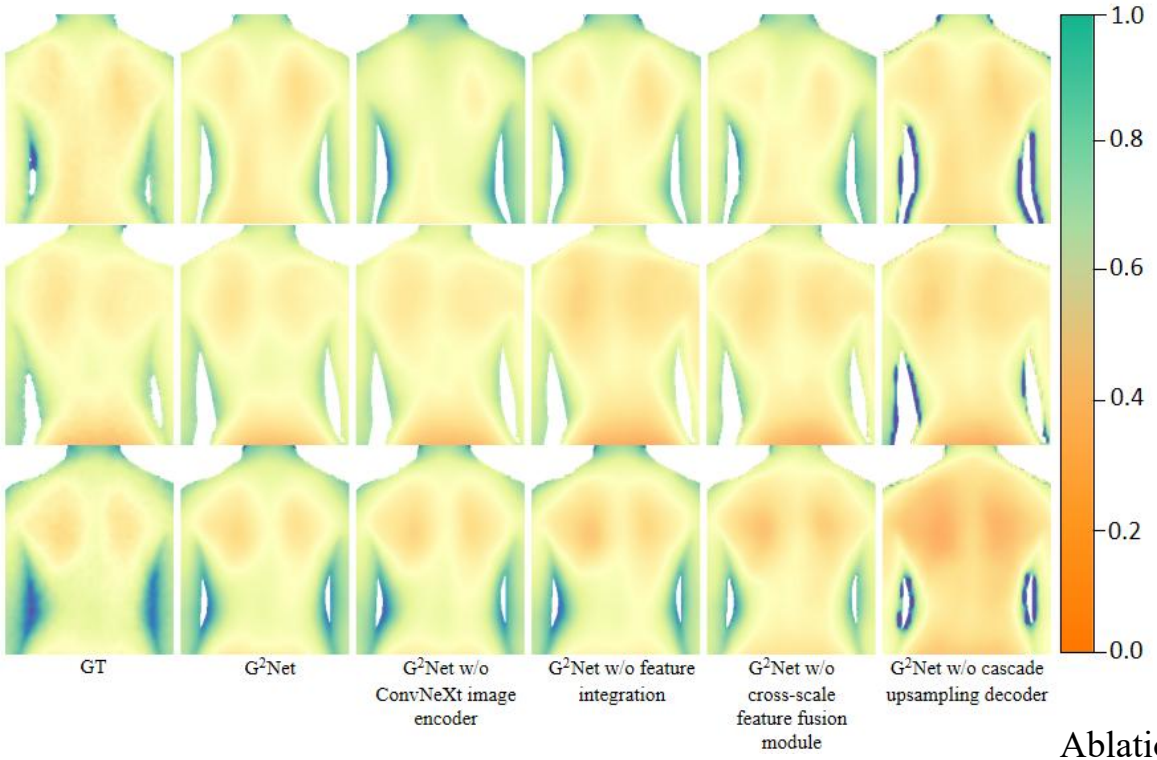

- Removing the image encoder would severely damage the core deep representation, resulting in a decline in prediction accuracy, and causing significant deviations at anatomical boundaries.
- Removing the Mamba-based feature integrator would cause discontinuity in depth transition, and blur the representation in local areas (especially the lumbar region), highlighting the crucial role of this module in cross-level feature fusion.
- Omitting the cross-scale feature fusion module would disrupt the depth consistency between multiple scales, verifying its core value in enhancing semantic-geometric synergy.
- The variant without the cascade upsampling decoder shows the most obvious artifacts and depth prediction misalignment in the back and lumbar regions, revealing the importance of the decoder in progressive resolution restoration and contour fidelity.

Ablation Study on the Components of our model

Model Variant	Components				Metrics					
	ConvNeXt image encoder	Mamba-based feature integrator	Cross-scale feature fusion module	Cascade upsampling decoder	ε_{ARE} ↓	$\varepsilon_{\mathrm{RMSE}}$ ↓	$\varepsilon_{\mathrm{SRE}}$ ↓	δ1 ↑	δ2 ↑	δ3 ↑
w/o ConvNeXt image encoder	✗	✓	✓	✓	0.690	0.251	0.332	0.538	0.702	0.788
w/o Mamba-based feature integrator	✓	✗	✓	✓	0.714	0.255	0.342	0.531	0.695	0.782
w/o Cross-scale feature fusion module	✓	✓	✗	✓	0.698	0.256	0.334	0.524	0.690	0.778
w/o Cascade upsampling decoder	✓	✓	✓	✗	0.707	0.182	0.166	0.558	0.730	0.796
G²Net (full model)	✓	✓	✓	✓	0.158	0.060	0.011	0.821	0.940	0.976

Research project

Thesis Publication

Journal: Chaos, Solitons and Fractals JCR Rank: SCI Q1 Top Journal

2026 JCR Impact Factor: 5.7

Title: MDHGFN: Multiscale Dual Hypergraph Fusion Spatiotemporal Network for Traffic Flow Prediction

Invention Patent

Patent Title:一种基于多尺度对偶超图融合的交通流预测方法

Application Number:202510759638.1



Chaos, Solitons and Fractals

Contents lists available

Chaos, Solitons a

journal homepage: www.elsev

MDHGFN: Multiscale Dual Hypergraph Fus
Network for traffic flow prediction

Jiajun Xian, Yixuan Ye, Wei Zhang, Zishen Che
Zichun Lin, Can Zhou, Hao LIU, Dan Yang, *,
Teng Zhou

ARTICLE INFO

ABSTRACT

国家知识产权局

310013

浙江省杭州市西湖区古墩路701号紫金广场B座1103室 杭州求是专利事务所有限公司

发文日：

2026年05月19日

申请号：202510759638.1 发文序号：2026051900238210

申请人：电子科技大学长三角研究院（湖州）

发明创造名称：一种基于多尺度对偶超图融合的交通流预测方法

授予发明专利权通知书

1.根据专利法第39条及实施细则第60条的规定，上述发明专利申请经实质审查，没有发现驳回理由，现作出授予专利权的通知。

申请人收到本通知书后，还应当依照办理登记手续通知书的内容办理登记手续。

申请人按期办理登记手续后，国家知识产权局将作出授予专利权的决定，颁发发明专利证书，并予以登记和公告。

期满未办理登记手续的，视为放弃取得专利权的权利。

法律、行政法规规定和宣传技术的实施应当办理批准、登记等手续的，应依照其规定办理。

2.授予专利权的上述发明专利申请是以下列申请文件为基础的：

☐原始申请文件。☐分案申请递交日提交的文件。☒下列申请文件：

申请日提交的权利要求第1－10项、说明书第1－206段、说明书摘要：2025年7月4日提交的说明书附图、摘要附图。

3.授予专利权的上述发明专利申请的名称：

☒未变更。

☐由_____变更为上述名称。

4. ☐申请人于_____年_____月_____日提交专利号为_____的“放弃专利权声明”，经审查：

☐进入放弃专利权的程序。

☐未进入放弃专利权的程序。

5. ☐审查员依职权对申请文件修改如下：

6. ☐申请人在申请日后补交了实验数据，该数据未包含在授权公告文本中。

注：在本通知书发出后收到的申请人主动修改的申请文件，不予考虑。

审查员：王胜

联系电话：022-84867424

国家知识产权局 专利审查业务章

* Corresponding author.
E-mail address: yangdan930504@gmail.com (D. Yang).


https://doi.org/10.1016/j.chaos.2025.117228
Received 1 June 2025; Received in revised form 27 July 2025; Accepted 11 September 2025
Available online 24 September 2025
0960-0779/© 2025 Elsevier Ltd. All rights are reserved, including those for text and data mining, AI training, and similar technologies.

Research project

➢ **Model architecture diagram**

Transportation Topology Map
G = (V, E, A)

Traffic Feature Matrix
$X \in R_{T \times N \times D}$

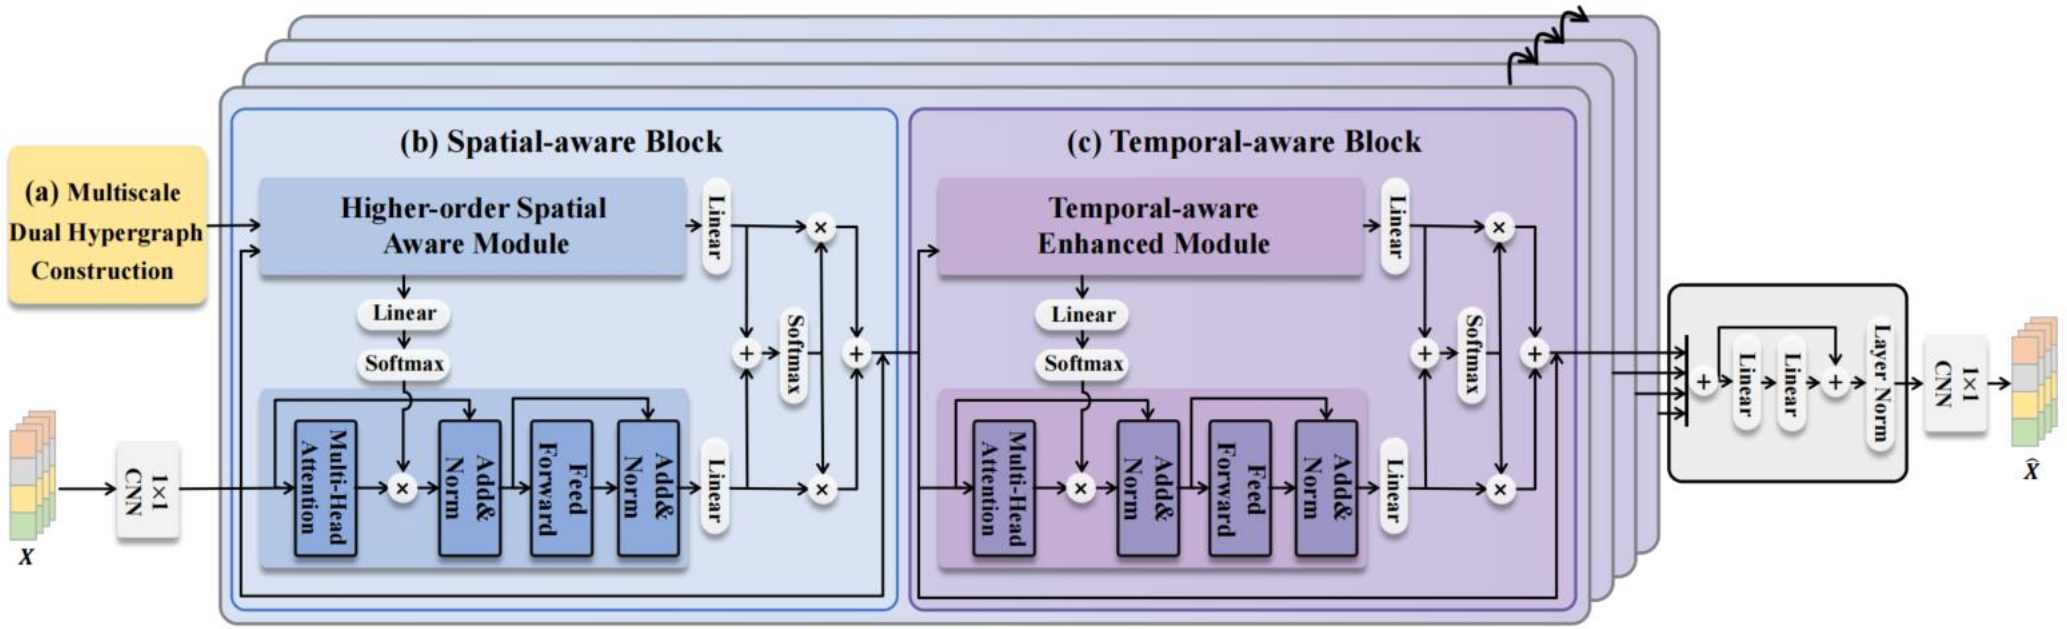

Historical traffic flow data → Multiscale Dual Hypergraph Construction Module → Spatial perception module → Time perception module → Traffic flow prediction results

Research project


➢ Microscopic scale - Travel correlation dual hypergraph $G_t = (V_t, \varepsilon^t, H_t)$

✓ Construct the origin hyper-edge connection relationship for all nodes that share the same road node as the starting point.H_{src}^t


✓ Construct destination hyper-edge connection relationships for all nodes that share the same road node as the destination.H_{dst}^t

✓ H_{src}^t and H_{dst}^t together constitute the complete topological structure of the travel-related dual hypergraph.H_t

(a) Travel Intent Dual Hypergraph

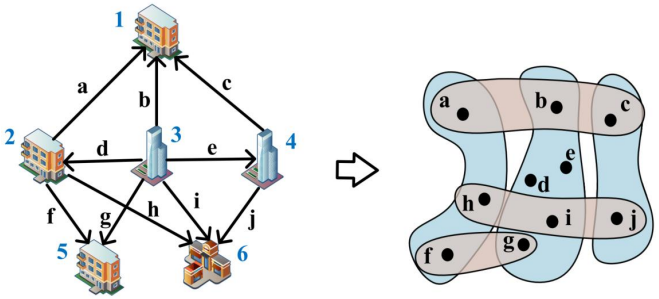

(b) Functional Community Dual Hypergraph

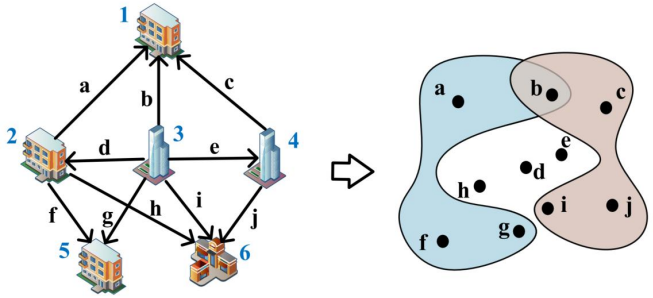

➢ Mesoscopic scale - Functional community dual hypergraph $G_c = (V_c, \varepsilon^c, H_c)$

✓ Based on the original adjacency matrix, the functional similarity $A_{i,j}^c$ between nodes (with smaller values indicating greater similarity) is calculated.

✓ The K-nearest neighbor algorithm is used to select the c most functionally similar neighbors for each node (origin and destination) to form functional community hyperedges $e_i^c \in \varepsilon^c$. At the same time, the spatial distance between nodes within the hyperedge is constrained to be the shortest.


✓ H_{src}^c and H_{dst}^c together constitute the complete topological structure of the functional community dual hypergraph, H_c

➢ Macroscopic scale - Regional conduction dual hypergraph $G_r = (V_r, \varepsilon^r, H_r)$

✓ Through Top-K sampling, select the top K most influential starting and ending neighbors for each node, construct the node influence matrix Ar, and combine the Top-K influence neighbor sets of each node as hyperedges $e_i^r \in \varepsilon^r$

✓ H_{src}^r and H_{dst}^r together constitute the complete topological structure of the regional conduction dual hypergraph, H_r

(c) Regional Propagation Dual Hypergraph

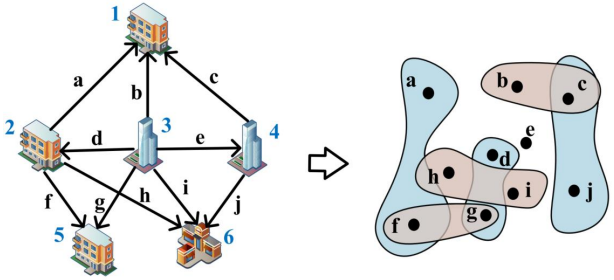

Research project

- **Dataset:** PEMS03, PEMS04, PEMS07 and PEMS08, collected by the California Department of Transportation through its Highway Performance Measurement System (PEMS), and have been widely applied in the field of traffic flow research.

Statistical information of the dataset

Dataset	Nodes Number	Edges Number	Time Steps	Date Range
PEMS03	358	547	26208	09/01/2018 - 11/30/2018
PEMS04	307	340	16992	01/01/2018 - 02/28/2018
PEMS07	883	866	28224	05/01/2017 - 08/31/2017
PEMS08	170	295	17856	07/01/2016 - 08/31/2016

The dataset was divided into 60% for training, 20% for validation, and 20% for testing, which is consistent with the baseline method.

Evaluation metrics: Three widely used evaluation metrics were adopted to assess the performance of the model: Mean Absolute Error (MAE), Mean Absolute Percentage Error (MAPE), and Root Mean Square Error (RMSE).

- **Baseline:** 14 baseline methods were selected for comparison experiments with the proposed method, and the parameter settings recommended in the original paper were followed to ensure the reliability and fairness of the comparison results.

Baseline Model Comparison Summary

Model Abbreviation	Publication Year	Core Innovation
FC-LSTM	2015	Fully connected LSTM structure focusing on time-series modeling
DCRNN	2017	Bidirectional random walk with an encoder-decoder framework
STGCN	2018	Fully convolutional graph structure for efficient spatio-temporal modeling
Graph WaveNet	2019	Adaptive dependency matrix and dilated convolution
STSGCN	2020	Synchronous spatio-temporal modeling and temporal heterogeneity handling
OGCRNN	2020	Data-driven graph structure optimization
STGODE	2021	Tensor differential equation and semantic adjacency matrix
STFGNN	2021	Spatio-temporal graph fusion and gated convolution
GMSDR	2022	Explicit modeling of multi-step dependencies
FEDformer	2022	Frequency-domain enhancement and seasonal-trend decomposition
HSTGCNT	2023	Integration of hierarchical Transformer and hypergraph convolution
AGFCRN	2024	Adaptive hypergraph fusion and attention mechanism
DS-STGCN	2024	Dynamic multi-scale spatio-temporal modeling
CDAGF	2024	Contrastive learning and residual-enhanced decomposition

Research project

① Traditional sequential modeling methods failed to effectively model spatial dependence.

② The introduction of graph structures to capture spatial characteristics still has shortcomings in modeling long-term sequence dependence and dynamic spatial relationships.

③ Its performance on large-scale datasets remains limited, and it is difficult to comprehensively capture the complex spatiotemporal characteristics.

④ It performs well in long-term sequence prediction, but still has certain limitations in modeling complex spatial dependencies.

Performance comparison results of different baseline models and MDGFN on each dataset

Method		PEMS03			PEMS04			PEMS07			PEMS08			Average(Rank)		
		MAE	RMSE	MAPE (%)	MAE	RMSE	MAPE (%)	MAE	RMSE	MAPE (%)	MAE	RMSE	MAPE (%)	MAE	RMSE	MAPE (%)
2015	FC-LSTM [50]	21.33	35.11	23.33	27.14	18.20	18.20	29.98	45.94	13.20	22.20	34.06	14.20	12	7	11
2017	DCRNN [51]	24.11	38.69	22.67	30.49	45.99	20.72	34.82	51.32	16.23	21.76	32.41	14.19	14	14	13
2018	STGCN [40]	23.48	37.51	21.95	28.80	44.00	19.08	33.80	51.74	14.75	22.49	34.05	14.54	13	13	12
2019	Graph WaveNet [52]	24.73	38.42	24.01	30.55	46.31	23.33	34.62	51.86	15.68	23.01	35.67	15.37	15	15	14
2020	STSGCN [53]	20.72	33.75	19.44	24.21	38.36	15.63	28.10	45.88	11.90	19.56	30.58	12.55	10	12	9
2020	OGCRNN [54]	17.16	29.40	16.48	22.16	35.15	15.72	24.45	39.80	10.22	18.50	29.00	11.74	7	8	7
2021	STGODE [55]	16.50	27.84	16.69	20.84	32.82	13.77	22.59	37.54	10.14	16.81	25.97	10.62	4	4	5
2021	STFGNN [56]	19.37	32.57	18.37	21.55	34.60	14.26	24.77	40.55	10.33	18.83	29.66	11.90	8	10	8
2022	GMSDR [57]	15.92	28.87	14.50	21.63	34.05	13.87	23.78	44.60	10.17	16.59	25.69	10.59	6	6	4
2022	FEDformer [58]	19.74	29.51	20.04	23.57	35.65	50.54	29.42	43.65	22.85	24.22	35.32	17.38	11	11	15
2023	HSTGCNT [59]	19.22	30.65	19.72	23.47	35.53	16.52	24.43	37.77	11.25	20.82	30.87	13.76	9	9	10
2023	AGFCRN [60]	16.89	28.98	17.65	20.51	33.81	13.81	22.69	37.95	9.62	17.35	27.66	11.31	5	5	6
2024	DS-STGCN [14]	16.04	26.40	15.69	19.80	31.81	13.40	22.11	36.62	9.38	15.66	25.65	**10.09**	3	2	2
2024	CDAGF [61]	16.54	27.71	16.28	19.55	32.58	13.06	21.56	37.03	9.11	15.68	25.71	10.13	2	3	3
(Ours)	**MDHGFN**	**14.12**	**22.52**	**12.95**	**19.29**	**31.57**	**12.35**	**20.41**	**33.69**	**8.98**	**15.45**	**25.20**	11.50	1	1	1

⑤ Due to the limitations of the low-order graph structure and the expressive capacity of the single-scale hypergraph, it is impossible to fully extract the multi-scale high-order spatial information contained in the traffic flow data.

The evaluation results on all datasets have reached the current optimal level, and the performance on large-scale datasets is superior to that on small-scale datasets.

Research project

➢ Module ablation experiment

The ablation experiment results of different model variants on the PEMS03 and PEMS08 datasets

Datasets	Model	RMSE	MAE	MAPE (%)
PEMS03	MDHGFN w/o both HSAM and TAEM	23.48	14.91	13.83
PEMS03	MDHGFN w/o HSAM	23.07	14.64	13.51
PEMS03	MDHGFN w/o TAEM	22.68	14.21	13.39
PEMS03	MDHGFN	22.52	14.12	12.95
PEMS08	MDHGFN w/o both HSAM and TAEM	26.54	16.72	12.93
PEMS08	MDHGFN w/o HSAM	25.57	15.90	11.89
PEMS08	MDHGFN w/o TAEM	25.26	15.52	11.82
PEMS08	MDHGFN	25.20	15.45	11.50

The experimental results show that the complete model outperforms all the ablation variants in terms of RMS E, MAE and MAPE metrics, thereby verifying the crucial role of the HSAM and TAEM modules in the modeling of spatio-temporal characteristics.

➢ Supergraph ablation experiment


Joint learning of multi-scale dual hypergraphs can effectively integrate high-order spatial information at different scales, significantly improving the performance of the model.

The ablation experiment results of different-scale dual hypergraph combinations on the PEMS03 and PEMS08 datasets

Datasets	Dual Hypergraph	RMSE	MAE	MAPE (%)
PEMS03	$[G^r]$	22.63	14.23	13.01
PEMS03	$[G^c]$	22.66	14.30	13.48
PEMS03	$[G^t]$	22.88	14.53	15.03
PEMS03	$[G^r, G^c, G^t]$	22.52	14.12	12.95
PEMS08	$[G^r]$	25.49	15.48	11.52
PEMS08	$[G^c]$	25.36	15.53	12.07
PEMS08	$[G^t]$	25.52	15.46	11.57
PEMS08	$[G^r, G^c, G^t]$	25.20	15.45	11.50

Research project


➢ **Hyperparameter experiment result graph**

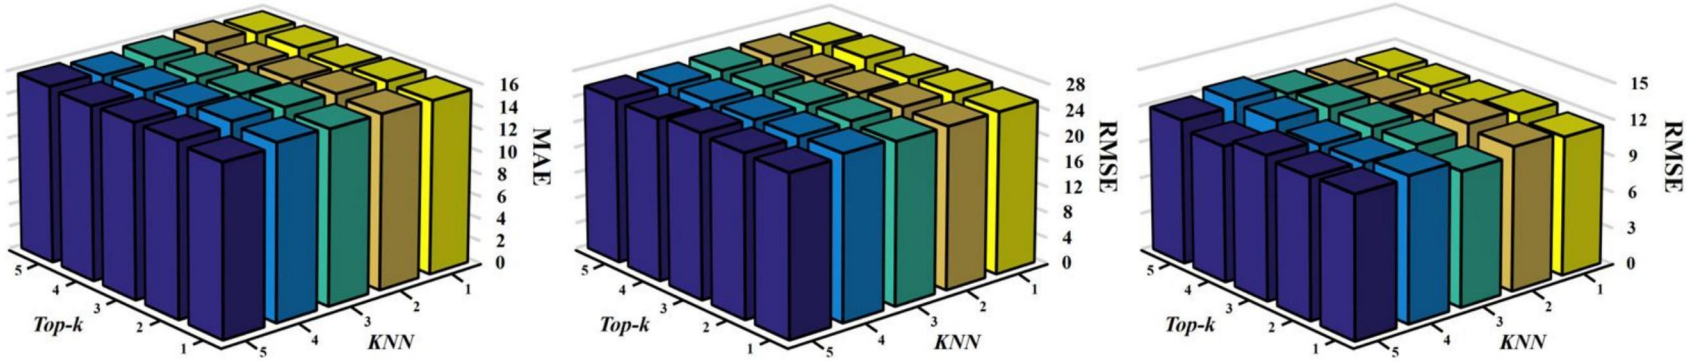

Evaluate the impact of different K values (the number of KNN neighbors used for the functional community dual hypergraph) and Top-k values (the number of key nodes selected for the regional conduction dual hypergraph) on the model performance

- ✓ A smaller K value may lead to insufficient community division, failing to capture the extensive interaction information between regions; while a larger K value introduces too many irrelevant nodes, resulting in redundancy and affecting the extraction of spatial features.
- ✓ Similarly, a smaller Top-k value may ignore the critical path dependency information, while an overly large Top-k value will introduce irrelevant paths and interfere with the modeling of critical dependency relationships.
- ✓ Based on the comprehensive experimental results, appropriately setting the values of K and Top-k can effectively balance the feature sufficiency and redundancy, fully leveraging the advantages of the functional community dual hypergraph and the regional conduction dual hypergraph, thereby significantly enhancing the model's ability to model high-order spatiotemporal relationships.

Research project

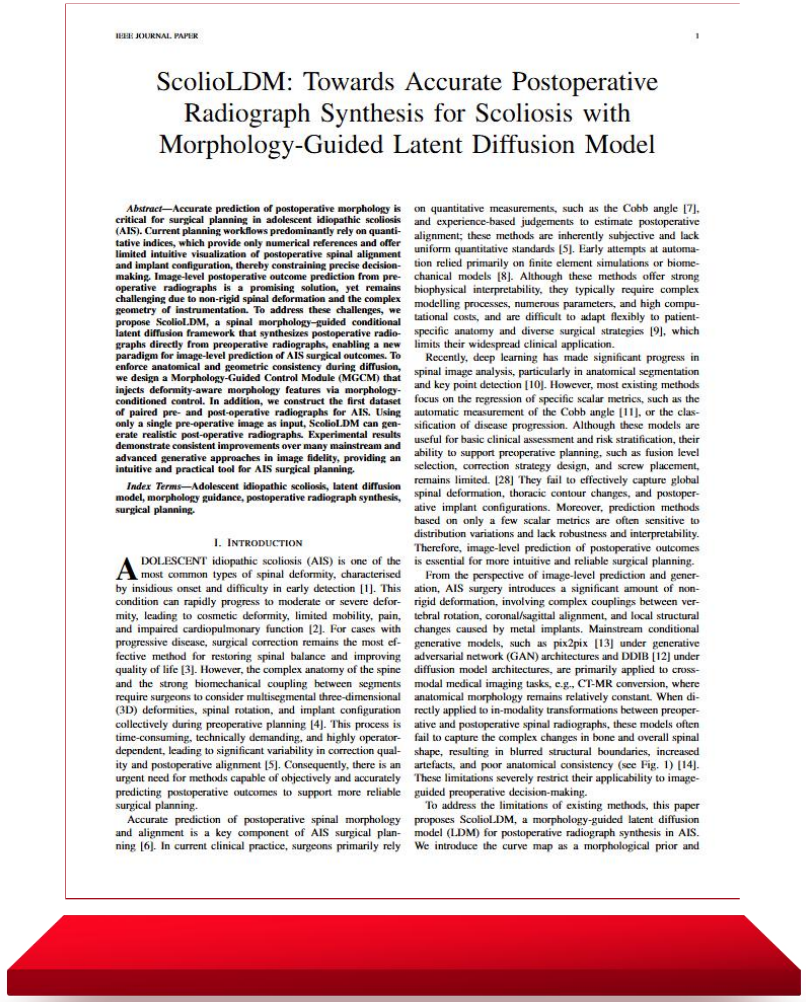

IEEE JOURNAL PAPER 1

ScolioLDM: Towards Accurate Postoperative Radiograph Synthesis for Scoliosis with Morphology-Guided Latent Diffusion Model

***Abstract*—Accurate prediction of postoperative morphology is critical for surgical planning in adolescent idiopathic scoliosis (AIS). Current planning workflows predominantly rely on quantitative indices, which provide only numerical references and offer limited intuitive visualization of postoperative spinal alignment and implant configuration, thereby constraining precise decision-making. Image-level postoperative outcome prediction from preoperative radiographs is a promising solution, yet remains challenging due to non-rigid spinal deformation and the complex geometry of instrumentation. To address these challenges, we propose ScolioLDM, a spinal morphology–guided conditional latent diffusion framework that synthesizes postoperative radiographs directly from preoperative radiographs, enabling a new paradigm for image-level prediction of AIS surgical outcomes. To enforce anatomical and geometric consistency during diffusion, we design a Morphology-Guided Control Module (MGCM) that injects deformity-aware morphology features via morphology-conditioned control. In addition, we construct the first dataset of paired pre- and post-operative radiographs for AIS. Using only a single pre-operative image as input, ScolioLDM can generate realistic post-operative radiographs. Experimental results demonstrate consistent improvements over many mainstream and advanced generative approaches in image fidelity, providing an intuitive and practical tool for AIS surgical planning.**

***Index Terms*—Adolescent idiopathic scoliosis, latent diffusion model, morphology guidance, postoperative radiograph synthesis, surgical planning.**

I. Introduction

ADOLESCENT idiopathic scoliosis (AIS) is one of the most common types of spinal deformity, characterised by insidious onset and difficulty in early detection [1]. This condition can rapidly progress to moderate or severe deformity, leading to cosmetic deformity, limited mobility, pain, and impaired cardiopulmonary function [2]. For cases with progressive disease, surgical correction remains the most effective method for restoring spinal balance and improving quality of life [3]. However, the complex anatomy of the spine and the strong biomechanical coupling between segments require surgeons to consider multisegmental three-dimensional (3D) deformities, spinal rotation, and implant configuration collectively during preoperative planning [4]. This process is time-consuming, technically demanding, and highly operator-dependent, leading to significant variability in correction quality and postoperative alignment [5]. Consequently, there is an urgent need for methods capable of objectively and accurately predicting postoperative outcomes to support more reliable surgical planning.

Accurate prediction of postoperative spinal morphology and alignment is a key component of AIS surgical planning [6]. In current clinical practice, surgeons primarily rely on quantitative measurements, such as the Cobb angle [7], and experience-based judgements to estimate postoperative alignment; these methods are inherently subjective and lack uniform quantitative standards [5]. Early attempts at automation relied primarily on finite element simulations or biomechanical models [8]. Although these methods offer strong biophysical interpretability, they typically require complex modelling processes, numerous parameters, and high computational costs, and are difficult to adapt flexibly to patient-specific anatomy and diverse surgical strategies [9], which limits their widespread clinical application.

Recently, deep learning has made significant progress in spinal image analysis, particularly in anatomical segmentation and key point detection [10]. However, most existing methods focus on the regression of specific scalar metrics, such as the automatic measurement of the Cobb angle [11], or the classification of disease progression. Although these models are useful for basic clinical assessment and risk stratification, their ability to support preoperative planning, such as fusion level selection, correction strategy design, and screw placement, remains limited. [28] They fail to effectively capture global spinal deformation, thoracic contour changes, and postoperative implant configurations. Moreover, prediction methods based on only a few scalar metrics are often sensitive to distribution variations and lack robustness and interpretability. Therefore, image-level prediction of postoperative outcomes is essential for more intuitive and reliable surgical planning.

From the perspective of image-level prediction and generation, AIS surgery introduces a significant amount of non-rigid deformation, involving complex couplings between vertebral rotation, coronal/sagittal alignment, and local structural changes caused by metal implants. Mainstream conditional generative models, such as pix2pix [13] under generative adversarial network (GAN) architectures and DDIB [12] under diffusion model architectures, are primarily applied to cross-modal medical imaging tasks, e.g., CT-MR conversion, where anatomical morphology remains relatively constant. When directly applied to in-modality transformations between preoperative and postoperative spinal radiographs, these models often fail to capture the complex changes in bone and overall spinal shape, resulting in blurred structural boundaries, increased artefacts, and poor anatomical consistency (see Fig. 1) [14]. These limitations severely restrict their applicability to image-guided preoperative decision-making.

To address the limitations of existing methods, this paper proposes ScolioLDM, a morphology-guided latent diffusion model (LDM) for postoperative radiograph synthesis in AIS. We introduce the curve map as a morphological prior and

Title of the paper

ScolioLDM: Towards Accurate Postoperative Radiograph Synthesis for Scoliosis with Morphology-Guided Latent Diffusion Model


Research content

This work designs ScolioLDM, which uses predicted spine contour maps and a MGCM to guide latent diffusion for high-fidelity AIS postoperative X-ray synthesis, validated on a 612-patient clinical dataset.

Research results


Experiments on 612 AIS cases prove ScolioLDM outperforms mainstream generative models, achieving top PSNR and NCC. Ablations verify spine contour maps and MGCM are vital for realistic spine and implant reconstruction.

Research project

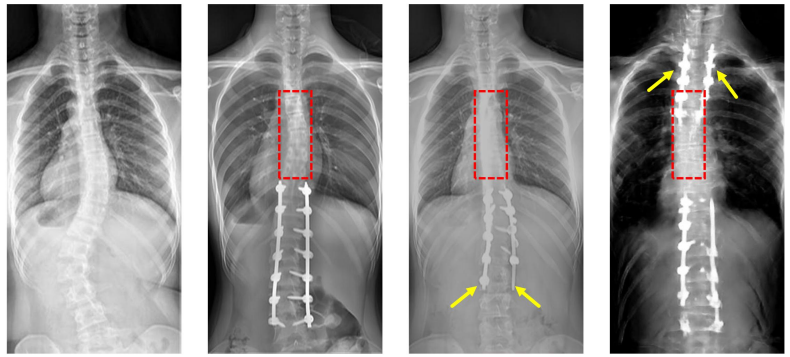


(a) preoperative radiograph (b) postoperative radiograph (GT) (c) DDIB (d) pix2pix

Illustration of postoperative radiograph synthesis directly using mainstream conditional generative models.When directly applied to in-modality transformations between preoperative and postoperative spinal radiographs, these models often fail to capture the complex changes in bone and overall spinal shape, resulting in blurred structural boundaries, increased artefacts, and poor anatomical consistency.

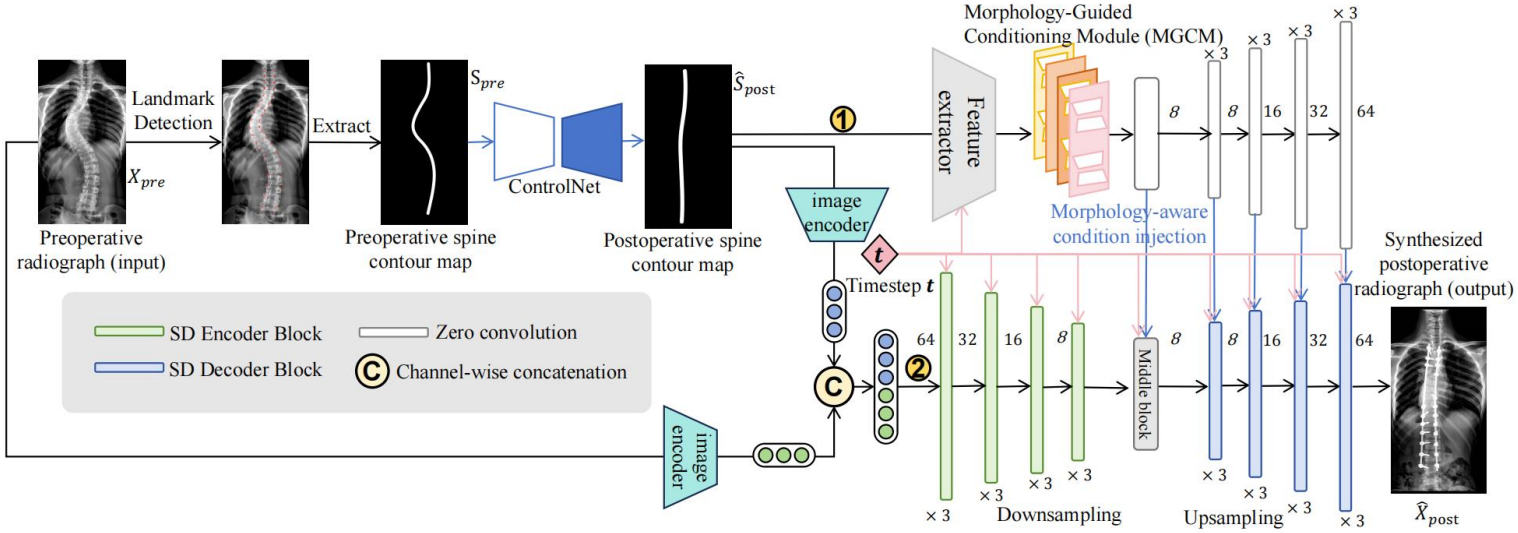


Overview of the proposed ScolioLDM. The left part presents the overall framework for postoperative radiograph synthesis, while the right part illustrates the detailed architecture of the core denoising U-Net integrated with the MGCM. ControlNet is used to introduce additional structural conditions into the diffusion model for controllable postoperative radiograph synthesis .

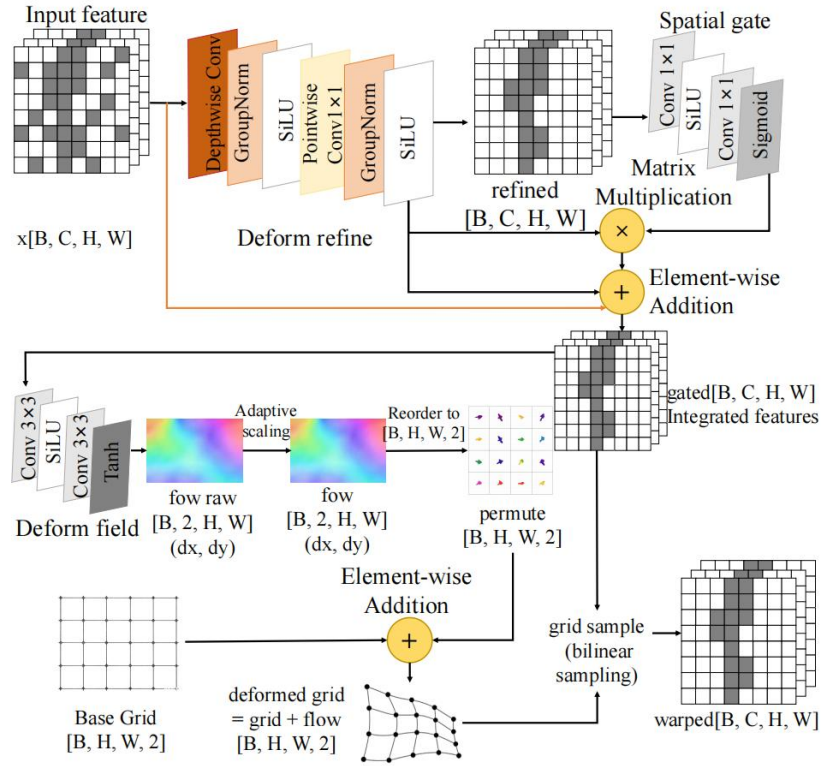


Detailed illustration of the Morphology-Guided Control Module (MGCM) embedded in the proposed ScolioLDM framework.

Research project

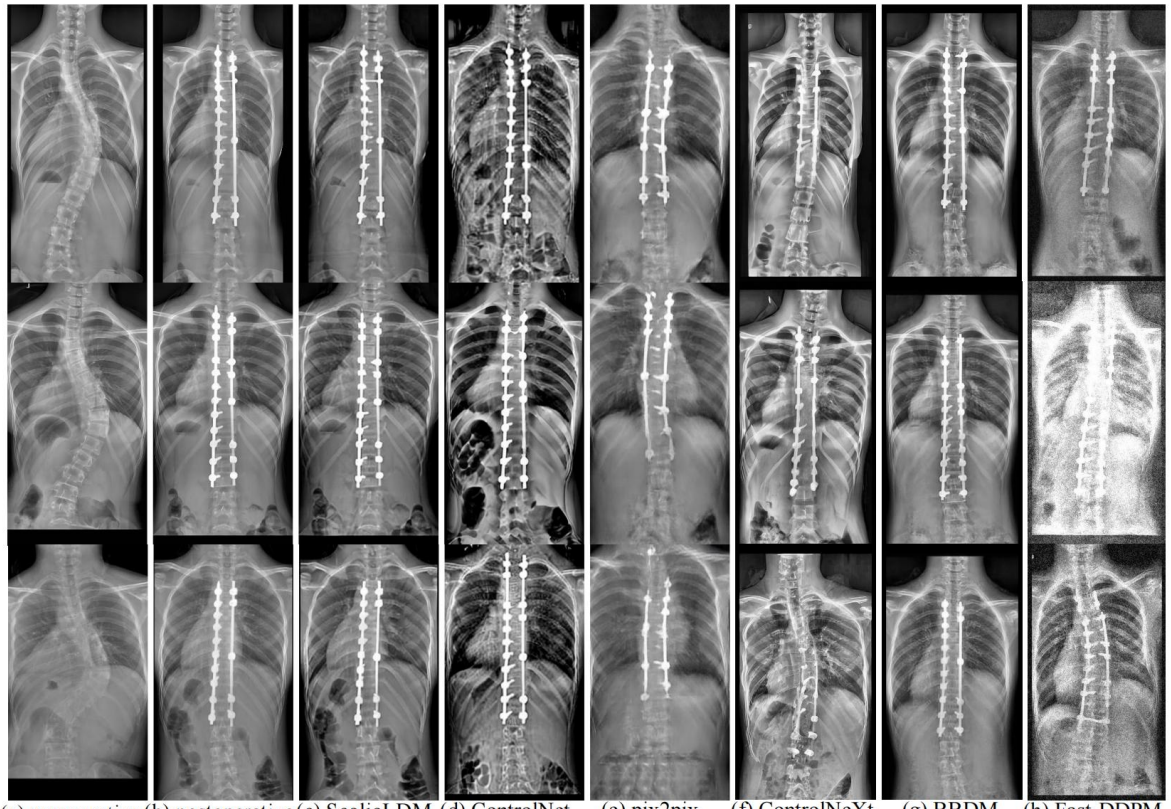

(a) preoperative radiograph (b) postoperative radiograph (GT) (c) ScolioLDM (d) ControlNet (e) pix2pix (f) ControlNeXt (g) BBDM (h) Fast-DDPM

Overall, both the quantitative and qualitative results demonstrate that the proposed framework can synthesize postoperative radiographs with high anatomical fidelity, structural consistency, and visual realism, while also confirming that MGCM and postoperative curve map guidance are essential components that significantly enhance the anatomical accuracy and visual quality of the synthesized results.

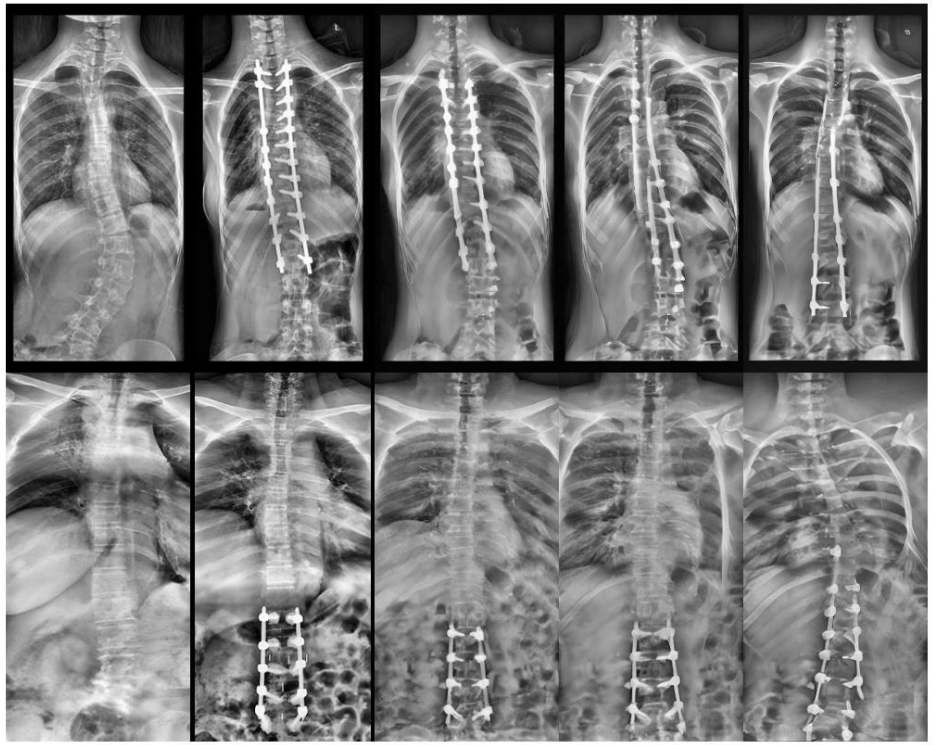

(a) preoperative radiograph (b) postoperative radiograph (GT) (c) ScolioLDM (d) ScolioLDM w/o MGCM (e) ScolioLDM w/o curve map

Method	SSIM ↑	PSNR ↑	MAE ↓	GradMAE ↓	NCC ↑
ControlNet	0.831 ± 0.009	19.726 ± 1.121	0.036 ± 0.005	0.054 ± 0.005	0.877 ± 0.03
pix2pix	0.846 ± 0.007	19.432 ± 0.861	0.035 ± 0.004	0.061 ± 0.006	0.861 ± 0.03
ControlNeXt	0.841 ± 0.010	19.179 ± 1.140	0.037 ± 0.006	0.059 ± 0.007	0.864 ± 0.03
BBDM	0.856 ± 0.010	19.654 ± 1.118	0.034 ± 0.005	0.053 ± 0.006	0.869 ± 0.03
Fast-DDPM	0.810 ± 0.011	17.539 ± 1.987	0.049 ± 0.015	0.067 ± 0.012	0.843 ± 0.06
ScolioLDM	0.841 ± 0.011	20.436 ± 1.322	0.032 ± 0.006	0.051 ± 0.006	0.892 ± 0.03

Variant	SSIM ↑	PSNR ↑	MAE ↓	GradMAE ↓	NCC ↑
w/o MGCM	0.836 ± 0.009	19.951 ± 1.142	0.034 ± 0.005	0.053 ± 0.005	0.882 ± 0.035
w/o postoperative curve map	0.822 ± 0.008	19.226 ± 1.007	0.039 ± 0.005	0.057 ± 0.006	0.857 ± 0.039
ScolioLDM	0.841 ± 0.011	20.436 ± 1.322	0.032 ± 0.006	0.051 ± 0.006	0.892 ± 0.035