

V-3/2 VMC

Цепь	Конн
AC_IN1	1
AC_IN2	2
AC_IN1	3
AC_IN2	4
EXEC_M_TX_P	5
EXEC_M_RX_P	6
GND	7
GND	8
EXEC_S1_TX_P	9
EXEC_S1_RX_P	10
MOD_GND_SIG	11
GND	12
RS232_2_TX	13
RS232_65_TX	14
RS232_2_RX	15
RS232_65_RX	16
+5V	17
GND	18
KEYBOARD_ROW_1	19
KEYBOARD_COL_2	20

DB9-F

Конн	Цепь
1	DCD
2	RS232_65_TX
3	RS232_65_RX
4	DTR
5	GND
6	DSR
7	
8	
9	

*Solder ending

V-3/2 VMC

089-F

				TERMT051.034.0050 R0											
				Vendotek-V* DB9F (RS232_65) + VCC						Лист		Масса	Масштаб		
Изм	Лист	№ докум	Подп.							Дата				1:1	
Разраб		Mikhaylenko N								21.07.2023					
Проб															
Т контр											Лист 1	Листов 2			
И контр					[No Variations]						TERMINAL TECHNOLOGIES				
Умб															



Vendotek V* - DB9F (RS232_65) + VCC

Wiring table

Molex	Solder ending	DB9-F
1	+	-
2	+	-
12	-	5
14	-	2
16	-	3

*Place shorts on pins of DB9-F: 1, 4, and 6

Sticker's recommended size
(as a part of the roll 3478-3812-2-6):

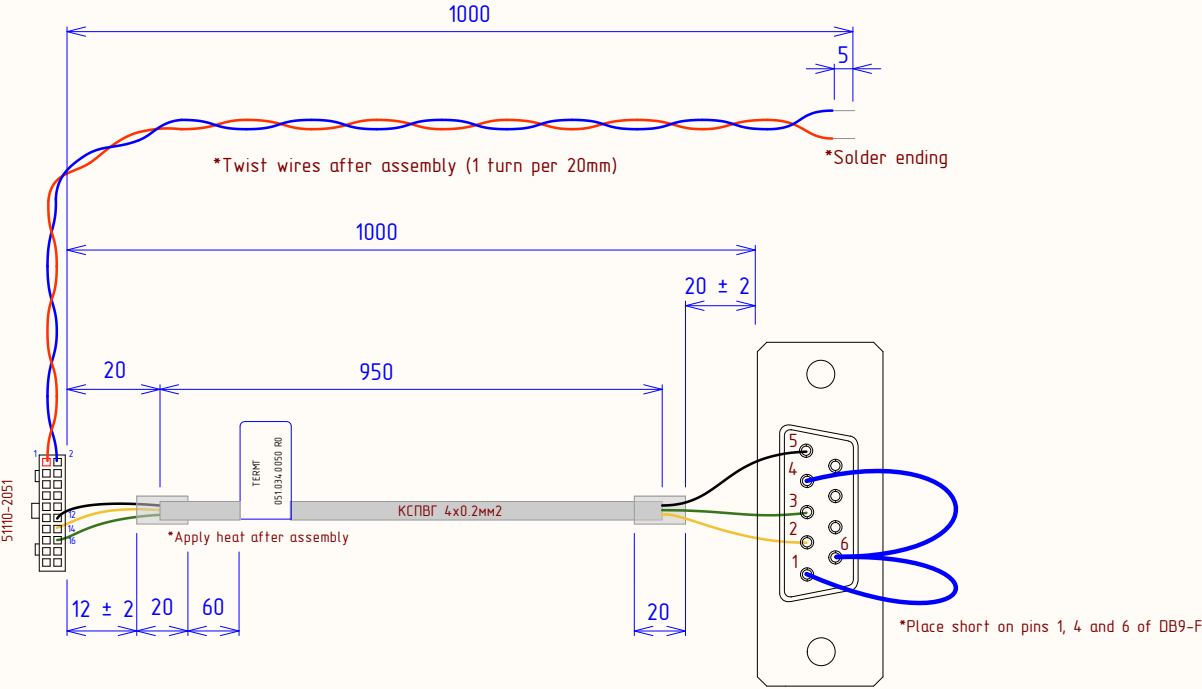

BOM

Molex 51110-2051 housing	1 pcs.
Molex 0503948100 contact	5 pcs.
DB-09F Female connector	1 pcs.
DP-09C set	1 pcs.
Wire HB-4 0.2 mm2 Red 1000mm	1 pcs.
Wire HB-4 0.2 mm2 Blue 1000mm	1 pcs.
Wire HB-4 0.2 mm2 Blue 40mm	2 pcs.
КСПВГ 4x0.2mm2 1000mm	1 pcs.
Heat shrink tube white D=5mm	2 pcs.
Sticker Label	1 pcs.

Изм.	Лист	№ докум.	Подп.	Дата