


USER GUIDE

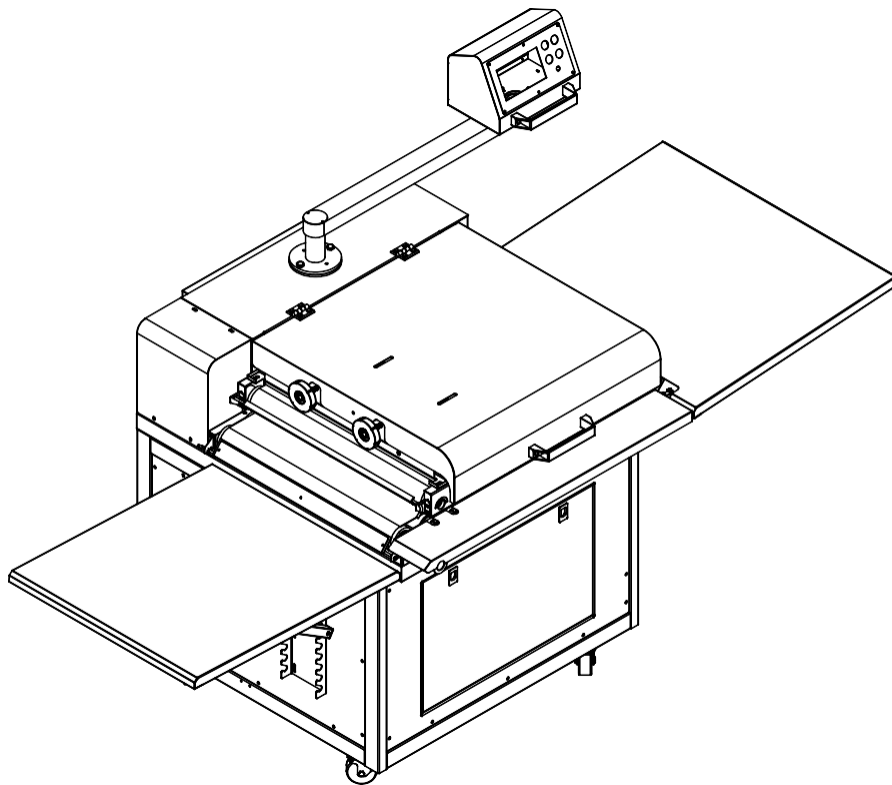

Tobago

Spanish. 02/2025. Rev.1.0

beinsen.com

Contents

Getting Started

- 3 Device design and functions
- 4 Safety warnings
- 5 Unique features of your iron

Use your iron

- 6 Meet the Digital Controller
- 7 Set a target temperature (SV)
- 8 Turning on and setting up your thermal iron

Troubleshooting

- 10 Controller Digital

Getting Started

Device Design and Functions

► Tobago:





- Please read these instructions carefully before using your iron for the first time
- Use the heat press only for its intended purpose: pressing materials using heat.
- Avoid electric shocks by avoiding contact with water or liquids.
- Disconnect securely by holding the plug, not the cord, when disconnecting it from the electrical current.
- Keep cords away from hot surfaces and allow the machine to cool completely before storing.
- Do not use the machine if the cord is damaged or if it has been dropped or damaged. If repairs are necessary, take them to a qualified service technician to avoid risks of fire, electric shock, or injury.
- Always turn off the power before cleaning, repairing, or servicing the machine.
- Supervision is required for anyone using the heat press, especially children or those with reduced physical, sensory, or mental capabilities. Never leave the machine unattended while it is connected.
- Avoid burns by not touching hot metal parts or heated plate during use. Wear heat-resistant gloves.
- Do not overload electrical circuits. Avoid using other high-voltage equipment on the same circuit as the heat press.
- If an extension cord is needed, make sure it is rated at least 20 amps to prevent overheating. Position the cord so that it does not trip or pull on it.
- Keep your hands away from the top plate during locking to avoid injury caused by machine pressure.
- Place the heat press on a sturdy and suitable support to ensure stability during operation.
- Keep the work area clean and free of obstructions to avoid accidents.

Double heat roller

Versatile and efficient. By incorporating a double heat roller, together with pressure regulation, the Beinsen Tobago continuous ironing station represents a leap forward in high-production customization processes as it allows a homogeneous distribution of heat as well as to reduce waits and downtime.

Its configuration possibilities make it ideal for all types of processes, including of course DTF (Direct-to-film) and HTV (thermal transfer vinyl)



Mobile Digital Controller

The REX C400 mobile digital controller ensures you are in control at all times. You can rotate your arm AND rotate the head up to 90° to always have it in front of you

On its control panel you will have the temperature settings of both heat rollers independently, the travel speed settings and the power indicators, as well as the emergency stop button



Folding trays



The continuous ironing station has been optimized not only in terms of productivity, but has also evolved in terms of robustness and use of space.

Starting from this base, we have incorporated 2 folding trays designed to facilitate both the feeding of garments and their exit and stacking. In addition, the tray Output can be fixed in various positions at different angles to fit the output stack.




Use your iron

Meet the Digital Controller

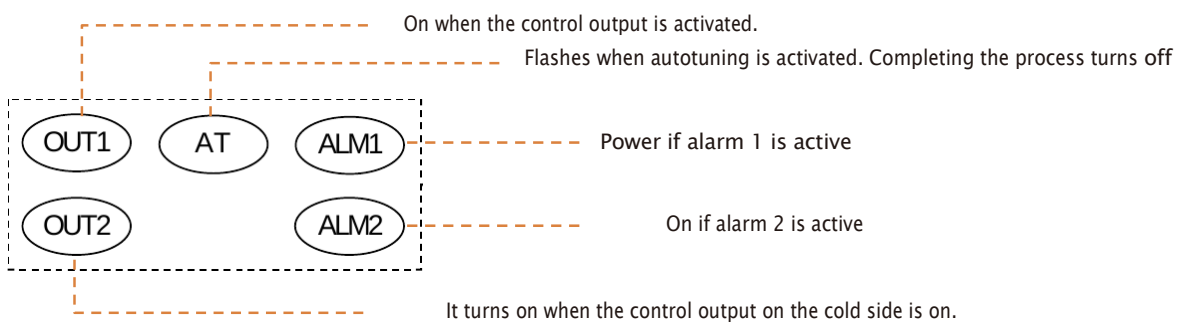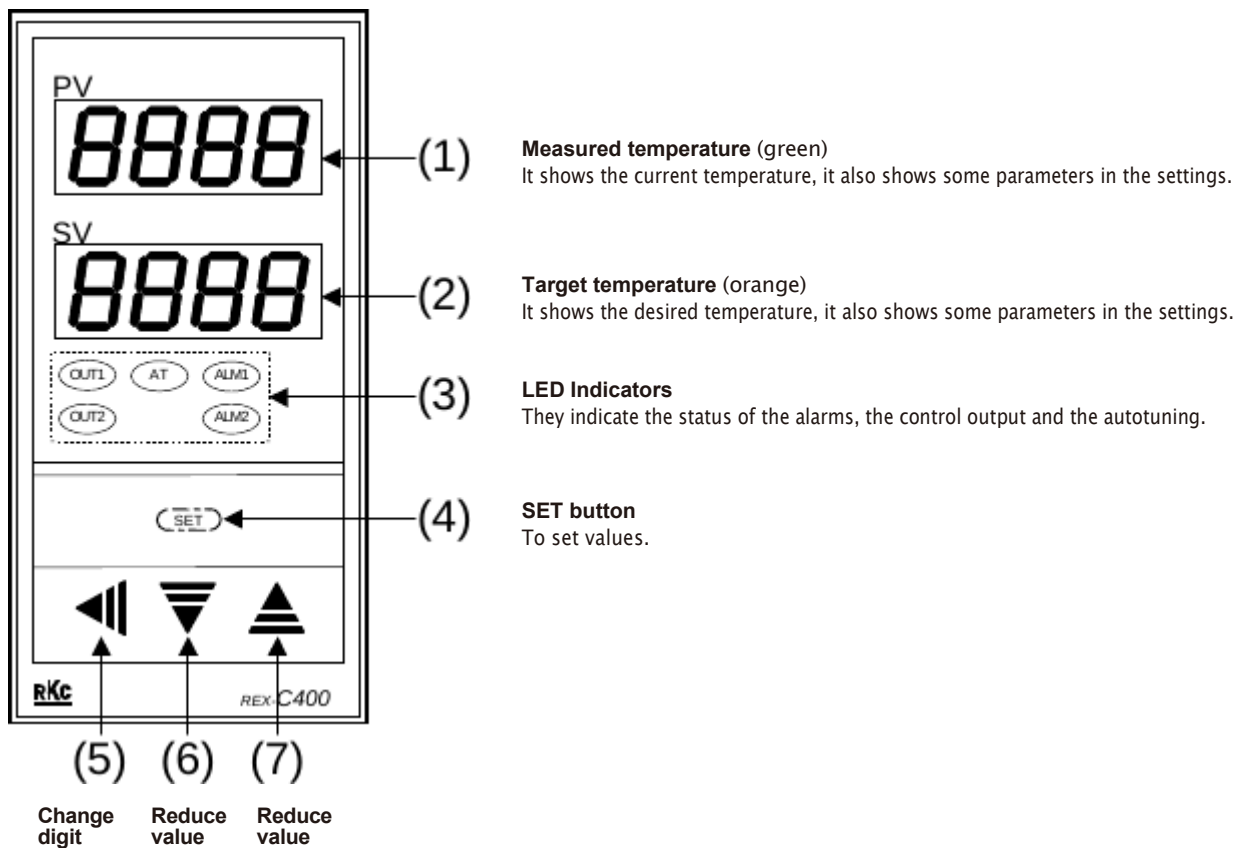


Set a target temperature (SV)

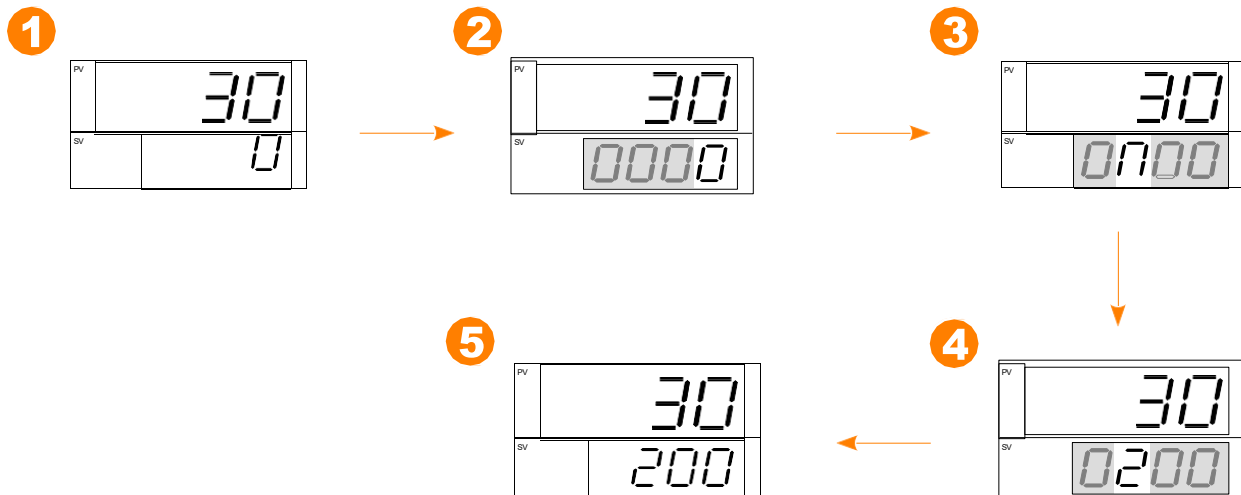

- 1 The display shows the current values. Press the "**SET**" button to enter edit mode.
- 2 Use the button ◀ to navigate to the digit you want to change.
- 3 Use the button ▲ to increase the value to the desired value.
- 4 Press the "**SET**" button to save the value.

Turning on and setting up your thermal iron

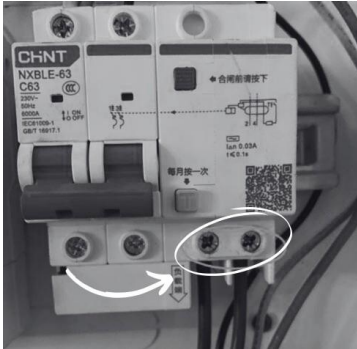

Perform the electrical installation

Connect your workstation to electrical power. When you are finished, turn up the switch to start the power supply to the iron.



Check the power supply

If the electrical installation is correct and the machine receives electricity, the indicator light will come on.



Turn on the machine

Press the green power button to turn on the machine. The motor will start and spin the rollers at the set speed in the corresponding command. The digital controllers will be launched and will begin to display information.



Set temperatures

Press the "SET" button on one of the controllers to begin setup. Enter the target temperature by following the steps described on the previous page. Remember to perform the same process with the other controller, as they work independently and can be set to different temperatures if desired. When the rollers have reached the desired temperature, you are ready to start working.



Turn off the machine

When you are done working, press the power switch again to turn off the machine. The green power indicator and the red power indicator will light up at the same time and the digital controllers will turn off. The motor will continue to spin the rollers until the temperature drops below 90°C. At this point the green indicator light turns off and the engine stops automatically.



Emergency push button

Press the emergency stop button in case of anomaly during the transfer process; The engine stops.
When turning off, the green indicator light turns on; Do not cut off the main power supply to avoid burning the conveyor belt.

Troubleshooting

Before contacting a Beinsen Service Center (SAT) or authorized service center, try the following solutions. Some situations may not apply to your device

Digital controller

The screen shows the message *E r r*

- Indicates a failure in the controller's RAM memory (write failure, etc.).
- Restart the workstation. If the problem persists, contact technical support.

Current Temperature (PV) indicator flashes

- Indicates that the current temperature is out of range
- Check the connections and sensor and replace it if necessary. If the problem persists, contact technical support.

Copyright

Copyright © 2025 Futura Teck de Murcia S.L.U.

This guide is protected by international copyright laws.

You may not reproduce, distribute, translate, or transmit any part of this guide in any way or by any means, whether electronic or mechanical, including photocopying, recording, or storing in any information storage and retrieval system.

Trademarks

- Beinsen and the Beinsen logo are registered trademarks of Futura Teck de Murcia S.L.U.
- All other trademarks and copyrights are the property of their respective owners.