


!

CAUTION

Tool Holder

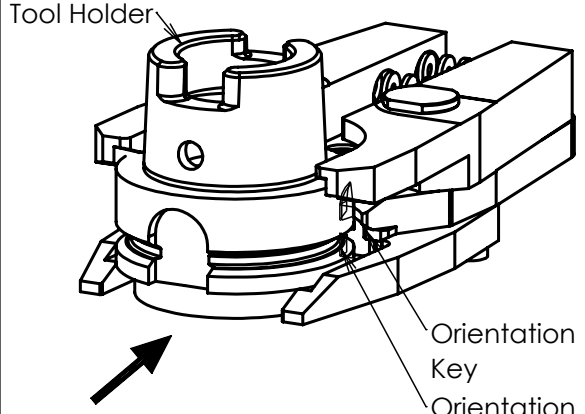

Ensure that tool holder is orientated properly before inserting into tool pot.

Orientation notch should be as shown.

32VS190A2019=X

										0		—		NEW RELEASE		09/01/2024		MV32-0100		REJEESH																	
										REVISION		C.N.		DESCRIPTION OF CHANGE				APPROVED BY		DATE		CHECKED BY		DWG. INF. No.		DESIGNED BY		CHANGED BY		DATE							
GENERAL PARTS 一般部品										MATERIAL 材料										REFER NOTE		MASS 質量		kg		CHOW JF		SRIDHAR		REJEESH		09 Jan 2024					
REMOVE SHARP EDGES TO C0.2. EACH INSIDE CORNER SHOULD BE R0.5 OR LESS UNLESS SPECIFIED. TARGET THE MIDDLE OF TOLERANCE FOR FINISHED DIMENSION.										PAINT (1 or 0)										上塗り処理有無(1/0)																	
指示無き角はC0.2のこと。指示無きコーナーはR0.5以下のこと。仕上がり寸法は公差の中心を目標とすること。										SURFACE TREATMENT 表面処理																											
PARTS FORMED FROM SHEET METAL 板金部品										GENERAL PARTS 一般部品										SURFACE CONDITION 表面																	
										TOLERANCES FOR TAP AND CLEARANCE HOLE										THICKNESS 厚さ																	
										THREAD SIZE										TAP & HOLE POSITION		HOLE DIAMETER		CHAMFER DIAMETER													
										M3 AND BELOW										±0.05		+0.05/-0.0		+0.1/-0.0													
										M4,M5,M6,M8										±0.1		+0.1/-0.0		+0.2/-0.0													
										M10										±0.15		+0.15/-0.0		+0.3/-0.0													
										M12,M14,M16										±0.2		+0.2/-0.0		+0.4/-0.0													
										M18,M20										±0.3		+0.3/-0.0		+0.6/-0.0													
										M22 AND ABOVE										±0.4		+0.4/-0.0		+0.8/-0.0													