

PROTOTYPE BOM

Source Data From: **Softcore SA HW.PrjPcb**
Project: **Softcore SA HW.PrjPcb**
Variant: **None**

SoftCore SA Adapter

Company Part Number: **IMR-006-SCH**
PCB Revision: **1**
Engineer: **Hab S Collector**



Report Date: 1/24/2026
Print Date: 24-Jan-26

7:13:10 AM
7:13:49 AM


#	Quantity	LibRef	Description	Designator	MFG	MFG_PN	Supplier 1	Supplier Part Number 1	Unit Price	TOTAL
1	5	CAP_SMD_47UF_16V_1210	CAP CER 47UF 50V XSR 1210	C1, C4, C15, C43, C46	Murata Electronics	GRM2ER60J476ME20L	DigiKey	490-1887-1-ND	28	\$1.40
2	18	CAP_SMD_0.1UF_50V_0805	CAP CER 0.1UF 50V X7R 0805	C2, C3, C5, C6, C10, C11, C12, C13, C16, C17, C20, C22, C23, C26, C27, C32, C33, C35	KYOCERA AVX	KGM21NR71H104KT	DigiKey	478-KGM21NR71H104KTCT-ND	1	\$1.80
3	1	CAP_SMD_470PF_50V_0805	CAP CER 470PF 50V COGNF0 0805	C7	Yageo	CC0805JRNPO9BN471	DigiKey	311-1119-1-ND	11	\$0.11
4	5	CAP_SMD_10UF_50V_0805	CAP CER 10UF 50V XSR 0805	C8, C30, C40, C41, C49	Murata Electronics	GRM21BR61H106KE63L	DigiKey	490-18663-1-ND	28	\$1.40
5	2	CAP_SMD_220PF_50V_0805	CAP CER 220PF 50V COGNF0 0805	C9, C14	Yageo	CC0805JRNPO9BN221	DigiKey	311-1115-1-ND	11	\$0.22
6	2	CAP_SMD_330PF_50V_0805	CAP CER 330PF 50V COGNF0 0805	C18, C19	Yageo	CC0805JRNPO9BN331	DigiKey	311-1117-1-ND	11	\$0.22
7	2	CAP_SMD_1UF_50V_0805	CAP CER 1UF 50V X7R 0805	C21, C31	KYOCERA AVX	08055C105K4T2A	DigiKey	478-KAM21KR71H105KUCT-ND	27	\$0.54
8	2	CAP_SMD_4.7NF_50V_0805	CAP CER 4.7NF 50V X7R 0805	C28, C38	KEMET	CJ0805CA72K5RACAUTO	DigiKey	399-8969-1-ND	12	\$0.24
9	3	CAP_SMD_100UF_16V_SMD	CAP CER 100UF 16V X7S SMD	C29, C36, C37	Taiyo Yuden	EMK325ABJ107MM-P	DigiKey	587-5426-1-ND	1.92	\$5.76
10	3	CAP_SMD_4.7UF_50V_0805	CAP CER 4.7UF 50V XSR 0805	C34, C45, C47	Murata Electronics	GRM21BR61H475KE51L	DigiKey	490-10751-1-ND	1.9	\$0.57
11	1	CAP_SMD_22PF_50V_0805	CAP CER 22PF 50V X7R 0805	C39	KEMET	CJ0805C220K5RACAUTO	DigiKey	399-17627-1-ND	24	\$0.24
12	1	CAP_SMD_470NF_50V_0805	CAP CER 0.47UF 6.3V XSR 0402	C42	Murata Electronics	GRM558R60J474KE19D	DigiKey	490-3266-1-ND	10	\$0.10
13	1	CAP_SMD_277F_50V_0805	CAP CER 277F 50V COGNF0 0805	C44	KEMET	CJ0805C270J5GACTU	DigiKey	399-C0805C270J5GACTU-ND	11	\$0.11
14	1	CAP_SMD_22UF_16V_1210	CAP CER 22UF 16V X7R 1210	C48	Taiyo Yuden	MSASE32MSB7226MPN825	DigiKey	587-MSA SE32MSB7226MPN825CT-ND	47	\$0.47
15	8	DIODE_1N4148W-7-F	RELAY REED SPDT 250MA 5V	D1, D2, D3, D4, D5, D6, D7, D8	Diodes Inc	1N4148W-7-F	DigiKey	1N4148W-FOICT-ND	16	\$1.28
16	4	CONN_HEADER_12P_100MLL_RA	CONN HEADER R/A 12POS 2.54MM	J1, J3, J4, J6	Samtec Inc.	TSW-106-08-T-D-RA	Digi-Key	SAM049-06-ND	93	\$3.72
17	1	CONN_MICRO-SD_DM8BT-DSF-REIS	CONN MICRO SD CARD R/A SMD	J2	Hrose Electric Co Ltd	DM8BT-DSF-REIS	DigiKey	HR1942CT-ND	2.30	\$2.30
18	1	CONN_HEADER_3P_100MLL_VERT	CONN HEADER VERT 3POS 2.54MM	J5	Sullins Connector Solutions	PREC003SFAN-RC	Digi-Key	S1212EC-03-ND	07	\$0.07
19	1	CONN_MOLEX_0731713150	CONN BNC RCPT R/A 50 OHM PCB	J7	Molex	0731713150	DigiKey	WM20430-ND	1.40	\$1.40
20	4	CONN_HEADER_2P_100MLL_VERT, CONN_JUMPER_2P_100MLL_VERT, CONN_JUMPER_2P_100MLL_VERT, CONN_JUMPER_2P_100MLL_VERT	CONN HEADER VERT 2POS 2.54MM	J8, J9, J10, J12	Sullins Connector Solutions	PREC002SFAN-RC	Digi-Key	S1212EC-02-ND	07	\$0.28
21	1	CONN_BATT_18650	CONN HEADER VERT 2POS 2.54MM	J11	Keystone Electronics	54	Digi-Key	36-54-ND	1.10	\$1.10
22	1	INDUCTOR_74439324022	POWER INDUCTOR 4030, 2.2UH, 7.80	L1	Würth Elektronik	74439324022	DigiKey	722-74439324022CT-ND	1.80	\$1.80
23	1	INDUCTOR_VLS3012ET-150M	FIXED IND 15UH 550MA 516MOHM SMD	L2	TDK Corporation	VLS3012ET-150M	DigiKey	445-6660-1-ND	26	\$0.26
24	5	LED_GREEN_LTST-C170GKT	LED GREEN CLEAR SMD	LED1, LED2, LED3, LED7, LED8	Lite-On	LTST-C170GKT	DigiKey	160-1179-1-ND	10	\$0.50
25	2	LED_YELLOW_LTST-C170YKT	LED YELLOW CLEAR SMD	LED4, LED5	Lite-On	LTST-C170YKT	DigiKey	160-1175-1-ND	15	\$0.30
26	1	LED_RED_LTST-C170BKT	LED RED CLEAR SMD	LED6	Lite-On	LTST-C170BKT	DigiKey	160-1178-1-ND	18	\$0.18
27	4	MECHANICAL_SCRWB_M3X6_PAN_HEAD	SCREW M3X6 PAN HEAD SS	MECH1, MECH2, MECH3, MECH4	APM Hexseal	RM36MM 2701	DigiKey	335-1156-ND	58	\$2.32
28	4	MECHANICAL_STANDOFF_M3X20	HEX STANDOFF M3 BRASS 20MM	MECH5, MECH6, MECH7, MECH8	Keystone Electronics	24407	DigiKey	36-24407-ND	1.36	\$5.44
29	1	MECHANICAL_SPEAKER_MOUNTED	SPEAKER PANEL MOUNT	MECH9	ARDUINO	312815-3W	ARDUINO	312815-3W	2.50	\$2.50
30	1	MODULE_ARTY_A7	DEVELOPMENT BOARD FPGA XILINX A7	MECH10	Digilent, Inc.	410-319-1	DigiKey	1286-1206-ND	299.00	\$299.00
31	2	MOSFET_NCH_2N7002-7-F	MOSFET N-CH 60V 115MA SOT23-3	Q1, Q3	Diodes Inc	2N7002-7-F	DigiKey	2N7002-FOICT-ND	20	\$0.40
32	2	MOSFET_PCH_IRLML5103TRPBF	MOSFET P-CH 30V 760MA SOT23	Q2, Q4	Infineon Technologies	IRLML5103TRPBF	DigiKey	IRLML5103PBFCT-ND	45	\$0.90
33	8	RES_SMD_240_0805_1/8W_1%	RES SMD 240 OHM 1% 1/8W 0805	R1, R2, R3, R4, R5, R6, R7, R8	Yageo	RC0805FR-13240RL	DigiKey	13-RC0805FR-13240RLCT-ND	1	\$0.80
34	6	RES_SMD_10_0805_1/8W_1%	RES SMD 10 OHM 1% 1/8W 0805	R9, R10, R11, R12, R13, R14	Yageo	RC0805FR-1310RL	DigiKey	13-RC0805FR-1310RLCT-ND	1	\$0.60
35	21	RES_SMD_10K_0805_1/4W_1%	RES SMD 10K OHM 1% 1/4W 0805	R15, R16, R17, R18, R19, R20, R22, R28, R29, R31, R32, R33, R35, R36, R38, R39, R40, R41, R44, R45, R49	Yageo	RC0805FR-7W10KL	DigiKey	13-RC0805FR-7W10KLCT-ND	10	\$2.10
36	1	RES_SMD_200_0805_1/8W_1%	RES SMD 200 OHM 1% 1/8W 0805	R21	Yageo	RC0805FR-07200RL	DigiKey	311-200CRCT-ND	1	\$0.10
37	1	RES_SMD_3.0K_0805_1/8W_1%	RES SMD 3.0K OHM 1% 1/8W 0805	R23	Yageo	RC0805FR-133KL	DigiKey	13-RC0805FR-133KLCT-ND	1	\$0.10
38	2	RES_SMD_1.0K_0805_1/8W_1%	RES SMD 1.0K OHM 1% 1/8W 0805	R24, R27	Yageo	RC0805FR-071KL	DigiKey	311-100KCRCT-ND	1	\$0.20
39	2	RES_SMD_1.5K_0805_1/8W_0.1%	RES SMD 1.5K OHM 0.1% 1/8W 0805	R25, R26	Yageo	FP0805BR0071KSL	DigiKey	YAG1814CT-ND	16	\$0.32
40	1	RES_SMD_10K_0805_1/8W_0.1%	RES SMD 10K OHM 0.1% 1/8W 0805	R30	Yageo	FP0805BR00710KL	DigiKey	13-FP0805BR00710KLCT-ND	16	\$0.16
41	2	RES_SMD_22K_0805_1/8W_1%	RES SMD 22K OHM 1% 1/8W 0805	R34, R37	Yageo	RC0805FR-0722KL	DigiKey	311-22.0KCRCT-ND	10	\$0.20
42	1	RES_POT_10K_2YGANG_LINEAR	POT 10K OHM 1/20W LINEAR - 2X GANG	R42	Bourns Inc.	FRS12R-4115K-103B1	DigiKey	118-FRS12R-4115K-103B1-ND	2.56	\$2.56
43	1	RES_SMD_7.5K_0805_1/8W_1%	RES SMD 7.5K OHM 1% 1/8W 0805	R43	Yageo	RC0805FR-077KSL	DigiKey	311-7.50KCRCT-ND	10	\$0.10
44	2	RES_SMD_2.49K_0805_1/8W_1%	RES SMD 2.49K OHM 1% 1/8W 0805	R46, R64	Yageo	RC0805FR-132K49L	DigiKey	13-RC0805FR-132K49LCT-ND	1	\$0.20
45	6	RES_SMD_0_0805_1/8W_1%	RES SMD 0 OHM 1% 1/8W 0805	R47, R48, R54, R61, R62, R72	Yageo	RC0805JR-070RL	DigiKey	311-0.0ARCT-ND	1	\$0.60
46	1	RES_POT_10K_1YGANG_LINEAR	POT 10K OHM 1/20W LINEAR - 1X GANG	R50	Bourns Inc.	3386P-1-103TLF	DigiKey	3386P-103TLF-ND	2.20	\$2.20
47	1	RES_SMD_1.69K_0805_1/8W_1%	RES SMD 1.69K OHM 1% 1/8W 0805	R51	Yageo	RC0805FR-071K69L	DigiKey	311-1.69KCRCT-ND	1	\$0.10
48	1	RES_SMD_178K_0805_1/8W_1%	RES SMD 178K OHM 1% 1/8W 0805	R52	Yageo	RC0805FR-07178KL	DigiKey	311-178KCRCT-ND	10	\$0.10
49	2	RES_SMD_102K_0805_1/8W_1%	RES SMD 102K OHM 1% 1/8W 0805	R53, R56	Yageo	RC0805FR-07102KL	DigiKey	311-102KCRCT-ND	10	\$0.20
50	7	RES_SMD_100K_0805_1/4W_1%	RES SMD 100K OHM 1% 1/4W 0805	R55, R57, R63, R66, R67, R68, R70	Yageo	RC0805FR-07100KL	DigiKey	311-100KCRCT-ND	13	\$0.91
51	1	RES_SMD_48.7K_0805_1/8W_1%	RES SMD 48.7K OHM 1% 1/8W 0805	R58	Yageo	RC0805FR-0748K7L	DigiKey	311-48.7KCRCT-ND	1	\$0.10
52	1	RES_SMD_17.4K_0805_1/8W_1%	RES SMD 17.4K OHM 1% 1/8W 0805	R59	Yageo	RC0805FR-0717K4L	DigiKey	311-17.4KCRCT-ND	10	\$0.10
53	1	RES_SMD_17.8K_0805_1/8W_1%	RES SMD 17.8K OHM 1% 1/8W 0805	R60	Yageo	RC0805FR-0717K8L	DigiKey	311-17.8KCRCT-ND	10	\$0.10
54	1	RES_SMD_6.81K_0805_1/8W_1%	RES SMD 6.81K OHM 1% 1/8W 0805	R65	Yageo	RC0805FR-076K81L	DigiKey	311-6.81KCRCT-ND	10	\$0.10
55	1	RES_SMD_1M_0805_1/8W_1%	RES SMD 1M OHM 1% 1/8W 0805	R69	Yageo	RC0805FR-071ML	DigiKey	311-1.00MCRCT-ND	12	\$0.12
56	1	RES_SMD_255K_0805_1/8W_1%	RES SMD 255K OHM 1% 1/8W 0805	R71	Yageo	RC0805FR-07255KL	DigiKey	311-255KCRCT-ND	10	\$0.10
57	1	RELAY_HE721C0500	RELAY REED SPDT 250MA 5V	REL1	Littlefuse	HE721C0500	DigiKey	HE112-ND	5.77	\$3.77
58	1	CONN_SPKR_HEADER_2P_100MLL	CONN SPEAKER HEADER GENERIC VERT 2POS 2.54MM	SPK1	GENERIC	TBD	Digi-Key	TBD	1.00	\$1.00
59	5	SWITCH_EVQ-Q2U02W	SWITCH TACTILE SPST-NO 0.02A 15V	SW1, SW2, SW3, SW4, SW5	American Zettler	EVQ-Q2U02W	DigiKey	PL2954SCT-ND	25	\$1.25
60	1	SWITCH_SLW-12689-4A-N-D	SWITCH SLIDE SPDT 300MA 50V	SW6	Same Sky	SLW-12689-4A-N-D	DigiKey	2223-SLW-12689-4A-N-D-ND	48	\$0.48
61	8	CONN_TEST_POINT_S1751-46R	PCB TEST POINT CONNECT	TP5, TP8, TP10, TP12, TP14, TP15, TP16, TP17	Harw in Inc	S1751-46R	Digi-Key	952-1478-1-ND	28	\$2.24
62	2	IC_MCP23S08T-E/50	IC IO XPNDR 10MHZ SPI 18SOIC	U1, U2	Microchip	MCP23S08T-E/50	DigiKey	MCP23S08T-E/50SCT-ND	1.54	\$3.08
63	1	MODULE_DISPLAY_128X64_2.42	DISPLAY 128X64 SSD1309 2.42" OLED WHITE	U3	UNKNOWN	SSD1309_128X64_2.42"	Amazon	SSD1309 2.42"	16.99	\$16.99
64	2	IC_AD7476ARTZ-REEL7	IC ADC 12BIT SAR SOT23-6	U4, U6	Analog Devices	AD7476ARTZ-REEL7	DigiKey	AD7476ARTZ-REEL7CT-ND	12.02	\$24.04
65	3	IC_OPAMP_AD8606ARZ-REEL7	IC OPAMP GP 2 CIRCUIT 8SOIC	U5, U7, U8	Analog Devices	AD8606ARZ-REEL7	DigiKey	AD8606ARZ-REEL7CT-ND	4.94	\$14.82
66	1	IC_LM4990MMXNCPB	IC AMP CLASS AB MONO 2W 8VSSOP	U9	Texas Instruments	LM4990MMXNCPB	DigiKey	296-37579-1-ND	45	\$0.45
67	1	IC_OPAMP_TLV9302IDR	IC OPAMP GP 2 CIRCUIT 8SOIC	U10	Texas Instruments	TLV9302IDR	DigiKey	296-53513-1-ND	60	\$0.66
68	1	IC_SMPS_TPS552892RQYR	IC REG BUCK ADJ 1A 16HTSSOP	U11	Texas Instruments	TPS552892RQYR	DigiKey	296-TPS552892RQYRQCT-ND	6.42	\$6.42
69	1	IC_REG_AZ1117CH-ADJTRG1	IC REG BUCK ADJ 2A SOT23	U12	Diodes Incorporated	AZ1117CH-ADJTRG1	DigiKey	AZ1117CH-ADJTRG1DICT-ND	2	\$0.20
70	1	IC_SMPS_LM3601PWPR	IC REG BUCK ADJ 1A 16HTSSOP	U13	Texas Instruments	LM3601PWPR	DigiKey	296-40221-1-ND	4.41	\$4.41

Approved

Notes

Bill of Cost (Unit Buy):


\$428.91

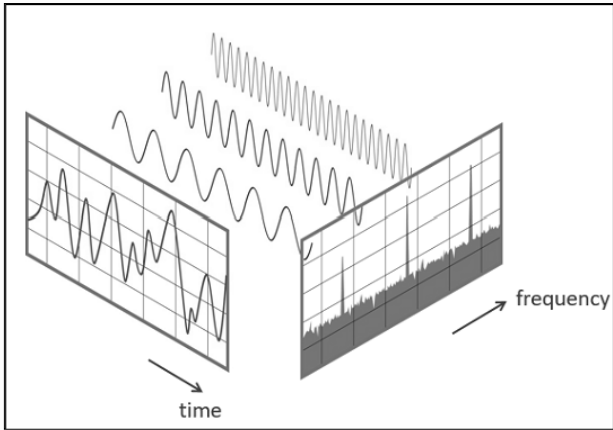

APPLICATION


REVISION HISTORY:

REV	ECO	CHANGE DESCRIPTION
1	NA	Initial design

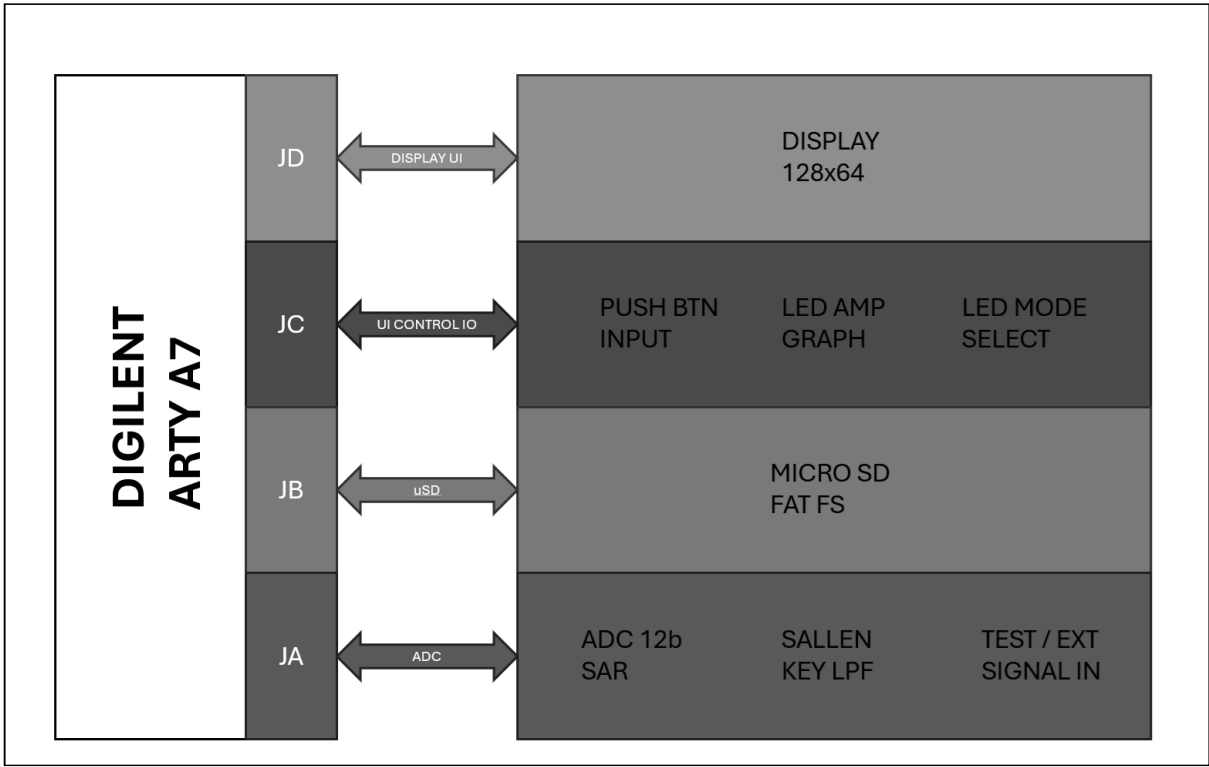


HARDWARE


Title SoftCore SA Adapter			IMR Engineering 3621 Gin Way Snelville GA, 30039		IMR Engineering © 2004 IMR Inc.
Size: B	Number: IMR-006-SCH	Revision: 1			
Date: 02/26/26	Time: 08:00	Sheet 1 of 7	Engineer: Hab S Collector		
File: SoftCore_SA_P1.SchDoc					

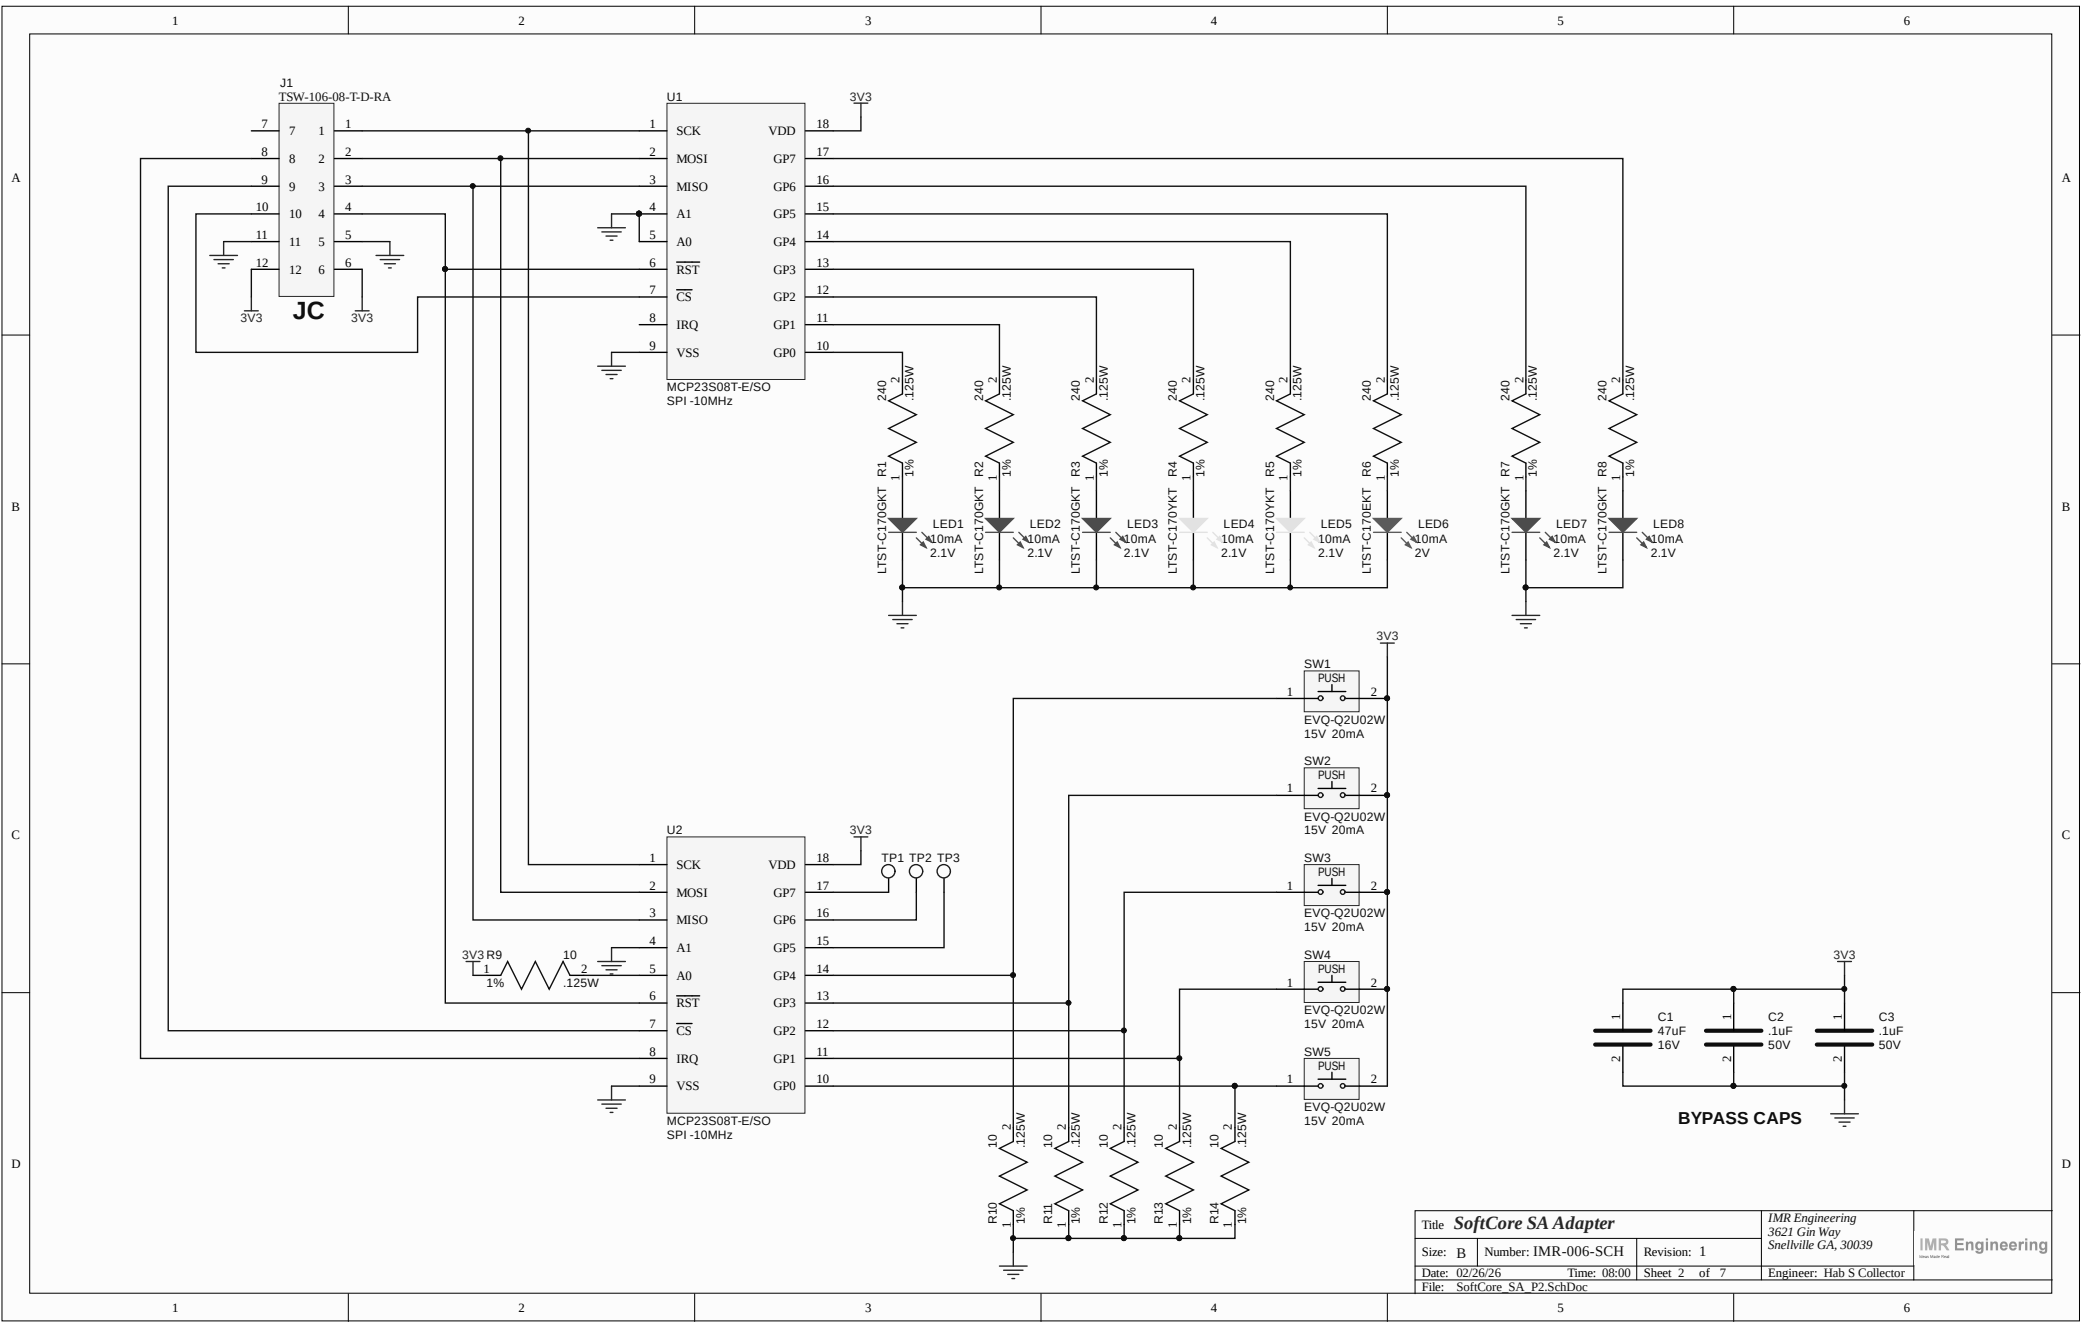


Title SoftCore SA Adapter			IMR Engineering 3621 Gin Way Snelville GA, 30039	
Size: B	Number: IMR-006-SCH	Revision: 1	IMR Engineering	
Date: 02/26/26	Time: 08:00	Sheet 2 of 7	Engineer: Hab S Collector	
File: SoftCore_SA_P2.SchDoc				

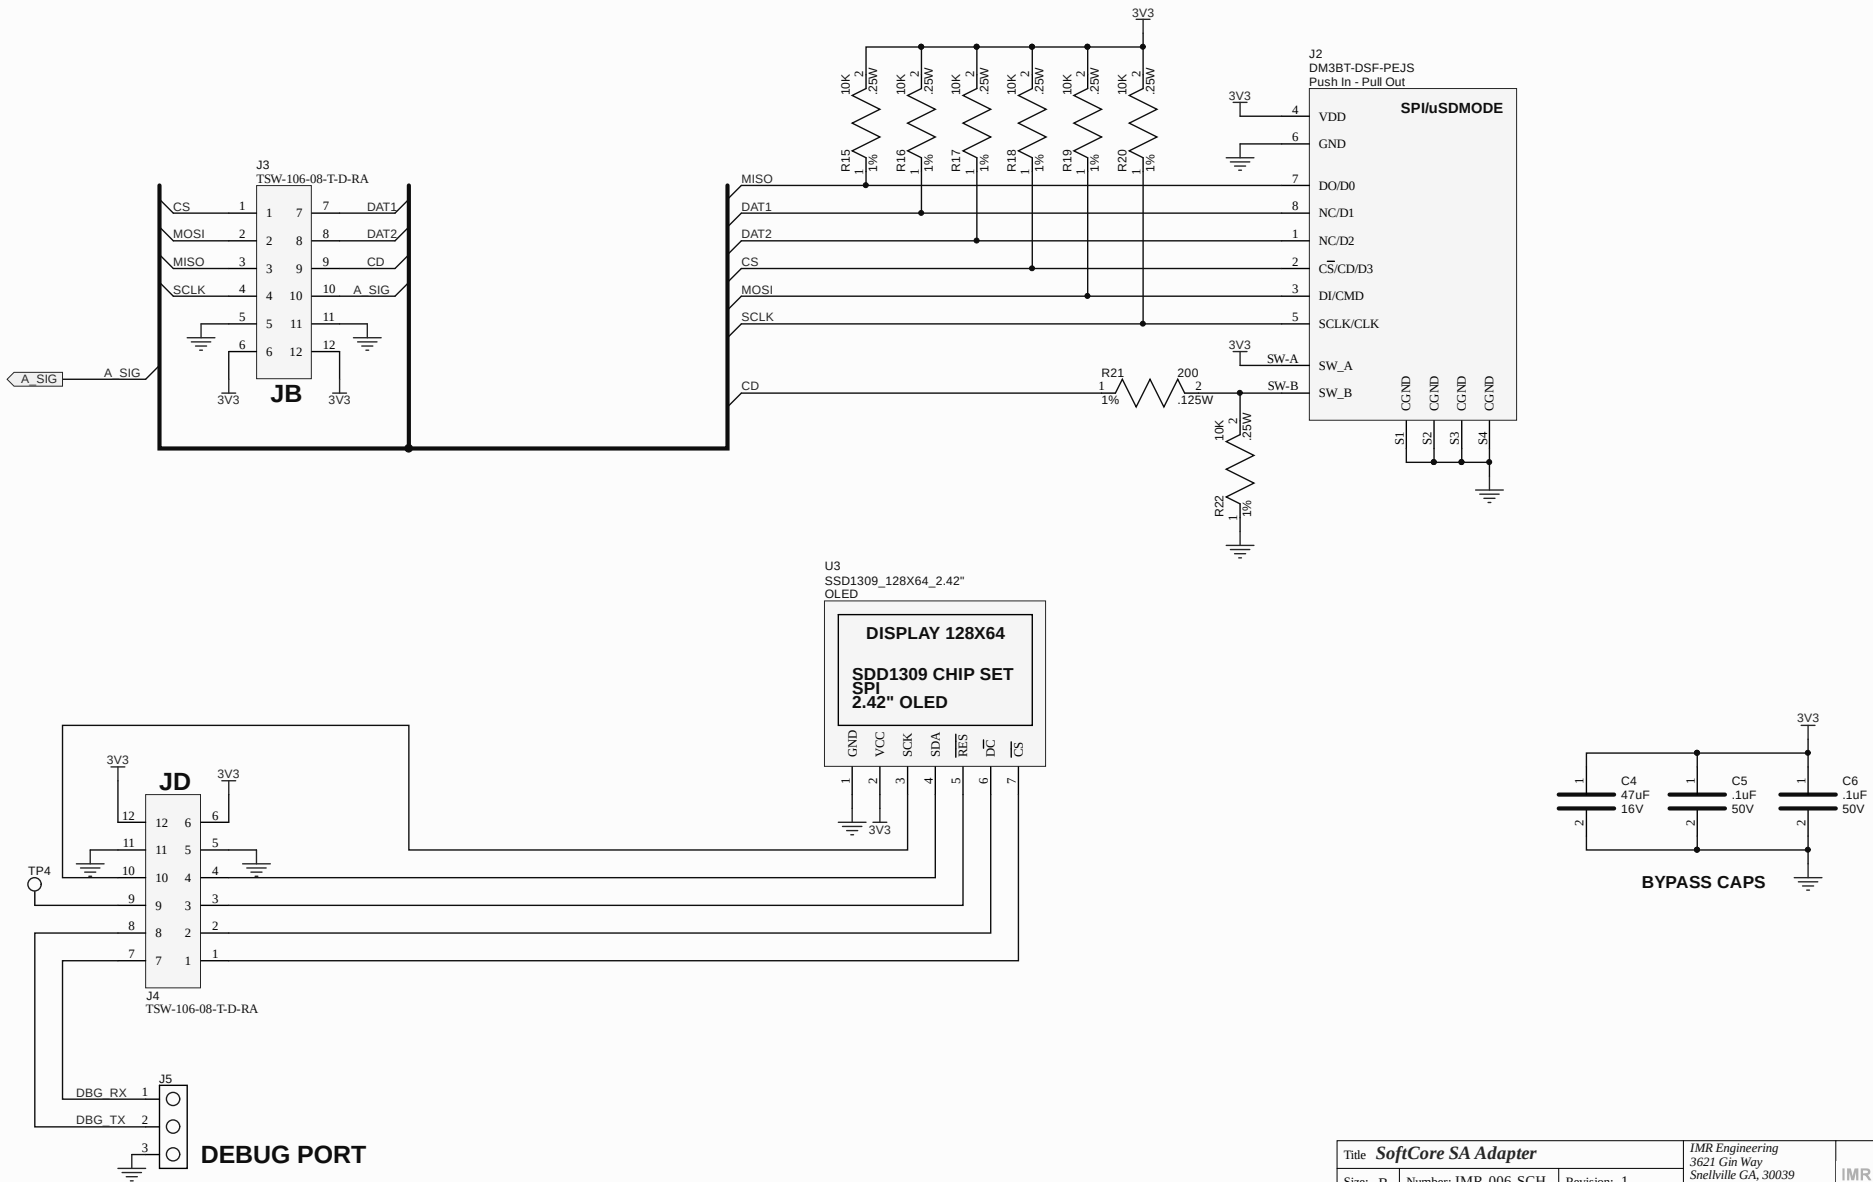

Title SoftCore SA Adapter			IMR Engineering 3621 Gin Way Snelville GA, 30039	
Size: B	Number: IMR-006-SCH	Revision: 1	IMR Engineering	
Date: 02/26/26	Time: 08:00	Sheet 3 of 7	Engineer: Hab S Collector	
File: SoftCore_SA_P3.SchDoc				

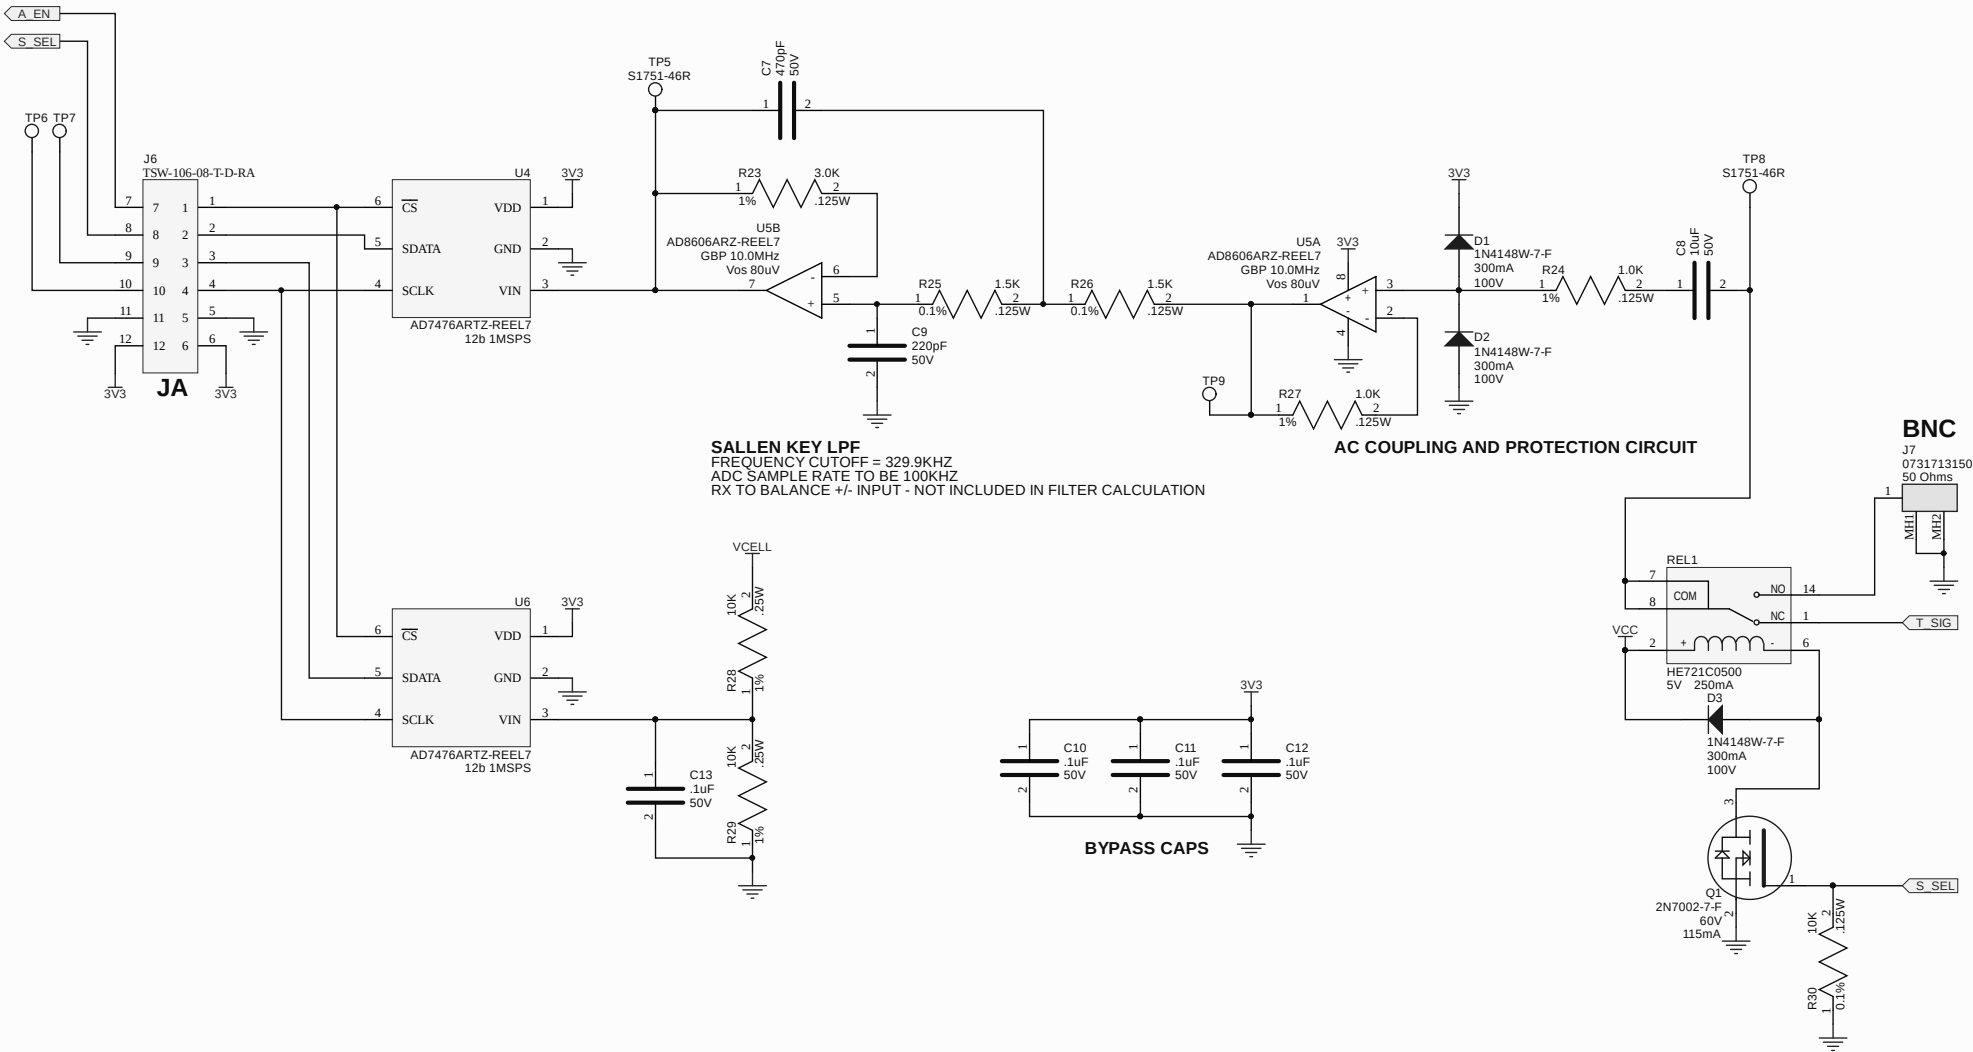

Title SoftCore SA Adapter			IMR Engineering 3621 Gin Way Snelville GA, 30039	
Size: B	Number: IMR-006-SCH	Revision: 1	IMR Engineering	
Date: 02/26/26	Time: 08:00	Sheet 4 of 7	Engineer: Hab S Collector	
File: SoftCore_SA_P4.SchDoc				

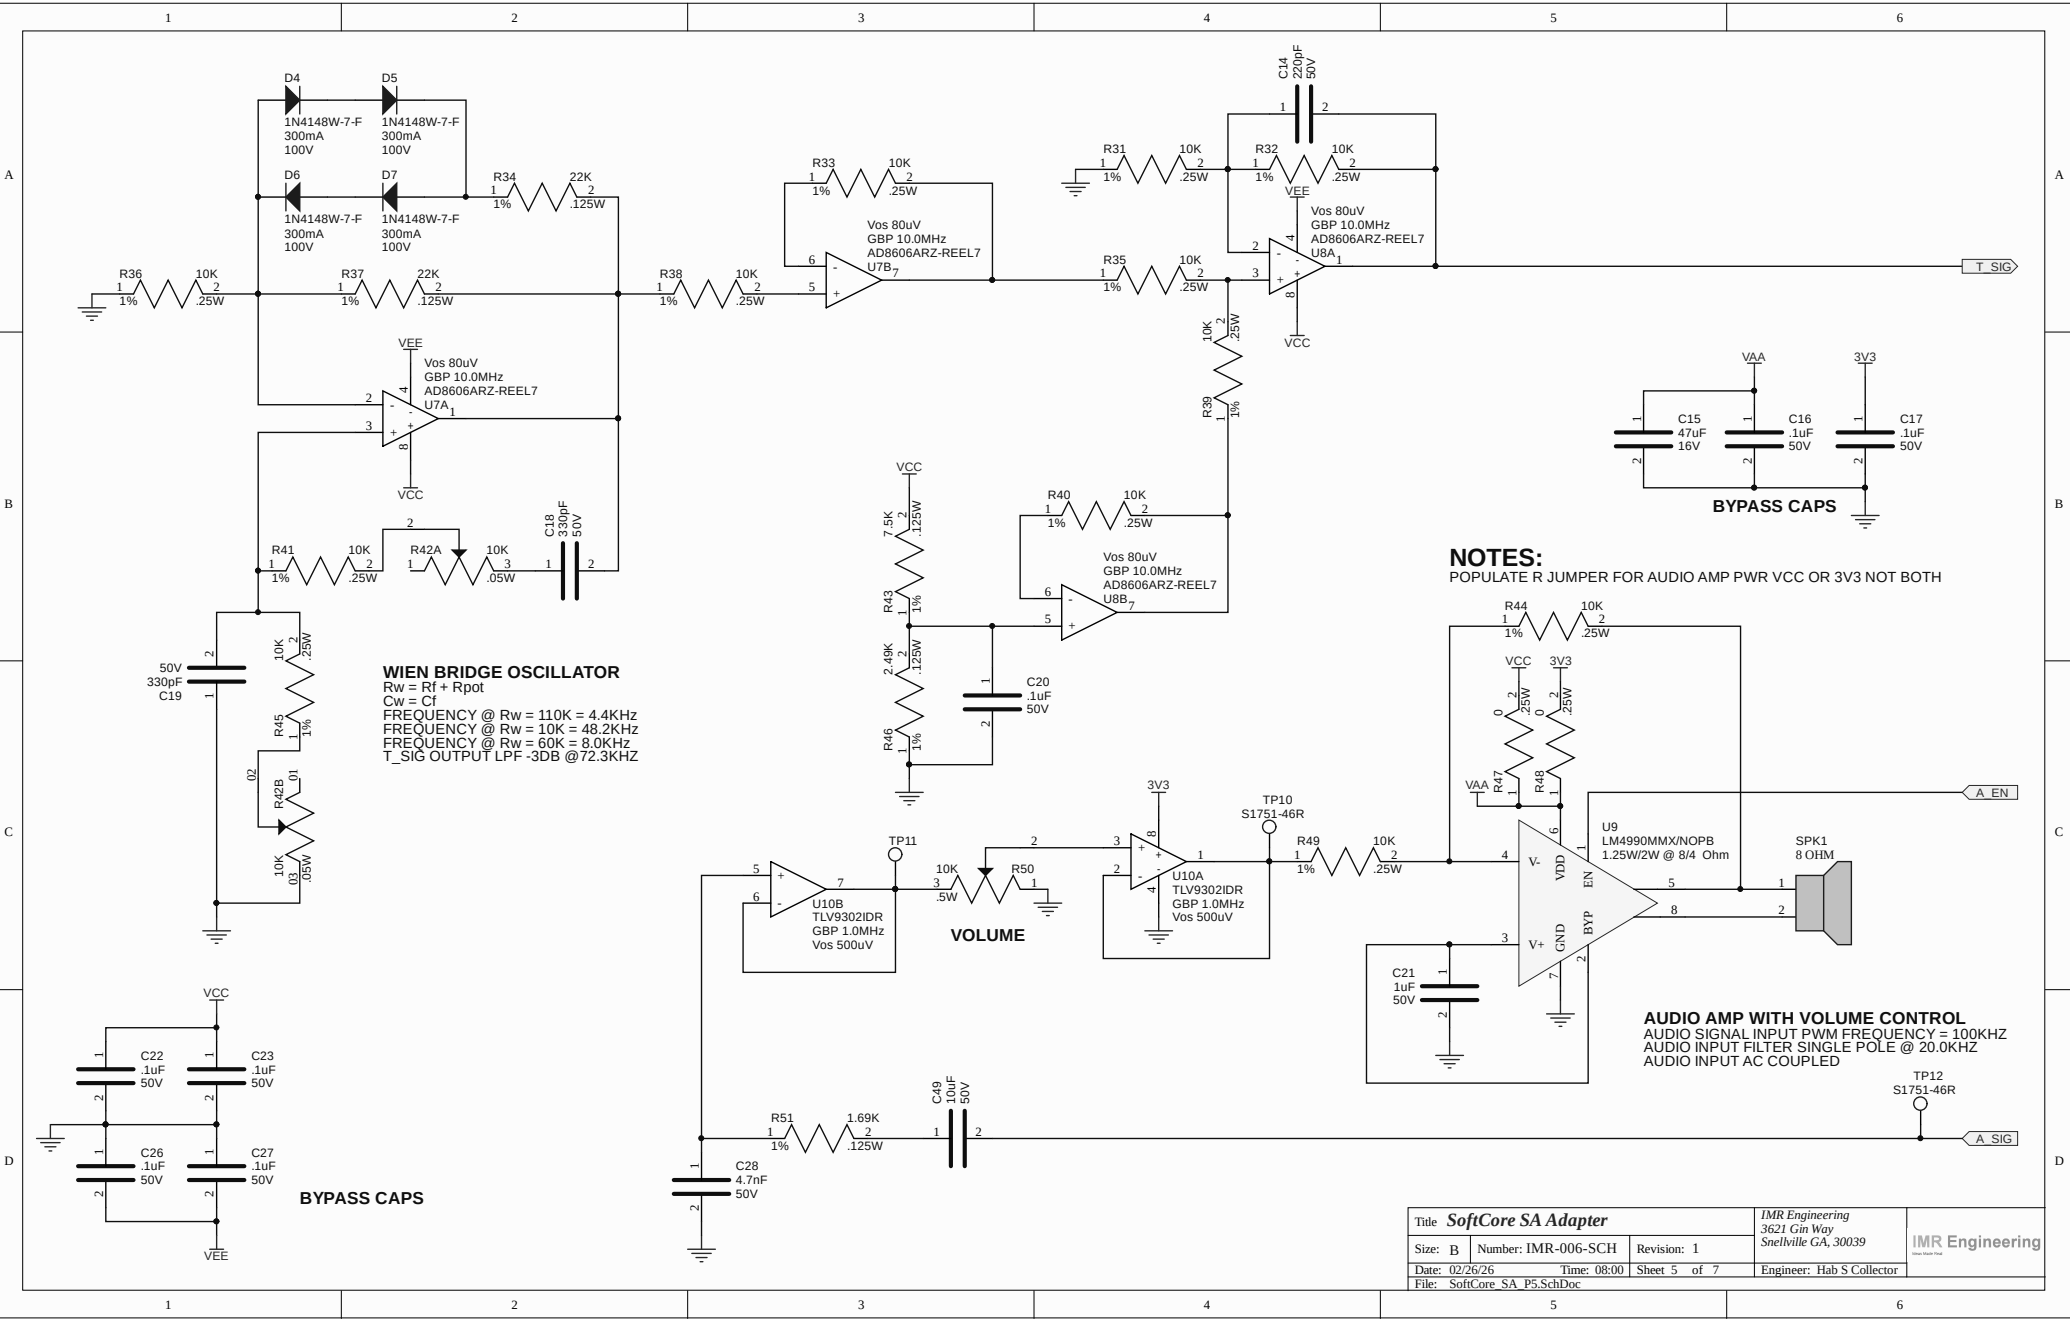


WIEN BRIDGE OSCILLATOR
 $R_w = R_f + R_{pot}$
 $C_w = C_f$
 FREQUENCY @ $R_w = 110K = 4.4KHz$
 FREQUENCY @ $R_w = 10K = 48.2KHz$
 FREQUENCY @ $R_w = 60K = 8.0KHz$
 T_SIG OUTPUT LPF -3DB @72.3KHz

NOTES:
 POPULATE R JUMPER FOR AUDIO AMP PWR VCC OR 3V3 NOT BOTH

AUDIO AMP WITH VOLUME CONTROL
 AUDIO SIGNAL INPUT PWM FREQUENCY = 100KHz
 AUDIO INPUT FILTER SINGLE POLE @ 20.0KHz
 AUDIO INPUT AC COUPLED

Title SoftCore SA Adapter			IMR Engineering 3621 Gin Way Snelville GA, 30039	
Size: B	Number: IMR-006-SCH	Revision: 1	IMR Engineering	
Date: 02/26/26	Time: 08:00	Sheet 5 of 7	Engineer: Hab S Collector	
File: SoftCore_SA_P5.SchDoc				

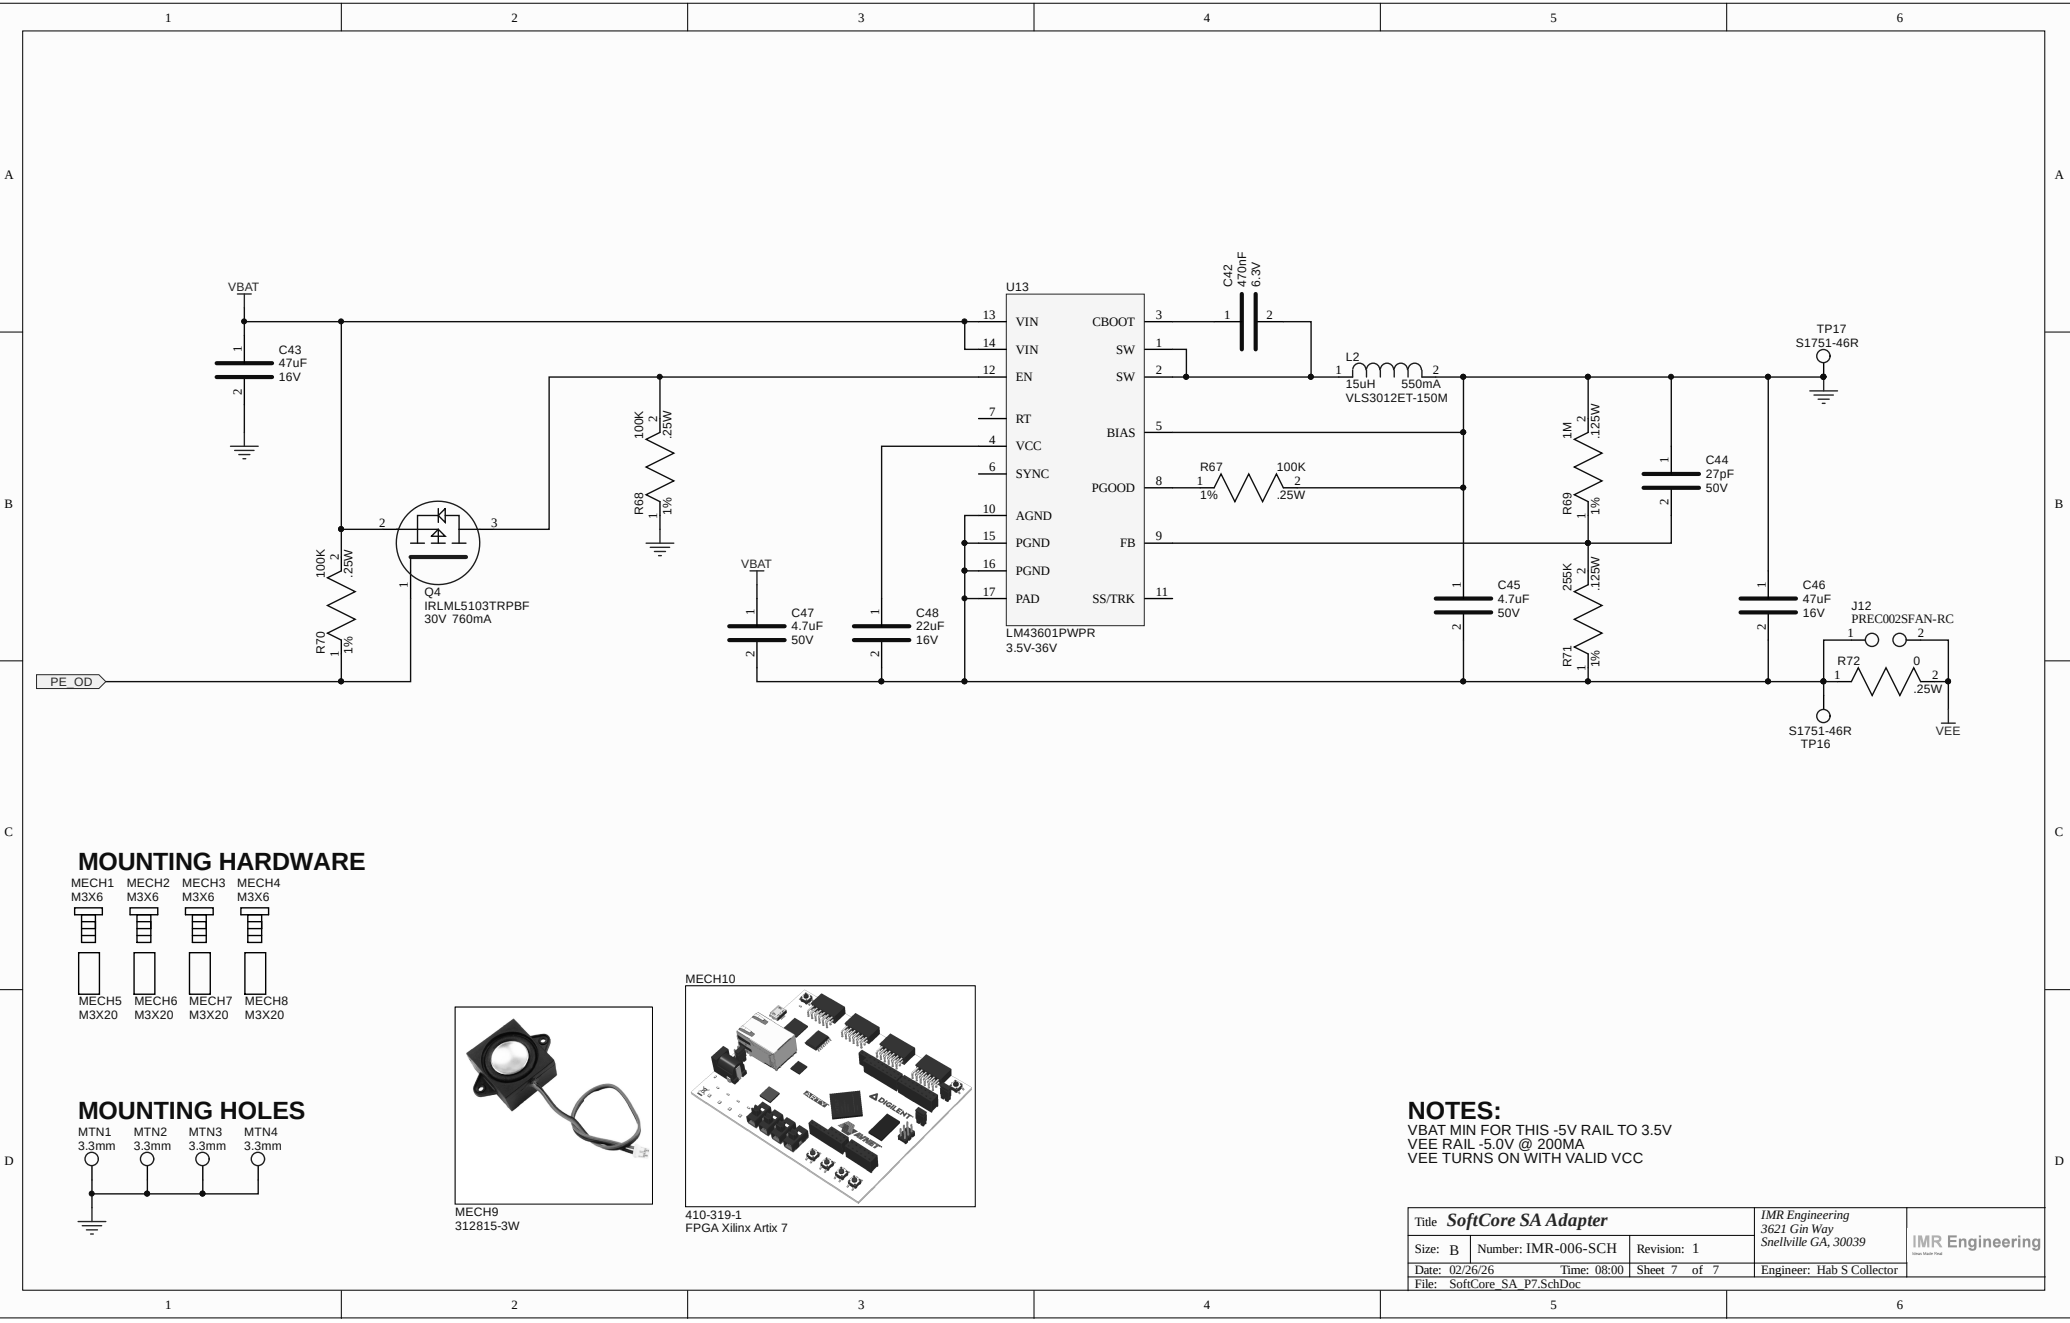

MOUNTING HARDWARE


- MECH1 M3X6
- MECH2 M3X6
- MECH3 M3X6
- MECH4 M3X6
- MECH5 M3X20
- MECH6 M3X20
- MECH7 M3X20
- MECH8 M3X20

MOUNTING HOLES

- MTN1 3.3mm
- MTN2 3.3mm
- MTN3 3.3mm
- MTN4 3.3mm




MECH9
312815-3W

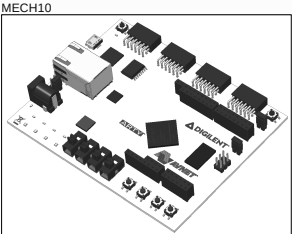

410-319-1
FPGA Xilinx Artix 7


NOTES:
VBAT MIN FOR THIS -5V RAIL TO 3.5V
VEE RAIL -5.0V @ 200mA
VEE TURNS ON WITH VALID VCC

Title SoftCore SA Adapter			IMR Engineering 3621 Gin Way Snelville GA, 30039		IMR Engineering © 2024 IMR Inc.
Size: B	Number: IMR-006-SCH	Revision: 1			
Date: 02/26/26	Time: 08:00	Sheet 7 of 7	Engineer: Hab S Collector		
File: SoftCore_SA_P7.SchDoc					

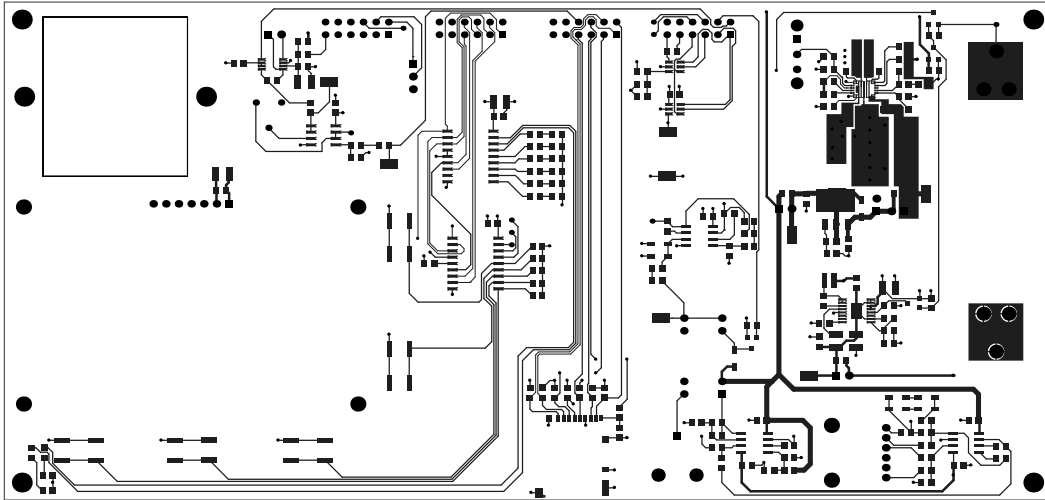


TOP


BOARD OUTLINE

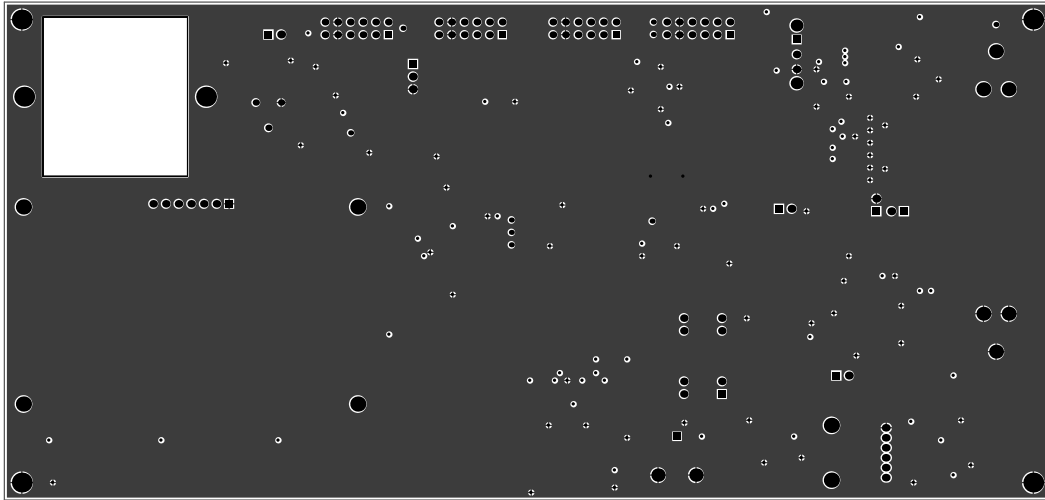

SIGNAL LAYER 1
BOARD OUTLINE

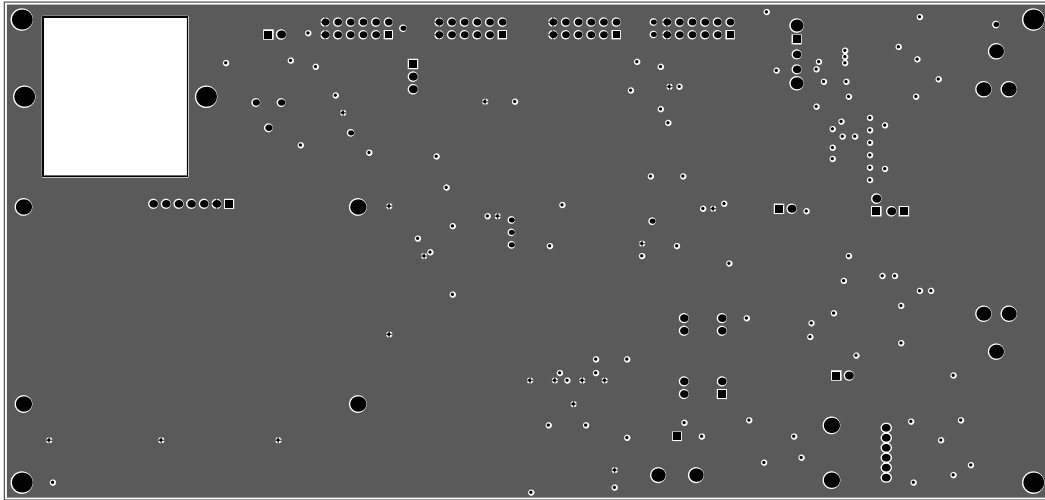


SIGNAL LAYER 2
BOARD OUTLINE

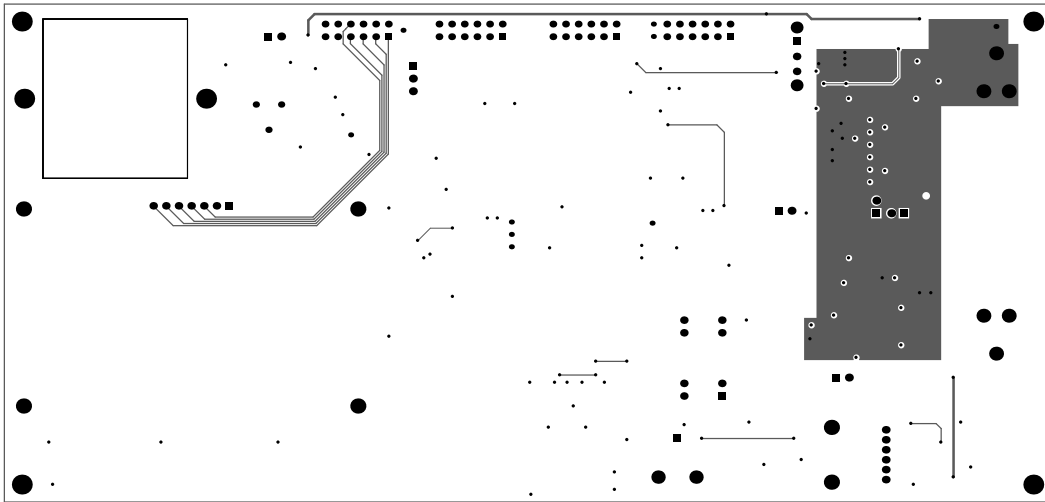


BOTTOM

BOARD OUTLINE

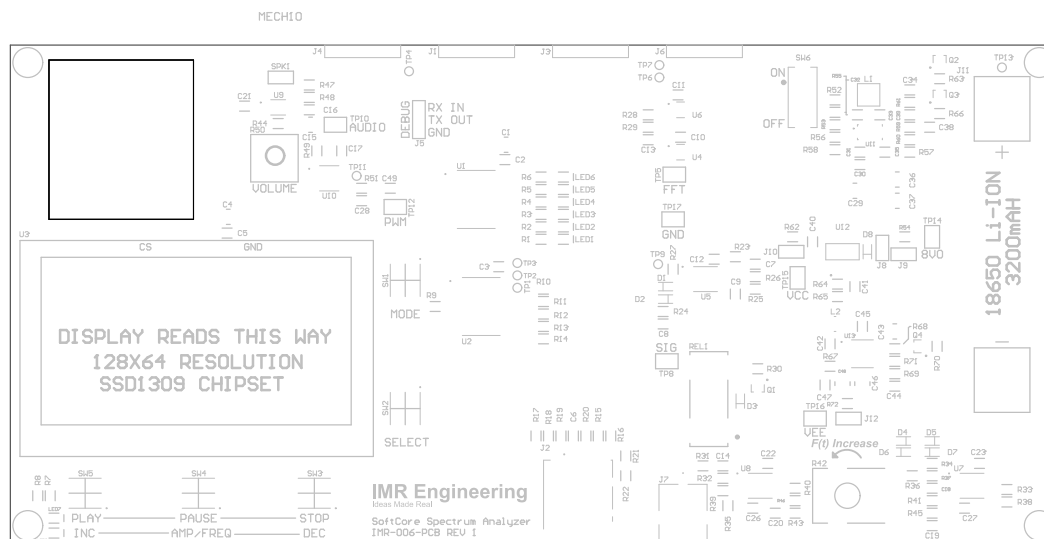


TOP SILK

BOARD OUTLINE

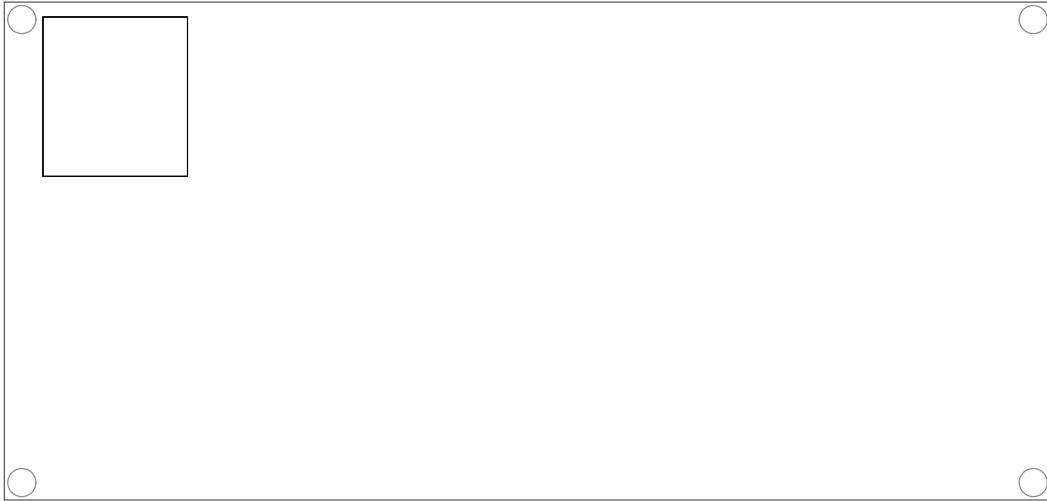


BOTTOM SILK

BOARD OUTLINE

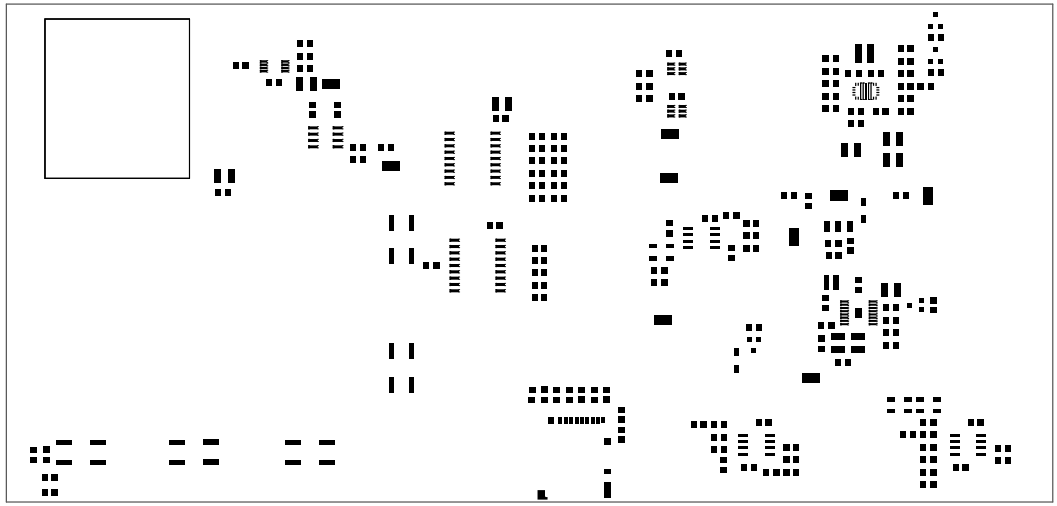


TOP PM

BOARD OUTLINE




BOTTOM PM

BOARD OUTLINE

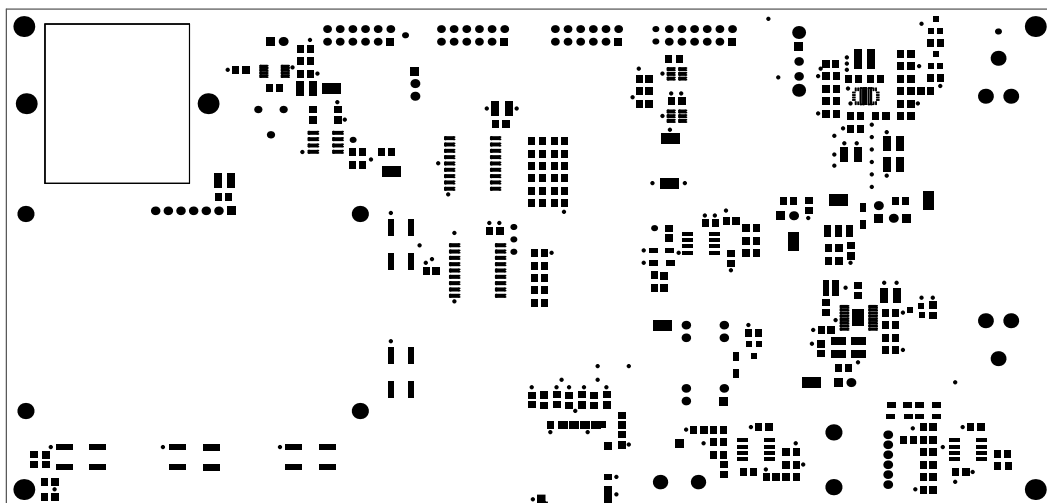

TOP SM

BOARD OUTLINE

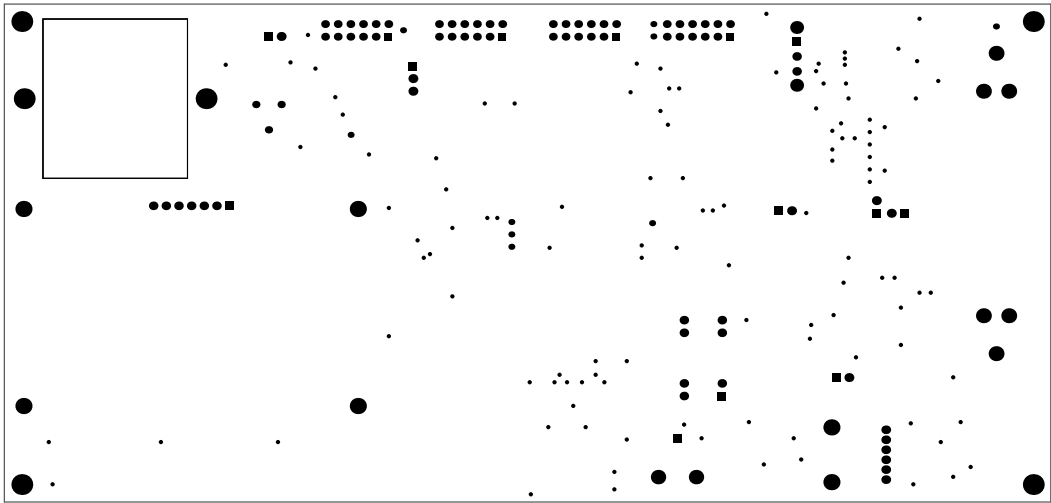

BOTTOM SM

BOARD OUTLINE

Symbol	Hit Count	Finished Hole Size	Plated	Hole Type
o	1	0.920mm (36.22mil)	PTH	Round
o	2	1.590mm (62.60mil)	PTH	Round
*	2	1.800mm (70.87mil)	PTH	Round
x	2	2.108mm (83.00mil)	PTH	Round
x	2	3.300mm (129.92mil)	NPTH	Round
ss	3	1.010mm (39.76mil)	PTH	Round
o	4	3.048mm (120.00mil)	NPTH	Round
A	4	3.300mm (129.92mil)	PTH	Round
◇	6	1.016mm (40.00mil)	PTH	Round
▽	6	1.778mm (70.00mil)	PTH	Round
o	7	0.889mm (35.00mil)	PTH	Round
o	9	0.508mm (20.00mil)	PTH	Round
▽	11	0.762mm (30.00mil)	PTH	Round
ss	13	0.900mm (35.43mil)	PTH	Round
ss	48	1.020mm (40.16mil)	PTH	Round
□	116	0.381mm (15.00mil)	PTH	Round
236 Total				

PCB FABRICATION NOTES:

MATERIAL:

FR4 (GF per MIL-P-13949) MIN UL 94V0

Cu WEIGHT:

OUTER LAYER: 1oz

INNER LAYER: 1oz

SOLDER MASK:

TYPE: LPI (LIQUID PHOTO-IMAGE)

COVER: SMOBC (SOLDER MASK OVER BARE Cu)

COLOR: RED (PROTOTYPE) OR GREEN (PRODUCTION) GLOSS

OVERALL PCB THICKNESS:

PCB: 1.6mm (63MIL)

TOLERANCE: 0.178mm (7MIL)

PCB ELECTRICAL TEST

TESTED TO GERBER DATA

PURCHASE ORDER TO OVERRIDE

HOLE DIAMETER TOLERANCE:

PLATED HOLE TOLERANCE: 0.076mm (3MIL)

NON PLATED HOLE TOLERANCE: 0.076mm (3MIL)

SILK SCREEN

SIDES: TOP

COLOR: WHITE

TYPE: LPI (PREFERRED)

SURFACE FINISH:


PROTOTYPE: HASL OR ENIG

PRODUCTION: ENIG (ONLY IF SPEC ON PURCHASE ORDER)

ACCEPTABILITY:

STANDARD: IPC-A-600 (LATEST REV)

MFG TO ADD: DATE CODE, UL FLAME CODE

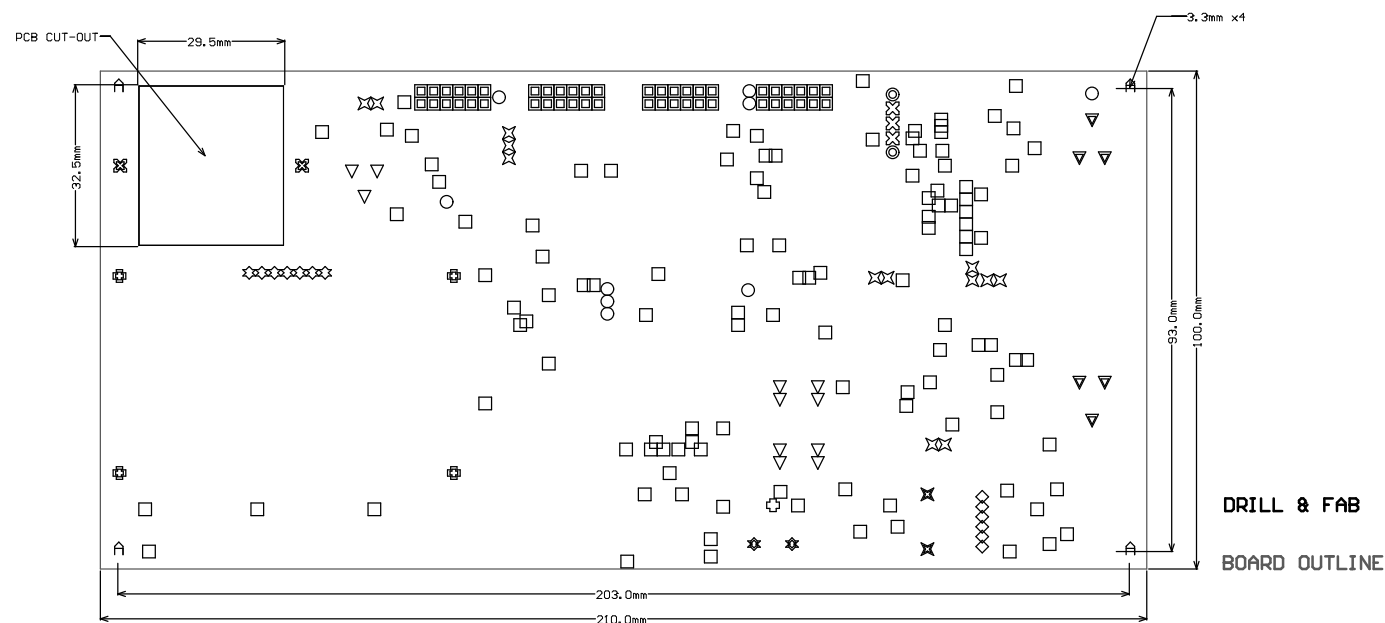

IMR Engineering	REV 1	ENGG: IMR-006-PCB
SoftCore SA	02/26/2026	Hab Collector

