\*G Denotes RoHS Compliant, Pb Free Terminal Finish.

# **ULTRAFAST SOFT RECOVERY RECTIFIER DIODE**

#### **PRODUCT APPLICATIONS**

- Anti-Parallel Diode


   Switchmode Power Supply
   Inverters
- Free Wheeling Diode -Motor Controllers
  - -Converters
- -Inverters
- Snubber Diode
- PFC

#### **PRODUCT FEATURES**

- Ultrafast Recovery Times
- Soft Recovery Characteristics
- Popular TO-247 Package or Surface Mount D<sup>3</sup>PAK Package
- Low Forward Voltage
- Low Leakage Current

#### **PRODUCT BENEFITS**

- Low Losses
- · Low Noise Switching
- Cooler Operation
- . Higher Reliability Systems
- Increased System Power Density





- 1 Cathode
- 2 Anode Back of Case - Cathode

#### **MAXIMUM RATINGS**

All Ratings:  $T_C = 25$ °C unless otherwise specified.

Symbol	Characteristic / Test Conditions	APT60D40B(G)_S(G)	UNIT
V <sub>R</sub>	Maximum D.C. Reverse Voltage		
V <sub>RRM</sub>	Maximum Peak Repetitive Reverse Voltage	400	Volts
V <sub>RWM</sub>	Maximum Working Peak Reverse Voltage		
I <sub>F(AV)</sub>	Maximum Average Forward Current (T <sub>C</sub> = 140°C, Duty Cycle = 0.5)	60	
I <sub>F(AV)</sub>	RMS Forward Current (Square wave, 50% duty)	146	Amps
I <sub>FSM</sub>	Non-Repetitive Forward Surge Current (T <sub>J</sub> = 45°C, 8.3ms)	600	
T <sub>J</sub> ,T <sub>STG</sub>	Operating and StorageTemperature Range	-55 to 175	°C
T <sub>L</sub>	Lead Temperature for 10 Sec.	300	

#### STATIC ELECTRICAL CHARACTERISTICS

Symbol	Characteristic / Test Conditions		MIN	TYP	MAX	UNIT
V <sub>F</sub>	Forward Voltage	I <sub>F</sub> = 60A		1.3	1.5	Volts
		I <sub>F</sub> = 120A		1.6		
		I <sub>F</sub> = 60A, T <sub>J</sub> = 125°C		1.2		
I <sub>RM</sub>	Maximum Reverse Leakage Current	V <sub>R</sub> = V <sub>R</sub> Rated			250	μА
		$V_R = V_R$ Rated, $T_J = 125$ °C			500	
C <sub>T</sub>	Junction Capacitance, V <sub>R</sub> = 200V			120		pF


#### **DYNAMIC CHARACTERISTICS**

Symbol	Characteristic	Test Conditions	MIN	TYP	MAX	UNIT
t <sub>rr</sub>	Reverse Recovery Time $I_F = 1A$ , $di_F/dt =$	$-100A/\mu s$ , $V_R = 30V$ , $T_J = 25^{\circ}C$	-	30		no
t <sub>rr</sub>	Reverse Recovery Time	$I_F = 60A$ , $di_F/dt = -200A/\mu s$ $V_R = 266V$ , $T_C = 25^{\circ}C$	-	37		ns
Q <sub>rr</sub>	Reverse Recovery Charge		-	80		nC
I <sub>RRM</sub>	Maximum Reverse Recovery Current		-	4	-	Amps
t <sub>rr</sub>	Reverse Recovery Time	$I_F = 60A$ , $di_F/dt = -200A/\mu s$ $V_R = 266V$ , $T_C = 125^{\circ}C$	-	110		ns
Q <sub>rr</sub>	Reverse Recovery Charge		-	540		nC
I <sub>RRM</sub>	Maximum Reverse Recovery Current		-	10	-	Amps
t <sub>rr</sub>	Reverse Recovery Time	$I_F = 60A$ , $di_F/dt = -800A/\mu s$ $V_R = 266V$ , $T_C = 125^{\circ}C$	-	65		ns
Q <sub>rr</sub>	Reverse Recovery Charge		-	1050		nC
I <sub>RRM</sub>	Maximum Reverse Recovery Current		-	27		Amps

#### THERMAL AND MECHANICAL CHARACTERISTICS

Symbol	Characteristic / Test Conditions	MIN	TYP	MAX	UNIT
$R_{\theta JC}$	Junction-to-Case Thermal Resistance			.34	°C/W
$R_{ heta JA}$	Junction-to-Ambient Thermal Resistance			40	
١٨/	Package Weight		0.22		oz
W <sub>T</sub>			5.9		g
Torque	Maximum Mounting Torque			10	lb•in
				1.1	N•m

APT Reserves the right to change, without notice, the specifications and information contained herein.

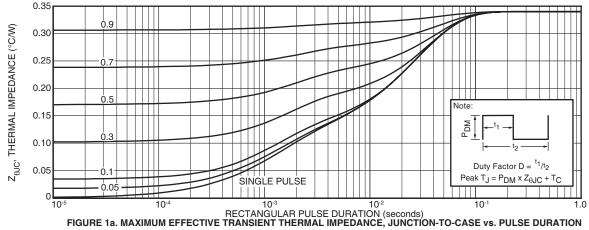

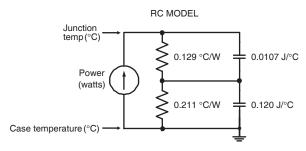
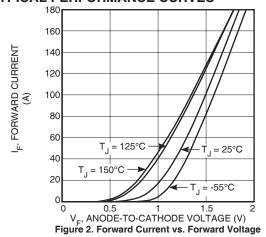


FIGURE 1b, TRANSIENT THERMAL IMPEDANCE MODEL

#### **TYPICAL PERFORMANCE CURVES**





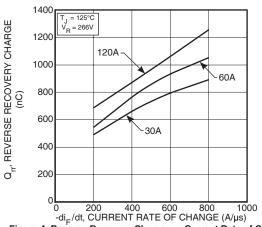


Figure 4. Reverse Recovery Charge vs. Current Rate of Change

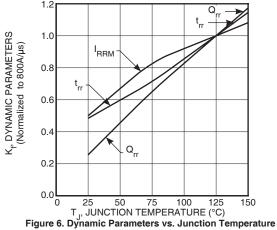

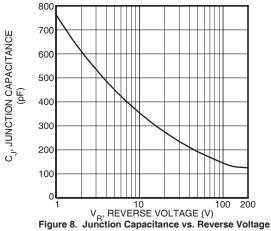

### APT60D40B(G)\_S(G)

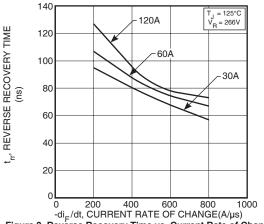


Figure 3. Reverse Recovery Time vs. Current Rate of Change

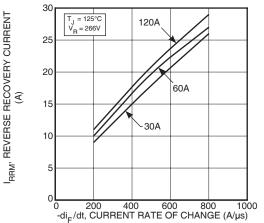


Figure 5. Reverse Recovery Current vs. Current Rate of Change

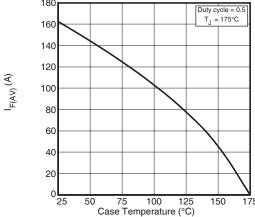


Figure 7. Maximum Average Forward Current vs. CaseTemperature

0.25 I<sub>RRM</sub>

Figure 9. Diode Test Circuit


Zero

- 1 I<sub>F</sub> Forward Conduction Current
- 2 di<sub>F</sub>/dt Rate of Diode Current Change Through Zero Crossing.
- 3 I<sub>RRM</sub> Maximum Reverse Recovery Current.
- 4 t<sub>rr</sub> Reverse Recovery Time, measured from zero crossing where diode current goes from positive to negative, to the point at which the straight line through I<sub>RRM</sub> and 0.25•I<sub>RRM</sub> passes through zero.
- $\mathbf{5}$   $\mathbf{Q}_{rr}$  Area Under the Curve Defined by  $\mathbf{I}_{RRM}$  and  $\mathbf{t}_{rr}$ .

Figure 10, Diode Reverse Recovery Waveform and Definitions

## TO-247 Package Outline

e1 SAC: Tin, Silver, Copper

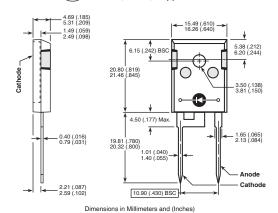

# D<sup>3</sup>PAK Package Outline

@3 100% Sn

2

