

© 2010 by Oppenheim. Published by Pearson Prentice Hall, Pearson Education, Inc., Upper Saddle River, NJ.  
All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this  
material may be reproduced, in any form or by any means, without permission in writing from the publisher.

**3.1. (a)**

$$\mathcal{Z}\left[\left(\frac{1}{2}\right)^n u[n]\right] = \sum_{n=0}^{\infty} \left(\frac{1}{2}\right)^n z^{-n} = \sum_{n=0}^{\infty} \left(\frac{1}{2z}\right)^n = \frac{1}{1 - \frac{1}{2}z^{-1}} \quad |z| > \frac{1}{2}$$

(b)

$$\begin{aligned} \mathcal{Z}\left[-\left(\frac{1}{2}\right)^n u(-n-1)\right] &= -\sum_{n=-\infty}^{-1} \left(\frac{1}{2}\right)^n z^{-n} = -\sum_{n=1}^{\infty} (2z)^n \\ &= -\frac{2z}{1-2z} = \frac{1}{1-\frac{1}{2}z^{-1}} \quad |z| < \frac{1}{2} \end{aligned}$$

(c)

$$\mathcal{Z}\left[\left(\frac{1}{2}\right)^n u[-n]\right] = \sum_{n=-\infty}^0 (2z)^n = \frac{1}{1-2z} \quad |z| < \frac{1}{2}$$

(d)

$$\mathcal{Z}[\delta[n]] = z^0 = 1 \quad \text{all } z$$

(e)


$$\mathcal{Z}[\delta[n-1]] = z^{-1} \quad |z| > 0$$

(f)

$$\mathcal{Z}[\delta[n+1]] = z^{+1} \quad 0 \leq |z| < \infty$$

(g)

$$\mathcal{Z}\left[\left(\frac{1}{2}\right)^n (u[n] - u[n-10])\right] = \sum_{n=0}^9 \left(\frac{1}{2z}\right)^n = \frac{1 - (2z)^{-10}}{1 - (2z)^{-1}} \quad |z| > 0$$



© 2010 by Oppenheim. Published by Pearson Prentice Hall, Pearson Education, Inc., Upper Saddle River, NJ.  
All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this  
material may be reproduced, in any form or by any means, without permission in writing from the publisher.

**3.2.**

$$x[n] = \begin{cases} n, & 0 \leq n \leq N-1 \\ N, & N \leq n \end{cases} = n u[n] - (n-N)u[n-N]$$


$$n x[n] \Leftrightarrow -z \frac{d}{dz} X(z) \Rightarrow n u[n] \Leftrightarrow -z \frac{d}{dz} \frac{1}{1-z^{-1}} \quad |z| > 1$$


$$n u[n] \Leftrightarrow \frac{z^{-1}}{(1-z^{-1})^2} \quad |z| > 1$$

$$x[n-n_0] \Leftrightarrow X(z) \cdot z^{-n_0} \Rightarrow (n-N)u[n-N] \Leftrightarrow \frac{z^{-N-1}}{(1-z^{-1})^2} \quad |z| > 1$$

therefore

$$X(z) = \frac{z^{-1} - z^{-N-1}}{(1-z^{-1})^2} = \frac{z^{-1}(1-z^{-N})}{(1-z^{-1})^2}$$






© 2010 by Oppenheim. Published by Pearson Prentice Hall, Pearson Education, Inc., Upper Saddle River, NJ.  
All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this  
material may be reproduced, in any form or by any means, without permission in writing from the publisher.

## 3.3. (a)

$$x_a[n] = \alpha^{|n|} \quad 0 < |\alpha| < 1$$

$$\begin{aligned} X_a(z) &= \sum_{n=-\infty}^{-1} \alpha^{-n} z^{-n} + \sum_{n=0}^{\infty} \alpha^n z^{-n} \\ &= \sum_{n=1}^{\infty} \alpha^n z^n + \sum_{n=0}^{\infty} \alpha^n z^{-n} \\ &= \frac{\alpha z}{1 - \alpha z} + \frac{1}{1 - \alpha z^{-1}} = \frac{z(1 - \alpha^2)}{(1 - \alpha z)(z - \alpha)}, \quad |\alpha| < |z| < \frac{1}{|\alpha|} \end{aligned}$$

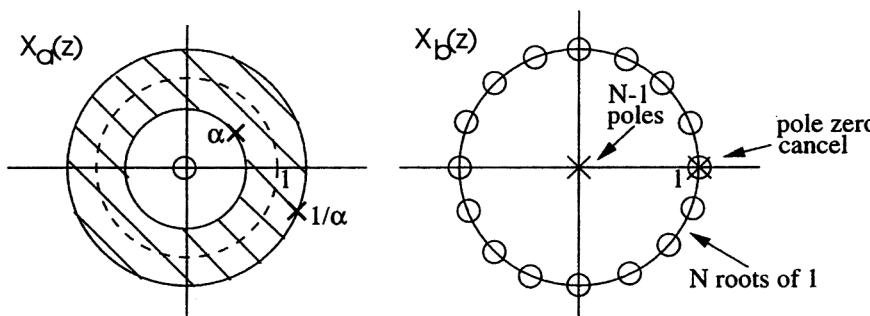



## (b)


$$x_b = \begin{cases} 1, & 0 \leq n \leq N-1 \\ 0, & N \leq n \\ 0, & n < 0 \end{cases} \Rightarrow X_b(z) = \sum_{n=0}^{N-1} z^{-n} = \frac{1 - z^{-N}}{1 - z^{-1}} = \frac{z^N - 1}{z^{N-1}(z - 1)} \quad z \neq 0$$

## (c)

$$x_c[n] = x_b[n-1] * x_b[n] \Leftrightarrow X_c(z) = z^{-1} X_b(z) \cdot X_b(z)$$


$$X_c(z) = z^{-1} \left( \frac{z^N - 1}{z^{N-1}(z - 1)} \right)^2 = \frac{1}{z^{2N-1}} \left( \frac{z^N - 1}{z - 1} \right)^2 \quad z \neq 0, 1$$

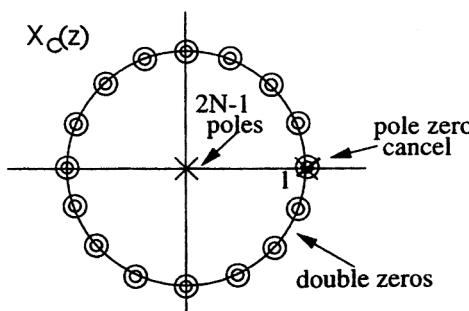





© 2010 by Oppenheim. Published by Pearson Prentice Hall, Pearson Education, Inc., Upper Saddle River, NJ.  
All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this  
material may be reproduced, in any form or by any means, without permission in writing from the publisher.

3.4. The pole-zero plot of  $X(z)$  appears below.

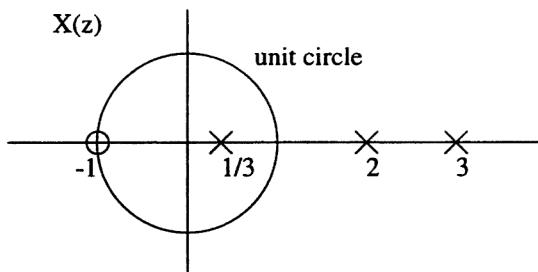

- (a) For the Fourier transform of  $x[n]$  to exist, the  $z$ -transform of  $x[n]$  must have an ROC which includes the unit circle, therefore,  $|\frac{1}{3}| < |z| < |2|$ . Since this ROC lies outside  $\frac{1}{3}$ , this pole contributes a right-sided sequence. Since the ROC lies inside 2 and 3, these poles contribute left-sided sequences. The overall  $x[n]$  is therefore two-sided.
- (b) Two-sided sequences have ROC's which look like washers. There are two possibilities. The ROC's corresponding to these are:  $|\frac{1}{3}| < |z| < |2|$  and  $|2| < |z| < |3|$ .
- (c) The ROC must be a connected region. For stability, the ROC must contain the unit circle. For causality the ROC must be outside the outermost pole. These conditions cannot be met by any of the possible ROC's of this pole-zero plot.






© 2010 by Oppenheim. Published by Pearson Prentice Hall, Pearson Education, Inc., Upper Saddle River, NJ.  
All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this  
material may be reproduced, in any form or by any means, without permission in writing from the publisher.


**3.5.**

$$\begin{aligned} X(z) &= (1 + 2z)(1 + 3z^{-1})(1 - z^{-1}) \\ &= 2z + 5 - 4z^{-1} - 3z^{-2} \\ &= \sum_{n=-\infty}^{\infty} x[n]z^{-n} \end{aligned}$$

Therefore,

$$x[n] = 2\delta[n+1] + 5\delta[n] - 4\delta[n-1] - 3\delta[n-2]$$





© 2010 by Oppenheim. Published by Pearson Prentice Hall, Pearson Education, Inc., Upper Saddle River, NJ.  
All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

**3.6. (a)**

$$X(z) = \frac{1}{1 + \frac{1}{2}z^{-1}} \quad |z| > \frac{1}{2}$$

Partial fractions: one pole  $\rightarrow$  inspection,  $x[n] = (-\frac{1}{2})^n u[n]$

Long division:

$$\begin{array}{r} 1 - \frac{1}{2}z^{-1} + \frac{1}{4}z^{-2} + \dots \\ 1 + \frac{1}{2}z^{-1} \overline{)1} \\ \underline{1 + \frac{1}{2}z^{-1}} \\ - \frac{1}{2}z^{-1} \\ \underline{- \frac{1}{2}z^{-1} - \frac{1}{4}z^{-2}} \\ + \frac{1}{4}z^{-2} \\ \underline{+ \frac{1}{4}z^{-2} + \frac{1}{8}z^{-3}} \end{array}$$

$$\Rightarrow x[n] = \left(-\frac{1}{2}\right)^n u[n]$$

**(b)**

$$X(z) = \frac{1}{1 + \frac{1}{2}z^{-1}} \quad |z| < \frac{1}{2}$$

Partial Fractions: one pole  $\rightarrow$  inspection,  $x[n] = -(-\frac{1}{2})^n u[-n-1]$

Long division:

$$\begin{array}{r} 2z - 4z^2 + 8z^3 + \dots \\ \frac{1}{2}z^{-1} + 1 \overline{)1} \\ \underline{1 + 2z} \\ - 2z \\ \underline{- 2z - 4z^2} \\ + 4z^2 \\ \underline{+ 4z^2 + 8z^3} \end{array}$$

$$\Rightarrow x[n] = -\left(-\frac{1}{2}\right)^n u[-n-1]$$

**(c)**

$$X(z) = \frac{1 - \frac{1}{2}z^{-1}}{1 + \frac{3}{4}z^{-1} + \frac{1}{8}z^{-2}} \quad |z| > \frac{1}{2}$$


Partial Fractions:

$$\begin{aligned} X(z) &= \frac{-3}{1 + \frac{1}{4}z^{-1}} + \frac{4}{1 + \frac{1}{2}z^{-1}} \quad |z| > \frac{1}{2} \\ x[n] &= \left[ -3\left(-\frac{1}{4}\right)^n + 4\left(-\frac{1}{2}\right)^n \right] u[n] \end{aligned}$$

Long division:

$$\begin{array}{r} 1 + (-\frac{3}{4} - \frac{1}{2})z^{-1} + (-\frac{3}{16} + 1)z^{-2} + \dots \\ 1 + \frac{3}{4}z^{-1} + \frac{1}{8}z^{-2} \overline{)1} \\ \underline{1 - \frac{1}{2}z^{-1}} \\ 1 + \frac{3}{4}z^{-1} + \frac{1}{8}z^{-2} \\ \underline{(-\frac{3}{4} - \frac{1}{2})z^{-1} - \frac{1}{8}z^{-2}} \\ (-\frac{3}{4} - \frac{1}{2})z^{-1} + \frac{3}{4}(-\frac{3}{4} - \frac{1}{2})z^{-2} + \frac{1}{8}(-\frac{3}{4} - \frac{1}{2})z^{-3} \\ \underline{[-\frac{1}{8} + \frac{3}{4}(\frac{3}{4} + \frac{1}{2})]z^{-2} + \frac{1}{8}(\frac{3}{4} + \frac{1}{2})z^{-3}} \end{array}$$

$$\Rightarrow x[n] = \left[ -3\left(-\frac{1}{4}\right)^n + \left(-\frac{1}{2}\right)^{n-2} \right] u[n]$$



© 2010 by Oppenheim. Published by Pearson Prentice Hall, Pearson Education, Inc., Upper Saddle River, NJ.  
All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this  
material may be reproduced, in any form or by any means, without permission in writing from the publisher.

(d)

$$X(z) = \frac{1 - \frac{1}{2}z^{-1}}{1 - \frac{1}{4}z^{-2}} \quad |z| > \frac{1}{2}$$

**Partial Fractions:**

$$\begin{aligned} X(z) &= \frac{1 - \frac{1}{2}z^{-1}}{1 - \frac{1}{4}z^{-2}} = \frac{1}{1 + \frac{1}{2}z^{-1}} \quad |z| > \frac{1}{2} \\ x[n] &= \left(-\frac{1}{2}\right)^n u[n] \end{aligned}$$

**Long division: see part (i) above.**

(e)


$$X(z) = \frac{1 - az^{-1}}{z^{-1} - a} \quad |z| > |a^{-1}|$$

**Partial Fractions:**

$$\begin{aligned} X(z) &= -a - \frac{a^{-1}(1 - a^2)}{1 - a^{-1}z^{-1}} \quad |z| > |a^{-1}| \\ x[n] &= -a\delta[n] - (1 - a^2)a^{-(n+1)}u[n] \end{aligned}$$

**Long division:**

$$\begin{array}{r} \begin{matrix} -\frac{1}{a} & -(\frac{a^{-1}-a}{a})z^{-1} & -(\frac{a^{-1}-a}{a^2})z^{-2} & + \dots \end{matrix} \\[-1ex] -a + z^{-1} \overline{) \begin{matrix} 1 & -az^{-1} \\ 1 & -az^{-1} \\ \hline (a^{-1}-a)z^{-1} & \dots \end{matrix}} \\[-1ex] \Rightarrow x[n] = -a\delta[n] - (1 - a^2)a^{-(n+1)}u[n] \end{array}$$



© 2010 by Oppenheim. Published by Pearson Prentice Hall, Pearson Education, Inc., Upper Saddle River, NJ.  
All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this  
material may be reproduced, in any form or by any means, without permission in writing from the publisher.

**3.7. (a)**

$$\begin{aligned}x[n] &= u[-n-1] + \left(\frac{1}{2}\right)^n u[n] \\ \Rightarrow X(z) &= \frac{-1}{1-z^{-1}} + \frac{1}{1-\frac{1}{2}z^{-1}} \quad \frac{1}{2} < |z| < 1\end{aligned}$$

Now to find  $H(z)$  we simply use  $H(z) = Y(z)/X(z)$ ; i.e.,

$$H(z) = \frac{Y(z)}{X(z)} = \frac{-\frac{1}{2}z^{-1}}{(1-\frac{1}{2}z^{-1})(1+z^{-1})} \cdot \frac{(1-z^{-1})(1-\frac{1}{2}z^{-1})}{-\frac{1}{2}z^{-1}} = \frac{1-z^{-1}}{1+z^{-1}}$$

$H(z)$  causal  $\Rightarrow$  ROC  $|z| > 1$ .


- (b) Since one of the poles of  $X(z)$ , which limited the ROC of  $X(z)$  to be less than 1, is cancelled by the zero of  $H(z)$ , the ROC of  $Y(z)$  is the region in the  $z$ -plane that satisfies the remaining two constraints  $|z| > \frac{1}{2}$  and  $|z| > 1$ . Hence  $Y(z)$  converges on  $|z| > 1$ .


(c)

$$Y(z) = \frac{-\frac{1}{3}}{1-\frac{1}{2}z^{-1}} + \frac{\frac{1}{3}}{1+z^{-1}} \quad |z| > 1$$

Therefore,

$$y[n] = -\frac{1}{3} \left(\frac{1}{2}\right)^n u[n] + \frac{1}{3} (-1)^n u[n]$$





© 2010 by Oppenheim. Published by Pearson Prentice Hall, Pearson Education, Inc., Upper Saddle River, NJ.  
All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this  
material may be reproduced, in any form or by any means, without permission in writing from the publisher.

### 3.8. The causal system has system function

$$H(z) = \frac{1 - z^{-1}}{1 + \frac{3}{4}z^{-1}}$$

and the input is  $x[n] = (\frac{1}{3})^n u[n] + u[-n - 1]$ . Therefore the  $z$ -transform of the input is

$$X(z) = \frac{1}{1 - \frac{1}{3}z^{-1}} - \frac{1}{1 - z^{-1}} = \frac{-\frac{2}{3}z^{-1}}{(1 - \frac{1}{3}z^{-1})(1 - z^{-1})} \quad \frac{1}{3} < |z| < 1$$

(a)  $h[n]$  causal  $\Rightarrow$

$$h[n] = \left(-\frac{3}{4}\right)^n u[n] - \left(-\frac{3}{4}\right)^{n-1} u[n-1]$$


(b)


$$\begin{aligned} Y(z) &= X(z)H(z) = \frac{-\frac{2}{3}z^{-1}}{(1 - \frac{1}{3}z^{-1})(1 + \frac{3}{4}z^{-1})} \quad \frac{3}{4} < |z| \\ &= \frac{-\frac{8}{13}}{1 - \frac{1}{3}z^{-1}} + \frac{\frac{8}{13}}{1 + \frac{3}{4}z^{-1}} \end{aligned}$$

Therefore the output is

$$y[n] = -\frac{8}{13} \left(\frac{1}{3}\right)^n u[n] + \frac{8}{13} \left(-\frac{3}{4}\right)^n u[n]$$

(c) For  $h[n]$  to be causal the ROC of  $H(z)$  must be  $\frac{3}{4} < |z|$  which includes the unit circle. Therefore,  $h[n]$  absolutely summable.





© 2010 by Oppenheim. Published by Pearson Prentice Hall, Pearson Education, Inc., Upper Saddle River, NJ.  
All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this  
material may be reproduced, in any form or by any means, without permission in writing from the publisher.

**3.9.**

$$H(z) = \frac{1 + z^{-1}}{(1 - \frac{1}{2}z^{-1})(1 + \frac{1}{4}z^{-1})} = \frac{2}{(1 - \frac{1}{2}z^{-1})} - \frac{1}{(1 + \frac{1}{4}z^{-1})}$$

(a)  $h[n]$  causal  $\Rightarrow$  ROC outside  $|z| = \frac{1}{2} \Rightarrow |z| > \frac{1}{2}$ .


(b) ROC includes  $|z| = 1 \Rightarrow$  stable.


(c)

$$\begin{aligned} y[n] &= -\frac{1}{3} \left(-\frac{1}{4}\right)^n u[n] - \frac{4}{3}(2)^n u[-n-1] \\ Y(z) &= \frac{-\frac{1}{3}}{1 + \frac{1}{4}z^{-1}} + \frac{\frac{4}{3}}{1 - 2z^{-1}} \\ &= \frac{1 + z^{-1}}{(1 + \frac{1}{4}z^{-1})(1 - 2z^{-1})} \quad \frac{1}{4} < |z| < 2 \\ X(z) &= \frac{Y(z)}{H(z)} = \frac{(1 - \frac{1}{2}z^{-1})}{(1 - 2z^{-1})} \quad |z| < 2 \\ x[n] &= -(2)^n u[-n-1] + \frac{1}{2}(2)^{n-1} u[-n] \end{aligned}$$

(d)

$$h[n] = 2 \left(\frac{1}{2}\right)^n u[n] - \left(-\frac{1}{4}\right)^n u[n]$$





© 2010 by Oppenheim. Published by Pearson Prentice Hall, Pearson Education, Inc., Upper Saddle River, NJ.  
All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this  
material may be reproduced, in any form or by any means, without permission in writing from the publisher.

**3.10. (a)**

$$\begin{aligned}x[n] &= \left(\frac{1}{2}\right)^n u[n-10] + \left(\frac{3}{4}\right)^n u[n-10] \\&= \left(\frac{1}{2}\right)^n u[n] + \left(\frac{3}{4}\right)^n u[n] \\&\quad - \left[ \left( \left(\frac{1}{2}\right)^n + \left(\frac{3}{4}\right)^n \right) (u[n] - u[n-11]) \right]\end{aligned}$$

The last term is finite length and converges everywhere except at  $z = 0$ .  
Therefore, ROC outside largest pole  $\frac{3}{4} < |z|$ .

**(b)**

$$x[n] = \begin{cases} 1, & -10 \leq n \leq 10 \\ 0, & \text{otherwise} \end{cases}$$

Finite length but has positive and negative powers at  $z$  in its  $X(z)$ . Therefore the ROC is  $0 < |z| < \infty$ .

**(c)**

$$\begin{aligned}x[n] &= 2^n u[-n] = \left(\frac{1}{2}\right)^{-n} u[-n] \\x[-n] &\leftrightarrow X(1/z) \\ \left(\frac{1}{2}\right)^n u[n] &\Rightarrow \text{ROC is } |z| > \frac{1}{2} \\ \left(\frac{1}{2}\right)^{-n} u[-n] &\Rightarrow \text{ROC is } |z| < 2\end{aligned}$$

**(d)**

$$x[n] = \left[ \left(\frac{1}{4}\right)^{n+4} - (e^{j\pi/3})^n \right] u[n-1]$$

$x[n]$  is right-sided, so its ROC extends outward from the outermost pole  $e^{j\pi/3}$ . But since it is non-zero at  $n = -1$ , the ROC does not include  $\infty$ . So the ROC is  $1 < |z| < \infty$ .

**(e)**


$$\begin{aligned}x[n] &= u[n+10] - u[n+5] \\&= \begin{cases} 1, & -10 \leq n \leq -6 \\ 0, & \text{otherwise} \end{cases}\end{aligned}$$

$x[n]$  is finite-length and has only positive powers of  $z$  in its  $X(z)$ . So the ROC is  $|z| < \infty$ .

**(f)**

$$x[n] = \left(\frac{1}{2}\right)^{n-1} u[n] + (2+3j)^{n-2} u[-n-1]$$

$x[n]$  is two-sided, with two poles. Its ROC is the ring between the two poles:  $\frac{1}{2} < |z| < \left|\frac{1}{2+3j}\right|$ , or  $\frac{1}{2} < |z| < \frac{1}{\sqrt{13}}$ .



© 2010 by Oppenheim. Published by Pearson Prentice Hall, Pearson Education, Inc., Upper Saddle River, NJ.  
All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this  
material may be reproduced, in any form or by any means, without permission in writing from the publisher.

**3.11.**

$$x[n] \text{ causal} \Rightarrow X(z) = \sum_{n=0}^{\infty} x[n]z^{-n}$$

which means this summation will include *no* positive powers of  $z$ . This means that the closed form of  $X(z)$  must converge at  $z = \infty$ , i.e.,  $z = \infty$  must be in the ROC of  $X(z)$ , or  $\lim_{z \rightarrow \infty} X(z) \neq \infty$ .

(a)

$$\lim_{z \rightarrow \infty} \frac{(1 - z^{-1})^2}{(1 - \frac{1}{2}z^{-1})} = 1 \quad \text{could be causal}$$

(b)


$$\lim_{z \rightarrow \infty} \frac{(z - 1)^2}{(z - \frac{1}{2})} = \infty \quad \text{could not be causal}$$


(c)

$$\lim_{z \rightarrow \infty} \frac{(z - \frac{1}{4})^5}{(z - \frac{1}{2})^6} = 0 \quad \text{could be causal}$$

(d)

$$\lim_{z \rightarrow \infty} \frac{(z - \frac{1}{4})^6}{(z - \frac{1}{2})^5} = \infty \quad \text{could not be causal}$$





© 2010 by Oppenheim. Published by Pearson Prentice Hall, Pearson Education, Inc., Upper Saddle River, NJ.  
All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this  
material may be reproduced, in any form or by any means, without permission in writing from the publisher.

**3.12. (a)**


$$X_1(z) = \frac{1 - \frac{1}{2}z^{-1}}{1 + 2z^{-1}}$$

The pole is at -2, and the zero is at 1/2.

(b)

$$X_2(z) = \frac{1 - \frac{1}{3}z^{-1}}{(1 + \frac{1}{2}z^{-1})(1 - \frac{2}{3}z^{-1})}$$



The poles are at -1/2 and 2/3, and the zero is at 1/3. Since  $x_2[n]$  is causal, the ROC is extends from the outermost pole:  $|z| > 2/3$ .

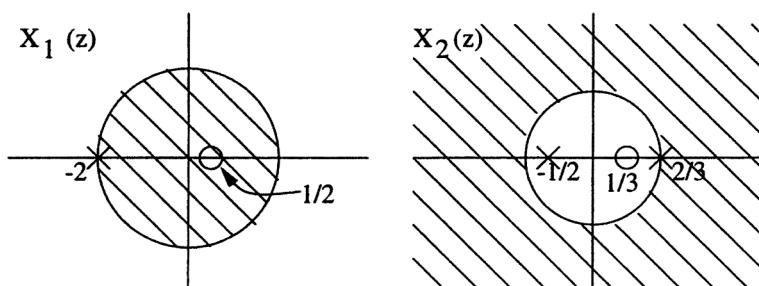


(c)

$$X_3(z) = \frac{1 + z^{-1} - 2z^{-2}}{1 - \frac{13}{6}z^{-1} + z^{-2}}$$

The poles are at 3/2 and 2/3, and the zeros are at 1 and -2. Since  $x_3[n]$  is absolutely summable, the ROC must include the unit circle:  $2/3 < |z| < 3/2$ .

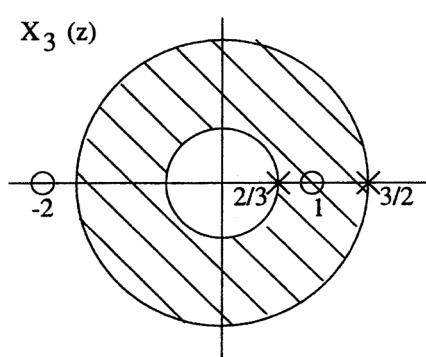




© 2010 by Oppenheim. Published by Pearson Prentice Hall, Pearson Education, Inc., Upper Saddle River, NJ.  
All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this  
material may be reproduced, in any form or by any means, without permission in writing from the publisher.


**3.13.**

$$\begin{aligned}G(z) &= \sin(z^{-1})(1 + 3z^{-2} + 2z^{-4}) \\&= (z^{-1} - \frac{z^{-3}}{3!} + \frac{z^{-5}}{5!} - \frac{z^{-7}}{7!})(1 + 3z^{-2} + 2z^{-4}) \\&= \sum_n g[n]z^{-n}\end{aligned}$$

$g[11]$  is simply the coefficient in front of  $z^{-11}$  in this power series expansion of  $G(z)$ :

$$g[11] = -\frac{1}{11!} + \frac{3}{9!} - \frac{2}{11!}$$





© 2010 by Oppenheim. Published by Pearson Prentice Hall, Pearson Education, Inc., Upper Saddle River, NJ.  
All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this  
material may be reproduced, in any form or by any means, without permission in writing from the publisher.

**3.14.**


$$\begin{aligned}H(z) &= \frac{1}{1 - \frac{1}{4}z^{-2}} \\&= \frac{1}{(1 - \frac{1}{2}z^{-1})(1 + \frac{1}{2}z^{-1})} \\&= \frac{0.5}{1 - \frac{1}{2}z^{-1}} + \frac{0.5}{1 + \frac{1}{2}z^{-1}}\end{aligned}$$


Taking the inverse z-Transform:

$$h[n] = \frac{1}{2}(\frac{1}{2})^n u[n] + \frac{1}{2}(-\frac{1}{2})^n u[n]$$

So,

$$A_1 = \frac{1}{2}; \quad \alpha_1 = \frac{1}{2}; \quad A_2 = \frac{1}{2}; \quad \alpha_2 = -\frac{1}{2};$$





© 2010 by Oppenheim. Published by Pearson Prentice Hall, Pearson Education, Inc., Upper Saddle River, NJ.  
All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this  
material may be reproduced, in any form or by any means, without permission in writing from the publisher.


**3.15.** Using long division, we get


$$\begin{aligned} H(z) &= \frac{1 - \frac{1}{1024}z^{-10}}{1 - \frac{1}{2}z^{-1}} \\ &= \sum_{n=0}^{n=9} \left(\frac{1}{2}\right)^n z^{-n} \end{aligned}$$

Taking the inverse z-transform,

$$h[n] = \begin{cases} \left(\frac{1}{2}\right)^n, & n = 0, 1, 2, \dots, 9 \\ 0, & \text{otherwise} \end{cases}$$

Since  $h[n]$  is 0 for  $n < 0$ , the system is causal.





© 2010 by Oppenheim. Published by Pearson Prentice Hall, Pearson Education, Inc., Upper Saddle River, NJ.  
All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this  
material may be reproduced, in any form or by any means, without permission in writing from the publisher.


**3.16.** (a) To determine  $H(z)$ , we first find  $X(z)$  and  $Y(z)$ :

$$\begin{aligned} X(z) &= \frac{1}{1 - \frac{1}{3}z^{-1}} - \frac{1}{1 - 2z^{-1}} \\ &= \frac{-\frac{5}{3}z^{-1}}{(1 - \frac{1}{3}z^{-1})(1 - 2z^{-1})}, \quad \frac{1}{3} < |z| < 2 \\ Y(z) &= \frac{5}{1 - \frac{1}{3}z^{-1}} - \frac{5}{1 - \frac{2}{3}z^{-1}} \\ &= \frac{-\frac{5}{3}z^{-1}}{(1 - \frac{1}{3}z^{-1})(1 - \frac{2}{3}z^{-1})}, \quad |z| > \frac{2}{3} \end{aligned}$$

Now

$$\begin{aligned} H(z) &= \frac{Y(z)}{X(z)} \\ &= \frac{1 - 2z^{-1}}{1 - \frac{2}{3}z^{-1}} \quad |z| > \frac{2}{3} \end{aligned}$$

The pole-zero plot of  $H(z)$  is plotted below.

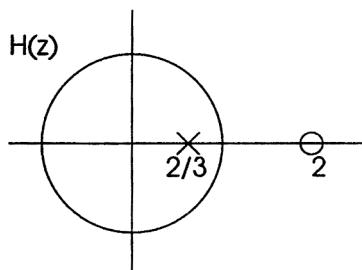

(b) Taking the inverse z-transform of  $H(z)$ , we get

$$\begin{aligned} h[n] &= \left(\frac{2}{3}\right)^n u[n] - 2\left(\frac{2}{3}\right)^{n-1} u[n-1] \\ &= \left(\frac{2}{3}\right)^n (u[n] - 3u[n-1]) \end{aligned}$$

(c) Since

$$H(z) = \frac{Y(z)}{X(z)} = \frac{1 - 2z^{-1}}{1 - \frac{2}{3}z^{-1}},$$

we can write

$$Y(z)(1 - \frac{2}{3}z^{-1}) = X(z)(1 - 2z^{-1}),$$

whose inverse z-transform leads to

$$y[n] - \frac{2}{3}y[n-1] = x[n] - 2x[n-1]$$

(d) The system is stable because the ROC includes the unit circle. It is also causal since the impulse response  $h[n] = 0$  for  $n < 0$ .

$$(3.17) \quad -1) \quad Y[n] - \frac{5}{2} Y[n-1] + Y[n-2] = x[n] - x[n-1]$$

$\downarrow \mathcal{Z}\{ \}$

$$Y(z) - \frac{5}{2} z^{-1} Y(z) + z^{-2} Y(z) = X(z) - z^{-1} X(z)$$

$$\text{i)} \quad H(z) = \frac{Y(z)}{X(z)} = \frac{1 - z^{-1}}{1 - \frac{5}{2} z^{-1} + z^{-2}} = \frac{A}{1 - z z^{-1}} + \frac{B}{1 - \frac{1}{2} z^{-1}} = \frac{1 - z^{-1}}{(1 - z z^{-1})(1 - \frac{1}{2} z^{-1})}$$


$$\text{ii)} \quad A = \left. \frac{1 - z^{-1}}{1 - \frac{1}{2} z^{-1}} \right|_{z^{-1} = \frac{1}{2}} = \frac{1 - \frac{1}{2}}{1 - \frac{1}{4}} = \frac{1}{2} \cdot \frac{\frac{1}{4}}{\frac{3}{4}} = \frac{2}{3}$$

$$\text{iii)} \quad B = \left. \frac{1 - z^{-1}}{1 - z z^{-1}} \right|_{z^{-1} = z} = \frac{1 - z}{1 - 4} = \frac{1}{3}$$

Sei:

$$H(z) = \frac{\frac{2}{3}}{1 - z z^{-1}} + \frac{\frac{1}{3}}{1 - \frac{1}{2} z^{-1}}$$

If the ROC is:

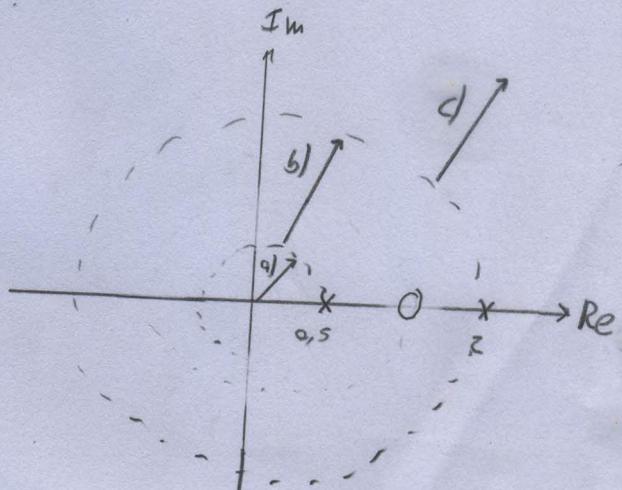

$$\text{a)} \quad |z| < \frac{1}{2}$$


$$h[n] = -\frac{2}{3} \cdot z^n u[-n-1] - \frac{1}{3} \left(\frac{1}{2}\right)^n u[-n-1] \rightarrow h[0] = 0 \quad -\frac{1}{3} \left(\frac{1}{2}\right)^n u[-n-1]$$

$$\text{b)} \quad \frac{1}{2} < |z| < 2$$

$$h[n] = -\frac{2}{3} \cdot z^n u[-n-1] + \frac{1}{3} \left(\frac{1}{2}\right)^n u[n] \rightarrow h[0] = \frac{1}{3}$$

$$\text{c)} \quad |z| > 2$$

$$h[n] = \frac{2}{3} z^n u[n] + \frac{1}{3} \left(\frac{1}{2}\right)^n u[n] \rightarrow h[0] = 1$$



© 2010 by Oppenheim. Published by Pearson Prentice Hall, Pearson Education, Inc., Upper Saddle River, NJ.  
All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this  
material may be reproduced, in any form or by any means, without permission in writing from the publisher.

**3.18. (a)**

$$\begin{aligned} H(z) &= \frac{1 + 2z^{-1} + z^{-2}}{(1 + \frac{1}{2}z^{-1})(1 - z^{-1})} \\ &= -2 + \frac{\frac{1}{3}}{1 + \frac{1}{2}z^{-1}} + \frac{\frac{8}{3}}{1 - z^{-1}} \end{aligned}$$

Taking the inverse z-transform:

$$h[n] = -2\delta[n] + \frac{1}{3}(-\frac{1}{2})^n u[n] + \frac{8}{3}u[n].$$


**(b)**


Given

$$H(z) = \frac{1 + 2z^{-1} + z^{-2}}{(1 + \frac{1}{2}z^{-1})(1 - z^{-1})},$$

$z = 2$  is inside the ROC. Therefore,

$$\begin{aligned} y[n] &= H(z)|_{z=2} 2^n \\ &= \frac{18}{5} 2^n. \end{aligned}$$





© 2010 by Oppenheim. Published by Pearson Prentice Hall, Pearson Education, Inc., Upper Saddle River, NJ.  
All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this  
material may be reproduced, in any form or by any means, without permission in writing from the publisher.

**3.19. The ROC( $Y(z)$ ) includes the intersection of ROC( $H(z)$ ) and ROC( $X(z)$ ).**

(a)

$$Y(z) = \frac{1}{(1 + \frac{1}{2}z^{-1})(1 - \frac{1}{4}z^{-1})}$$


The intersection of ROCs of  $H(z)$  and  $X(z)$  is  $|z| > \frac{1}{2}$ . So the ROC of  $Y(z)$  is  $|z| > \frac{1}{2}$ .


(b) The ROC of  $Y(z)$  is exactly the intersection of ROCs of  $H(z)$  and  $X(z)$ :  $\frac{1}{3} < |z| < 2$ .

(c)

$$Y(z) = \frac{1}{(1 - \frac{1}{5}z^{-1})(1 + \frac{1}{3}z^{-1})}$$

The ROC is  $|z| > \frac{1}{3}$ .





© 2010 by Oppenheim. Published by Pearson Prentice Hall, Pearson Education, Inc., Upper Saddle River, NJ.  
All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this  
material may be reproduced, in any form or by any means, without permission in writing from the publisher.

- 3.20.** In both cases, the ROC of  $H(z)$  has to be chosen such that  $\text{ROC}(Y(z))$  includes the intersection of  $\text{ROC}(H(z))$  and  $\text{ROC}(X(z))$ .

(a)


$$H(z) = \frac{1 - \frac{3}{4}z^{-1}}{1 + \frac{2}{3}z^{-1}}$$


The ROC is  $|z| > \frac{2}{3}$ .

(b)

$$H(z) = \frac{1}{1 - \frac{1}{6}z^{-1}}$$

The ROC is  $|z| > \frac{1}{6}$ .





© 2010 by Oppenheim. Published by Pearson Prentice Hall, Pearson Education, Inc., Upper Saddle River, NJ.  
All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this  
material may be reproduced, in any form or by any means, without permission in writing from the publisher.

**3.21.**

$$H(z) = \frac{4 + 0.25z^{-1} - 0.5z^{-2}}{(1 - 0.25z^{-1})(1 + 0.5z^{-1})}$$

- A. Poles are located at  $z = 0.25$  and  $z = -0.5$ . Since the system is causal, the ROC is the disk that extends outwards from the outermost pole. Hence,  $|z| > 0.5$ .
- B. The unit circle has to be contained in the ROC to ensure stability. The above ROC contains the ROC, and hence the system is stable.

C.

$$\begin{aligned} H(z) &= \frac{Y(z)}{X(z)} = \frac{4 + 0.25z^{-1} - 0.5z^{-2}}{(1 - 0.25z^{-1})(1 + 0.5z^{-1})} \\ (1 + 0.5z^{-1} - 0.25z^{-1} - 0.125z^{-2})Y(z) &= (4 + 0.25z^{-1} - 0.5z^{-2})X(z) \\ Y(z) + 0.25z^{-1}Y(z) - 0.125z^{-2}Y(z) &= 4X(z) + 0.25z^{-1}X(z) - 0.5z^{-2}X(z) \end{aligned}$$

Taking the inverse z-transform of both sides gives

$$\begin{aligned} y[n] + 0.25y[n-1] - 0.125y[n-2] &= 4x[n] + 0.25x[n-1] - 0.5x[n-2] \\ y[n] &= -0.25y[n-1] + 0.125y[n-2] + 4x[n] + 0.25x[n-1] - 0.5x[n-2]. \end{aligned}$$

- D. Since the degree of the numerator is equal to the degree of the denominator, we need to do long division. The result is

$$H(z) = 4 - \frac{0.75z^{-1}}{1 + 0.25z^{-1} - 0.125z^{-2}}.$$

Then

$$\frac{0.75z^{-1}}{(1 - 0.25z^{-1})(1 + 0.5z^{-1})} = \frac{A}{(1 - 0.25z^{-1})} + \frac{B}{(1 + 0.5z^{-1})} = P(z).$$

We have

$$A = (1 - 0.25z^{-1})P(z)|_{z=0.25} = \frac{0.75(4)}{1 + 0.5(4)} = 1$$

and


$$B = (1 + 0.5z^{-1})P(z)|_{z=-0.5} = \frac{0.75(-2)}{1 - 0.25(-2)} = -1$$

so that

$$H(z) = 4 - \frac{1}{(1 - 0.25z^{-1})} + \frac{1}{(1 + 0.5z^{-1})}.$$

The inverse z-transform is

$$h[n] = 4\delta[n] - (0.25)^n u[n] + (-0.5)^n u[n].$$



© 2010 by Oppenheim. Published by Pearson Prentice Hall, Pearson Education, Inc., Upper Saddle River, NJ.  
All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this  
material may be reproduced, in any form or by any means, without permission in writing from the publisher.

E.  $x[n] = u[-n-1]$ . Note that this is a left-sided sequence. The z-transform is

$$X(z) = \frac{-1}{1-z^{-1}}, \quad \text{ROC } |z| < 1.$$

Then

$$\begin{aligned} Y(z) &= H(z)X(z), \quad \text{ROC } R_H \cap R_X \\ &= \frac{4 + 0.25z^{-1} - 0.5z^{-2}}{(1 - 0.25z^{-1})(1 + 0.5z^{-1})(1 - z^{-1})} \frac{-1}{(1 - z^{-1})}, \quad \text{ROC } [|z| > 0.5] \cap [|z| < 1] \\ &= \frac{-4 - 0.25z^{-1} + 0.5z^{-2}}{(1 - 0.25z^{-1})(1 + 0.5z^{-1})(1 - z^{-1})}, \quad \text{ROC } 0.5 < |z| < 1. \end{aligned}$$

F. Notice that the degree of the numerator is less than the degree of the denominator. Thus there is no need for long division and we can proceed directly to the partial fraction expansion.

$$Y(z) = \frac{A}{(1 - 0.25z^{-1})} + \frac{B}{(1 + 0.5z^{-1})} + \frac{C}{(1 - z^{-1})}.$$

We have


$$\begin{aligned} A &= (1 - 0.25z^{-1})Y(z)|_{z=0.25} = \frac{-4 - 0.25(4) + 0.5(4)^2}{(1 + 0.5(4))(1 - 4)} = \frac{-1}{3} \\ B &= (1 + 0.5z^{-1})Y(z)|_{z=-0.5} = \frac{-4 - 0.25(-2) + 0.5(-2)^2}{(1 + 0.5(-2))(1 - (-2))} = \frac{-1}{3} \\ C &= (1 - z^{-1})Y(z)|_{z=1} = \frac{-4 - 0.25 + 0.5}{(1 - 0.25)(1 + 0.5)} = \frac{-10}{3}. \end{aligned}$$

Then

$$Y(z) = \frac{-\frac{1}{3}}{(1 - 0.25z^{-1})} + \frac{-\frac{1}{3}}{(1 + 0.5z^{-1})} + \frac{-\frac{10}{3}}{(1 - z^{-1})}.$$

The inverse z-transform is

$$y[z] = -\frac{1}{3}(0.25)^n u[n] - \frac{1}{3}(-0.5)^n u[n] + \frac{10}{3}u[-n-1].$$



© 2010 by Oppenheim. Published by Pearson Prentice Hall, Pearson Education, Inc., Upper Saddle River, NJ.  
All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this  
material may be reproduced, in any form or by any means, without permission in writing from the publisher.

- 3.22.** A. The system is linear, so we can find the response to each term in the input expression and add the responses together.

For input  $2\cos(\frac{\pi}{2}n)$ , we can evaluate  $H(z)$  at  $z = e^{j\frac{\pi}{2}}$ . The steady-state response is then  $|H(e^{j\frac{\pi}{2}})|2\cos(\frac{\pi}{2}n + \angle H(e^{j\frac{\pi}{2}}))$ .

For input  $u[n]$ , the steady-state response is equal to the DC gain; that is,  $H(e^{j0})$ .

- B. Given  $H(z) = \frac{1-4z^2}{1+0.5z^{-1}}$ , we have


$$H(e^{j\frac{\pi}{2}}) = \frac{1-4e^{-j\pi}}{1+0.5e^{-j\frac{\pi}{2}}} = \frac{5}{1-j0.5} = 4.47e^{j0.464}.$$


Then  $y_1[n] = 8.94\cos(\frac{\pi}{2}n + 0.464)$ .

Next,  $H(e^{j0}) = \frac{1-4}{1+0.5} = -2.00$ , so that  $y_2[n] = -2.00 \times 1 = -2.00$ .

As  $n$  gets large the response becomes

$$y[n] = y_1[n] + y_2[n] = -2.00 + 8.94\cos(\frac{\pi}{2}n + 0.464).$$





© 2010 by Oppenheim. Published by Pearson Prentice Hall, Pearson Education, Inc., Upper Saddle River, NJ.  
All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this  
material may be reproduced, in any form or by any means, without permission in writing from the publisher.

**3.23. (a)**

$$\begin{aligned}y[n] &= 0 \quad n < 0 \\y[n] &= \sum_{k=0}^n x[k]h[n-k] = \sum_{k=0}^n a^{n-k} = a^n \frac{1-a^{-(n+1)}}{1-a^{-1}} = \frac{1-a^{n+1}}{1-a} \quad 0 \leq n < N-1 \\y[n] &= \sum_{k=0}^{N-1} x[k]h[n-k] = \sum_{k=0}^{N-1} a^{n-k} = a^n \frac{1-a^{-N}}{1-a^{-1}} = a^{n+1} \frac{1-a^{-N}}{a-1}, \quad n \geq N\end{aligned}$$

**(b)**

$$\begin{aligned}H(z) &= \sum_{n=0}^{\infty} a^n z^{-n} = \frac{1}{1-az^{-1}} \quad |z| > |a| \\X(z) &= \sum_{n=0}^{N-1} z^{-n} = \frac{1-z^{-N}}{1-z^{-1}} \quad |z| > 0\end{aligned}$$

Therefore,


$$Y(z) = \frac{1-z^{-N}}{(1-az^{-1})(1-z^{-1})} = \frac{1}{(1-az^{-1})(1-z^{-1})} - \frac{z^{-N}}{(1-az^{-1})(1-z^{-1})} \quad |z| > |a|$$

Now,

$$\frac{1}{(1-az^{-1})(1-z^{-1})} = \frac{\frac{1}{1-a^{-1}}}{1-az^{-1}} + \frac{\frac{1}{1-a}}{1-z^{-1}} = \left(\frac{1}{1-a}\right) \left(\frac{1}{1-z^{-1}} - \frac{a}{1-az^{-1}}\right)$$

So

$$\begin{aligned}y[n] &= \left(\frac{1}{1-a}\right) [u[n] - a^{n+1}u[n] - u[n-N] - a^{n-N+1}u[n-N]] \\&= \frac{1-a^{n+1}}{1-a}u[n] - \frac{1-a^{n-N+1}}{1-a}u[n-N] \\y[n] &= \begin{cases} 0 & n < 0 \\ \frac{1-a^{n+1}}{1-a} & 0 \leq n \leq N-1 \\ a^{n+1} \left(\frac{1-a^{-N}}{a-1}\right) & n \geq N \end{cases}\end{aligned}$$




© 2010 by Oppenheim. Published by Pearson Prentice Hall, Pearson Education, Inc., Upper Saddle River, NJ.  
All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this  
material may be reproduced, in any form or by any means, without permission in writing from the publisher.


**3.24. (a)**

$$\begin{aligned}
 y[n] &= \sum_{k=-\infty}^{\infty} h[k]x[n-k] \\
 &= \sum_{k=-\infty}^{\infty} \left( 3 \left( -\frac{1}{3} \right)^k u[k] \right) u[n-k] \\
 &= \sum_{k=0}^n 3 \left( -\frac{1}{3} \right)^k \\
 &= \begin{cases} \frac{9}{4} \left( 1 - \left( -\frac{1}{3} \right)^{n+1} \right), & n \geq 0 \\ 0, & \text{otherwise} \end{cases}
 \end{aligned}$$

**(b)**

$$\begin{aligned}
 Y(z) &= H(z)X(z) \\
 &= \frac{3}{1 + \frac{1}{3}z^{-1}} \frac{1}{1 - z^{-1}} \\
 &= \frac{\frac{3}{4}}{1 + \frac{1}{3}z^{-1}} + \frac{\frac{9}{4}}{1 - z^{-1}} \\
 y[n] &= \frac{3}{4} \left( -\frac{1}{3} \right)^n u[n] + \frac{9}{4} u[n] \\
 &= \frac{9}{4} \left( 1 + \frac{1}{3} \left( -\frac{1}{3} \right)^n \right) u[n] \\
 &= \frac{9}{4} \left( 1 - \left( -\frac{1}{3} \right)^{n+1} \right) u[n]
 \end{aligned}$$





© 2010 by Oppenheim. Published by Pearson Prentice Hall, Pearson Education, Inc., Upper Saddle River, NJ.  
All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this  
material may be reproduced, in any form or by any means, without permission in writing from the publisher.

**3.25.** The plots of the sequences are shown below.

(a) Let



$$a[n] = \sum_{k=-\infty}^{\infty} \delta[n - 4k],$$


Then

$$A(z) = \sum_{k=-\infty}^{\infty} z^{-4n}$$

(b)

$$\begin{aligned} b[n] &= \frac{1}{2} \left[ e^{j\pi n} + \cos\left(\frac{\pi}{2}n\right) + \sin\left(\frac{\pi}{2} + 2\pi n\right) \right] u[n] \\ &= \frac{1}{2} \left[ (-1)^n + \cos\left(\frac{\pi}{2}n\right) + 1 \right] u[n] \\ &= \begin{cases} \frac{3}{2}, & n = 4k, k \geq 0 \\ \frac{1}{2}, & n = 4k + 2, k \geq 0 \\ 0, & \text{otherwise} \end{cases} \\ B(z) &= \sum_{n=0}^{\infty} \frac{3}{2} z^{-4n} + \sum_{n=0}^{\infty} \frac{1}{2} z^{-(4n+2)} \\ &= \frac{3/2 + 1/2z^{-2}}{1 - z^{-4}}, \quad |z| > 1 \end{aligned}$$

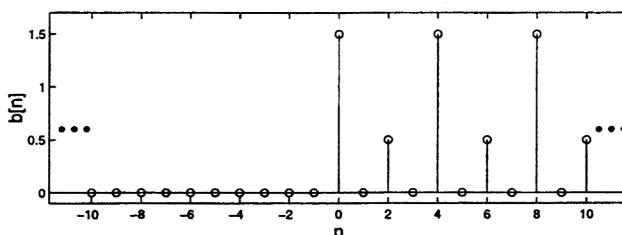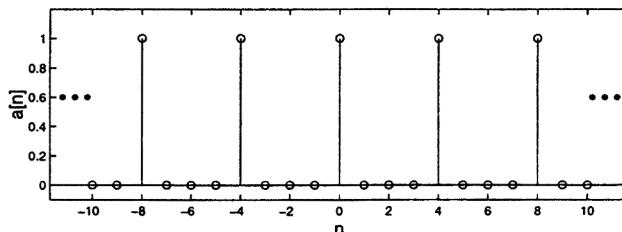



© 2010 by Oppenheim. Published by Pearson Prentice Hall, Pearson Education, Inc., Upper Saddle River, NJ.  
All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this  
material may be reproduced, in any form or by any means, without permission in writing from the publisher.


**3.26.**


$$X(z) = \frac{z^2}{(z-a)(z-b)} = \frac{z^2}{z^2 - (a+b)z + ab}$$

Obtain a proper fraction:



$$\begin{array}{r} 1 \\ z^2 - (a+b)z + ab \end{array} \overline{ \left| \begin{array}{r} z^2 \\ z^2 - (a+b)z + ab \\ \hline (a+b)z - ab \end{array} \right. }$$


$$\begin{aligned} X(z) &= 1 + \frac{(a+b)z - ab}{(z-a)(z-b)} = 1 + \frac{\frac{(a+b)a-ab}{a-b}}{z-a} + \frac{\frac{(a+b)b-ab}{b-a}}{z-b} \\ &= 1 + \frac{\frac{a^2}{a-b}}{z-a} - \frac{\frac{b^2}{a-b}}{z-b} = 1 + \frac{1}{a-b} \left( \frac{a^2 z^{-1}}{1 - az^{-1}} - \frac{b^2 z^{-1}}{1 - bz^{-1}} \right) \\ x[n] &= \delta[n] + \frac{a^2}{a-b} a^{n-1} u[n-1] - \frac{b^2}{a-b} b^{n-1} u[n-1] \\ &= \delta[n] + \left( \frac{1}{a-b} \right) (a^{n+1} - b^{n+1}) u[n-1] \end{aligned}$$







© 2010 by Oppenheim. Published by Pearson Prentice Hall, Pearson Education, Inc., Upper Saddle River, NJ.  
All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this  
material may be reproduced, in any form or by any means, without permission in writing from the publisher.







© 2010 by Oppenheim. Published by Pearson Prentice Hall, Pearson Education, Inc., Upper Saddle River, NJ.  
All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this  
material may be reproduced, in any form or by any means, without permission in writing from the publisher.





© 2010 by Oppenheim. Published by Pearson Prentice Hall, Pearson Education, Inc., Upper Saddle River, NJ.  
All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this  
material may be reproduced, in any form or by any means, without permission in writing from the publisher.





© 2010 by Oppenheim. Published by Pearson Prentice Hall, Pearson Education, Inc., Upper Saddle River, NJ.  
All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this  
material may be reproduced, in any form or by any means, without permission in writing from the publisher.

**3.30.**

$$H(z) = \frac{1-z^{-1}}{1-0.25z^{-2}} = \frac{1-z^{-1}}{(1-0.5z^{-1})(1+0.5z^{-1})}$$

A. Given  $x[n] = u[n]$ , we have  $X(z) = \frac{1}{1-z^{-1}}$ ,  $1 < |z|$ . Then

$$\begin{aligned} Y(z) &= H(z)X(z) \\ &= \frac{1-z^{-1}}{(1-0.5z^{-1})(1+0.5z^{-1})} \frac{1}{1-z^{-1}} \\ &= \frac{1}{(1-0.5z^{-1})(1+0.5z^{-1})} \\ &= \frac{\frac{1}{2}}{(1-0.5z^{-1})} + \frac{\frac{1}{2}}{(1+0.5z^{-1})}, \quad 0.5 < |z|. \end{aligned}$$

(The ROC for  $Y(z)$  includes the intersection of the ROC of  $H(z)$  with the ROC of  $X(z)$ .)

Inverse z-transforming gives

$$y[n] = \frac{1}{2}(0.5)^n u[n] + \frac{1}{2}(-0.5)^n u[n].$$

B. If  $y[n] = \delta[n] - \delta[n-1]$ , then  $Y(z) = 1 - z^{-1}$ ,  $0 < |z|$ . We have

$$\begin{aligned} X(z) &= \frac{Y(z)}{H(z)} \\ &= \frac{1-z^{-1}}{\left(\frac{1-z^{-1}}{1-0.25z^{-2}}\right)} \\ &= 1-0.25z^{-2}, \quad 0 < |z|. \end{aligned}$$

Inverse z-transforming gives


$$x[n] = \delta[n] - 0.25\delta[n-2].$$

C. Now  $x[n] = \cos(0.5\pi n)$ ,  $-\infty < n < \infty$ . At  $\omega = 0.5\pi$  we have

$$\begin{aligned} H(e^{j0.5\pi}) &= \frac{1-e^{-j0.5\pi}}{1-0.25e^{-j\pi}} \\ &= 1.13e^{j\frac{\pi}{4}}. \end{aligned}$$

Then

$$y[n] = 1.13 \cos\left(0.5\pi n + \frac{\pi}{4}\right).$$



© 2010 by Oppenheim. Published by Pearson Prentice Hall, Pearson Education, Inc., Upper Saddle River, NJ.  
All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

**3.31. (a)**  $x[n]$  is right-sided and

$$X(z) = \frac{1 - \frac{1}{3}z^{-1}}{1 + \frac{1}{3}z^{-1}}$$

Long division:

$$\begin{array}{r} 1 - \frac{2}{3}z^{-1} + \frac{2}{9}z^{-2} + \dots \\ 1 + \frac{1}{3}z^{-1} \overline{)1 - \frac{1}{3}z^{-1}} \\ \underline{1 - \frac{1}{3}z^{-1}} \\ - \frac{2}{3}z^{-1} \\ - \frac{2}{3}z^{-1} - \frac{2}{9}z^{-2} \\ \underline{- \frac{2}{9}z^{-2}} \end{array}$$

Therefore,  $x[n] = 2(-\frac{1}{3})^n u[n] - \delta[n]$

(b)

$$X(z) = \frac{3}{z - \frac{1}{4} - \frac{1}{8}z^{-1}} = \frac{3z^{-1}}{(1 - \frac{1}{2}z^{-1})(1 + \frac{1}{4}z^{-1})} = \frac{4}{1 - \frac{1}{2}z^{-1}} - \frac{4}{1 - \frac{1}{4}z^{-1}}$$

Poles at  $\frac{1}{2}$ , and  $-\frac{1}{4}$ .  $x[n]$  stable,  $\Rightarrow |z| > \frac{1}{2} \Rightarrow$  causal.

Therefore,

$$x[n] = 4 \left(\frac{1}{2}\right)^n u[n] - 4 \left(-\frac{1}{4}\right)^n u[n]$$

(c)

$$\begin{aligned} X(z) &= \ln(1 - 4z) \quad |z| < \frac{1}{4} \\ &= -\sum_{i=1}^{\infty} \frac{(4z)^i}{i} = -\sum_{\ell=-\infty}^{-1} \frac{1}{\ell} (4z)^{-\ell} \end{aligned}$$

Therefore,

$$x[n] = \frac{1}{n} (4)^{-n} u[-n - 1]$$


(d)

$$X(z) = \frac{1}{1 - \frac{1}{3}z^{-3}} \quad |z| > (3)^{-\frac{1}{3}} \Rightarrow \text{causal}$$

By long division:

$$\begin{array}{r} 1 + \frac{1}{3}z^{-3} + \frac{1}{9}z^{-6} + \dots \\ 1 - \frac{1}{3}z^{-3} \overline{)1} \\ \underline{1 - \frac{1}{3}z^{-3}} \\ + \frac{1}{3}z^{-3} \\ + \frac{1}{3}z^{-3} - \frac{1}{9}z^{-6} \\ \underline{+ \frac{1}{9}z^{-6}} \end{array}$$

$$\Rightarrow x[n] = \begin{cases} \left(\frac{1}{3}\right)^{\frac{n}{3}}, & n = 0, 3, 6, \dots \\ 0, & \text{otherwise} \end{cases}$$



© 2010 by Oppenheim. Published by Pearson Prentice Hall, Pearson Education, Inc., Upper Saddle River, NJ.  
All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this  
material may be reproduced, in any form or by any means, without permission in writing from the publisher.

**3.32. (a)**

$$\begin{aligned} X(z) &= \frac{1}{(1 + \frac{1}{2}z^{-1})^2(1 - 2z^{-1})(1 - 3z^{-1})} \quad \frac{1}{2} < |z| < 2 \\ &= \frac{\frac{1}{35}}{(1 + \frac{1}{2}z^{-2})^2} + \frac{\frac{88}{1225}}{(1 + \frac{1}{2}z^{-1})} - \frac{\frac{1568}{1225}}{(1 - 2z^{-1})} + \frac{\frac{2700}{1225}}{(1 - 3z^{-1})} \end{aligned}$$

Therefore,

$$x[n] = \frac{1}{35}(n+1) \left(\frac{-1}{2}\right)^{n+1} u[n+1] + \frac{58}{(35)^2} \left(\frac{-1}{2}\right)^n u[n] + \frac{1568}{(35)^2} (2)^n u[-n-1] - \frac{2700}{(35)^2} (3)^n u[-n-1]$$

**(b)**

$$X(z) = e^{z^{-1}} = 1 + z^{-1} + \frac{z^{-2}}{2!} + \frac{z^{-3}}{3!} + \frac{z^{-4}}{4!} + \dots$$


$$\text{Therefore, } x[n] = \frac{1}{n!} u[n].$$


**(c)**

$$X(z) = \frac{z^3 - 2z}{z - 2} = z^2 + 2z + \frac{2}{1 - 2z^{-1}} \quad |z| < 2$$

Therefore,

$$x[n] = \delta[n+2] + 2\delta[n+1] - 2(2)^n u[-n-1]$$





© 2010 by Oppenheim. Published by Pearson Prentice Hall, Pearson Education, Inc., Upper Saddle River, NJ.  
All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this  
material may be reproduced, in any form or by any means, without permission in writing from the publisher.

**3.33. (a)**

$$\begin{aligned} nx[n] &\Leftrightarrow -z \frac{d}{dz} X(z) \\ x[n - n_0] &\Leftrightarrow z^{-n_0} X(z) \\ X(z) &= \frac{3z^{-3}}{(1 - \frac{1}{4}z^{-1})^2} = 12z^{-2} \left[ -z \frac{d}{dz} \left( \frac{1}{1 - \frac{1}{4}z^{-1}} \right) \right] \end{aligned}$$

$x[n]$  is left-sided. Therefore,  $X(z)$  corresponds to:

$$x[n] = -12(n-2) \left( \frac{1}{4} \right)^{n-2} u[-n+1]$$

**(b)**

$$X(z) = \sin(z) = \sum_{k=0}^{\infty} \frac{(-1)^k}{(2k+1)!} z^{2k+1} \quad \text{ROC includes } |z| = 1$$

Therefore,

$$x[n] = \sum_{k=0}^{\infty} \frac{(-1)^k}{(2k+1)!} \delta[n+2k+1]$$

Which is stable.


**(c)**


$$X(z) = \frac{z^7 - 2}{1 - z^{-7}} = z^7 - \frac{1}{1 - z^{-7}} \quad |z| > 1$$

$$X(z) = z^7 - \sum_{n=0}^{\infty} z^{-7n}$$

Therefore,

$$x[n] = \delta[n+7] - \sum_{n=0}^{\infty} \delta[n-7k]$$







© 2010 by Oppenheim. Published by Pearson Prentice Hall, Pearson Education, Inc., Upper Saddle River, NJ.  
All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this  
material may be reproduced, in any form or by any means, without permission in writing from the publisher.

**3.34.**

$$X(z) = e^z + e^{1/z} \quad z \neq 0$$

$$X(z) = \sum_{n=0}^{\infty} \frac{1}{n!} z^n + \sum_{n=0}^{\infty} \frac{1}{n!} \left(\frac{1}{z}\right)^n = \sum_{n=-\infty}^0 \frac{1}{(-n)!} z^{-n} + \sum_{n=0}^{\infty} \frac{1}{n!} z^{-n} \implies x[n] = \frac{1}{|n|!} + \delta[n]$$





© 2010 by Oppenheim. Published by Pearson Prentice Hall, Pearson Education, Inc., Upper Saddle River, NJ.  
All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this  
material may be reproduced, in any form or by any means, without permission in writing from the publisher.

**3.35.**

$$X(z) = \log_2\left(\frac{1}{2} - z\right) \quad |z| < \frac{1}{2}$$

(a)


$$X(z) = \log(1 - 2z) = -\sum_{i=1}^{\infty} \frac{(2z)^i}{i} = -\sum_{\ell=-\infty}^{-1} \frac{1}{-\ell} (2z)^{-\ell} = \sum_{\ell=-\infty}^1 \frac{1}{\ell} \left(\frac{1}{2}\right)^{\ell} z^{-\ell}$$


Therefore,

$$x[n] = \frac{1}{n} \left(\frac{1}{2}\right)^n u[-n-1]$$

(b)

$$\begin{aligned} nx[n] &\Leftrightarrow -z \frac{d}{dz} \log(1 - 2z) = -z \left(\frac{1}{1 - 2z}\right) (-2) = z^{-1} \left(\frac{-1}{1 - \frac{1}{2}z^{-1}}\right), \quad |z| < \frac{1}{2} \\ nx[n] &= \left(\frac{1}{2}\right)^n u[-n-1] \\ x[n] &= \frac{1}{n} \left(\frac{1}{2}\right)^n u[-n-1] \end{aligned}$$





© 2010 by Oppenheim. Published by Pearson Prentice Hall, Pearson Education, Inc., Upper Saddle River, NJ.  
All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this  
material may be reproduced, in any form or by any means, without permission in writing from the publisher.


**3.36. (a)**

$$\begin{aligned}x[n] &= a^n u[n] + b^n u[n] + c^n u[-n-1] \quad |a| < |b| < |c| \\X(z) &= \frac{1}{1-az^{-1}} + \frac{1}{1-bz^{-1}} - \frac{1}{1-cz^{-1}} \quad |b| < |z| < |c| \\X(z) &= \frac{1-2cz^{-1}+(bc+ac-ab)z^{-2}}{(1-az^{-1})(1-bz^{-1})(1-cz^{-1})} \quad |b| < |z| < |c|\end{aligned}$$


Poles:  $a, b, c$ ,

Zeros:  $z_1, z_2, \infty$  where  $z_1$  and  $z_2$  are roots of numerator quadratic.

pole-zero plot (a)

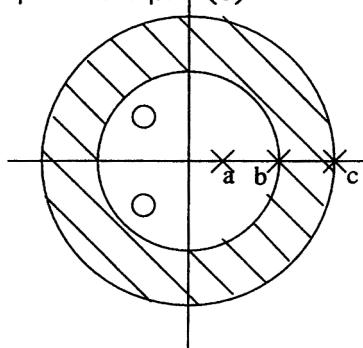

pole-zero plot (b)

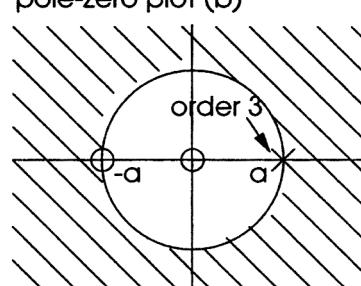


(b)

$$\begin{aligned}x[n] &= n^2 a^n u[n] \\x_1[n] &= a^n u[n] \Leftrightarrow X_1(z) = \frac{1}{1-az^{-1}} \quad |z| > a \\x_2[n] = nx_1[n] &= na^n u[n] \Leftrightarrow X_2(z) = -z \frac{d}{dz} X_1(z) = \frac{az^{-1}}{(1-az^{-1})^2} \quad |z| > a \\x[n] = nx_2[n] &= n^2 a^n u[n] \Leftrightarrow -z \frac{d}{dz} X_2(z) = -z \frac{d}{dz} \left( \frac{az^{-1}}{(1-az^{-1})^2} \right) \quad |z| > a \\X(z) &= \frac{-az^{-1}(1+az^{-1})}{(1-az^{-1})^3} \quad |z| > a\end{aligned}$$

(c)

$$\begin{aligned}x[n] &= e^{n^4} \left( \cos \frac{\pi}{12} n \right) u[n] - e^{n^4} \left( \cos \frac{\pi}{12} n \right) u[n-1] \\&= e^{n^4} \left( \cos \frac{\pi}{12} n \right) (u[n] - u[n-1]) = \delta[n]\end{aligned}$$

Therefore,  $X(z) = 1$  for all  $|z|$ .



© 2010 by Oppenheim. Published by Pearson Prentice Hall, Pearson Education, Inc., Upper Saddle River, NJ.  
All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this  
material may be reproduced, in any form or by any means, without permission in writing from the publisher.



**3.37. From the pole-zero diagram**


$$X(z) = \frac{z}{(z^2 - z + \frac{1}{2})(z + \frac{3}{4})} \quad |z| > \frac{3}{4}$$

$$\begin{aligned} y[n] &= x[-n+3] = x[-(n-3)] \\ \Rightarrow Y(z) &= z^{-3} X(z^{-1}) = \frac{z^{-3} z^{-1}}{(z^{-2} - z^{-1} + \frac{1}{2})(z^{-1} + \frac{3}{4})} \\ &= \frac{8/3}{z(2 - 2z + z^2)(\frac{4}{3} + z)} \end{aligned}$$

Poles at  $0, -\frac{4}{3}, 1 \pm j$ , zeros at  $\infty$

$x[n]$  causal  $\Rightarrow x[-n+3]$  is left-sided  $\Rightarrow$  ROC is  $0 < |z| < 4/3$ .

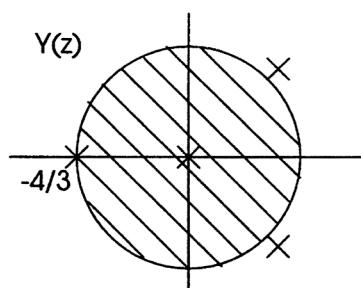



© 2010 by Oppenheim. Published by Pearson Prentice Hall, Pearson Education, Inc., Upper Saddle River, NJ.  
All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this  
material may be reproduced, in any form or by any means, without permission in writing from the publisher.


**3.38. From pole-zero diagram**

$$X(z) = \frac{z^2 + 1}{z - \frac{1}{2}}$$

(a)

$$y[n] = \left(\frac{1}{2}\right)^n x[n] \Rightarrow Y(z) = X(2z) = \frac{4z^2 + 1}{2z - \frac{1}{2}}$$

zeros  $\pm\frac{1}{2}j$   
poles  $\frac{1}{4}, \infty$

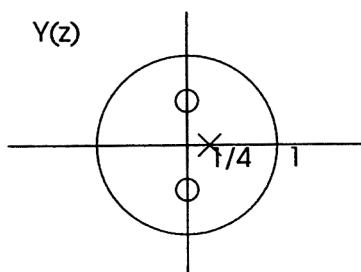



(b)


$$w[n] = \cos\left(\frac{\pi n}{2}\right) x[n] = \frac{1}{2}(e^{j\pi n/2} + e^{-j\pi n/2})x[n]$$

$$W(z) = \frac{1}{2}X(e^{-j\pi/2}z) + \frac{1}{2}X(e^{j\pi/2}z) = \frac{1}{2}X(-jz) + \frac{1}{2}X(jz)$$

$$W(z) = \frac{1}{2} \left( \frac{-z^2 + 1}{-jz - \frac{1}{2}} \right) + \frac{1}{2} \left( \frac{-z^2 + 1}{jz - \frac{1}{2}} \right) = \frac{z^2 - 1}{2(z^2 + \frac{1}{4})}$$

poles at  $\pm\frac{1}{2}j$   
zeros at  $\pm 1$

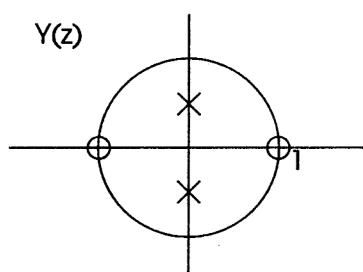





© 2010 by Oppenheim. Published by Pearson Prentice Hall, Pearson Education, Inc., Upper Saddle River, NJ.  
All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this  
material may be reproduced, in any form or by any means, without permission in writing from the publisher.

**3.39.**

$$\begin{aligned} H(z) &= \frac{1-z^3}{1-z^4} = z^{-1} \left( \frac{1-z^{-3}}{1-z^{-4}} \right) \quad |z| > 1 \\ u[n] &\Leftrightarrow \frac{1}{1-z^{-1}} = \frac{z}{z-1} \quad |z| > 1 \\ U(z)H(z) &\text{40} = \frac{z^{-1} - z^{-4}}{(1-z^{-4})(1-z^{-1})} \\ &= \frac{z^{-1}}{1-z^{-1}} - \frac{z^{-4}}{1-z^{-4}} \quad |z| > 1 \\ u[n] * h[n] &= u[n-1] - \sum_{k=0}^{\infty} \delta[n-4-4k] \end{aligned}$$





© 2010 by Oppenheim. Published by Pearson Prentice Hall, Pearson Education, Inc., Upper Saddle River, NJ.  
All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this  
material may be reproduced, in any form or by any means, without permission in writing from the publisher.


**3.40.**

$$x[n] = u[n] \Leftrightarrow X(z) = \frac{1}{1 - z^{-1}} \quad |z| > 1$$

$$y[n] = \left(\frac{1}{2}\right)^{n-1} u[n+1] = 4 \left(\frac{1}{2}\right)^{n+1} u[n+1] \Leftrightarrow Y(z) = \frac{4z}{1 - \frac{1}{2}z^{-1}} \quad |z| > \frac{1}{2}$$

(a)

$$H(z) = \frac{Y(z)}{X(z)} = \frac{4z(1 - z^{-1})}{1 - \frac{1}{2}z^{-1}} \quad |z| > \frac{1}{2}$$

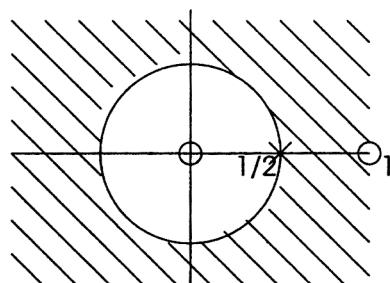


(b)

$$H(z) = \frac{4z}{1 - \frac{1}{2}z^{-1}} - \frac{4}{1 - \frac{1}{2}z^{-1}} \quad |z| > \frac{1}{2}$$

$$\begin{aligned} h[n] &= 4 \left(\frac{1}{2}\right)^{n+1} u[n+1] - 4 \left(\frac{1}{2}\right)^n u[n] \\ &= 4\delta[n+1] - 2 \left(\frac{1}{2}\right)^n u[n] \end{aligned}$$

(c) The ROC of  $H(z)$  includes  $|z| = 1 \Rightarrow$  stable.(d) From part (b) we see that  $h[n]$  starts at  $n = -1 \Rightarrow$  not causal



© 2010 by Oppenheim. Published by Pearson Prentice Hall, Pearson Education, Inc., Upper Saddle River, NJ.  
All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this  
material may be reproduced, in any form or by any means, without permission in writing from the publisher.


**3.41.**


$$X(z) = \frac{\frac{1}{3}}{1 - \frac{1}{2}z^{-1}} + \frac{\frac{1}{4}}{1 - 2z^{-1}}$$

has poles at  $z = \frac{1}{2}$  and  $z = 2$ .

Since the unit circle is in the region of convergence  $X(z)$  and  $x[n]$  have both a causal and an anticausal part. The causal part is “outside” the pole at  $\frac{1}{2}$ . The anticausal part is “inside” the pole at 2, therefore,  $x[0]$  is the sum of the two parts

$$x[0] = \lim_{z \rightarrow \infty} \frac{\frac{1}{3}}{1 - \frac{1}{2}z^{-1}} + \lim_{z \rightarrow 0} \frac{\frac{1}{4}z}{z - 2} = \frac{1}{3} + 0 = \frac{1}{3}$$





© 2010 by Oppenheim. Published by Pearson Prentice Hall, Pearson Education, Inc., Upper Saddle River, NJ.  
All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this  
material may be reproduced, in any form or by any means, without permission in writing from the publisher.

**3.42. (a) After writing the following equalities:**

$$\begin{aligned}V(z) &= X(z) - W(z) \\W(z) &= V(z)H(z) + E(z)\end{aligned}$$

we solve for  $W(z)$ :


$$W(z) = \frac{H(z)}{1+H(z)}X(z) + \frac{1}{1+H(z)}E(z)$$


(b)

$$H_1(z) = \frac{H(z)}{1+H(z)} = \frac{\frac{z^{-1}}{1-z^{-1}}}{1+\frac{z^{-1}}{1-z^{-1}}} = z^{-1}$$

$$H_2(z) = \frac{1}{1+\frac{z^{-1}}{1-z^{-1}}} = 1 - z^{-1}$$

(c)  $H(z)$  is not stable due to its pole at  $z = 1$ , but  $H_1(z)$  and  $H_2(z)$  are.





© 2010 by Oppenheim. Published by Pearson Prentice Hall, Pearson Education, Inc., Upper Saddle River, NJ.  
All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this  
material may be reproduced, in any form or by any means, without permission in writing from the publisher.

**3.43.** (a) Yes,  $h[n]$  is BIBO stable if its ROC includes the unit circle. Hence, the system is stable if  $r_{min} < 1$  and  $r_{max} > 1$ .

(b) Let's consider the system step by step.


(i) First,  $v[n] = \alpha^{-n}x[n]$ . By taking the z-transform of both sides,  $V(z) = X(\alpha z)$ .


(ii) Second,  $v[n]$  is filtered to get  $w[n]$ . So  $W(z) = H(z)V(z) = H(z)X(\alpha z)$ .

(iii) Finally,  $y[n] = \alpha^n w[n]$ . In the z-transform domain,  $Y(z) = W(z/\alpha) = H(z/\alpha)X(z)$ .

In conclusion, the system is LTI, with system function  $G(z) = H(z/\alpha)$  and  $g[n] = \alpha^n h[n]$ .

(c) The ROC of  $G(z)$  is  $\alpha r_{min} < |z| < \alpha r_{max}$ . We want  $r_{min} < 1/\alpha$  and  $r_{max} > 1/\alpha$  for the system to be stable.





© 2010 by Oppenheim. Published by Pearson Prentice Hall, Pearson Education, Inc., Upper Saddle River, NJ.  
All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this  
material may be reproduced, in any form or by any means, without permission in writing from the publisher.

**3.44. (a)**  $h[n]$  is the response of the system when  $x[n] = \delta[n]$ . Hence,

$$h[n] + \sum_{k=1}^{10} \alpha_k h[n-k] = \delta[n] + \beta\delta[n-1],$$

Further, since the system is causal,  $h[n] = 0$  for  $n < 0$ . Therefore,

$$h[0] + \sum_{k=1}^{10} \alpha_k h[-k] = h[0] = \delta[0] = 1.$$

**(b)** At  $n = 1$ ,

$$h[1] + \alpha_1 h[0] = \delta[1] + \beta\delta[0] \implies \alpha_1 = \frac{\beta - h[1]}{h[0]} = \beta - h[1]$$

**(c)** How can we extend  $h[n]$  for  $n > 10$  and still have it compatible with the difference equation for S?

Note that the difference equation can describe systems up to order 10. If we choose



$$h[n] = (0.9)^n \cos\left(\frac{\pi}{4}n\right)u[n],$$


we only need a second order difference equation:

$$\alpha_3 = \alpha_4 = \alpha_5 = \alpha_6 = \alpha_7 = \alpha_8 = \alpha_9 = \alpha_{10} = 0.$$

The z-transform of  $h[n]$  can be found from the z-transform table:

$$H(z) = \frac{1 - \frac{0.9}{\sqrt{2}}z^{-1}}{(1 - 0.9e^{j\pi/4}z^{-1})(1 - 0.9e^{-j\pi/4}z^{-1})}$$






© 2010 by Oppenheim. Published by Pearson Prentice Hall, Pearson Education, Inc., Upper Saddle River, NJ.  
All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this  
material may be reproduced, in any form or by any means, without permission in writing from the publisher.

**3.45. (a)**

$$X(z) = \frac{1}{1 - \frac{1}{2}z^{-1}} - \frac{1}{1 - 2z^{-1}}, \quad \frac{1}{2} < |z| < 2$$

$$Y(z) = \frac{6}{1 - \frac{1}{2}z^{-1}} - \frac{6}{1 - \frac{3}{4}z^{-1}}, \quad |z| > \frac{3}{4}$$

$$\begin{aligned} H(z) &= \frac{Y(z)}{X(z)} = \frac{\frac{-\frac{3}{2}z^{-1}}{(1-\frac{1}{2}z^{-1})(1-\frac{3}{4}z^{-1})}}{\frac{-\frac{3}{2}z^{-1}}{(1-\frac{1}{2}z^{-1})(1-2z^{-1})}} \\ &= \frac{1-2z^{-1}}{1-\frac{3}{4}z^{-1}}, \quad |z| > \frac{3}{4} \end{aligned}$$




**(b)**

$$h[n] = \left(\frac{3}{4}\right)^n u[n] - 2\left(\frac{3}{4}\right)^{n-1} u[n-1]$$

**(c)**

$$y[n] - \frac{3}{4}y[n-1] = x[n] - 2x[n-1]$$

- (d)** The system is stable because the ROC includes the unit circle. It is also causal since  $h[n] = 0$  for  $n < 0$ .



© 2010 by Oppenheim. Published by Pearson Prentice Hall, Pearson Education, Inc., Upper Saddle River, NJ.  
All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this  
material may be reproduced, in any form or by any means, without permission in writing from the publisher.

**3.46.** 1. Given  $x[n] = -\frac{1}{3}(\frac{1}{2})^n u[n] - \frac{4}{3}(2)^n u[-n-1]$ , we have

$$\begin{aligned} X(z) &= \frac{-\frac{1}{3}}{1-\frac{1}{2}z^{-1}} + \frac{\frac{4}{3}}{1-2z^{-1}} \\ &= \frac{1}{(1-\frac{1}{2}z^{-1})(1-2z^{-1})}, \quad \frac{1}{2} < |z| < 2. \end{aligned}$$

2. The expression

$$Y(z) = \frac{1-z^{-2}}{(1-\frac{1}{2}z^{-1})(1-2z^{-1})}$$

can converge for a)  $|z| < \frac{1}{2}$ , b)  $\frac{1}{2} < |z| < 2$ , or c)  $2 < |z|$ . However,  $Y(z) = H(z)X(z)$ , where  $H(z)$  is the system function of the given LTI system, and the ROC of  $Y(z)$  must contain the intersection of the ROC of  $H(z)$  with the ROC of  $X(z)$ . Since  $X(z)$  has ROC  $\frac{1}{2} < |z| < 2$ , only choice b) is possible.

3. The system function  $H(z)$  is given by


$$H(z) = \frac{Y(z)}{X(z)} = 1 - z^{-2}, \quad 0 < |z|.$$


The only choice for difference equation is

$$y[n] = x[n] - x[n-2].$$

4. The only choice for impulse response is

$$h[n] = \delta[n] - \delta[n-2].$$






© 2010 by Oppenheim. Published by Pearson Prentice Hall, Pearson Education, Inc., Upper Saddle River, NJ.  
All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this  
material may be reproduced, in any form or by any means, without permission in writing from the publisher.


**3.47. (a)**

$$\begin{aligned} ny[n] &= x[n] \\ -z \frac{dY(z)}{dz} &= X(z) \\ Y(z) &= - \int z^{-1} X(z) dz \end{aligned}$$

(b) To apply the results of part (a), we let  $x[n] = u[n - 1]$ , and  $w[n] = y[n]$ .

$$\begin{aligned} W(z) &= - \int z^{-1} \frac{z^{-1}}{1 - z^{-1}} dz \\ &= - \int \frac{1}{z(z - 1)} dz \\ &= - \int \frac{-1}{z} + \frac{1}{z - 1} dz \\ &= \ln(z) - \ln(z - 1) \end{aligned}$$






© 2010 by Oppenheim. Published by Pearson Prentice Hall, Pearson Education, Inc., Upper Saddle River, NJ.  
All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this  
material may be reproduced, in any form or by any means, without permission in writing from the publisher.


- 3.48.** (a) Since  $y[n]$  is stable, its ROC contains the unit-circle. Hence,  $Y(z)$  converges for  $\frac{1}{2} < |z| < 2$ .  
 (b) Since the ROC is a ring on the  $z$ -plane,  $y[n]$  is a two-sided sequence.  
 (c)  $x[n]$  is stable, so its ROC contains the unit-circle. Also, it has a zero at  $\infty$  so the ROC includes  $\infty$ . ROC:  $|z| > \frac{3}{4}$ .  
 (d) Since the ROC of  $x[n]$  includes  $\infty$ ,  $X(z)$  contains no positive powers of  $z$ , and so  $x[n] = 0$  for  $n < 0$ . Therefore  $x[n]$  is causal.  
 (e)


$$\begin{aligned}x[0] &= X(z)|_{z=\infty} \\&= \frac{A(1 - \frac{1}{4}z^{-1})}{(1 + \frac{3}{4}z^{-1})(1 - \frac{1}{2}z^{-1})}|_{z=\infty} \\&= 0\end{aligned}$$

- (f)  $H(z)$  has zeros at  $-0.75$  and  $0$ , and poles at  $2$  and  $\infty$ . Its ROC is  $|z| < 2$ .



- (g) Since the ROC of  $h[n]$  includes  $0$ ,  $H(z)$  contains no negative powers of  $z$ , which implies that  $h[n] = 0$  for  $n > 0$ . Therefore  $h[n]$  is anti-causal.





© 2010 by Oppenheim. Published by Pearson Prentice Hall, Pearson Education, Inc., Upper Saddle River, NJ.  
All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this  
material may be reproduced, in any form or by any means, without permission in writing from the publisher.

**3.49.**

$$y[n] = -\sum_{k=1}^N \left( \frac{a_k}{a_0} \right) y[n-k] + \sum_{k=0}^M \left( \frac{b_k}{b_0} \right) x[n-k]$$

A. Using Equation (3.76), the unilateral z-transform of  $y[n-k]$  is

$$\sum_{m=1}^k y[m-k-1] z^{-m+1} + z^{-k} Y(z).$$

Applying the unilateral z-transform to the difference equation gives

$$\begin{aligned} Y(z) &= -\sum_{k=1}^N \left( \frac{a_k}{a_0} \right) \left\{ \sum_{m=1}^k y[m-k-1] z^{-m+1} + z^{-k} Y(z) \right\} \\ &\quad + \sum_{k=0}^M \left( \frac{b_k}{b_0} \right) z^{-k} X(z), \end{aligned}$$

assuming that  $x[n]$  is suddenly applied at  $n=0$ .

Solving for  $Y(z)$  gives

$$Y(z) = -\frac{\sum_{k=1}^N a_k \left( \sum_{m=1}^k y[m-k-1] z^{-m+1} \right)}{\sum_{k=0}^N a_k z^{-k}} + \frac{\sum_{k=0}^M b_k z^{-k}}{\sum_{k=0}^N a_k z^{-k}} X(z),$$

QED.

B. If  $x[n]=0$  for all  $n$ , then  $X(z)=0$ . This gives


$$Y(z) = Y_{ZIR}(z) = -\frac{\sum_{k=1}^N a_k \left( \sum_{m=1}^k y[m-k-1] z^{-m+1} \right)}{\sum_{k=0}^N a_k z^{-k}},$$

which depends only on the initial conditions  $y[-1], y[-2], \dots, y[-N]$ . The inverse z-transform is the “zero-input response”  $y_{ZIR}[n]$ .

If  $y[-1]=y[-2]=\dots=y[-N]=0$ , then

$$Y(z) = Y_{ZICR}(z) = \frac{\sum_{k=0}^M b_k z^{-k}}{\sum_{k=0}^N a_k z^{-k}} X(z),$$

which depends only on the input  $x[n]$ . The inverse z-transform is the “zero-initial-condition response”  $y_{ZICR}[n]$ .



© 2010 by Oppenheim. Published by Pearson Prentice Hall, Pearson Education, Inc., Upper Saddle River, NJ.  
All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this  
material may be reproduced, in any form or by any means, without permission in writing from the publisher.

In general we have  $\mathcal{Y}(z) = \mathcal{Y}_{ZIR}(z) + \mathcal{Y}_{ZICR}(z)$ . Since the z-transform is linear, this implies  $y[n] = y_{ZIR}[n] + y_{ZICR}[n]$ , as was to have been shown.

- C. When the initial conditions are all zero,  $\mathcal{Y}(z) = \mathcal{Y}_{ZICR}(z)$  as shown in part B. Applying the bilateral z-transform to the difference equation gives


$$\mathcal{Y}(z) = -\sum_{k=1}^N \left( \frac{a_k}{a_0} \right) z^{-k} \mathcal{Y}(z) + \sum_{k=0}^M \left( \frac{b_k}{a_0} \right) z^{-k} X(z).$$


Solving for  $\mathcal{Y}(z)$  gives

$$\mathcal{Y}(z) = \frac{\sum_{k=0}^M b_k z^{-k}}{\sum_{k=0}^N a_k z^{-k}} X(z),$$

Now if  $x[n] = 0$  for  $n < 0$ , then  $X(z)$  is identical to  $\mathcal{X}(z)$ . In this case we have

$$\mathcal{Y}(z) = \mathcal{Y}_{ZICR}(z).$$





© 2010 by Oppenheim. Published by Pearson Prentice Hall, Pearson Education, Inc., Upper Saddle River, NJ.  
All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this  
material may be reproduced, in any form or by any means, without permission in writing from the publisher.

**3.50. (a)**


$$\begin{aligned} X(z) &= \sum_{n=0}^{\infty} x[n]z^{-n} \\ X(\infty) &= \lim_{z \rightarrow \infty} \sum_{n=0}^{\infty} x[n]z^{-n} = x[0] \end{aligned}$$


Therefore,  $X(\infty) = x[0] \neq 0$  and finite by assumption. Thus,  $X(z)$  has neither a pole nor a zero at  $z = \infty$ .

- (b) Suppose  $X(z)$  has finite numbers of poles and zeros in the finite  $z$ -plane. Then the most general form for  $X(z)$  is

$$X(z) = \sum_{n=0}^{\infty} x[n]z^{-n} = K z^L \frac{\prod_{k=1}^M (z - c_k)}{\prod_{K=1}^N (z - d_k)}$$

where  $K$  is a constant and  $M$  and  $N$  are finite positive integers and  $L$  is a finite positive or negative integer representing the net number of poles ( $L < 0$ ) or zeros ( $L > 0$ ) at  $z = 0$ . Clearly, since  $X(\infty) = x[0] \neq 0$  and  $< \infty$  we must have  $L + M = N$ ; i.e., the total number of zeros in the finite  $z$ -plane must equal the total number of poles in the finite  $z$ -plane.





© 2010 by Oppenheim. Published by Pearson Prentice Hall, Pearson Education, Inc., Upper Saddle River, NJ.  
All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this  
material may be reproduced, in any form or by any means, without permission in writing from the publisher.


**3.51.**


$$X(z) = \frac{P(z)}{Q(z)}$$

where  $P(z)$  and  $Q(z)$  are polynomials in  $z$ . Sequence is absolutely summable  $\Rightarrow$  ROC contains  $|z| = 1$   
and roots of  $Q(z)$  inside  $|z| = 1$ .

These conditions do not necessarily imply that  $x[n]$  is causal. A shift of a causal sequence would only  
add more zeros at  $z = 0$  to  $P(z)$ . For example, consider

$$\begin{aligned} X(z) &= \frac{z^2}{z - \frac{1}{2}} \quad |z| > \frac{1}{2} \\ &= \frac{z}{z - \frac{1}{2}} = z \cdot \frac{1}{1 - \frac{1}{2}z^{-1}} \\ \Rightarrow x[n] &= \left(\frac{1}{2}\right)^{n+1} u[n+1] \Rightarrow \text{right-sided but non-causal.} \end{aligned}$$






© 2010 by Oppenheim. Published by Pearson Prentice Hall, Pearson Education, Inc., Upper Saddle River, NJ.  
All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this  
material may be reproduced, in any form or by any means, without permission in writing from the publisher.


**3.52.**

$$\begin{aligned}x[n] &= \delta[n] + a\delta(n - N) \quad |a| < 1 \\X(z) &= 1 + az^{-N} \\ \hat{X}(z) &= \log X(z) = \log(1 + az^{-N}) = az^{-N} - \frac{a^2 z^{-2N}}{2} + \frac{a^3 z^{-3N}}{3} - \dots\end{aligned}$$

Therefore,

$$\hat{x}[n] = \sum_{k=1}^{\infty} \frac{(-1)^{k+1}}{k} a^k \delta[n - kN]$$





© 2010 by Oppenheim. Published by Pearson Prentice Hall, Pearson Education, Inc., Upper Saddle River, NJ.  
All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this  
material may be reproduced, in any form or by any means, without permission in writing from the publisher.

**3.53. (a)**

$$x[n] = x[-n] \implies X(z) = X\left(\frac{1}{z}\right)$$

Therefore,

$$X(z_0) = 0 = X\left(\frac{1}{z_0}\right)$$

i.e.,  $1/z_0$  is also a zero of  $X(z)$ .


**(b)**


$$x[n] \text{ real} \implies x[n] = x^*[n] \implies X(z) = X^*(z^*)$$

Therefore

$$X(z_0) = 0 = X(z_0^*)$$

i.e.,  $z_0^*$  is also a zero and by part (a) so is  $1/z_0^*$ .





© 2010 by Oppenheim. Published by Pearson Prentice Hall, Pearson Education, Inc., Upper Saddle River, NJ.  
All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this  
material may be reproduced, in any form or by any means, without permission in writing from the publisher.

**3.54. (a)**

$$\mathcal{Z}[x^*[n]] = \sum_{n=-\infty}^{\infty} X^*[n]z^{-n} = \left( \sum_{n=-\infty}^{\infty} x[n](z^*)^{-n} \right)^* = X^*(z^*)$$

**(b)**


$$\mathcal{Z}[x[-n]] = \sum_{n=-\infty}^{\infty} x[-n]z^{-n} = \sum_{n=-\infty}^{\infty} x[n](z^{-1})^{-n} = X(z^{-1})$$


**(c)**

$$\mathcal{Z}[\mathcal{R}e\{x[n]\}] = \mathcal{Z}\left[\frac{x[n] + x^*[n]}{2}\right] = \frac{1}{2} [X(z) + X^*(z^*)]$$

**(d)**

$$\mathcal{Z}[\mathcal{I}m\{x[n]\}] = \mathcal{Z}\left[\frac{x[n] - x^*[n]}{2j}\right] = \frac{1}{2j} [X(z) - X^*(z^*)]$$







© 2010 by Oppenheim. Published by Pearson Prentice Hall, Pearson Education, Inc., Upper Saddle River, NJ.  
All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this  
material may be reproduced, in any form or by any means, without permission in writing from the publisher.

**3.55.**

$$x_1(n) = (-1)^n x(n) \Rightarrow X_1(z) = \sum_{n=-\infty}^{\infty} (-1)^n x(n) z^{-n} = X(-z)$$

The poles and zeros are rotated 180 degrees about the origin.





© 2010 by Oppenheim. Published by Pearson Prentice Hall, Pearson Education, Inc., Upper Saddle River, NJ.  
All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

**3.56. (a)**

$$\theta_x(\omega) = \tan^{-1} \left( \frac{\text{Im}\{X(e^{j\omega})\}}{\text{Re}\{X(e^{j\omega})\}} \right) \Rightarrow \tan \theta_x(\omega) = \frac{-\sum_{n=0}^{N-1} x[n] \sin(n\omega)}{\sum_{n=0}^{N-1} x[n] \cos(n\omega)}$$

$$\tan \theta_x(\omega) \sum_{n=0}^{N-1} x[n] \cos(n\omega) = - \sum_{n=1}^{N-1} x[n] \sin(n\omega)$$

$$\tan \theta_x(\omega)x[0] + \sum_{n=1}^{N-1} x[n](\tan \theta_x(\omega) \cos(n\omega) + \sin(n\omega)) = 0$$

$$\tan \theta_x(\omega_k) + \frac{1}{x[0]} \sum_{n=1}^{N-1} x[n](\tan \theta_x(\omega_k) \cos(n\omega_k) + \sin(n\omega_k)) = 0$$

for  $N - 1$  values of  $\omega_k$  in the range  $0 < \omega_k < \pi$ .

$$(b) x[n] = \delta[n] + 2\delta[n-1] + 3\delta[n-2] \Rightarrow X(z) = 1 + 2z^{-1} + 3z^{-2}$$

$$\theta_x(\omega) = \tan^{-1} \left( \frac{-2 \sin(\omega) - 3 \sin(2\omega)}{1 + 2 \cos(\omega) + 3 \cos(2\omega)} \right)$$

Consider the values  $\theta_x(\frac{\pi}{2}) = \frac{5\pi}{4}$  and  $\theta_x(\frac{2\pi}{3}) = \frac{5\pi}{6}$ , which give the equations

$$\begin{aligned} \tan \theta_x\left(\frac{\pi}{2}\right) &+ \frac{1}{x[0]} \left[ x[1] \left( \tan \theta_x\left(\frac{\pi}{2}\right) \cos \frac{\pi}{2} + \sin \frac{\pi}{2} \right) \right. \\ &\quad \left. + x[2] \left( \tan \theta_x\left(\frac{\pi}{2}\right) \cos \pi + \sin \pi \right) \right] = 0 \\ \tan \theta_x\left(\frac{2\pi}{3}\right) &+ \frac{1}{x_0} \left[ x[1] \left( \tan \theta_x\left(\frac{2\pi}{3}\right) \cos \frac{2\pi}{3} + \sin \frac{2\pi}{3} \right) \right. \\ &\quad \left. + x[2] \left( \tan \theta_x\left(\frac{2\pi}{3}\right) \cos \frac{4\pi}{3} + \sin \frac{4\pi}{3} \right) \right] = 0 \end{aligned}$$


$$\begin{aligned} 1 + \frac{1}{x[0]} (x[1] \cdot 1 + x[2] \cdot -1) &= 0 \\ -\frac{1}{\sqrt{3}} + \frac{1}{x[0]} \left( x[1] + \frac{1}{2\sqrt{3}} + \frac{\sqrt{3}}{2} \right) + x[2] \left( \frac{1}{2\sqrt{3}} - \frac{\sqrt{3}}{2} \right) &= 0 \end{aligned}$$

$$\left. \begin{aligned} x[0] + x[1] - x[2] &= 0 \\ -x[0] + 2x[1] - x[2] &= 0 \end{aligned} \right\} \Rightarrow \left\{ \begin{aligned} x[1] &= 2x[0] \\ x[2] &= 3x[0] \end{aligned} \right.$$

Therefore

$$x[n] = x[0](\delta[n] + 2\delta[n-1] + 3\delta[n-2])$$

where  $x[0]$  is undetermined.




© 2010 by Oppenheim. Published by Pearson Prentice Hall, Pearson Education, Inc., Upper Saddle River, NJ.  
All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this  
material may be reproduced, in any form or by any means, without permission in writing from the publisher.


**3.57.**  $x[n] = 0$  for  $n < 0$  implies:

$$\lim_{z \rightarrow \infty} X(z) = \lim_{z \rightarrow \infty} \sum_{n=0}^{\infty} x[n]z^{-n} = x[0] + \lim_{z \rightarrow \infty} \sum_{n=1}^{\infty} x[n]z^{-n} = x[0]$$

For the case  $x[n] = 0$  for  $n > 0$ ,

$$\lim_{z \rightarrow 0} X(z) = \lim_{z \rightarrow 0} \sum_{n=-\infty}^0 x[n]z^{-n} = x[0] + \lim_{z \rightarrow 0} \sum_{n=1}^{\infty} x[-n]z^n = x[0]$$





© 2010 by Oppenheim. Published by Pearson Prentice Hall, Pearson Education, Inc., Upper Saddle River, NJ.  
All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this  
material may be reproduced, in any form or by any means, without permission in writing from the publisher.

**3.58. (a)**

$$c_{xx}[n] = \sum_{k=-\infty}^{\infty} x[k]x[n+k] = \sum_{k=-\infty}^{\infty} x[-k]x[n-k] = x[-n]*x[n]$$

$$C_{xx}(z) = X(z^{-1})X(z) = X(z)X(z^{-1})$$

$X(z)$  has ROC:  $r_R < |z| < r_L$  and therefore  $X(z^{-1})$  has ROC:  $r_L^{-1} < |z| < r_R^{-1}$ . Therefore  $C_{xx}(z)$  has ROC:  $\max[r_L^{-1}, r_R] < |z| < \min[r_R^{-1}, r_L]$

(b)  $x[n] = a^n u[n]$  is stable if  $|a| < 1$ . In this case

$$X(z) = \frac{1}{1 - az^{-1}} \quad |a| < |z| \quad \text{and} \quad X(z^{-1}) = \frac{1}{1 - az} \quad |z| < |a^{-1}|$$


Therefore

$$\begin{aligned} C_{xx}(z) &= \frac{1}{1 - az^{-1}} \frac{1}{1 - az} = \frac{-az^{-1}}{(1 - az^{-1})(1 - a^{-1}z^{-1})} \\ &= \frac{\frac{1-a^2}{1-a^2}}{1 - az^{-1}} - \frac{\frac{1-a^2}{1-a^2}}{1 - a^{-1}z^{-1}} \quad |a| < |z| < |a^{-1}| \end{aligned}$$

This implies that

$$c_{xx}[n] = \frac{1}{1 - a^2} [a^n u[n] + a^{-n} u[-n - 1]]$$

Thus, in summary, the poles are at  $a$  and  $a^{-1}$ ; the zeros are at 0 and  $\infty$ ; and the ROC of  $C_{xx}(z)$  is  $|a| < |z| < |a^{-1}|$ .

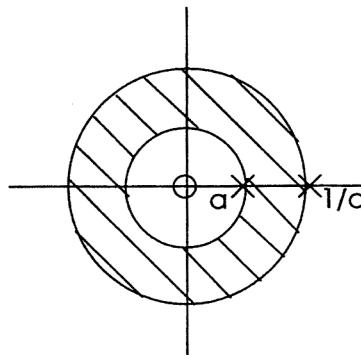


(c) Clearly,  $x_1[n] = x[-n]$  will have the same autocorrelation function. For example,

$$X_1(z) = \frac{1}{1 - az} \quad |z| < |a^{-1}| \implies C_{x_1 x_1}(z) = \frac{1}{1 - az} \frac{1}{1 - az^{-1}} = C_{xx}(z)$$

(d) Also, any delayed version of  $x[n]$  will have the same autocorrelation function; e.g.,  $x_2[n] = x[n - m]$  implies

$$X_2(z) = \frac{z^{-m}}{1 - az^{-1}} \quad |a| < |z| \implies C_{x_2 x_2}(z) = \frac{z^{-m}}{1 - az^{-1}} \frac{z^m}{1 - az} = C_{xx}(z)$$



© 2010 by Oppenheim. Published by Pearson Prentice Hall, Pearson Education, Inc., Upper Saddle River, NJ.  
All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this  
material may be reproduced, in any form or by any means, without permission in writing from the publisher.

- 3.59.** In order to be a  $z$ -transform,  $X(z)$  must be analytic in some annular region of the  $z$ -plane. To determine if  $X(z) = z^*$  is analytic we examine the existence of  $X'(z)$  by the Cauchy Riemann conditions. If

$$X(z) = X(x + jy) = u(x, y) + jv(x, y)$$

then for the derivative to exist at  $z$ , we must have

$$\frac{\partial u}{\partial x} = \frac{\partial v}{\partial y} \quad \text{and} \quad \frac{\partial u}{\partial y} = -\frac{\partial v}{\partial x}$$

In our case,


$$X(x + jy) = x - jy$$


and thus,

$$\frac{\partial u}{\partial x} = 1 \neq \frac{\partial v}{\partial y} = -1$$

unless  $x$  and  $y$  are zero. Thus,  $X'(z)$  exists only at  $z = 0$ .  $X(z)$  is not analytic anywhere. Therefore,

$$x[n] = \frac{1}{2\pi j} \oint X(z)z^{n-1} dz \quad \text{does not exist.}$$





© 2010 by Oppenheim. Published by Pearson Prentice Hall, Pearson Education, Inc., Upper Saddle River, NJ.  
All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this  
material may be reproduced, in any form or by any means, without permission in writing from the publisher.

**3.60.** If  $X(z)$  has a pole at  $z = z_0$  then  $A(z)$  can be expressed as a Taylor's series about  $z = z_0$ .

$$A(z) = A(z_0) + \sum_{n=1}^{\infty} \frac{A^n(z_0)}{n!} (z - z_0)^n$$

where  $A(z_0) = 0$ . Thus

$$\begin{aligned}\text{Res } [X(z) \text{ at } z = z_0] &= X(z)(z - z_0)|_{z=z_0} = \frac{B(z)}{A(z)} \Big|_{z=z_0} \\ &= \frac{B(z)(z - z_0)}{\sum_{n=1}^{\infty} \frac{A^n(z_0)}{n!} (z - z_0)^n} \Big|_{z=z_0} \\ &= \frac{B(z)}{A'(z_0) + \sum_{n=2}^{\infty} \frac{A^n(z_0)}{n!} (z - z_0)^{n-1}} \Big|_{z=z_0} = \frac{B(z_0)}{A'(z_0)}\end{aligned}$$

