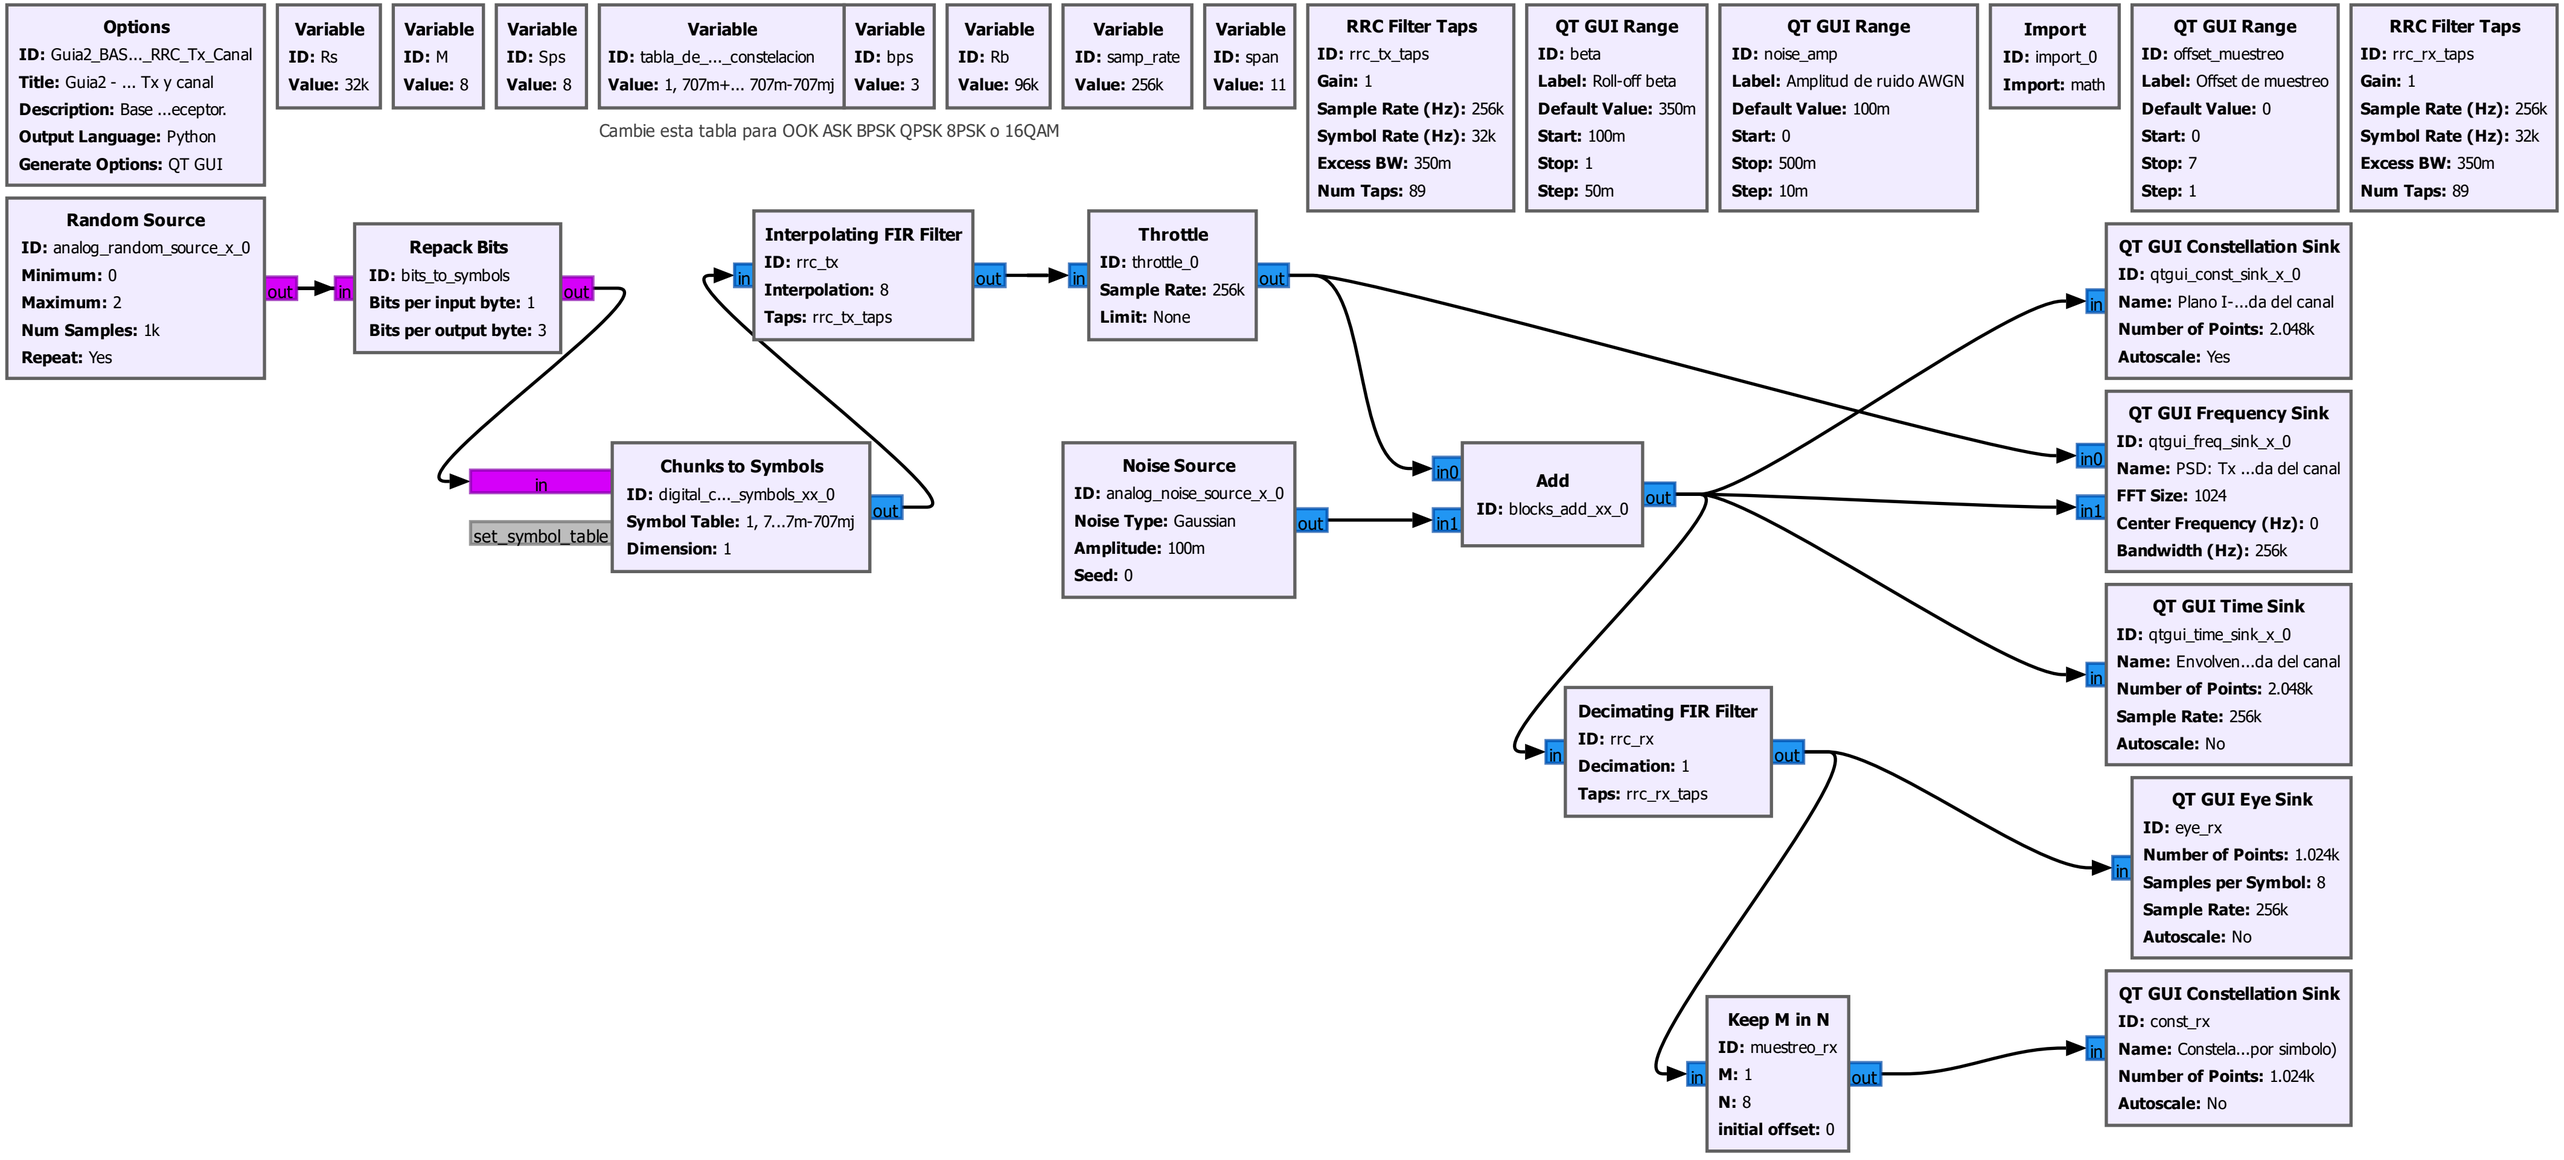

Options
ID: Guia2_BAS..._RRC_Tx_Canal
Title: Guia2 - ... Tx y canal
Description: Base ...eceptor.
Output Language: Python
Generate Options: QT GUI
Variable
ID: Rs
Value: 32k
Variable
ID: M
Value: 8
Variable
ID: Sps
Value: 8
Variable
ID: tabla_de_..._constelacion
Value: 1, 707m+... 707m-707mj
Variable
ID: bps
Value: 3
Variable
ID: Rb
Value: 96k
Variable
ID: samp_rate
Value: 256k
Variable
ID: span
Value: 11
Cambie esta tabla para OOK ASK BPSK QPSK 8PSK o 16QAM
RRC Filter Taps
ID: rrc_tx_taps
Gain: 1
Sample Rate (Hz): 256k
Symbol Rate (Hz): 32k
Excess BW: 350m
Num Taps: 89
QT GUI Range
ID: beta
Label: Roll-off beta
Default Value: 350m
Start: 100m
Stop: 1
Step: 50m
QT GUI Range
ID: noise_amp
Label: Amplitud de ruido AWGN
Default Value: 100m
Start: 0
Stop: 500m
Step: 10m
Import
ID: import_0
Import: math
QT GUI Range
ID: offset_muestreo
Label: Offset de muestreo
Default Value: 0
Start: 0
Stop: 7
Step: 1
RRC Filter Taps
ID: rrc_rx_taps
Gain: 1
Sample Rate (Hz): 256k
Symbol Rate (Hz): 32k
Excess BW: 350m
Num Taps: 89
Random Source
ID: analog_random_source_x_0
Minimum: 0
Maximum: 2
Num Samples: 1k
Repeat: Yes
out
in
Repack Bits
ID: bits_to_symbols
Bits per input byte: 1
Bits per output byte: 3
out
in
set_symbol_table
Chunks to Symbols
ID: digital_c..._symbols_xx_0
Symbol Table: 1, 7...7m-707mj
Dimension: 1
out
Interpolating FIR Filter
ID: rrc_tx
Interpolation: 8
Taps: rrc_tx_taps
in
out
Throttle
ID: throttle_0
Sample Rate: 256k
Limit: None
in
out
Noise Source
ID: analog_noise_source_x_0
Noise Type: Gaussian
Amplitude: 100m
Seed: 0
out
Add
ID: blocks_add_xx_0
in0
in1
out
QT GUI Constellation Sink
ID: qtgui_const_sink_x_0
Name: Plano I-...da del canal
Number of Points: 2.048k
Autoscale: Yes
QT GUI Frequency Sink
ID: qtgui_freq_sink_x_0
Name: PSD: Tx ...da del canal
FFT Size: 1024
Center Frequency (Hz): 0
Bandwidth (Hz): 256k
QT GUI Time Sink
ID: qtgui_time_sink_x_0
Name: Envolven...da del canal
Number of Points: 2.048k
Sample Rate: 256k
Autoscale: No
Decimating FIR Filter
ID: rrc_rx
Decimation: 1
Taps: rrc_rx_taps
in
out
QT GUI Eye Sink
ID: eye_rx
Number of Points: 1.024k
Samples per Symbol: 8
Sample Rate: 256k
Autoscale: No
Keep M in N
ID: muestreo_rx
M: 1
N: 8
initial offset: 0
in
out
QT GUI Constellation Sink
ID: const_rx
Name: Constela...por simbolo)
Number of Points: 1.024k
Autoscale: No