UGREEN®
– – More For You – –

USB Bluetooth Adapter Driver Installation

MANUAL

USB Bluetooth Adapter Driver Installation Instructions
Thank you for purchasing the Ugreen products. For optimum operation, please read m   this instal carefully before use.

Product Details

USB ———— Bluetooth Adapter ———— Bluetooth4.0

How It Works

PC — Bluetooth Adapter — Sound box, PDC, Phone, Headphones, Keyboard, Mouse

Installation
This product is compatible with Windows XP, Vista/Win7/8/10, etc., does not work for Apple Mac OS.
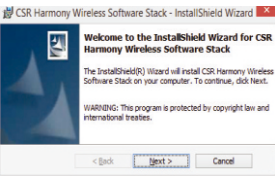

You can use attached CD-ROM drive or contact Ugreen support team for latest driver link to install. This is an installation instruction for Windows 7.

1. Start the installation by clicking the setup.exe.
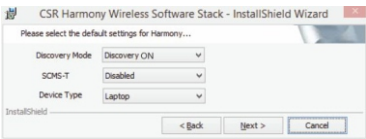
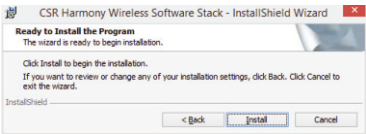2. Select the language and click OK.

3. Click Next.

---

4. Confirm that you agree with the terms of the License Agreement and click Next.

5. Select the installation directory (recommended to use the preset) and click Next.

---
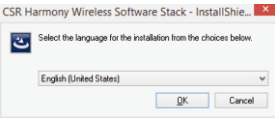
6. Select the discovery mode, Discovery ON; select the device type, Laptop or PC/Desktop. You may keep the original values of options of SCMS-T. Click Next.
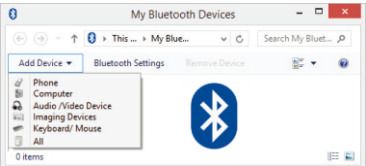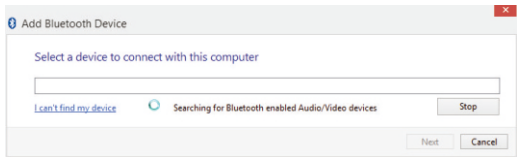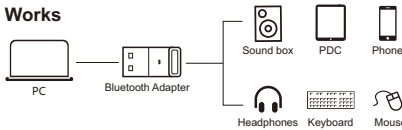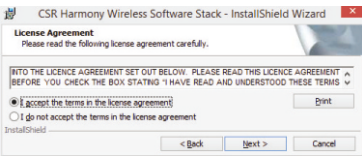
7. Click Install.

---

8. Click Finish.
9. Restart your computer.
10. Insert Bluetooth dongle to USB port of the computer and you will find a Bluetooth icon in the notification area which means the driver has been installed successfully.

Notes:
- If there is no Bluetooth icon in the notification area, and please restart your computer again or reinstall the drive according to the above steps.

Pairing
- Click with right button to the Bluetooth icon in the notification area and select Show Bluetooth Devices.

- Click Add Device and select, for example, Audio/Video device.

- Make sure that the device is visible during the searching. Select the found out device from the list and click Next.

- After finishing the pairing click Finish.
- During the pairing you may be prompted to enter the pairing code. You must enter the identical code to both devices. If you pair the earphones that do not enable to enter a code, please, try to use the combination of 0000 or 1234, or **have a look at the manual of the paired device.**