# **BONENG**



C斜齿 齿轮马达

C Helical Gearmotor

Edit date 08/2023 Selection Catalogue: C05.009-CN/EN

## **Boneng Transmission**



### 注意事项:

- ◆ 样本中的结构示意图、外 形图及其他附图只属范 例, 无严格比例要求。 (未注尺寸单位均为 mm)。
- ◆ 所注重量仅为平均值,并不具有约束力。

## △必须严格遵守以下各项:

- ◆ 为防止意外事故发生,所有旋转部件均按照使用者所在国家和地区的安全规范由购置方加罩保护。
- ★ 试车之前必须认真阅读使用说明书。
- ◆ 齿轮马达在供货时已处于 准运行状态,运行前需加 注润滑油。
- ◆ 本样本中注油量只作为参考值,实际注油量应以油镜上的标记为准。
- ▶ 润滑油粘度应按齿轮马达 使用工况及使用环境温度 选取。
- ◆ 推荐采用知名品牌的润滑油。

#### Note:

◆ The structure scheme,appearance diagram and other attached diagrams in sample are

examples, there is no strict proportion requirement. (The unmarked dimension units are mm).

◆ The marked weight is average value, it has no constraint force.

# ∴ You must conform to the following instructions:

- ◆ To prevent accidents, all the rotation parts are added with protective covers according to the safety regulations of the nation and region.
- ◆ Before debugging, you should carefully read instruction book.
- ◆ Gearbox is on running-permission status when delivered, you should add lubrication oil before putting it into running.
- ◆ The marked oil quantity in sample is only reference value, actual oil filling quantity should be the same with the mark on oil immersion lens.
- ◆ Lubrication oil viscosity should be selected according to working situation and application environment temperature of gearmotor.
- ◆ You can only apply lubrication oil of internationlly famous brand.

# 目录

# Contents

01.型号表示方法 01	01.Type Designation ····· 01
02.安装方位 03	02.Mounting Positions ··· 03
03.选型及举例	03.Type Selection and
05	Example 05
04.传动能力表 07	04. Transmission Capacity · · 07
05.允许的径向力 ·······	05.Permissible Radial
17	Force 17
06.外形尺寸图表 19	06.Dimensions ····· 19
07.输入法兰和输入轴 ········	07.Input Flange and
59	Input shaft ····· 59
08.组合型尺寸图表	08.Combi-type
69	Dimensions ····· 69
09.可选附件和指定配置	09. Accessories and Specific
70	Configuration ······ 70
10.润滑油 71	10.0il ····· 71
11.马达防雨罩尺寸	11. Motor Rainproof Cover
73	Dimensions ····· 73
12.轴端中心孔 73	12. Shaft End Centre Hole ·· 73
13.平键与键槽的尺寸	13.Dimension of Parallel
74	Key and Keyway ······ 74



#### 1型号表示方法 1 Type Designation


系列名 传动级数 1级/2级/3级 机座号 安装形式 F=法兰安装 S=小法兰安装 输出形式 公称减速比代号

## **安装方位** D1/D2/D3/D4/D5/D6

可选附件和指定配置 0=无可选 6=补偿油箱

#### 润滑油代号

0=不加润滑油(C200/C201, C300/C301 出厂已加入000#极压锂基润滑脂,以及 其他产品不加油出厂时,请选此项) 1=矿物润滑油VG220(环境温度为-20 °C~+40°C,需加油出厂时,请选此项) 5=合成润滑油VG220(环境温度<0℃,需 加油出厂时,推荐选用此项)

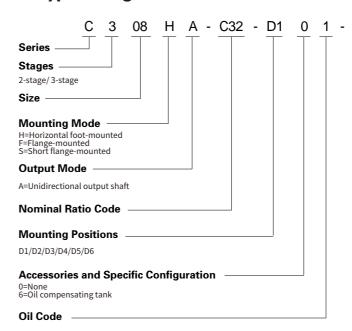

0=Without oil filling(Please select this option when you do not need lubricating oil);
1=With mineral oil VG220(Please select this option when the ambient temperature is -20°C-+40°C, and you need lubricating oil);
5=With synthetic lubricating oil VG220(It is recommended to select this option when you need lubricating oil and the ambient temperature is below 0°C);


#### 注1)马达系列/机座号/极数/功率代号 **Note**<sup>1)</sup> Motor Type/Frame Size/Poles/Power Code

功率 kW	4极规格	6极规格	功率 kW	4极规格	6极规格	功率 kW	4极规格	6极规格	功率 kW	4极规格	6极规格
Power KW	4-pole Type	6-pole Type	Power KW	4-pole Type	6-pole Type	Power KW	4-pole Type	6-pole Type	Power KW	4-pole Type	6-pole Type
0.09	MS056M4A09		1.1	MS090S4B11 MH090S4B11 MP090S4B11 MA090M4B11	MH090S6B11 MP090M6B11	11	MH160S4C11 MP160M4C11 MA160M4C11	MH160M6C11 MP160M6C11	55	MH250M4C55 MP250M4C55 MA250M4C55	MH280M6C55 MP280M6C55
0. 12	MS056M4A12 MH063M4A12 MP063M4A12 MA063M4A12		1.5	MS090S4B15 MH090S4B15 MP090M4B15 MA090M4B15	MH100M6B15 MP100M6B15	15	MH160M4C15 MP160L4C15 MA160L4C15	MH180M6C15 MP180M6C15	75	MH280S4C75 MP280S4C75 MA280S4C75	MH315S6C75 MP315S6C75
0. 18	MH063M4A18 MP063M4A18 MA063M4A18	MH071M6A18 MP071M6A18	2. 2	MS100M4B22 MH100M4B22 MP100M4B22 MA100M4B22	MH112M6B22 MP112M6B22	18.5	MH180M4C18 MP180M4C18 MA180M4C18	MH200M6C18 MP200M6C18	90	MH280M4C90 MP280M4C90 MA280M4C90	MH315M6C90 MP315M6C90
0. 25	MS063M4A25 <sup>3)</sup> MH071M4A25 MP071M4A25 MA071M4A25	MH071M6A25 MP071M6A25	3	MS100M4B30 MH100M4B30 MP100M4B30 MA100M4B30	MH132S6B30 MP132S6B30	22	MH180L4C22 MP180L4C22 MA180L4C22	MH200M6C22 MP200M6C22	110	MH315S4D11 MP315S4D11	MH315L6D11
0.37	MH071M4A37 MP071M4A37 MA071M4A37	MH080M6A37 MP080M6A37	4	MS112M4B40 MH112L4B40 MP112L4B40 MA112L4B40	MH132M6B40 MP132S6B40	30	MH200M4C30 MP200M4C30 MA200M4C30	MH225M6C30 MP225M6C30	132	MH315M4D13 MP315M4D13	MH315L6D13
0. 55	MS071M4A55 <sup>4)</sup> MS080M4A55 MH080M4A55 MP080M4A55 MA080M4A55	MH080M6A55 MP080M6A55	5. 5	MS132S4B55 MH132S4B55 MP132M4B55 MA132L4B55	MH132M6B55 MP132M6B55	37	MH225M4C37 MP225M4C37 MA225M4C37	MH250M6C37 MP250M6C37	160	MH315L4D16 MP315L4D16	
0.75	MS080M4A75 MH080M4A75 MP080M4A75 MA080M4A75	MH090S6A75 MP090S6A75	7.5	MS132M4B75 MH132M4B75 MP132L4B75 MA132L4B75	MH160S6B75 MP160S6B75	45	MH225M4C45 MP225M4C45 MA225M4C45	MH280S6C45 MP280S6C45	200	MH315L4D20 MP315L4D20	

注: 2) 仅用于C200/C300, 3) 仅用于C200/C300/C201/C301 4) 仅用于C201/C301

Note: 2) Only C200/C300, 3) OnlyC200/C300/C201/C301 4) OnlyC201/C301



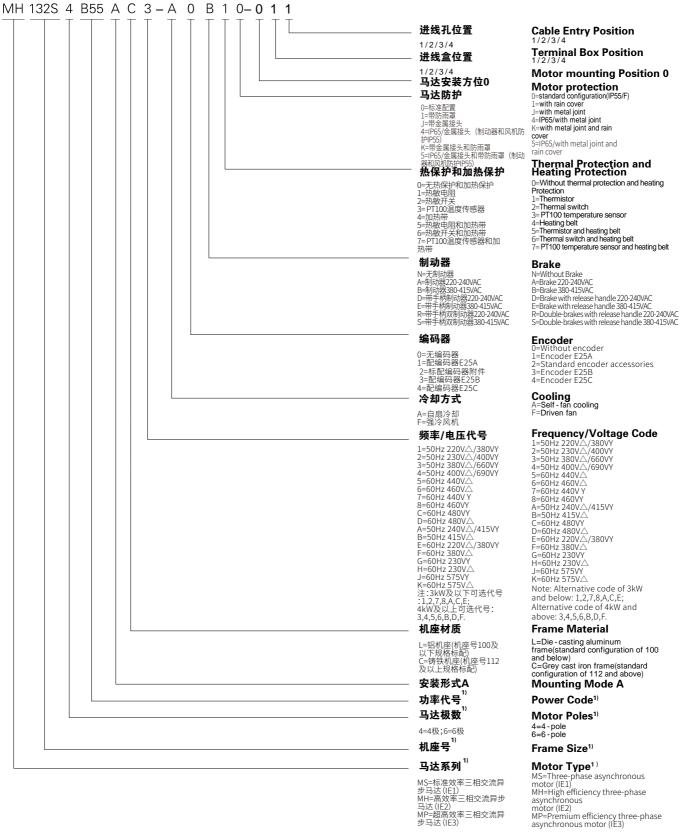

◆配输入法兰或输入轴型号示例: C308HA-C32-D101-AE3 ◆ Example of product type with input flange or input shaft: C308HA-C32-D101-AE300 ◆Example of product type with input flange and motor type: C308HA - C32 - D101 - AP132 - M A132M4B55FC6-A0N10-011

◆ Combi-type Designation: C308HA/C205 - D28 - D100 - M A080M4A75AL6 - A0N00 - 011

Note:MA motor series (NEMA efficiency three-phase asynchronous motor) can be configured with pole code 4, frequency/voltage code 6,8,G,H,J,K, brake code A,D,G,K.

**◆配输入法兰和马达型号示例:** C308HA-C32-D101-A

◆组合型号示例: C308HA/C205-D28-D100-M H080M4A75AL1-A0N00-011

注: MA系列(NEMA能效三相交流异步马达)可选极数代号4,频率/电压代号6,8,G,H,J,K,制动器代号A,D,G,K。


P132-MH132S4B55FC

3-A0N10-011



## 2 安装方位


## Mounting Positions

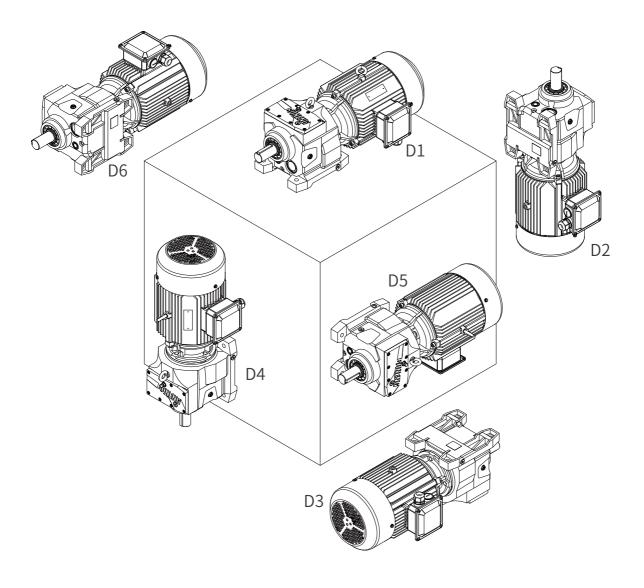




### 马达接线盒和进线孔位置 (视角:马达尾部)

Motor terminal box and cable entry position ( View :Motor afterbody )



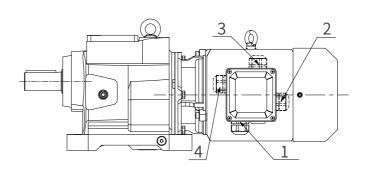

整机标配颜色

(RAL5015)

Assembly colour of gearmotor

(RAL5015)



## 3 选型及举例

## **3 Type Selection and Example**

序号	说明		代号_			参数计算		
Step	Description		Symbol		Paramete	rs Calculation an		
				负荷 性质	Load Characteristic		每天使用 C 时间(小时)	perating hours per day (h)
					Characteristic	≤2	2~10	10~24
		Driven Machine		均匀负载	Uniform	1.00(1.00)	1.00(1.25)	1.25(1.50)
1	1/2-10-70	Factor	f1	一般冲击	Moderate	1.00(1.25)	1.25(1.50)	1.50(1.75)
				强烈 冲击	Heavy	1.25(1.50)	1.50(1.75)	1.75(2.00)
						注:当每小时起停止次数≥10½ 使用括号内数值	欠,请 brackets	oly values in the when starts per 10 times or
2		Input Speed	n1			≤1800rpm 更ī 转速请咨询。		n Consult us peed required.
3		Calculation of the Ratio	i			i=n1/n2		
4		Transmission	10			C1一级: 98% C2二级: 96%	,	
'	动效率	Efficienc	η			C3三级: 94%	,	
5	设备所需 的扭矩或 功率,确 定齿轮马 达的输入	Calculation of the input power of the gearunit on basis of the torque and power required by the driven machine.	P1	P1=T2·n1/	(9550·i·η) σ	or P1=P2/ŋ		
6	(算动表齿规联需点,能引擎 ),他可以是一个人,我们就是一个人。 一个人,我们就是我们就是一个人,我们就是一个人,我们就是一个人,我们就是一个人,我们就是一个人,我们就是一个人,我们就是一个人,我们就是一个人,我们就是一个我们就是一个人,我们就是一个我们就是一个人,我们就是一个我们就是一个人,我们就是一个我们就是一个我们就是我们就是我们就是我们就是我们就是我们就是我们就是我们就是我们就是我们就是	Determination of gearunit type referring to the table of transmission capacity after calculation, For directly-connected motor, require to refer to directly-connected motor power table.	T2N、 P1N	T2N≥T2·f.	1 or P1N≫F	P1 · f1		
7	轴向力校 核	Check the radial and axial forces on the shafts.	Fr1/Fr2 Fa1/Fa2			查15页,输出 径向力Fr2表	轴 See the ta Force on ( (Fr2) on P2	ble of Radial Output Shaft .5
8	開 場 開 場 場 に ま 式	Determination of Lubrication system	/			一般采用飞溅剂	国滑 Generally Lubrication	Splash
9		Determination of Cooling Syste	/			一般采用自然冷	令却 Generally Cooling	Air
10	按型号表 示方法确 完全项	Determination of every item included in the Type Designation	/			型号表示方法贝 01页	Designati	s about Type on, see P01
11		Normal ambient conditions	/			环境温度: -20 40℃,空旷场均 风良好,海拔高 1000米以下,- 工厂灰尘。	也通 to 40°C, a 高度 good ven 一般 not excee and com	temperature -20 imple space, tilation,altitude eding 1000m mon plant dust.
12		Special ambient conditions	/			高温、低温、 多,化学作用 (例:酸碱等) 露天(直接日 冰、水淋等), 咨询。	,  sites,cnem 震、  (acids,alka	re, dusty ical reaction line, etc), or open ght, ice, rain,etc),



## 举例 Example

#### ◆ 已知条件:

- 1、被驱动设备负荷性质:一般冲击,工作6小时/天,启动频率5次/小时;
- 2、马达: 4极,

转速n1=1450r/min;

- 3、所需功率P2=1.6kW, 所需转速n2=26r/min;
- 4、安装输出形式: 法兰安装,安装方位 D1,马达接线盒1号位,进线孔1号位。

### ◆ 选型步骤:

- 1、根据负荷性质查表可得出被驱动设备 系数f1=1.25;
- 2、确定速比iN:

i=n1/n2=1450/26=55.7, 取公称减速比iN=56:

3、计算输入功率并确定马达功率(查表得出齿轮传动效率 $\eta$ =94%):

查直联马达功率表,可直联;

4、确定减速机额定功率

P1N: P1N≥P2·f1/η

 $=1.6 \cdot 1.25 / 0.94 = 2.13 \text{kW};$ 

5、根据已知条件和以上数据,查传动能力表可选出减速马达型号为:

C307-

FA-C56-D100-MS100M4B22AL2-A0N00 -011

#### Known Criteria:

- 1.Load characteristics by the driven machine: Moderate, working 6 hours/d and starting 5 times/h;
- 2. Normal motor: 4-pole 460V 60Hz, speed n1=1740r/min;
- 3. The power required P2=1.6kW, speed n2=32.3 r/min;
- 4. Mounting mode: flange-mounted, mounting position D1, motor terminal box 1, cable entry position 1.

#### Selection steps:

1. By referring to the table of Load Characteristic,

we get the driven machine factor f1=1.25;

- 2、Calculation of the Ratio iN: i=n1/n2=1740/32.3=53.9, nominal ratio iN=56;
- 3、Calculation of the input power and determination of the motor power

(transmission efficiency $\eta$ =94%): P1 $\geqslant$ P2/ $\eta$ =1.6/0.94=1.7kW, so 2.2kW motor is selected.

Refer to the directly-connected motor power table,

it can be directly-connected;

4. Determination of the nominal power of the geared motor P1N:

P1N≥P2·f1/n\

=1.6·1.25/0.94=2.13kW;

5. The type selected:

C307-

FA-C56-D100-MA100M4B22AL8-A0N00 -011

n2:被驱动设备所需的输出转速 T2:被驱动设备所需的输出扭矩

P2: 被驱动设备所需的输出功率 T2N: 齿轮马达的额定输出扭矩

P1N: 齿轮马达的额定输入功率

n2: The output speed required by the driven machine.

T2: The output torque required by the driven machine.

P2: The output power required by the driven machine.

T2N: The rated output torque of gearmotor. P1N: The rated input power of gearmotor.



## 4 传动能力表

## **4 Transmission Capacity**

4.1 C系列传动能力表

4.1 C Transmission capacity

C...(iN=1.25-7.1)

C...(iN=1.25-7.1)

公称 输入转速	公称 输出转速	公称减速比 代号	公称 减速比	额定输出 扭矩	精确 减速比	额定输入 功率	额定输出 扭矩	精确 减速比	额定输入 功率	额定输出 扭矩	精确 减速比	额定输入 功率
Nominal Input Speed	Nominal Output Speed	Nominal Ratio Code	Nominal Ratio	Rated Output Torque	Exact Ratio	Rated Intput Power	Rated Output Torque	Exact Ratio	Rated Intput Power	Rated Output Torque	Exact Ratio	Rated Intput Power
$n_{\rm 1N} \atop ({\rm r/min})$	$n_{2N} \atop \text{(r/min)}$	Code	$\mathtt{i}_{\mathtt{N}}$	$T_{2N} \atop \text{(N. m)}$	iex	$\Pr_{\stackrel{(kW)}{\text{\tiny (kW)}}}$	$T_{2N} \atop \text{(N. m)}$	iex	$\Pr_{\stackrel{(kW)}{\text{\tiny (kW)}}}$	$T_{2N} \atop \text{(N. m)}$	iex	$\Pr_{\stackrel{(kW)}{\text{\tiny (kW)}}}$
					C103			C104			C106	
	1160	B13	1. 25	30	1. 22	3. 75	65	1. 28	7. 7	110	1. 25	13. 4
	1036	B14	1.4	33	1. 37	3. 65	70	1.44	7. 4	120	1. 43	12. 7
	906	B16	1.6	36	1. 56	3. 50	70	1.62	6.6	130	1.63	12. 1
	806	B18	1.8	40	1. 77	3. 44	76	1.80	6. 4	140	1.82	11.7
	725	B20	2	45	2.00	3. 42	85	2.06	6. 3	140	2. 03	10.5
	647	B22	2. 24	45	2. 15	3. 17	90	2. 27	6.0	140	2. 23	9. 5
	580	B25	2. 5	40	2. 52	2. 41	90	2. 56	5. 3	130	2. 53	7.8
	518	B28	2.8	40	2. 86	2. 13	90	2. 73	5. 0	125	2. 77	6. 9
1450	460	B32	3. 15	30	3. 15	1. 45	60	3. 17	2. 87	120	3. 15	5.8
	408	B36	3. 55	24	3. 44	1.06	55	3. 57	2. 34	100	3. 35	4. 54
	363	B40	4	20	3. 76	0.81	45	3.90	1.75	80	4.09	2. 97
	322	B45	4.5				30	4. 28	1.06	80	4.60	2. 64
	290	B50	5							70	4. 89	2. 17
	259	B56	5.6							60	5. 53	1.65
	230	В63	6.3									
	204	B71	7. 1									
	600	B16	1.6	36	1.56	2. 32						
-	533 480	B18 B20	1.8	40 45	1. 77 2. 00	2. 28 2. 26	85	2.06	4. 1			
	429	B22	2. 24	45	2. 15	2. 10	90	2. 27	4. 0			
960	384	B25	2.5		_		90	2.56	3.5	130	2. 53	5. 2
300	343	B28	2.8				90	2. 73	3.3	125	2. 77	4. 5
-	305	B32	3. 15							120	3. 15	3.8
-	270	B36	3. 55							100	3. 35	3.0
-	240	B40	4									
	213	B45	4.5									

注: (1)齿轮马达的实际输出转速应 是 实际输入转速n1/精确减速比iex; (2)齿轮马达的实际输入转速n1 对应的额定输入功率应是:

P<sub>1</sub>N=T<sub>2</sub>N\*n<sub>1</sub>/(9550\*iex),公式中额定输出扭矩T<sub>2</sub>N不变。

Note: (1) Actual output speed of the gearmotor: Actual input speed (n1)/Exact ratio (iex);

(2) Rated input power corresponding to actual input speed of the gearmotor: P1N=T2N\*n1/(9550\*iex),the rated output torque T2Nin the formula remains unchanged.



- 额定输出 扭矩	精确 减速比	额定输入 功率	额定输出 扭矩	精确 减速比	额定输入 功率	额定输出 扭矩	精确 减速比	额定输入 功率	额定输出 扭矩	精确 减速比	额定输入 功率
Rated Output Torque	Exact Ratio	Rated Intput Power	Rated Output Torque	Exact Ratio	Rated Intput Power	Rated Output Torque	Exact Ratio	Rated Intput Power	Rated Output Torque	Exact Ratio	Rated Intput Power
T <sub>2N</sub> (N. m)	iex	P <sub>1N</sub> (kW)	T <sub>2N</sub> (N. m)	iex	$\Pr_{\substack{\text{(kW)}}}$	T <sub>2N</sub> (N. m)	iex	$\Pr_{\stackrel{(kW)}{\text{\tiny (kW)}}}$	T <sub>2N</sub> (N. m)	iex	P <sub>1N</sub> (kW)
	C107			C108			C109			C110	
150	1.28	17.8	280	1.26	33.8	420	1. 25	51	600	1. 23	74
170	1.45	17.7	310	1.43	32. 9	450	1. 37	50	660	1. 38	73
180	1.61	16.9	355	1.66	32. 5	510	1.62	47.9	750	1.63	70
190	1.85	15.6	380	1.81	32.0	550	1.81	46. 1	800	1.76	69
200	2. 08	14.6	400	2.03	29. 9	580	1. 94	45. 5	850	2.06	63
220	2. 33	14. 4	420	2. 23	28. 7	650	2. 21	44.6	900	2. 28	60
220	2. 59	12. 9	430	2. 57	25. 4	650	2. 46	40.1	900	2. 42	56
220	2. 84	11.8	430	2. 74	23.8	650	2. 79	35. 4	900	2. 75	49. 7
220	3. 09	10.8	420	3. 17	20. 1	650	3. 13	31.5	900	3.08	44. 4
220	3. 47	9.6	410	3.60	17. 3	650	3. 57	27.6	900	3. 42	40.0
190	3.80	7. 6	320	4.00	12. 1	650	3. 81	25. 9	780	4.00	29.6
180	4. 46	6. 1	300	4. 50	10.1	530	4. 38	18. 4	760	4. 30	26.8
130	4. 96	3. 98	250	4. 95	7. 7	400	4. 92	12. 3	680	4.83	21.4
120	5. 45	3. 34	200	5. 41	5. 6	350	5. 43	9.8	600	5. 56	16. 4
100	6. 15	2. 47	164	6. 26	3. 98	350	6. 11	8. 7	500	6. 19	12. 3
80	7. 24	1. 68	150	6.91	3. 30	300	6. 65	6. 8			
220	2. 84	11.8	430	2. 74	23.8	650	2. 79	23. 4			
220	3. 09	7. 2	420	3. 17	20. 1	650	3. 13	20.9	900	3. 08	44. 4
220 190	3. 47 3. 80	6. 4 5. 0	410 320	3. 60 4. 00	17. 3 8. 0	650 650	3. 57 3. 81	18. 3 17. 2	900 780	3. 42 4. 00	40.0
180	4.46	4. 1	300	4. 50	6. 7	000	0.01	11.2	100	1.00	23.0



## C系列传动能力表(续)

### C Transmission capacity

C...(iN=3.15-280)

C...(iN=3.15-280)

						(114 3.1				J(114 J			
公 输入	称 转速	公称 输出转;	公称减速 大号	比 公称 减速比	额定输出 扭矩	精确 减速比	额定输入 功率	额定输出 扭矩	精确 减速比	额定输入 功率	额定输出 扭矩	精确 减速比	额定输入 功率
	ninal Speed	Nomina Outpu Speed	al Nominal t Ratio Code	Nominal Ratio	Rated Output Torque	Exact Ratio	Rated Intput Power	Rated Output Torque	Exact Ratio	Rated Intput Power	Rated Output Torque	Exact Ratio	Rated Intput Power
	l <sub>1N</sub>	n <sub>2N</sub> (r/min)	Code	$i_{\scriptscriptstyle  m N}$	T <sub>2N</sub> (N. m)	iex	$\Pr_{\substack{1N\\(kW)}}$	T <sub>2N</sub> (N. m)	iex	$\Pr_{\stackrel{(kW)}{\text{\tiny (kW)}}}$	T <sub>2N</sub> (N. m)	iex	P <sub>1N</sub> (kW)
						C200			C201			C203	
						C300			C301			C303	
	46		B32	3. 15	35	3. 13	1.70	=0	2.25	2 22			
	40		B36	3. 55 4	35 35	3. 43	1.55	50 50	3. 37	2. 26	130	4 04	1 00
	36		B40 B45	4.5	40	3. 93 4. 68	1. 35 1. 30	50	3. 87 4. 40	1. 96 1. 73	140	4. 04 4. 56	4.88 4.66
	29		B50	5	40	4. 90	1. 24	50	4. 78	1. 59	150	5. 07	4. 50
	25		B56	5, 6	40	5. 53	1.10	60	5. 76	1. 58	160	5. 81	4. 18
	23		B63	6.3	40	6. 26	0.97	60	6.44	1.41	170	6.32	4.08
	20		B71	7. 1	40	6.86	0.89	60	6.84	1.33	190	7.10	4.06
	18		B80	8	50	7. 86	0.97	65	7. 75	1. 27	190	8.02	3.60
	16		B90	9	50	9.36	0.81	70	9. 15	1.16	190	8.90	3. 24
	14 12		C10 C11	10	50 55	9.80	0. 77 0. 75	80 80	10. 2 11. 4	1. 20 1. 07	200	10. 2 11. 2	2. 98 2. 71
		16	C13	12. 5	55	12. 2	0.69	80	12.1	1.01	200	12. 6	2.40
	1(		C14	14	55	14. 3	0.58	90	14.4	0.95	200	13. 5	2. 25
		. 6	C16	16	55	15.6	0.54	90	16. 5	0.83	200	15. 3	1.98
		. 6	C18	18	55	17.8	0.47	90	18.8	0.73	200	17. 3	1.76
		. 5	C20	20	55	20.2	0.41	90	20.4	0.67	200	19. 7	1.54
		. 7	C22	22. 4	55	22. 2	0.38	90	22.2	0.62	200	22. 2	1.37
		. 8	C25 C28	25 28	50 50	25. 0 28. 6	0.30	95 95	24. 6 27. 5	0. 59 0. 52	200 200	25. 2 26. 9	1. 21 1. 13
1450	46		C28	31. 5	50	31. 1	0. 24	95	32.3	0. 32	200	30. 3	1.13
		. 8	C36	35. 5	50	35. 4	0.21	85	35.4	0.36	200	34. 5	0.88
		. 3	C40	40	50	40.6	0. 19	85	38.4	0.34	200	39. 1	0.78
		. 2	C45	45	50	45.9	0.17	85	46. 3	0.28	200	44. 2	0.69
		. 0	C50	50	50	50.5	0.15	85	51.8	0.25	200	47.6	0.64
	25		C56	56	50	55. 8	0.14	85	55.0	0. 23	200	55. 7	0.54
		. 0	C63	63 71	50 50	63. 5 68. 7	0. 12 0. 11	85 85	60.8	0. 21 0. 18	200	63. 2	0.48
	18	1	C71 C80	80	50	00.1	0.11	85	81.0	0.16	200 200	69. 6 76. 1	0. 44 0. 40
	16		C90	90				85	87.4	0.15	200	83. 2	0. 36
		. 5	D10	100									
	12	. 9	D11	112									
	11.		D13	125									
	10.		D14	140									
	9. 8.		D16 D18	160 180									
	7.		D18 D20	200									
	6.		D20	224									
	5.		D25	250									
	5.	18	D28	280									
	15.	. 2	C63	63							200	63. 2	0.32
	13.		C71	71							200	69.6	0.29
	12.		C80	80							200	76.1	0.26
	10		C90	90							200	83. 2	0. 24
	9.		D10	100 112									
	8 7.		D11 D13	125									
960	6.		D13 D14	140									
	6		D14	160									
	5.		D18	180									
	4.		D20	200				_					
	4.		D22	224									
	3.		D25	250									
ш	3.	43	D28	280									

注: (1)红色线以上为2级传动的型号C2..,红色 线以下为3级传动的型号C3..;

(2)齿轮马达的实际输出转速应是实际输入 转速n1/精确减速比iex;

(3)齿轮马达的实际输入转速n1对应的额定 输入功率应是: P1N=T2N\*n1/(9550\*iex),公式 中额定输出扭矩T2N不变。

Note:(1) Above the red line are two-stage transmission gearmotor models,model name C2...; Below the red line are three-stage transmission gearmotor models,model name C3...; (2) Actual output speed of the gearmotor: Actual input speed (n1)/Exact ration (iex); (3)Rated input power corresponding to actual input speed of the gearmotor: P1N=T2N\*n1/ (9550\*iex),the rated output torque T2N in the formula remains unchanged.



额定输出 扭矩	精确 减速比	额定输入 功率	额定输出 扭矩	精确 减速比	额定输入 功率	额定输出 扭矩	精确 减速比	额定输入 功率	额定输出 扭矩	精确 减速比	额定输入 功率
Rated Output Torque	Exact Ratio	Rated Intput Power	Rated Output Torque	Exact Ratio	Rated Intput Power	Rated Output Torque	Exact Ratio	Rated Intput Power	Rated Output Torque	Exact Ratio	Rated Intput Power
T <sub>2N</sub> (N. m)	iex	$\Pr_{\substack{1N\\(kW)}}$	$T_{2N} \atop \text{(N. m)}$	iex	$\Pr_{\substack{1N\\(kW)}}$	$T_{2N} \atop \text{(N. m)}$	iex	$\Pr_{\substack{1N\\(kW)}}$	T <sub>2N</sub> (N. m)	iex	$\Pr_{\substack{1N\\(kW)}}$
	C204			C205			C206			C207	
	C304			C305			C306			C307	
180	4. 16	6.6							700	3. 89	27. 3
180	4.67	5. 9	360	4.47	12. 2	420	4. 54	14.0	700	4. 43	24.0
200 220	5. 27 5. 85	5. 8 5. 7	360 380	5. 13 5. 83	10. 7 9. 9	420 430	5. 20 5. 55	12. 3 11. 8	700 700	4. 92 5. 64	21. 6 18. 9
220	6.70	4.98	380	6.52	8.9	430	6.40	10.2	700	6. 34	16.8
220	7. 37	4. 53	380	7. 25	8. 0	480	7. 33	9.9	700	7. 14	14.9
235 250	8. 20 9. 21	4. 35 4. 12	380 390	7. 98 9. 06	7. 2 6. 5	480 480	7. 82 8. 59	9.3 8.5	700 700	8. 13 9. 01	13. 1 11. 8
250	10.4	3.65	390	9.66	6. 1	480	9.85	7.4	700	10.3	10.3
250 270	11. 5 13. 2	3. 29 3. 10	430 430	10. 8 12. 0	6.0	480	10.5	6.9	750	11.6	9.8
270	13. 2	2. 82	430	15. 0	5. 4 4. 35	520 520	12. 5 13. 9	6.3 5.7	800 800	12. 6 14. 5	9.6 8.4
300	16. 4	2.78	430	16. 4	3.98	550	15. 3	5. 5	800	15. 4	7.9
300 300	17. 5 19. 3	2, 60 2, 35	430 430	18. 7 19. 9	3. 50 3. 29	550 550	17. 4 19. 0	4. 80 4. 39	800 900	17. 7 20. 7	6. 9 6. 6
300	21.8	2. 09	470	22. 4	3. 18	600	21.6	4. 21	900	23. 2	5. 9
300	24. 9	1.83	470	25. 2	2.84	650	24. 3	4. 06	900	26.5	5. 1
300 300	28. 1 31. 8	1. 62 1. 43	470 470	28. 4 31. 5	2. 51 2. 26	650 650	27. 3 30. 8	3. 61 3. 20	900 900	28. 3 32. 4	4. 83 4. 21
300	34. 3	1. 33	480	36. 1	2.02	650	34. 2	2. 88	900	36. 9	3. 71
300	38. 2	1.19	480	39. 7	1.84	650	39. 2	2. 52	900	38.0	3. 59
300 300	43. 0 49. 0	1. 06 0. 93	480 480	47. 1 52. 3	1. 55 1. 39	650 650	43. 0 48. 3	2. 29 2. 04	900 900	43. 6 49. 5	3. 14 2. 76
300	55. 4	0.82	480	59.9	1. 22	650	54. 6	1.81	900	55. 4	2. 47
300	62. 8	0.73	480	65. 8	1.11	650	60.6	1. 63	900	61. 7	2. 22
300 300	67. 6 79. 1	0. 67 0. 58	480 480	74. 2 79. 3	0. 98 0. 92	650 650	69. 4 76. 3	1. 42 1. 29	900 900	67. 8 77. 0	2. 02 1. 77
300	89. 7	0.51	480	92. 2	0.79	650	86. 0	1. 15	900	95.8	1.43
300	98. 9	0.46	480	103. 7	0.70	650	91.9	1. 07	900	101.8	1. 34
300 300	108. 1 118. 2	0. 42 0. 39	480 480	113. 3 124. 2	0. 64 0. 59	650 650	106. 8 120. 2	0. 92 0. 82	900 900	117. 7 124. 5	1. 16 1. 10
	110.	0,00	480	135. 0	0.54	650	131. 2	0.75	900	140.0	0. 98
						650	144.0	0.69	900 900	148. 9 168. 2	0. 92 0. 81
									900	100, 2	0.01
300	62.8	0. 48									
300	67.6	0.44									
300	79.1	0.38	480	79. 3 92. 2	0.61	650	76. 3	0.85	900	77. 0 95. 8	1. 17
300	89. 7 98. 9	0.34	480 480	92. 2	0. 52 0. 46	650 650	86. 0 91. 9	0. 76 0. 71	900	95. 8	0. 95 0. 89
300	108.1	0.28	480	113.3	0.42	650	106.8	0.61	900	117. 7	0.77
300	118.2	0.26	480	124. 2	0.39	650	120. 2	0.54	900	124. 5	0.73
			480	135.0	0.36	650 650	131. 2 144. 0	0. 50 0. 46	900	140. 0 148. 9	0. 65 0. 61
									900	168. 2	0. 54



C系列传动能力表(续) C...(iN=3.15-280)

C Transmission capacity C...(iN=3.15-280)

						C(IIV	=3.15-280	))		C(	(iN=3.15-2	280)	
公 输入	、称 转速	公称 输出转运	公称减速1 東 代号	比 公称减速比	额定输出 扭矩	精确 减速比	额定输入 功率	额定输出 扭矩	精确 减速比	额定输入 功率	额定输出 扭矩	精确 减速比	额定输入 功率
In	ninal put eed	Nominal Output Speed	l Nominal Ratio Code	Nominal Ratio	Rated Output Torque	Exact Ratio	Rated Intput Power	Rated Output Torque	Exact Ratio	Rated Intput Power	Rated Output Torque	Exact Ratio	Rated Intput Power
(r,	n <sub>1N</sub> /min)	$n_{2N} \atop \text{(r/min)}$	Code	$i_{\scriptscriptstyle  m N}$	T <sub>2N</sub> (N. m)	iex	$\Pr_{\stackrel{(kW)}{(kW)}}$	T <sub>2N</sub> (N. m)	iex	$\Pr_{\stackrel{(kW)}{(kW)}}$	T <sub>2N</sub> (N. m)	iex	$\Pr_{\substack{1N\\(kW)}}$
						C208			C209			C210	
						C308			C309			C310	
		30 08	B32 B36	3. 15 3. 55									
		63	B40	4				1900	3. 99	72	3300	3. 87	130
	32	22	B45	4.5	1300	4.50	43.9	1900	4. 37	66	3300	4.33	116
		90	B50	5	1300	5. 11	38.6	1900	5. 16	56	3300	5. 11	98
	25	30	B56 B63	5. 6 6. 3	1300 1300	5. 47 6. 46	36. 1 30. 5	1900 1900	5. 78 6. 18	49. 9 46. 7	3300 3800	5. 54 6. 47	90 89
		04	B71	7. 1	1300	7. 27	27. 2	2200	7. 06	47. 3	4100	7. 17	87
	18	81	B80	8	1300	7.97	24.8	2200	7.85	42.5	4300	7.60	86
		61	B90	9	1300	9. 20	21.4	2200	8. 91	37.5	4300	8.64	76
		45 29	C10 C11	10 11. 2	1300 1300	10. 4 11. 3	19. 0 17. 4	2200 2300	10. 1 11. 4	33. 0 30. 7	4300 4300	9.67 10.7	68 61
		16	C13	12. 5	1300	12. 7	15. 5	2300	12. 1	28. 8	4300	12. 5	52
		04	C14	14	1300	13.9	14.2	2500	13.9	27.4	4400	13.8	48.4
		. 6	C16	16	1500	16.1	14. 1	2500	15.4	24.6	4400	14.6	45. 6
		. 6	C18 C20	18 20	1500 1500	17. 2 20. 0	13. 3 11. 4	2650 2650	17. 5 19. 6	23. 0 20. 5	4400 4400	16. 6 18. 6	40. 1 35. 9
		. 7	C22	22.4	1500	22. 1	10. 3	2850	22.4	19. 3	4500	20. 7	33. 0
		. 0	C25	25	1700	25.4	10.2	2850	23.9	18. 1	4500	24.3	28. 1
1450		. 8	C28	28	1800	28.6	9.6	3000	27. 9	16. 4	4500	26.6	25. 7
		i. 0 i. 8	C32 C36	31. 5 35. 5	1800 1800	31. 7 36. 4	8. 6 7. 5	3200 3200	32. 3 35. 2	15. 0 13. 8	4500 4500	31. 5 35. 2	21. 7 19. 4
		5. 3	C40	40	1800	41. 0	6. 7	3200	39.6	12. 3	4500	37. 6	18. 2
	32	. 2	C45	45	1800	44.0	6. 2	3200	43.4	11.2	4500	43.1	15. 9
		. 0	C50	50	1800	50.1	5. 5	3200	50. 1	9.7	4500	47.9	14. 3
		. 9	C56 C63	56 63	1800 1800	55. 6 63. 8	4. 92 4. 29	3200 3200	53. 5 63. 4	9. 1 7. 7	4500 4500	54. 3 67. 9	12. 6 10. 1
		. 4	C71	71	1800	71.7	3. 81	3200	69. 1	7. 0	4500	72. 5	9.4
	18	. 1	C80	80	1800	80.2	3.41	3200	77.8	6.2	4500	82.9	8.2
	16		C90	90	1800	89.3	3.06	3200	85. 2	5. 7	4500	92. 2	7.4
		. 5	D10 D11	100 112	1800 1800	97. 8 106. 4	2. 79 2. 57	3200 3200	98. 5 105. 0	4. 93 4. 63	4500 4500	104. 5 117. 2	6. 5 5. 8
		. 6	D13	125	1800	119.6	2. 29	3200	121. 3	4. 03	4500	133. 8	5. 1
		. 4	D14	140	1800	131.0	2.09	3200	137.9	3. 52	4500	142.6	4.79
	٠.	06	D16	160	1800	153.8	1. 78	3200	153. 2	3. 17	4500	163. 8	4. 17
		06 25	D18 D20	180 200	1800 1800	170. 9 188. 0	1. 60 1. 45	3200 3200	172. 3 189. 6	2. 82 2. 56	4500 4500	184. 3 203. 5	3.71 3.36
		47	D20 D22	224	1000	100.0	1, 10	3200	207. 1	2. 35	4500	228. 9	2.99
	5.	80	D25	250				3200	239.9	2.03			
		18	D28	280				3200	264.6	1.84			
		. 2	C63	63									
		5. 5	C71 C80	71 80									
		. 7	C90	90									
	9.	. 6	D10	100	1800	97.8	1.85	3200	98.5	3. 26	4500	104. 5	4.30
		54	D11	112	1800	106.4	1. 70	3200	105.0	3. 07	4500	117. 2	3.84
960		68 89	D13 D14	125 140	1800 1800	119.6 131.0	1. 52 1. 38	3200 3200	121. 3 137. 9	2. 65 2. 33	4500 4500	133. 8 142. 6	3. 38 3. 17
		6	D14 D16	160	1800	153.8	1. 38	3200	157. 9	2. 33	4500	163.8	2.76
	5.	34	D18	180	1800	170.9	1.06	3200	172.3	1.87	4500	184. 3	2.46
		80	D20	200	1800	188.0	0.96	3200	189.6	1. 69	4500	203. 5	2.22
		28 84	D22 D25	224 250				3200 3200	207. 1 239. 9	1. 56	4500	228. 9	1.98
		43	D25 D28	280 280				3200	264. 6	1.34 1.22			
	٠.	_~	2=3					0=00					

注: (1)红色线以上为2级传动的型号C2.., 红色线以下为3级传动的型号C3..;

(2)齿轮马达的实际输出转速应是实际输 入转速n1/精确减速比iex;

(3)齿轮马达的实际输入转速n1对应的额 定输入功率应是: P1N=T2N\*n1/(9550\*iex-),公式中额定输出扭矩T2N不变。

Note:(1) Above the red line are two-stage transmission gearmotor models,model name C2...; Below the red line are three-stage transmission gearmotor models,model name C3...;
(2) Actual output speed of the gearmotor: Actual input speed (n1)/Exact ration (iex);
(3)Rated input power corresponding to actual input speed of the gearmotor: P1N=T2N\*n1/ (9550\*iex),the rated output torque T2N in the formula remains unchanged.



额定输出 扭矩	精确 减速比	额定输入 功率	额定输出 扭矩	精确 减速比	额定输入 功率	额定输出 扭矩	精确 减速比	额定输入 功率	额定输出 扭矩	精确 减速比	额定输入 功率
Rated Output Torque	Exact Ratio	Rated Intput Power	Rated Output Torque	Exact Ratio	Rated Intput Power	Rated Output Torque	Exact Ratio	Rated Intput Power	Rated Output Torque	Exact Ratio	Rated Intput Power
T <sub>2N</sub> (N. m)	iex	$\Pr_{\stackrel{1N}{(kW)}}$	$T_{2N\atop (N.\ m)}$	iex	$\Pr_{\stackrel{1N}{(kW)}}$	$T_{2N\atop (N.\ m)}$	iex	$\Pr_{\stackrel{(kW)}{(kW)}}$	$T_{2N\atop (\text{N. m})}$	iex	$\Pr_{\stackrel{(kW)}{(kW)}}$
	C212 C312			C213 C313			C214 C314			C216 C316	
	0012			0010			0011			0010	
4000	4 07	1.40	5000	4. 07	187	10000	4.00	380	1,0000	4.40	540
4300	4. 37 4. 89	149 134	5000 5300	4. 74 5. 26	160 153	10000 10000	4. 47 4. 97	340 305	16000 16000	4. 42 4. 99	549 487
4300	5. 77 6. 26	113 112	5300 5600	5. 87 6. 48	137 131	10000 10000	5. 60 6. 45	271 235	16000 16000	5. 76 6. 57	422 370
5100	7. 31	106	6000	7.03	130	10000	7.12	213	16000	7.04	345
5600 5800	8. 10 8. 59	105 103	8000 8000	8. 08 9. 15	150 133	13000 13000	7. 89 8. 74	250 226	17000 17000	7. 61 8. 80	339 293
5800	9.8	90	8000	10.5	115	13000	9.77	202	17000	10.1	255
5800 5800	10. 8 12. 6	82 70	8000 8000	11. 7 13. 0	103 94	13000 13000	10. 9 12. 2	182 161	17000 17000	11. 6 12. 4	223 209
5800	14.0	63	8000	14.1	86	13000	14.1	140	17000	13.4	193
5800 5800	16. 9 18. 9	52 46, 6	8000 8000	16. 2 18. 3	75 66	13000 13000	15. 6 17. 3	127 114	18000 18000	15. 5 17. 3	177 158
5800	19.1	46. 2	8000	20.4	60	13000	19.2	103	18000	19.5	140
5800 6000	20. 9 24. 7	42. 2 36. 9	8000 8000	22. 6 25. 1	54 48. 3	13000 13000	21. 8 24. 2	91 82	18000 18000	21. 5 24. 2	127 113
6300	27. 7	34.6	8000	29.4	41. 4	13000	29.5	67	18000	27. 2	100
6300 6300	30. 1 35. 5	31.8 26.9	8200 8200	32. 5 35. 1	38. 3 35. 5	14000 14000	32. 7 36. 5	65 58	18000 18000	30. 3 34. 2	90 80
6300	39.8	24.0	8200	39.3	31. 7	14000	40.3	53	18000	39.4	69
6300 6300	42. 5 48. 6	22. 5 19. 7	8200 8200	46. 4 50. 3	26. 8 24. 7	14000 14000	43. 7 50. 3	48. 6 42. 3	18000 18000	43. 4 48. 1	63 57
6300	54.1	17. 7	8200	58.7	21. 2	14000	55.3	38. 4	18000	53.5	51
6300	61. 3 73. 5	15. 6 13. 0	8200 8000	65. 1 69. 0	19. 1 17. 6	14000 14000	64. 5 71. 6	33. 0 29. 7	18000 18000	60. 8 69. 2	45. 0 39. 5
6300	84. 0	13.0	8000	78.5	17. 6	14000	79.8	29. 7 26. 6	18000	76. 3	39. 5 35. 8
6300	93.4	10.2	8000	87.8	13.8	13500	88.1	23. 3 21. 4	18000	84. 5	32.3
6300	105. 9 118. 7	9. 03 8. 06	8000 8200	97. 5 114. 1	12. 5 10. 9	13500 13500	95. 6 109. 9	18.6	18000 18000	94. 1 106. 7	29. 1 25. 6
6300	135. 5	7.06	8200	122.7	10.1	13500	124. 5	16.5	18000	118.6	23. 1
6300 6300	144. 4 166. 0	6. 62 5. 76	8200 8200	137. 9 158. 7	9. 0 7. 8	13500 13500	138. 6 153. 4	14. 8 13. 4	18000 18000	134. 7 154. 6	20. 3
6300	186.7	5. 12	8200	176.6	7.1	13500	179.1	11.4	18000	174.8	15.6
6300 6300	206. 3 231. 9	4. 64 4. 12	8200 8200	207. 7 225. 4	6. 0 5. 5	13500 14000	190. 0 215. 5	10.8 9.9	18000 18000	191. 9 212. 0	14. 2 12. 9
6300	252.4	3. 79				14000	245. 9	8.6			
6300	274. 2	3. 49									
6300	105.9	6	8000	97.5	8.3						
6300 6300	118. 7 135. 5	5. 3 4. 67	8200 8200	114. 1 122. 7	7. 2 6. 7						
6300	144.4	4. 38	8200	137.9	6.0						
6300	166. 0 186. 7	3. 81 3. 39	8200 8200	158. 7 176. 6	5. 2 4. 70	13500 13500	153. 4 179. 1	8. 9 7. 6	18000 18000	154. 6 174. 8	11. 7 10. 3
6300	206.3	3. 07	8200	207.7	3.97	13500	190.0	7.2	18000	191.9	9.4
6300	231. 9 252. 4	2. 73 2. 51	8200	225.4	3.64	14000 14000	215. 5 245. 9	6. 6 5. 7	18000	212.0	8. 5
6300	274. 2	2. 31				11000	210. 3	0.1			



4.2 C…/C…组合型 传动能力表 4.2 C.../C... Combi-type transmission capacity C.../C... (iN=100-18000) 公称减速比 公称 公称 公称 额定输出 额定输入 额定输出 额定输入 精确 输入转速 输出转速 代号 减速比 扭矩 减速比 功率 扭矩 减速比 功率 Rated Rated Rated Rated Nominal Nominal Nominal Fxact Nominal Output Intput Power Output Intput Input Output Ratio Ratio Speed Torque Torque Speed  $T_{2N}$  $P_{1N}$  $T_{2N} \\$  $P_{1N}$ iex  $n_{1N}$  $n_{2N}$ iex  $i_{\,N}$ Code (kW) (kW)  $(N \cdot m)$  $(N \cdot m)$ (r/min) (r/min) C204/C203 C203/C201 14.50 D10 100 200 97.70 0.31 270 105.9 0.39 12.90 D11 112 200 115.3 0.26 270 117.5 0.35 125 200 128.5 0.24 270 0.30 11.60 D13 134.6 D14 140 200 143.6 0.21 270 147.8 0.28 10.36 270 9.06 D16 160 200 152.5 0.20 166.3 0.25 C203/C301 180 270 0.23 8.06 D18 200 181.4 0.17 178.2 C204/C303 7.25 D20 200 200 207.9 0.15 270 202.0 0.20 D22 224 200 236. 9 270 228.4 0.18 6.47 0.13 C303/C201 C304/C203 5.80 D25 250 200 236.0 0.13 300 243.5 0.19 5. 18 D28 275.1 280 200 267.4 0.11 300 0.17 4.60 D32 315 200 315.7 300 305.3 0.15 4.08 D36 355 200 351.9 300 349.9 0.13 3.63 400 200 393.3 300 384.2 0.12 D40 3, 22 D45 450 200 417.5 300 432.2 0.11 C303/C301 2.90 D50 500 200 496.8 300 463.1 C304/C303 200 2.59 D56 560 569.3 300 524.8 2.30 D63 630 200 648.6 300 593.4 2.04 D71 710 200 703.8 300 675.7 1.81 D80 800 200 765.9 300 761.5 1.61 D90 900 200 848.7 300 864.4 200 922.7 1450 1.45 E10 1000 948.8 300 1.29 E11 1120 200 1114 300 1039 1.16 E13 1250 200 1221 300 1183 200 1.04 E14 1400 300 1341 1325 0.91 1600 200 300 E16 1597 1516 0.81 E18 1800 200 1787 300 1633 0.73 E20 2000 200 1898 300 1911 E22 2240 200 3843 300 2168 0.65 2500 200 0.58 E25 2427 300 2455 0.52 E28 2800 200 2926 300 2776 E32 3150 200 3274 300 2989 0.46 3550 200 300 3498 0.41 E36 3476 0.36 E40 4000 200 3843 300 3969 0.32 E45 4500 200 4506 300 4371 0.29 E50 5000 200 5119 300 4779 0.26 200 5524 300 5225 E56 5600 0.23 E63 6300 300 6243 0.20 E71 7100 300 6826 E80 8000 300 7463 0.18 0.16 E90 9000 0.15 F10 10000 11200 0.13 F11 0.12 F13 12500 0.10 F14 14000 0.09 F16 16000 0.08 F18 18000



额定输出 扭矩	精确 减速比	额定输入 功率	额定输出 扭矩	精确 减速比	额定输入 功率	额定输出 扭矩	精确 减速比	额定输入 功率
Rated Output Torque	Exact Ratio	Rated Intput Power	Rated Output Torque	Exact Ratio	Rated Intput Power	Rafed Output Torque	Exact Ratio	Rated Intput Power
T <sub>2N</sub> (N • m)	iex	P <sub>1N</sub> (kW)	T <sub>2N</sub> (N • m)	iex	P <sub>1N</sub> (kW)	T <sub>2N</sub> (N • m)	iex	P <sub>1N</sub> (kW)
	C205/C203			C206/C203			C307/C203	
430	96.2	0.68	520	100.3	0.79	800	101.1	1.20
430	106.8	0.61	520	111.3	0.71	800	112. 1	1.08
430	122.4	0.53	520	127.5	0.62	800	128. 5	0.95
430	134.4	0.49	520	140.0	0.56	800	141.1	0.86
430	151.2	0.43	520	157. 5	0.50	800	158.8	0.77
430	162.0	0.40	520	168.8	0.47	800	170. 1	0.71
	C205/C303			C206/C303			C307/C303	
430	183.6	0.36	520	191. 3	0.41	800	192.8	0.63
430	207.6	0.31	520	216. 3	0.37	800	218.0	0. 56
	C305/C203			C306/C203			C307/C203	
480	256. 3	0.28	650	242.8	0.41	900	262.0	0.52
480	289.5	0.25	650	274. 3	0.36	900	295. 9	0.46
480	321.3	0.23	650	304.4	0.32	900	328. 4	0.42
480	368. 2	0.20	650	348.8	0. 28	900	376. 4	0.36
480	404.3	0.18	650	383.0	0. 26	900	413.3	0.33
480	454.9	0.16	650	430.9	0.23	900	464. 9	0. 29
480	487. 4	0.15	650	461.7	0.21	900	498. 2	0.27
	C305/C303			C306/C303			C307/C303	
480	552 <b>.</b> 3	0.13	650	523. 3	0.19	900	564. 6	0.24
480	624.5	0.12	650	591. 7	0.17	900	638.4	0.21
480	711.2	0.10	650	673. 7	0.15	900	726. 9	0.19
480	801.4		650	759. 2	0.13	900	819.2	0.17
480	909.7		650	861.8	0.11	900	929. 9	0.15
480	971.1		650	920.0		900	992.6	0.14
480	1094		650	1036		900	1118	0.12
480	1245		650	1180		900	1273	0.11
480	1412		650	1337		900	1443	
480	1596		650	1512		900	1631	
480	1718		650	1628		900	1756	
480	2011		650	1905		900	2055	
480	2282		650	2161		900	2332	
480	2573		570	2369		900	2412	
480	2908		570	2679		900	2727	
480	3132		570	2885		900	2937	
480	3665		570	3375		900	3437	
480	4159		570	3830		900	3899	
480	4580		570	4218	-	900	4294	
480	5007		570	4612		900	4695	
480	5475		570	5042		900	5133	
480	6417		570	5979		900	6668	
480 480	7016 7671		570 570	6537 7147		800 800	7290 7971	
100	1011		310	1111		000	1311	



## C.../C...组合型传动能力表(续) C.../C... Combi-type transmission capacity

### C.../C... (iN=100-18000)

公称 输入转速	公称 输出转速	公称减速比 代号	公称 减速比	额定输出 扭矩	精确 减速比	额定输入 功率	额定输出 扭矩	精确 减速比	额定输入 功率	额定输出 扭矩	精确 减速比	额定输入 功率
Nominal Input Speed	Nominal Output Speed	Nominal Ratio Code	Nominal Ratio	Ratēd - Output Torque	Exact Ratio	Rated - Intput Power	- Rafed Output Torque	Exact Ratio	Rated Intput Power	Ratēd Output Torque	Exact Ratio	Rated Intput Power
n <sub>1N</sub> (r/min)	n <sub>2N</sub> (r/miı	Code	$i_{ m N}$	T <sub>2N</sub> (N • m)	iex	P <sub>1N</sub> (kW)	T <sub>2N</sub> (N • m)	iex	P <sub>1N</sub> (kW)	T <sub>2N</sub> (N • m)	iex	P <sub>1N</sub> (kW)
(1 / 11111)					208/C205			C209/C20			C210/C2	
	14. 50	D10	100	1300	101.3	1. 95	2300	96.6	3.62	4300	101.6	
	12.90	D11	112	1300	115. 1	1.72	2300	109.6	3. 19	4300	112.6	
	11.60	D13	125	1300	122.7	1.61	2300	116.9	2.99	4300	128.8	_
	10.36	D14	140	1300	137. 2	1.44	2300	130.7	2.67	4300	145. 0	
	0.00	D1C	1.00	1200	150 4	1 20	0200	145.0	0.41		C210/C	
	9.06	D16	160	1300	152.4	1.30	2300	145. 2	2.41	4300	157. 5	
	8.06	D18	180	1300	190. 5	1.04	2300	181.5	1. 92	4300	181. 3	
	7. 25	D20	200	1300	208. 3	0.95	2300	198.4	1. 76	4300	192. 5	
	6.47	D22	224	1300	237. 5	0.83	2300	226. 3	1.54	4300	221.3 C310/C2	
	F 00	DOE	050		308/C205			C309/C205				_
	5. 80	D25	250	1800	263. 9	1.04	3200	255. 2	1.90	4500	251. 3	
	5. 18	D28	280	1800	290. 5	0. 94	3200	280. 9	1. 73	4500	286. 2	
	4.60	D32 D36	315 355	1800	329. 8 351. 6	0. 83 0. 78	3200	318. 9 340. 0	1. 52	4500	317. 2	
	4. 08 3. 63	D36 D40	400	1800 1800	393. 1	0. 78	3200 3200	380. 2	1. 43 1. 28	4500 4500	362. 6 408. 3	_
	5.05	D40	400	1000	595.1	0.70	3200	360. 2	1, 20		C310/C3	_
	2 22	DAE	450	1000	436.8	0.63	3200	422.4	1 15		443. 5	
	3. 22	D45	450	1800	-				1. 15	4500		
	2.90	D50 D56	500	1800 1800	546. 0	0. 50 0. 46	3200 3200	528. 0	0.92	4500	510. 4 542. 1	1.34
	2. 59	D56 D63	560		597. 0			577.3	0.84	4500		
	2.30	D63	630	1800	680. 7	0. 40 0. 38	3200	658. 2	0. 74 0. 69	4500	623. 0 728. 6	_
	2.04	DII	710	1800	724. 4 308/C305	•	3200	700. 5 309/C30		4500	128.0	0.94
	1.81	D80	800	1800	815. 4	0.34	3200	788. 5	0.62	4500	816.6	0.84
	1.61	D80	900	1800	917. 3	0.34	3200	887. 0	0. 55	4500	932. 8	
	1.01	טפע	300	1000	317.3	0.30	3200	001.0	0.00	4500	932.0	0.73
1450	1.45	E10	1000	1800	1034	0. 26	3200	1000	0.49	4500	996. 2	0.69
1100	1. 29	E11	1120	1800	1147	0. 24	3200	1109	0.44	4500	1140	0.60
	1. 16	E13	1250	1800	1314	0. 21	3200	1271	0. 38	4500	1299	0.53
	1. 04	E14	1400	1800	1445	0. 19	3200	1397	0.35	4500	1338	0.51
	0. 91	E16	1600	1800	1714	0. 16	3200	1658	0.29	4500	1535	0. 45
	0.81	E18	1800	1800	1904	0. 14	3200	1841	0. 26	4500	1742	0. 39
	0. 73	E20	2000	1800	2180	0.13	3200	2108	0. 23	4500	1950	0.35
	0.65	E22	2240	1800	2395	0.11	3200	2316	0.21	4500	2172	0.31
	0. 58	E25	2500	1800	2533	0.11	3200	2517	0. 19	4500	2580	0. 26
	0. 52	E28	2800	1800	3005		3200	2986	0.16	4500	2960	0. 23
	0.46	E32	3150	1800	3337		3200	3316	0. 15	4500	3361	0.20
	0.41	E36	3550	1800	3822		3200	3798	0.13	4500	3762	0.18
	0.36	E40	4000	1800	4198		3200	4172	0.12	4500	4189	0.16
	0.32	E45	4500	1800	4734		3200	4704	0.10	4500	4604	0.15
	0.29	E50	5000	1800	5059		3200	5028		4500	5228	0.13
	0.26	E56	5600	1800	5882		3200	5845		4500	6505	0.11
	0.23	E63	6300	1800	6626		3200	6322		4500	6912	
	0.20	E71	7100	1500	7081		2800	6756		4500	7099	
	0.18	E80	8000	1500	8233		2800	7855		4500	8833	
	0.16	E90	9000	1500	9260		2800	8835		4500	9386	
	0.15	F10	10000	1500	10118		2800	9653		4500	10852	
	0.13	F11	11200	1500	11091		2800	10582		4500	11479	
	0.12	F13	12500	1500	12056		2800	11502		4500	12908	
	0.10	F14	14000							4500	13729	
	0.09	F16	16000							4500	15508	
	0.08	F18	18000									




额定输出 扭矩	精确 减速比	额定输入 功率	额定输出 扭矩	精确 减速比	额定输入 功率	额定输出 扭矩	精确 减速比	额定输入 功率
Rated Output Torque	Exact Ratio	Rated Intput Power	Rated Output Torque	Exact Ratio	Rated Intput Power	Rated Output Torque	Exact Ratio	Rated Intput Power
$T_{2N}$ (N • m)	iex	P <sub>1N</sub> (kW)	T <sub>2N</sub> (N • m)	iex	P <sub>1N</sub> (kW)	T <sub>2N</sub> (N • m)	iex	P <sub>1N</sub> (kW)
,	C213/C207	, ,	, ,	C214/C208	, ,	, ,	C216/C210	. ,
7300	105.7	10.49	14000	97. 2	21.9	16000	94. 2	25.8
7300	117.1	9.46	14000	112.2	18.9	16000	107.1	22. 7
7300	133.9	8. 28	14000	126.9	16.8	16000	119.9	20. 3
7300	150.8	7. 35	14000	137.9	15. 4	16000	132.7	18. 3
	C213/C307							
7300	163.8	6. 77	14000	154.9	13. 7	16000	155.0	15. 7
7300	188.5	5.88	14000	169.6	12.5	16000	171.1	14. 2
7300	200.2	5. 54	14000	196.4	10.8	16000	181.0	13. 4
7300	230. 1	4.82	14000	209.8	10. 1	16000	205.8	11.8
	C313/C207			C314/C207			C316/C209	
8200	250.6	4. 97	14000	260.6	8. 2	18000	241.5	11. 3
8200	285. 4	4. 36	14000	296. 7	7. 2	18000	268. 5	10. 2
8200	316. 3	3.94	14000	328. 9	6.5	18000	304. 7	9.0
8200	361.5	3.44	14000	376. 0	5. 7	18000	345. 4	7. 9
8200	407. 2	3.06	14000	423. 4	5. 02	18000	389.9	7.0
0000	C313/C307	0.00	1.4000	C314/C307	4 60	10000	410.0	C C
8200	442.3	2.82	14000	459.9	4. 62	18000	413.8	6.6
8200	509.0	2. 45 2. 30	14000 14000	529. 3 562. 1	4. 02 3. 78	18000 18000	475. 4 526. 7	5. 8 5. 2
8200 8200	540. 5 621. 3	2. 00	14000	646. 1	3. 78	18000	526. <i>t</i> 598. 5	5. Z 4. 57
8200	726.6	1.71	14000	755. 6	2. 81	18000	670.3	4. 08
0200	120.0	1.71	14000	755.0	2.01	18000	070.3	4.00
8200	814.3	1.53	14000	846.8	2.51	18000	766. 1	3. 57
8200	930. 2	1.34	14000	967.3	2. 20	18000	817. 4	3. 34
0200	000.2	1.01	11000	000	2.20	10000	C316/C309	0.01
8200	993.3	1.25	14000	1033	2.06	18000	954. 2	2.86
8200	1137	1.09	14000	1183	1.80	18000	1105	2.47
8200	1295	0.96	14000	1347	1.58	18000	1204	2. 27
8200	1334	0.93	14000	1387	1.53	18000	1354	2.02
8200	1530	0.81	14000	1591	1.34	18000	1484	1.84
8200	1737	0.72	14000	1807	1.18	18000	1713	1.60
8200	1945	0.64	14000	2022	1.05	18000	1830	1.49
8200	2166	0. 57	14000	2252	0.94	18000	2168	1.26
8200	2474	0.50	14000	2451	0.87	18000	2408	1. 14
8200	2838	0.44	14000	2812	0.76	18000	2639	1.04
8200	3222	0.39	14000	3193	0.67	18000	3046	0.90
8200	3607	0.35	14000	3573	0.59	18000	3253	0.84
8200	4017	0.31	14000	3980	0.53	18000	3855	0.71
8200	4414	0.28	14000	4373	0.49	18000	4201	0.65
8200	5013	0. 25	14000	4967	0.43	18000	4730 5180	0. 58
8200 8200	6237 6627	0. 20 0. 19	14000 14000	6179 6566	0. 34 0. 32	18000 18000	5180 5839	0. 53 0. 47
8000	6761	0. 19	13500	6784	0.32	17000	5839 6574	0. 47
8000	8411	0.18	13500	8440	0.30	17000	7199	0. 39
8000	8938	0.14	13500	8969	0. 24	17000	8323	0.30
8000	10334	0.14	13500	10369	0.20	17000	8873	0. 31
8000	10931	0.12	13500	10369	0. 20	17000	10250	0. 25
8000	12292	0.11	13500	12334	0.19	17000	11653	0. 23
8000	13073		13500	13118	0.17	17000	12945	0. 20
8000	14768		13500	14818	0.14	17000	14559	0. 18
5550	11100		10000	11010	J. 11	17000	16021	0. 16




### **5** Permissble Radial Force 5.1 Radial force on input shaft (Fr1) (N)



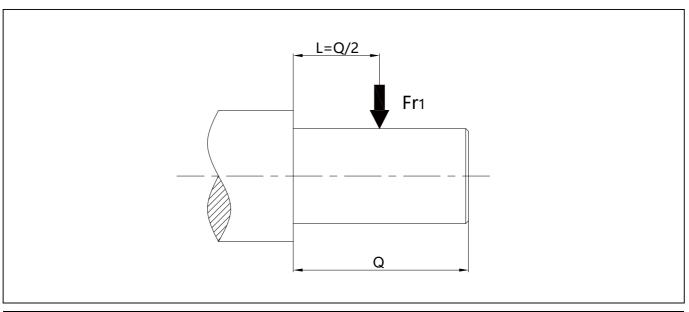

							Fr1	(N)						
	C200 C300	C201 C301	C103 C203 C303	C104 C204 C304	C205 C305	C106 C206 C306	C107 C207 C307	C108 C208 C308	C109 C209 C309	C110 C210 C310	C212 C312	C213 C313	C214 C314	C216 C316
AE2	/	/	803	803	803	803	803	803	/	/	/	/	/	/
AE3	/	/	/	1504	1504	1504	1504	1504	1504	1504	1504	/	/	/
AE4	/	/	/	/	/	/	2188	2188	2188	2188	2188	2188	2188	2188
AE5	/	/	/	/	/	/	/	4207	4207	4207	4207	4207	4207	4207
AE6	/	/	/	/	/	/	/	/	5664	5664	5664	5664	5664	5664
AE7	/	/	/	/	/	/	/	/	/	/	/	9957	9957	9957
AE8	/	/	/	/	/	/	/	/	/	/	/	12546	12546	12546

### 5.2 允许的输出轴径向力Fr2(N) 5.2 Radial force on output shaft (Fr2) (N)

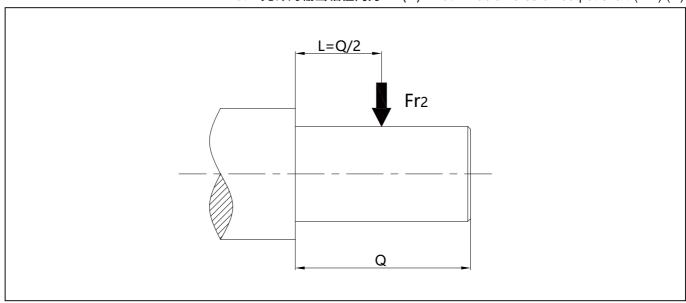



n 2N				Fr2(N)			
(r/min)	C103	C104	C106	C107	C108	C109	C110
1120~1250	60	118	245	295	340	390	450
1000~1120	60	118	245	315	360	410	480
850~1000	60	118	245	335	380	490	590
800~900	60	118	245	356	485	643	760
710~800	60	118	245	356	485	673	830
630~710	85	118	260	463	570	725	950
560~630	106	138	1430	1741	1825	2080	2610
500~560	213	298	2468	2780	2875	3104	3349
450~500	276	685	2675	2920	3186	3486	3800
400~450	350	1466	2975	3400	3701	3964	4771
355~400	468	1754	3283	4558	4845	5314	5898
315~355	/	1839	3560	4781	5844	6566	7450
280~315	/	/	3803	5206	6354	7471	8341
250~280	/	/	3803	5568	6715	7783	9648
224~250	/	/	/	5950	7279	7948	10306
≤224	/	/	/	6333	7843	7948	/

OM							Fr2	(N)						
n2N (r/min)	C200 C300	C201 C301	C203 C303	C204 C304	C205 C305	C206 C306	C207 C307	C208 C308	C209 C309	C210 C310	C212 C312	C213 C313	C214 C314	C216 C316
355~500	210	350	/	/	/	/	/	/	/	/	/	/	/	/
250~355	246	410	684	2052	3102	4689	6096	8082	8865	10170	17770	31050	44370	/
224~250	256	427	711	2223	3344	5031	6540	8505	9450	11160	18989	32310	47800	/
200~224	324	540	900	2358	3505	5211	6774	8802	9810	11520	19718	33750	52560	/
180~224	557	929	1548	2448	3584	5247	6821	9180	10170	12420	20879	35100	48735	/
160~180	557	929	1548	2502	3663	5364	6973	9450	10710	11995	17262	24840	44910	67575
125~160	590	983	1638	2601	3859	5724	5841	9720	10890	11160	17674	27990	51600	74250
112~125	586	977	1629	2772	4073	5985	6066	10260	11430	12420	19695	31230	55710	79830
100~112	609	1015	1692	2840	4174	6134	6206	10490	11700	12960	20492	32400	57060	82125
90~100	651	1085	1809	2907	4273	6282	6651	10890	12240	13860	21915	34650	56430	91215
80~90	774	1291	2151	3033	4433	6480	6858	11340	12600	14400	22337	34650	60300	98010
71~80	833	1388	2313	3177	4537	6480	7182	11700	12960	14740	24022	39150	60300	100260
63~71	833	1388	2313	3258	4585	6453	7425	11970	13320	15570	24689	39150	58140	108000
56~63	1251	2084	3474	3543	4936	6876	9090	12510	14318	17280	27718	44460	58140	108000
45~56	1225	2041	3402	3645	5075	7065	9009	12510	14136	18090	29678	48690	56430	108000
40~45	1335	2225	3708	4221	5461	7065	8928	14400	16272	19395	30531	48060	56430	108000
35.5~40	1471	2452	4086	4167	5314	6777	8928	15120	16740	20700	31541	48060	56430	108000
31.5~35.5	1575	2624	4374	4437	5351	6453	8928	15210	17820	22050	32553	48060	56430	108000
28~31.5	1604	2673	4455	4635	5469	6453	8928	15210	17820	22950	33211	48060	56430	108000
25~28	1604	2673	4455	4815	5574	6453	8928	12150	17820	23940	33920	48060	56430	108000
22.4~25	1604	2673	4455	4878	5611	6453	8928	13680	17820	25200	34801	48060	56430	108000
≤22.4	1604	2673	4455	4878	5611	6453	8928	14220	17820	26280	35539	48060	56430	108000




## 6 外形尺寸图表

## 6 Dimensions

#### C103

#### C103H

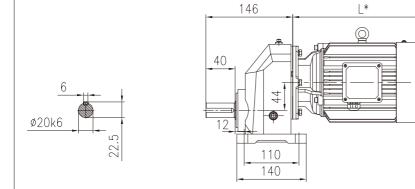



140 70 4XØ9 125 160

Horizontal foot-mounted

Weight: 6kg (Without motor and oil)

#### C103F

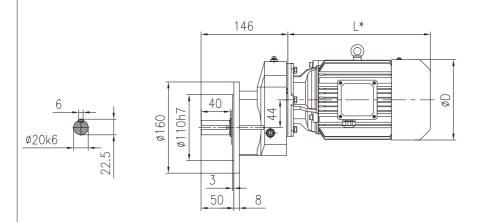




Flange - mounted

Weight: 6kg (Without motor and oil)




## 配C103对应马达的外形尺寸图表


## Corresponding motor dimension table for C103

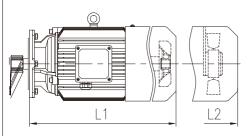







Brake + Fan




Double brake



Brake + Driven fan



Encorder +Driven fan



Brake + Encorder + Driven fan

						直	联马	达尺	八寸表	ŧ		С	irec	tly	conr	ecte	ed m	oto	r din	nens	sion	tabl	.e				
4极 4-pole	适用 Range				MS						N	ſH					M	Р					l	MA			D.
功率 power (k₩) (kW)	速比 of 范围 Ratio	L1	L2	L3	L4	L5	L6	L7	L1	L2	L3	L5	L6	L7	L1	L2	L3	L5	L6	L7	L1	L2	L3	L5	L6	L7	D
0.12	1.25-4	/	261	241	/	296	/	/	206	261	241	296	/	/	206	261	241	296	/	/	206	261	241	296	/	/	124
0.18	1. 25-4	/	261	241	/	296	/	/	206	261	241	296	/	/	206	261	241	296	/	/	206	261	241	296	/	/	124
0. 25	1. 25-4	/	268	263	/	313	313	353	223	268	263	313	313	353	223	268	263	313	313	353	223	273	263	318	318	358	139
0.37	1.25-4	/	268	263	/	313	313	353	223	268	263	313	313	353	223	268	263	313	313	353	223	273	263	318	318	358	139
0.55	1.25-4	299	344	359	419	404	404	454	299	344	359	404	404	454	299	344	359	404	404	454	299	344	359	404	404	449	162
0.75	1.25-4	299	344	359	419	404	404	454	299	344	359	404	404	454	299	344	359	404	404	454	299	344	359	404	404	449	162
1. 1	1. 25-2. 24	322	367	377	437	422	422	477	322	367	377	422	422	477	322	367	377	422	422	477	347	392	402	452	452	497	176
1.5	1. 25-2. 24	322	367	377	437	422	422	477	322	367	377	422	422	477	347	392	402	447	447	502	347	392	402	452	452	497	176
2. 2	1. 25-2. 24	394	434	469	529	509	509	564	394	434	469	509	509	564	394	434	469	509	509	564	394	449	469	529	529	574	202


#### 直联马达重量表/kg


#### Directly connected motor weight table / kg


4极 4-pole	适用 Range				MS						N	ИH					M	P					]	MA			
功率 power (kW) (kW)	速比 of 范围 Ratio	M1	M2	М3	M4	М5	M6	М7	M1	M2	М3	М5	M6	М7	M1	M2	М3	М5	M6	М7	M1	M2	М3	M5	M6	М7	
0.12	1. 25-4	/	8	9	/	9	/	/	7	8	9	9	/	/	7	8	9	9	/	/	7	7. 5	8.5	9	/	/	
0.18	1. 25-4	/	8	9	/	9	/	/	7	8	9	9	/	/	8	9	10	10	/	/	8	8. 5	9.5	10	/	/	
0.25	1. 25-4	/	9	10	/	11	10	12	8	9	10	11	10	12	9	10	11	12	11	13	9	10	10. 5	11.5	10.5	12. 5	
0.37	1. 25-4	/	10	11	/	12	11	13	9	10	11	12	11	13	10	11	12	13	12	14	10	11	11.5	12. 5	11.5	13. 5	
0.55	1. 25-4	13	14	17	21	18	15	19	14	15	18	19	16	20	15	16	19	20	17	21	15	16	19	20	16. 5	21	
0.75	1. 25-4	14	15	18	22	19	16	20	15	16	19	20	17	21	16	17	20	21	18	22	16	17	20	21	17. 5	22	
1.1	1. 25-2. 24	16	17	20	24	21	18	22	18	19	22	23	20	24	21	22	25	26	23	27	21	22	25	26	22. 5	27	
1.5	1. 25-2. 24	17	18	21	25	22	19	23	19	20	23	24	21	25	23	24	27	28	25	29	23	24	27	28	24. 5	29	
2.2	1. 25-2. 24	27	28	35	42	36	29	37	30	31	38	39	32	40	32	33	40	41	34	42	36	37	44	45	38	45	



#### C104H



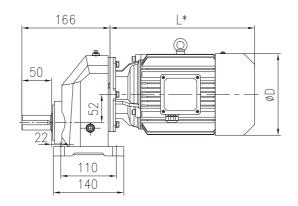





Horizontal foot-mounted

Weight: 9kg (Without motor and oil)

#### C104F

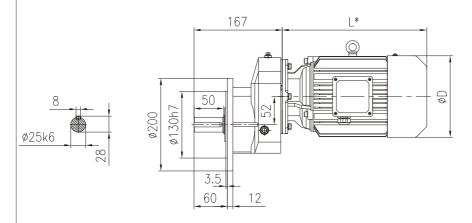




Flange - mounted

Weight: 9kg (Without motor and oil)





## 配C104对应马达 的外形尺寸图表


## Corresponding motor dimension table for C104

















Fan

Driven fan

Brake + Fan

Double brake

Brake + Driven fan

Encorder +Driven fan

Brake + Encorder


+ Driven fan	
--------------	--


						直	联马:	达尺	寸表			Di	rect	ly co	nne	ctec	l mo	tor	dime	ensi	on t	able	!				
4极 4-pole	适用 Range				MS						1	MH					M	P					1	MA			
功率 power (kW) (kW)	速比 of 范围 Ratio	L1	L2	L3	L4	L5	L6	L7	L1	L2	L3	L5	L6	L7	L1	L2	L3	L5	L6	L7	L1	L2	L3	L5	L6	L7	
0. 12	1. 25-4. 5	/	262	242	/	297	/	/	207	262	242	297	/	/	207	262	242	297	/	/	207	262	242	297	/	/	12
0.18	1. 25-4. 5	/	262	242	/	297	/	/	207	262	242	297	/	/	207	262	242	297	/	/	207	262	242	297	/	/	1
0. 25	1. 25-4. 5	/	269	264	/	314	314	354	224	269	264	314	314	354	224	269	264	314	314	354	224	274	264	319	319	359	1
0. 37	1. 25-4. 5	/	269	264	/	314	314	354	224	269	264	314	314	354	224	269	264	314	314	354	224	274	264	319	319	359	1
0. 55	1. 25-4. 5	300	345	360	420	405	405	455	300	345	360	405	405	455	300	345	360	405	405	455	300	345	360	405	405	450	1
0.75	1. 25-4. 5	300	345	360	420	405	405	455	300	345	360	405	405	455	300	345	360	405	405	455	300	345	360	405	405	450	1
1. 1	1. 25-2. 8	323	368	378	438	423	423	478	323	368	378	423	423	478	323	368	378	423	423	478	348	393	403	453	453	498	1
1.5	1. 25-2. 8	323	368	378	438	423	423	478	323	368	378	423	423	478	348	393	403	448	448	503	348	393	403	453	453	498	1
2. 2	1. 25-2. 8	395	435	470	530	510	510	565	395	435	470	510	510	565	395	435	470	510	510	565	395	450	470	530	530	575	2
3	1. 25-2. 8	395	435	470	530	510	510	565	395	435	470	510	510	565	395	435	470	510	510	565	395	450	470	530	530	575	2
4	1. 25-2. 8	391	441	466	526	516	516	571	459	509	534	584	584	639	459	509	534	584	584	639	459	519	534	599	599	639	2
						直联	马达	重量:	表/k	g		Dir	ectl	y co	nne	cted	mot	tor v	veig	ht ta	ble	/ kg					-
4极 4-nole	话田 Pange				MS						,	MH					М	D					,	мΔ			Т


4	1. 25-2. 8	391	441	466	526	516	516	571	459	509	534	584	584	639	459	509	534	584	584	639	459	519	534	599	599	639	220
					j	直联	马达	重量	表/k	g		Dir	ectl	y co	nne	cted	mo	tor v	veig	ht ta	ble	/ kg					
4极 4-pole	适用 Range				MS							MH					N	P					1	MA			
功率 power (kW) (kW)	速比 of 范围 Ratio	M1	M2	М3	M4	М5	M6	М7	M1	M2	М3	М5	M6	М7	M1	M2	М3	М5	М6	М7	M1	M2	М3	М5	M6	M7	
0.12	1. 25-4. 5	/	8	9	/	9	/	/	7	8	9	9	/	/	7	8	9	9	/	/	7	7. 5	8.5	9	/	/	
0.18	1. 25-4. 5	/	8	9	/	9	/	/	7	8	9	9	/	/	8	9	10	10	/	/	8	8. 5	9.5	10	/	/	
0. 25	1. 25-4. 5	/	9	10	/	11	10	12	8	9	10	11	10	12	9	10	11	12	11	13	9	10	10.5	11.5	10.5	12.5	
0.37	1. 25-4. 5	/	10	11	/	12	11	13	9	10	11	12	11	13	10	11	12	13	12	14	10	11	11.5	12. 5	11.5	13. 5	
0.55	1. 25-4. 5	13	14	17	21	18	15	19	14	15	18	19	16	20	15	16	19	20	17	21	15	16	19	20	16.5	21	
0.75	1. 25-4. 5	14	15	18	22	19	16	20	15	16	19	20	17	21	16	17	20	21	18	22	16	17	20	21	17. 5	22	
1.1	1. 25-2. 8	16	17	20	24	21	18	22	18	19	22	23	20	24	21	22	25	26	23	27	21	22	25	26	22.5	27	
1.5	1. 25-2. 8	17	18	21	25	22	19	23	19	20	23	24	21	25	23	24	27	28	25	29	23	24	27	28	24. 5	29	
2. 2	1. 25-2. 8	27	28	35	42	36	29	37	30	31	38	39	32	40	32	33	40	41	34	42	36	37	44	45	38	45	
3	1. 25-2. 8	30	31	38	45	39	32	40	33	34	41	42	35	43	36	37	44	45	38	46	36	37	44	45	38	45	
4	1. 25-2. 8	45	46	53	61	54	47	55	52	53	60	61	54	62	56	57	64	65	58	66	56	57	64	65	58	66	



#### C106H



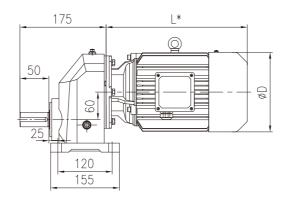





Horizontal foot-mounted

Weight: 10kg (Without motor and oil)

#### C106F

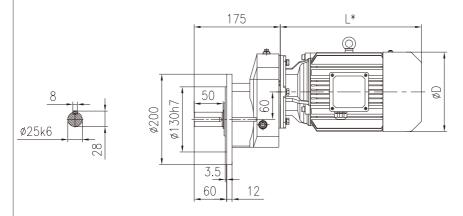




Flange - mounted


Weight: 10kg (Without motor and oil)





## 配C106对应马达 的外形尺寸图表


## Corresponding motor dimension table for C106

















Fan

Driven fan

Brake Double brake + Fan


Brake Encorder + Driven fan + Driven fan


Brake + Encorder + Driven fan


							直耶	关马过	尺寸	卡表			Dir	ectly	/ cor	nnec	ted	mot	or d	ime	nsic	n ta	ble				_
4极 4-pole	适用Range				MS						N	ſΗ					M	Р					N	ſА			
功率 power (kW) (kW)	速比 of 范围 Ratio	L1	L2	L3	L4	L5	L6	L7	L1	L2	L3	L5	L6	L7	L1	L2	L3	L5	L6	L7	L1	L2	L3	L5	L6	L7	
0. 25	1. 25-5. 6	/	269	264	/	314	314	354	224	269	264	314	314	354	224	269	264	314	314	354	224	274	264	319	319	359	,
0. 37	1. 25-5. 6	/	269	264	/	314	314	354	224	269	264	314	314	354	224	269	264	314	314	354	224	274	264	319	319	359	)
0. 55	1. 25-5. 6	300	345	360	420	405	405	455	300	345	360	405	405	455	300	345	360	405	405	455	300	345	360	405	405	450	)
0.75	1. 25-5. 6	300	345	360	420	405	405	455	300	345	360	405	405	455	300	345	360	405	405	455	300	345	360	405	405	450	)
1.1	1. 25-3. 55	323	368	378	438	423	423	478	323	368	378	423	423	478	323	368	378	423	423	478	348	393	403	453	453	498	}
1.5	1. 25-3. 55	323	368	378	438	423	423	478	323	368	378	423	423	478	348	393	403	448	448	503	348	393	403	453	453	498	}
2. 2	1. 25-3. 55	395	435	470	530	510	510	565	395	435	470	510	510	565	395	435	470	510	510	565	395	450	470	530	530	575	;
3	1. 25-3. 55	395	435	470	530	510	510	565	395	435	470	510	510	565	395	435	470	510	510	565	395	450	470	530	530	575	;
4	1. 25-3. 55	391	441	466	526	516	516	571	459	509	534	584	584	639	459	509	534	584	584	639	459	519	534	599	599	639	)
5. 5	1. 25-1. 4	432	482	512	577	557	557	612	432	482	512	557	557	612	470	520	550	595	595	650	508	573	588	658	658	688	;
7. 5	1. 25-1. 4	470	520	550	615	595	595	650	470	520	550	595	595	650	508	558	588	633	633	688	508	573	588	658	658	688	;
							直	联马	达重	量表	/kg		D	irec	tly c	onne	ecte	d m	otor	wei	ght	tabl	e/k	g			
4极 4-pole	适用Range				MS						N	ſН					M	Р					N	ИA			
功率 power (kW) (kW)	速比 of 范围 Ratio	M1	M2	М3	M4	M5	M6	M7	M1	M2	М3	M5	M6	М7	M1	M2	М3	M5	M6	М7	M1	M2	М3	М5	M6	М7	
0. 25	1. 25-5. 6	/	9	10	/	11	10	12	8	9	10	11	10	12	9	10	11	12	11	13	9	10	10.5	11.5	10. 5	12. 5	5
0. 37	1. 25-5. 6	/	10	11	/	12	11	13	9	10	11	12	11	13	10	11	12	13	12	14	10	11	11.5	12. 5	11.5	13. 5	5
0.55	1. 25-5. 6	13	14	17	21	18	15	19	14	15	18	19	16	20	15	16	19	20	17	21	15	16	19	20	16.5	21	
0.75	1. 25-5. 6	14	15	18	22	19	16	20	15	16	19	20	17	21	16	17	20	21	18	22	16	17	20	21	17. 5	22	
1. 1	1. 25-3. 55	16	17	20	24	21	18	22	18	19	22	23	20	24	21	22	25	26	23	27	21	22	25	26	22. 5	27	
1.5	1. 25-3. 55	17	18	21	25	22	19	23	19	20	23	24	21	25	23	24	27	28	25	29	23	24	27	28	24. 5	29	
2. 2	1. 25-3. 55	27	28	35	42	36	29	37	30	31	38	39	32	40	32	33	40	41	34	42	36	37	44	45	38	45	
3	1. 25-3. 55	30	31	38	45	39	32	40	33	34	41	42	35	43	36	37	44	45	38	46	36	37	44	45	38	45	
4	1. 25-3. 55	45	46	53	61	54	47	55	52	53	60	61	54	62	56	57	64	65	58	66	56	57	64	65	58	66	
	1. 25-1. 4	63	65	74	85	76	66	77	67	69	78	80	70	81	77	79	88	90	80	91	77	79	88	90	80	91	
5. 5	1.20 1.4	00	00						l		l .											1		1			



#### C107H



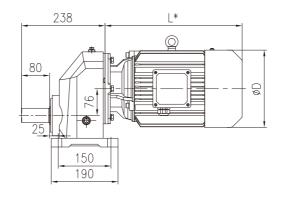






Horizontal foot-mounted

Weight: 19kg (Without motor and oil)

#### C107F



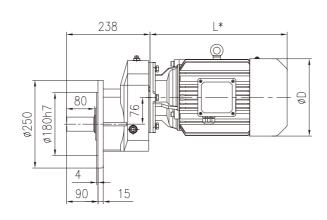




Flange - mounted


Weight: 21kg (Without motor and oil)





## 配C107对应马达 的外形尺寸图表


## Corresponding motor dimension table for C107

















Fan

Driven fan

Brake + Fan

Double brake

Brake + Driven fan

Encorder +Driven fan


Brake + Encorder


	Lincolaci
+	Driven fan


						直	镁马	达尺	寸表				Dir	ectl	у со	nne	cted	d mo	otor	dim	ens	ion	tabl	e				
4极 4-pole	适用 Range				MS							MH						MP						N	ΙA			
功率 power (kW)	速比 of 范围 Ratio	L1	L2	L3	L4	L5	L6	L7	L1	L2	L3	L4	L5	L6	L7	L1	L2	L3	L5	L6	L7	L1	L2	L3	L5	L6	L7	
0. 25	1. 25-7. 1	/	261	256	/	306	306	346	216	261	256	/	306	306	346	216	261	256	306	306	346	216	266	256	311	311	351	. ]
0.37	1. 25-7. 1	/	261	256	/	306	306	346	216	261	256	/	306	306	346	216	261	256	306	306	346	216	266	256	311	311	351	. ]
0.55	1. 25-7. 1	292	337	352	412	397	397	447	292	337	352	/	397	397	447	292	337	352	397	397	447	292	337	352	397	397	442	2 ]
0.75	1. 25-7. 1	292	337	352	412	397	397	447	292	337	352	/	397	397	447	292	337	352	397	397	447	292	337	352	397	397	442	}
1.1	1. 25-4. 5	315	360	370	430	415	415	470	315	360	370	/	415	415	470	315	360	370	415	415	470	340	385	395	445	445	490	)
1. 5	1. 25-4. 5	315	360	370	430	415	415	470	315	360	370	/	415	415	470	340	385	395	440	440	495	340	385	395	445	445	490	,[
2. 2	1. 25-4. 5	387	427	462	522	502	502	557	387	427	462	/	502	502	557	387	427	462	502	502	557	387	442	462	522	522	567	
3	1. 25-4. 5	387	427	462	522	502	502	557	387	427	462	/	502	502	557	387	427	462	502	502	557	387	442	462	522	522	567	
4	1. 25-4. 5	383	433	458	518	508	508	563	451	501	526	/	576	576	631	451	501	526	576	576	631	451	511	526	591	591	631	. [
5. 5	1. 25-2	421	471	501	566	546	546	601	421	471	501	/	546	546	601	459	509	539	584	584	639	497	562	577	647	647	677	
7. 5	1. 25-2	459	509	539	604	584	584	639	459	509	539	/	584	584	639	497	547	577	622	622	677	497	562	577	647	647	677	1
11	1. 25-2	/	542	602	/	632	632	682	507	542	602	652	632	632	682	551	586	646	676	676	726	551	601	646	701	701	736	;
			•				直	联马	b达重	重量を	麦/kg	g			Direc	ctly	coni	nect	ed r	note	or w	eigl	nt ta	ble	/ kg			
4极 4-pole	适用 Range				MS							MH						MP						N	ΙA			
功率 power (kW)	速比 of 范围 Ratio	M1	M2	М3	M4	М5	M6	М7	M1	M2	М3	M4	М5	M6	М7	M1	M2	М3	M5	M6	М7	M1	M2	М3	М5	M6	М7	Ī
0. 25	1. 25-7. 1	/	9	10	/	11	10	12	8	9	10	/	11	10	12	9	10	11	12	11	13	9	10	10. 5	11.5	10.5	12. 5	;
0. 37	1. 25-7. 1	/	10	11	/	12	11	13	9	10	11	/	12	11	13	10	11	12	13	12	14	10	11	11.5	12.5	11.5	13. 5	;
0.55	1. 25-7. 1	13	14	17	21	18	15	19	14	15	18	/	19	16	20	15	16	19	20	17	21	15	16	19	20	16.5	21	Ī
0.75	1. 25-7. 1	14	15	18	22	19	16	20	15	16	19	/	20	17	21	16	17	20	21	18	22	16	17	20	21	17. 5	22	Ī
1.1	1. 25-4. 5	16	17	20	24	21	18	22	18	19	22	/	23	20	24	21	22	25	26	23	27	21	22	25	26	22. 5	27	Ī
1.5	1. 25-4. 5	17	18	21	25	22	19	23	19	20	23	/	24	21	25	23	24	27	28	25	29	23	24	27	28	24. 5	29	Ī
2. 2	1. 25-4. 5	27	28	35	42	36	29	37	30	31	38	/	39	32	40	32	33	40	41	34	42	36	37	44	45	38	45	1
3	1. 25-4. 5	30	31	38	45	39	32	40	33	34	41	/	42	35	43	36	37	44	45	38	46	36	37	44	45	38	45	1
4	1. 25-4. 5	45	46	53	61	54	47	55	52	53	60	/	61	54	62	56	57	64	65	58	66	56	57	64	65	58	66	1
5. 5	1. 25-2	63	65	74	85	76	66	77	67	69	78	/	80	70	81	77	79	88	90	80	91	77	79	88	90	80	91	1
	1. 25-2	73	75	84	95	86	76	87	80	82	91	/	93	83	94	88	90	99	101	91	102	88	90	99	101	91	102	:
7. 5	1.20 2	١.٠				l						1	l .															



#### C108H



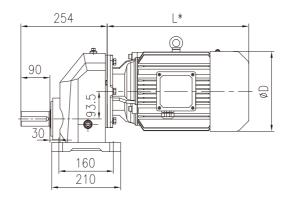






Horizontal foot-mounted

Weight: 30kg (Without motor and oil)

#### C108F



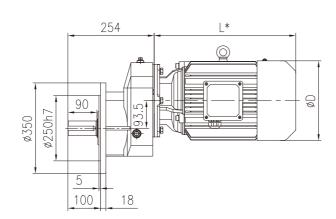




Flange - mounted

Weight: 36kg (Without motor and oil)





## 配C108对应马达 的外形尺寸图表


### **Corresponding motor** dimension table for C108

















Fan

Driven fan

Brake + Fan

Double brake

Brake + Driven fan

Encorder +Driven fan


Brake + Encorder + Driven fan


								直联	马达	尺寸	表			Dir	ectl	у со	nne	cted	l mo	otor	dim	ens	ion <sup>·</sup>	table	е			
4极 4-pole	适用 Range				MS							MH						MP						М	Α			I
功率 power (kW) (kW)	速比 of 范围 Ratio	L1	L2	L3	L4	L5	L6	L7	L1	L2	L3	L4	L5	L6	L7	L1	L2	L3	L5	L6	L7	L1	L2	L3	L5	L6	L7	
0. 75	3. 15-7. 1	283	328	343	403	388	388	438	283	328	343	/	388	388	438	283	328	343	388	388	438	283	328	343	388	388	433	1
1.1	1. 25-5. 6	306	351	361	421	406	406	461	306	351	361	/	406	406	461	306	351	361	406	406	461	331	376	386	436	436	481	. 1
1.5	1. 25-5. 6	306	351	361	421	406	406	461	306	351	361	/	406	406	461	331	376	386	431	431	486	331	376	386	436	436	481	. 1
2.2	1. 25-5. 6	378	418	453	513	493	493	548	378	418	453	/	493	493	548	378	418	453	493	493	548	378	433	453	513	513	558	3 2
3	1. 25-5. 6	378	418	453	513	493	493	548	378	418	453	/	493	493	548	378	418	453	493	493	548	378	433	453	513	513	558	3 2
4	1. 25-5. 6	374	424	449	509	499	499	554	442	492	517	/	567	567	622	442	492	517	567	567	622	442	502	517	582	582	622	2
5. 5	1. 25-2. 8	413	463	493	558	538	538	593	413	463	493	/	538	538	593	451	501	531	576	576	631	489	554	569	639	639	669	1 2
7. 5	1. 25-2. 8	451	501	531	596	576	576	631	451	501	531	/	576	576	631	489	539	569	614	614	669	489	554	569	639	639	669	1 2
11	1. 25-2. 8	/	541	601	/	631	631	681	506	541	601	651	631	631	681	550	585	645	675	675	725	550	600	645	700	700	735	3
15	1. 25-2. 8	/	585	645	/	675	675	725	550	585	645	695	675	675	725	580	615	675	705	705	755	580	630	675	730	730	765	3
18. 5	1. 25-2. 8	/	651	731	/	756	756	796	621	651	731	786	731	756	801	621	651	731	756	756	801	621	666	731	776	776	816	, 3
22	1. 25-2. 8	/	699	779	/	804	804	849	669	699	779	834	779	804	849	669	699	779	804	804	849	669	714	779	824	824	864	1 3
							直耶	关马i	大重量	量表/	′kg			Dire	ctly	con	inec	ted	mot	torv	veig	ht t	able	/ kg	5			
4极 4-pole	适用 Range				MS							MH						MP						М	Α			
功率 power (kW) (kW)	速比 of 范围 Ratio	M1	M2	М3	M4	M5	M6	M7	M1	M2	М3	M4	M5	M6	M7	M1	M2	М3	M5	M6	M7	M1	M2	М3	M5	M6	М7	
0.75	3. 15-7. 1	14	15	18	22	19	16	20	15	16	19	/	20	17	21	16	17	20	21	18	22	16	17	20	21	17.5	22	Ī
1.1	1. 25-5. 6	16	17	20	24	21	18	22	18	19	22	/	23	20	24	21	22	25	26	23	27	21	22	25	26	22. 5	27	Ī
1.5	1. 25-5. 6	17	18	21	25	22	19	23	19	20	23	/	24	21	25	23	24	27	28	25	29	23	24	27	28	24. 5	29	Ī
2. 2	1. 25-5. 6	27	28	35	42	36	29	37	30	31	38	/	39	32	40	32	33	40	41	34	42	36	37	44	45	38	45	
3	1. 25-5. 6	30	31	38	45	39	32	40	33	34	41	/	42	35	43	36	37	44	45	38	46	36	37	44	45	38	45	Ī
4	1. 25-5. 6	45	46	53	61	54	47	55	52	53	60	/	61	54	62	56	57	64	65	58	66	56	57	64	65	58	66	T
5. 5	1. 25-2. 8	63	65	74	85	76	66	77	67	69	78	/	80	70	81	77	79	88	90	80	91	77	79	88	90	80	91	Ī
7. 5	1. 25-2. 8	73	75	84	95	86	76	87	80	82	91	/	93	83	94	88	90	99	101	91	102	88	90	99	101	91	102	2
11	1. 25-2. 8	/	123	142	/	143	124	144	121	123	142	162	143	124	144	129	131	150	151	132	152	129	131	150	151	132	152	2
15	1. 25-2. 8	/	141	160	/	161	142	162	139	141	160	180	161	142	162	161	163	182	183	164	184	161	163	182	183	164	184	1
18.5	1. 25-2. 8	/	184	214	/	215	185	217	182	184	214	246	215	185	217	200	202	232	233	203	235	200	202	232	233	203	235	5
10.0																										1	1	- 1



#### C109H



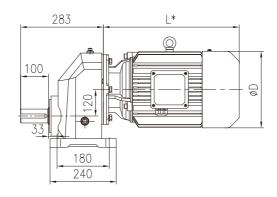






Horizontal foot-mounted

Weight: 46kg (Without motor and oil)

### C109F



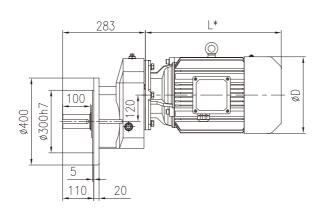




Flange - mounted

Weight: 56kg (Without motor and oil)





## 配C109对应马达 的外形尺寸图表


## **Corresponding motor** dimension table for C109

















Fan

Driven fan

Brake + Fan

Double brake

Brake + Driven fan

Encorder +Driven fan


Brake + Encorder


		_
+	Drive	n fan


						Ī	1联4	弘	7寸:	表				Dire	ectly	/ cor	nnec	ted	mo	tord	dime	ensi	on t	able	<u> </u>		
4极 4-pole 功率 power	适用Range 速比 of				MS							MH						MP						M	ΙA		
<sub>(kW)</sub> (kW)	范围 Ratio	L1	L2	L3	L4	L5	L6	L7	L1	L2	L3	L4	L5	L6	L7	L1	L2	L3	L5	L6	L7	L1	L2	L3	L5	L6	L7
1. 5	1. 25-7. 1	303	348	358	418	403	403	458	303	348	358	/	403	403	458	328	373	383	428	428	483	328	373	383	433	433	478
2. 2	1. 25-7. 1	374	414	449	509	489	489	544	374	414	449	/	489	489	544	374	414	449	489	489	544	374	429	449	509	509	554
3	1. 25-7. 1	374	414	449	509	489	489	544	374	414	449	/	489	489	544	374	414	449	489	489	544	374	429	449	509	509	554
4	1. 25-7. 1	370	420	445	505	495	495	550	438	488	513	/	563	563	618	438	488	513	563	563	618	438	498	513	578	578	618
5. 5	1. 25-4	412	462	492	557	537	537	592	412	462	492	/	537	537	592	450	500	530	575	575	630	488	553	568	638	638	668
7. 5	1. 25-4	450	500	530	595	575	575	630	450	500	530	/	575	575	630	488	538	568	613	613	668	488	553	568	638	638	668
11	1.25-4	/	535	595	/	625	625	675	500	535	595	645	625	625	675	544	579	639	669	669	719	544	594	639	694	694	729
15	1.25-4	/	579	639	/	669	669	719	544	579	639	689	669	669	719	574	609	669	699	699	749	574	624	669	724	724	759
18. 5	1. 25-4	/	645	725	/	750	750	795	615	645	725	780	725	750	795	615	645	725	750	750	795	615	660	725	770	770	810
22	1. 25-4	/	693	773	/	798	798	843	663	693	773	828	773	798	843	663	693	773	798	798	843	663	708	773	818	818	858
30	1. 25-2. 8	/	710	820	/	825	825	870	705	710	820	845	825	825	870	705	710	820	825	825	870	705	725	820	845	845	890
						直	联马	达重	量表	ŧ/kg				Di	rect	tly co	onne	ecte	d m	otoı	r we	ight	tab	le/	kg		
4极 4-pole	适用Range				MS							MH						MP						M	ΙA		
功率 power (kW) (kW)	速比 of 范围 Ratio	M1	M2	М3	M4	M5	M6	М7	M1	M2	М3	M4	M5	M6	M7	M1	M2	М3	M5	M6	M7	M1	M2	М3	M5	M6	М7
1.5	1. 25-7. 1	17	18	21	25	22	19	23	19	20	23	/	24	21	25	22	23	26	27	24	28	23	24	27	28	24.5	29
2.2	1. 25-7. 1	27	28	35	42	36	29	37	30	31	38	/	39	32	40	32	33	40	41	34	42	36	37	44	45	38	45
3	1. 25-7. 1	30	31	38	45	39	32	40	33	34	41	/	42	35	43	36	37	44	45	38	46	36	37	44	45	38	45
4	1. 25-7. 1	45	46	53	61	54	47	55	52	53	60	/	61	54	62	56	57	64	65	58	66	56	57	64	65	58	66
5. 5	1. 25-4	63	65	74	85	76	66	77	67	69	78	/	80	70	81	77	79	88	90	80	91	77	79	88	90	80	91
7.5	1. 25-4	73	75	84	95	86	76	87	80	82	91	/	93	83	94	88	90	99	101	91	102	88	90	99	101	91	102
11	1. 25-4	/	123	142	/	143	124	144	121	123	142	162	143	124	144	129	131	150	151	132	152	129	131	150	151	132	152
15	1.25-4	/	141	160	/	161	142	162	139	141	160	180	161	142	162	161	163	182	183	164	184	161	163	182	183	164	184
18. 5	1. 25-4	/	184	214	/	215	185	217	182	184	214	246	215	185	217	200	202	232	233	203	235	200	202	232	233	203	235
22	1. 25-4	/	206	236	/	237	207	239	204	206	236	268	237	207	239	220	222	252	253	223	255	220	222	252	253	223	255
30	1. 25-2. 8	/	260	310	/	308	261	310	260	260	310	360	308	261	310	280	280	330	328	281	330	280	280	330	328	281	330



#### C110H



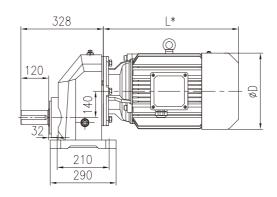






Horizontal foot-mounted

Weight: 74kg (Without motor and oil)

#### C110F



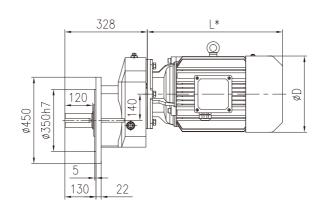




Flange - mounted

Weight: 84kg (Without motor and oil)





## 配C110对应马达 的外形尺寸图表


## Corresponding motor dimension table for C110

















Fan

Driven fan

Brake + Fan

Double brake

Brake + Driven fan

Encorder +Driven fan

Brake + Encorder


+ Driven far	า
--------------	---

							直联	马达	尺寸	表				irec	tly	conr	nect	ed n	noto	or di	mer	nsio	n ta	ble			
4极 4-pole	适用 Range				MS							MH						MP						N	ÍΑ		
功率 power (kW) (kW)	速比 of 范围 Ratio	L1	L2	L3	L4	L5	L6	L7	L1	L2	L3	L4	L5	L6	L7	L1	L2	L3	L5	L6	L7	L1	L2	L3	L5	L6	L7
1.5	1. 25-6. 3	300	345	355	415	400	400	455	300	345	355	/	400	400	455	325	370	380	425	425	480	325	370	380	430	430	475
2.2	1. 25-6. 3	370	410	445	505	485	485	540	370	410	445	/	485	485	540	370	410	445	485	485	540	370	425	445	505	505	550
3	1. 25-6. 3	370	410	445	505	485	485	540	370	410	445	/	485	485	540	370	410	445	485	485	540	370	425	445	505	505	550
4	1. 25-6. 3	366	416	441	501	491	491	546	434	484	509	/	559	559	614	434	484	509	559	559	614	434	494	509	574	574	614
5. 5	1. 25-4. 5	401	451	481	546	526	526	581	401	451	481	/	526	526	581	439	489	519	564	564	619	477	542	557	627	627	657
7. 5	1. 25-4. 5	439	489	519	584	564	564	619	439	489	519	/	564	564	619	477	527	557	602	602	657	477	542	557	627	627	657
11	1. 25-4. 5	/	524	584	/	614	614	664	489	524	584	634	614	614	664	533	568	628	658	658	708	533	583	628	683	683	718
15	1. 25-4. 5	/	568	628	/	658	658	708	533	568	628	678	658	658	708	563	598	658	688	688	738	563	613	658	713	713	748
18. 5	1. 25-4. 5	/	634	714	/	739	739	784	604	634	714	769	714	739	784	604	634	714	739	739	784	604	649	714	759	759	799
22	1. 25-4. 5	/	682	762	/	787	787	832	652	682	762	817	762	787	832	652	682	762	787	787	832	652	697	762	807	807	847
30	1. 25-3. 55	/	710	820	/	825	825	870	705	710	820	845	825	825	870	705	710	820	825	825	870	705	725	820	845	845	890
37	1. 25-3. 55	/	776	861	/	891	891	936	746	776	861	/	891	891	936	746	776	861	891	891	936	746	781	861	901	901	941
45	1. 25-3. 55	/	776	861	/	891	891	936	746	776	861	/	891	891	936	746	776	861	891	891	936	746	781	861	901	901	941
						直联	马达	重量	表/l	κg			Di	rect	ly c	onn	ecte	d m	otor	we	ight	tab	le/	kg			
4极 4-pole	适用 Range				MS							MH						MP						N	[A		
功率 power (kW)	速比 of 范围 Ratio	M1	M2	М3	M4	М5	M6	М7	M1	M2	М3	M4	M5	M6	М7	M1	M2	М3	M5	M6	M7	M1	M2	М3	M5	M6	M7
1.5	1. 25-6. 3	17	18	21	25	22	19	23	19	20	23	/	24	21	25	23	24	27	28	25	29	23	24	27	28	24. 5	29
2. 2	1. 25-6. 3	27	28	35	42	36	29	37	30	31	38	/	39	32	40	32	33	40	41	34	42	36	37	44	45	38	45
3	1. 25-6. 3	30	31	38	45	39	32	40	33	34	41	/	42	35	43	36	37	44	45	38	46	36	37	44	45	38	45
4	1. 25-6. 3	45	46	53	61	54	47	55	52	53	60	/	61	54	62	56	57	64	65	58	66	56	57	64	65	58	66
5. 5	1. 25-4. 5	63	65	74	85	76	66	77	67	69	78	/	80	70	81	77	79	88	90	80	91	77	79	88	90	80	91
7. 5	1. 25-4. 5	73	75	84	95	86	76	87	80	82	91	/	93	83	94	88	90	99	101	91	102	88	90	99	101	91	102
11	1. 25-4. 5	/	123	142	/	143	124	144	121	123	142	162	143	124	144	129	131	150	151	132	152	129	131	150	151	132	152
15	1. 25-4. 5	/	141	160	/	161	142	162	139	141	160	180	161	142	162	161	163	182	183	164	184	161	163	182	183	164	184
18. 5	1. 25-4. 5	/	184	214	/	215	185	217	182	184	214	246	215	185	217	200	202	232	233	203	235	200	202	232	233	203	235
22	1. 25-4. 5	/	206	236	/	237	207	239	204	206	236	268	237	207	239	220	222	252	253	223	255	220	222	252	253	223	255
30	1. 25-3. 55	/	260	310	/	308	261	310	260	260	310	360	308	261	310	280	280	330	328	281	330	280	280	330	328	281	330
37	1. 25-3. 55	/	332	380	/	381	334	383	330	332	380	/	381	334	383	345	347	395	396	349	398	345	347	395	396	349	398
		_					_															_				-	_




Weight: 4kg (Without motor and oil)

#### 

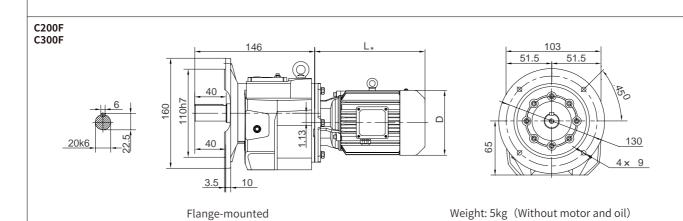


Horizontal foot-mounted

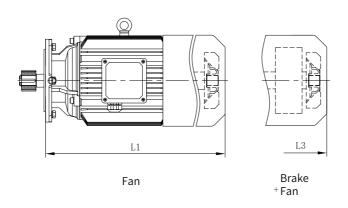

	直联马达尺寸表										直耳	联马	达重	量表	₹/kg	
Dire	ectly connected motor dimension t	able									Dire	ctly co	onnec ht tab	ted m	notor	
4极功率 <b>4-pole</b>	适用速比 适用速比	N	<b>M</b> S	M	ИH	N	MР	MA	D	M	<b>I</b> S	N	ΙΗ	N	ИP	MA
(kW) power(kW)	范围 范围	L1	L3	L1	L3	L1	L3	L1	D	M1	М3	M1	М3	M1	М3	M1
0.09	3. 15-71	179	214	/	/	/	/	/	116	5	7	/	/	/	/	/
0. 12	3. 15-71	179	214	/	/	/	/	/	116	5	7	/	/	/	/	/
0.18	3. 15-50	/	233	198	233	198	233	198	124	/	9	7	9	7	9	8
0. 25	3. 15-35. 5	198	233	/	/	/	/	/	124	7	9	/	/	/	/	/
0. 37	3. 15-25	/	246	211	246	211	246	211	139	/	11	9	11	9	11	10


33




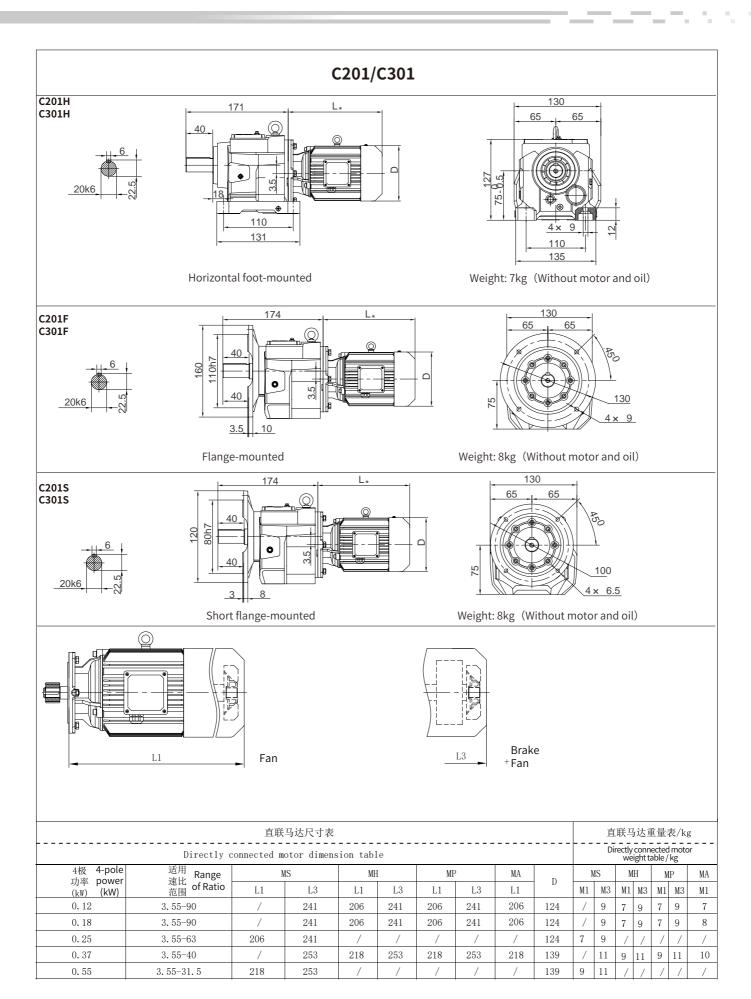





#### C203/C303

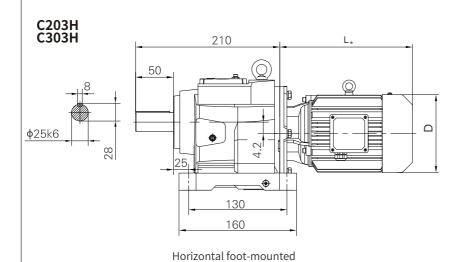




Weight: 8kg (Without motor and oil)

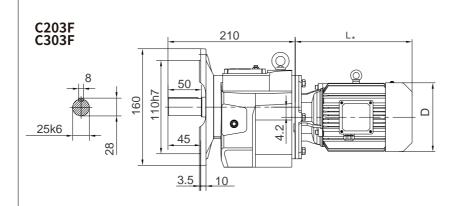




Flange-mounted

Weight: 9kg (Without motor and oil)

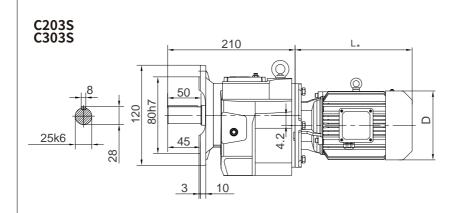




Short flange-mounted

Weight: 9kg (Without motor and oil)



# 配C203/C303对应马达的外形尺寸图表


# Corresponding motor dimension table for C203/C303

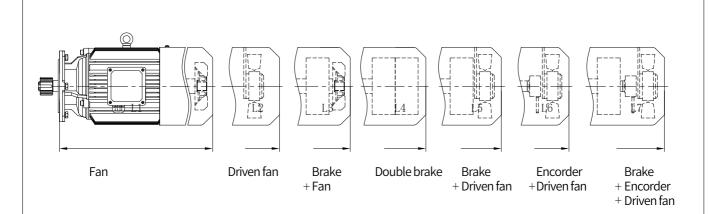


							直耳	联马:	达尺	寸表			[	Direc	ctly	conr	ecte	ed m	noto	r dir	nen	sion	tab	le			
4极 4-pole	适用 Range				MS						N	ſH					M	P					]	MA			
功率 power (kW) (kW)	速比 of 范围 Ratio	L1	L2	L3	L4	L5	L6	L7	L1	L2	L3	L5	L6	L7	L1	L2	L3	L5	L6	L7	L1	L2	L3	L5	L6	L7	D
0. 12	4-90	/	261	241	/	296	/	/	206	261	241	296	/	/	206	261	241	296	/	/	206	261	241	296	/	/	12
0.18	4-90	/	261	241	/	296	/	/	206	261	241	296	/	/	206	261	241	296	/	/	206	261	241	296	/	/	12
0. 25	4-90	/	268	263	/	313	313	353	223	268	263	313	313	353	223	268	263	313	313	353	223	273	263	318	318	358	13
0. 37	4-90	/	268	263	/	313	313	353	223	268	263	313	313	353	223	268	263	313	313	353	223	273	263	318	318	358	13
0. 55	4-71	299	344	359	419	404	404	454	299	344	359	404	404	454	299	344	359	404	404	454	299	344	359	404	404	449	16
0.75	4-50	299	344	359	419	404	404	454	299	344	359	404	404	454	299	344	359	404	404	454	299	344	359	404	404	449	16
1.1	4-35.5	322	367	377	437	422	422	477	322	367	377	422	422	477	322	367	377	422	422	477	347	392	402	452	452	497	176
1.5	4-25	322	367	377	437	422	422	477	322	367	377	422	422	477	347	392	402	447	447	502	347	392	402	452	452	497	176
2. 2	4-18	394	434	469	529	509	509	564	394	434	469	509	509	564	394	434	469	509	509	564	394	449	469	529	529	574	20
3	4-12.5	394	434	469	529	509	509	564	394	434	469	509	509	564	394	434	469	509	509	564	394	449	469	529	529	574	202
							直耳	联马:	达重:	量表	/kg				Dire	ectly	conne	ected	mote	or we	eight	table	/kg				
4极 4-pole 功率 power	适用 Range 速比 of				MS						N	ſH					M	Р						MA			
(kW) (kW)	范围 Ratio	M1	M2	М3	M4	M5	M6	M7	M1	M2	М3	М5	M6	М7	M1	M2	М3	M5	M6	М7	M1	M2	М3	М5	M6	M7	
0.12	4-90	/	8	9	/	9	/	/	7	8	9	9	/	/	7	8	9	9	/	/	7	7. 5	8. 5	9	/	/	
0.18	4-90	/	8	9	/	9	/	/	7	8	9	9	/	/	8	9	10	10	/	/	8	8. 5	9. 5	10	/	/	
0. 25	4-90	/	9	10	/	11	10	12	8	9	10	11	10	12	9	10	11	12	11	13	9	10	10.5	11.5	10. 5	12. 5	į
0. 37	4-90	/	10	11	/	12	11	13	9	10	11	12	11	13	10	11	12	13	12	14	10	11	11.5	12. 5	11.5	13. 5	
0. 55	4-71	13	14	17	21	18	15	19	14	15	18	12	16	20	15	16	19	20	17	21	15	16	19	20	16. 5	21	
0.75	4-50	14	15	18	22	19	16	20	15	16	19	12	17	21	16	17	20	21	18	22	16	17	20	21	17. 5	22	
1. 1	4-35.5	16	17	20	24	21	18	22	18	19	22	12	20	24	21	22	25	26	23	27	21	22	25	26	22. 5	27	
1.5	4-25	17	18	21	25	22	19	23	19	20	23	12	21	25	23	24	27	28	25	29	23	24	27	28	24. 5	29	
2. 2	4-18	27	28	35	42	36	29	37	30	31	38	12	32	40	32	33	40	41	34	42	36	37	44	45	38	45	
3	4-12.5	30	31	38	45	39	32	40	33	34	41	12	35	43	36	37	44	45	38	46	36	37	44	45	38	45	




#### C204/C304

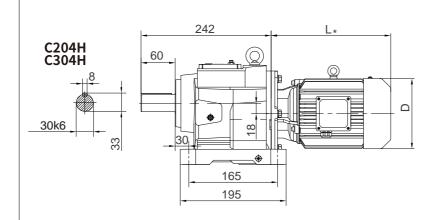


Horizontal foot-mounted




Weight: 14kg (Without motor and oil)

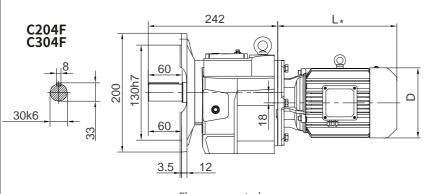

Flange-mounted




Weight: 15kg (Without motor and oil)

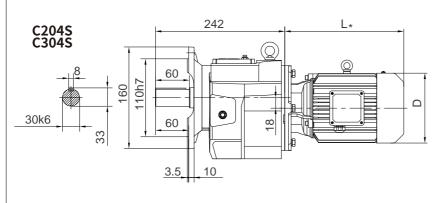

Short flange-mounted


Weight: 14kg (Without motor and oil)





# 配C204/C304对应马达的外形尺寸图表

## Corresponding motor dimension table for C204/C304

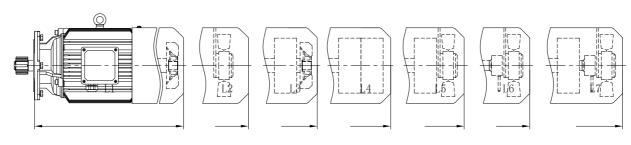

Fan Driven fan

3

4

4-18

4-11.2

Brake + Fan Double brake

Brake + Driven fan Encorder +Driven fan

37

57

44

64 65 58 66

36

45

Brake + Encorder

+ Driven fan

							т.	J. J.	-/-	十表		ט	neci	ly C	JIIII	ecte	u III	JUI	uiiii	CIISI	011 (	abit					_
4极 4-pole 功率 power	适用 Range 速比 of				MS						M	ИΗ					M	Р					]	MA			
(kW) (kW)	范围 Ratio	L1	L2	L3	L4	L5	L6	L7	L1	L2	L3	L5	L6	L7	L1	L2	L3	L5	L6	L7	L1	L2	L3	L5	L6	L7	
0.12	4-125	/	262	242	/	297	/	/	207	262	242	297	/	/	207	262	242	297	/	/	207	262	242	297	/	/	]
0. 18	4-125	/	262	242	/	297	/	/	207	262	242	297	/	/	207	262	242	297	/	/	207	262	242	297	/	/	
0. 25	4-125	/	269	264	/	314	314	354	224	269	264	314	314	354	224	269	264	314	314	354	224	274	264	319	319	359	,
0. 37	4-125	/	269	264	/	314	314	354	224	269	264	314	314	354	224	269	264	314	314	354	224	274	264	319	319	359	Ī
0. 55	4-100	300	345	360	420	405	405	455	300	345	360	405	405	455	300	345	360	405	405	455	300	345	360	405	405	450	ľ
0.75	4-71	300	345	360	420	405	405	455	300	345	360	405	405	455	300	345	360	405	405	455	300	345	360	405	405	450	,
1. 1	4-50	323	368	378	438	423	423	478	323	368	378	423	423	478	323	368	378	423	423	478	348	393	403	453	453	498	1
1. 5	4-35. 5	323	368	378	438	423	423	478	323	368	378	423	423	478	348	393	403	448	448	503	348	393	403	453	453	498	1
2. 2	4-25	395	435	470	530	510	510	565	395	435	470	510	510	565	395	435	470	510	510	565	395	450	470	530	530	575	1
3	4-18	395	435	470	530	510	510	565	395	435	470	510	510	565	395	435	470	510	510	565	395	450	470	530	530	575	
4	4-11.2	391	441	466	526	516	516	571	459	509	534	584	584	639	459	509	534	584	584	639	459	519	534	599	599	639	1
l					I		直	[联马	,       	量表	ŧ/kg		I	D	irect	y con	necte	ed mo	otor v	weigh	nt tab	le/k	g				
4极 4-pole	适用 Range				MS						N	ИН					M	P					]	MA			I
功率 power (kW) (kW)	速比 of 范围 Ratio	M1	M2	М3	M4	M5	M6	M7	M1	M2	М3	M5	M6	M7	M1	M2	М3	M5	M6	М7	M1	M2	М3	M5	M6	М7	1
0. 12	4-125	/	8	9	/	9	/	/	7	8	9	9	/	/	7	8	9	9	/	/	7	7. 5	8.5	9	/	/	1
0.18	4-125	/	8	9	/	9	/	/	7	8	9	9	/	/	8	9	10	10	/	/	8	8. 5	9.5	10	/	/	1
0. 25	4-125	/	9	10	/	11	10	12	8	9	10	11	10	12	9	10	11	12	11	13	9	10	10. 5	11.5	10. 5	12. 5	5
0. 37	4-125	/	10	11	/	12	11	13	9	10	11	12	11	13	10	11	12	13	12	14	10	11	11.5	12. 5	11.5	13. 5	5
0. 55	4-100	13	14	17	21	18	15	19	14	15	18	19	16	20	15	16	19	20	17	21	15	16	19	20	16. 5	21	1
0.75	4-71	14	15	18	22	19	16	20	15	16	19	20	17	21	16	17	20	21	18	22	16	17	20	21	17. 5	22	
1. 1	4-50	16	17	20	24	21	18	22	18	19	22	23	20	24	21	22	25	26	23	27	21	22	25	26	22. 5	27	+
		-		0.1	25	22	19	23	19		23	24	21	25	23	24	27	28	25	29	23	24	27	28	24. 5	29	1
1.5	4-35.5	17	18	21	25	44	13	20	10	20	20	24	21	20	-0		- '			= 0	= 0			20	-1.0		J

41

60 61

34

53

43 | 36 | 37

54 62 56

44 | 45

57

38


64 65 58 66 56

32 | 40


46 53 61 54 47 55 52




#### C205/C305

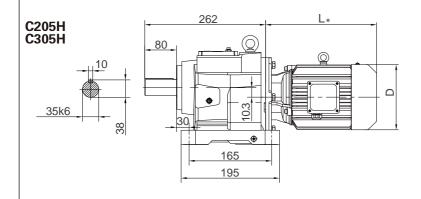







Weight: 18kg (Without motor and oil)

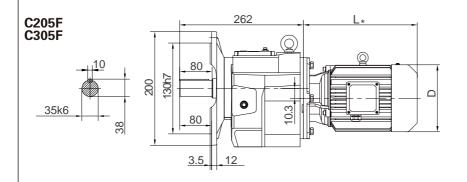


Flange - mounted



Weight:20kg (Without motor and oil)

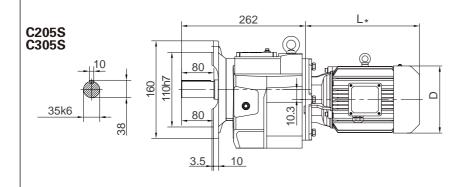

Short flange-mounted




Weight: 19kg (Without motor and oil)



#### 配C205/C305对应马达 的外形尺寸图表


## Corresponding motor dimension table for C205/305

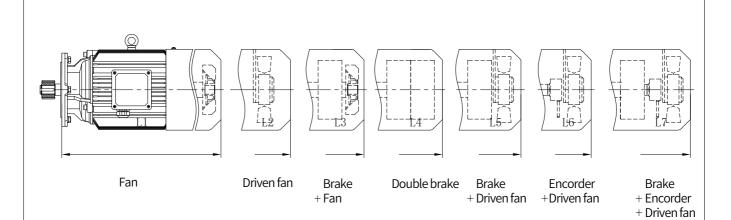


							有联	马计	尺寸	表			Dia	rectl	v	nne	rted	mo	tor	dima	anci,	on t	ahle				
4极 4-pole	适用 Range				MS			ر کے در	, ( )	~~	N	MH	ווט	CCL	y co	ille	M		toi (	J11110	11310	OII L		MA			Τ
功率 power (kW) (kW)	速比 of 范围 Ratio	L1	L2	L3	L4	L5	L6	L7	L1	L2	L3	L5	L6	L7	L1	L2	L3	L5	L6	L7	L1	L2	L3	L5	L6	L7	
0. 18	4. 5-140	/	262	242	/	297	/	/	207	262	242	297	/	/	207	262	242	297	/	/	207	262	242	297	/	/	Ī
0. 25	4. 5-140	/	269	264	/	314	314	354	224	269	264	314	314	354	224	269	264	314	314	354	224	274	264	319	319	359	t
0. 37	4. 5-140	/	269	264	/	314	314	354	224	269	264	314	314	354	224	269	264	314	314	354	224	274	264	319	319	359	Ī
0. 55	4. 5-140	300	345	360	420	405	405	455	300	345	360	405	405	455	300	345	360	405	405	455	300	345	360	405	405	450	Ī
0.75	4. 5-112	300	345	360	420	405	405	455	300	345	360	405	405	455	300	345	360	405	405	455	300	345	360	405	405	450	
1. 1	4. 5-80	323	368	378	438	423	423	478	323	368	378	423	423	478	323	368	378	423	423	478	348	393	403	453	453	498	1
1.5	4. 5-56	323	368	378	438	423	423	478	323	368	378	423	423	478	348	393	403	448	448	503	348	393	403	453	453	498	1
2. 2	4. 5-40	395	435	470	530	510	510	565	395	435	470	510	510	565	395	435	470	510	510	565	395	450	470	530	530	575	1
3	4. 5-28	395	435	470	530	510	510	565	395	435	470	510	510	565	395	435	470	510	510	565	395	450	470	530	530	575	
4	4. 5-22. 4	391	441	466	526	516	516	571	459	509	534	584	584	639	459	509	534	584	584	639	459	519	534	599	599	639	
				•	-	直联	马达	重量	表/k	g	•		Dire	ectly	cor	nec	ted	mot	or w	reigh	nt ta	ble ,	/ kg				
4极 4-pole	适用 Range				MS						N	ſΗ					M	P					1	MA			
功率 power (kW) (kW)	速比 of 范围 Ratio	M1	M2	М3	M4	M5	M6	М7	M1	M2	М3	М5	M6	М7	M1	M2	М3	M5	M6	М7	M1	M2	МЗ	М5	M6	М7	
0.18	4. 5-140	/	8	9	/	9	/	/	7	8	9	9	/	/	8	9	10	10	/	/	8	8. 5	9.5	10	/	/	
0. 25	4. 5-140	/	9	10	/	11	10	12	8	9	10	11	10	12	9	10	11	12	11	13	9	10	10.5	11.5	10. 5	12. 5	,
0.37	4. 5-140	/	10	11	/	12	11	13	9	10	11	12	11	13	10	11	12	13	12	14	10	11	11.5	12. 5	11.5	13. 5	,
0.55	4. 5-140	13	14	17	21	18	15	19	14	15	18	19	16	20	15	16	19	20	17	21	15	16	19	20	16. 5	21	
0.75	4. 5-112	14	15	18	22	19	16	20	15	16	19	20	17	21	16	17	20	21	18	22	16	17	20	21	17. 5	22	
1.1	4. 5-80	16	17	20	24	21	18	22	18	19	22	23	20	24	21	22	25	26	23	27	21	22	25	26	22. 5	27	
1.5	4. 5-56	17	18	21	25	22	19	23	19	20	23	24	21	25	23	24	27	28	25	29	23	24	27	28	24. 5	29	
2.2	4. 5-40	27	28	35	42	36	29	37	30	31	38	39	32	40	32	33	40	41	34	42	36	37	44	45	38	45	
3	4. 5-28	30	31	38	45	39	32	40	33	34	41	42	35	43	36	37	44	45	38	46	36	37	44	45	38	45	
4	4. 5-22. 4	45	46	53	61	54	47	55	52	53	60	61	54	62	56	57		65	58	66	56	57	64	65	58	66	1




#### C206/C306

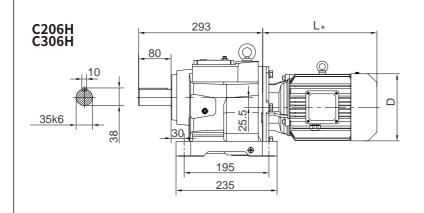




Horizontal foot-mounted


Weight: 25kg (Without motor and oil)

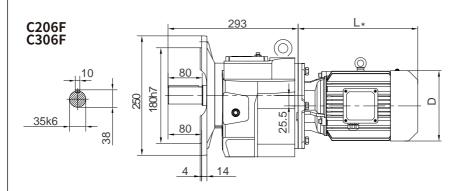




Flange - mounted

Weight:27kg (Without motor and oil)

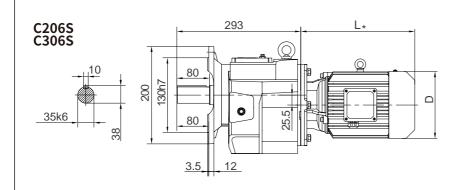




Short flange-mounted


Weight: 36kg (Without motor and oil)





#### 配C206/C306对应马达 的外形尺寸图表


## Corresponding motor dimension table for C206/306

















Fan

Driven fan

Brake + Fan Double brake


Brake + Driven fan Encorder +Driven fan Brake + Encorder


+ Driven fan

						直	联马	达尺	寸表	ξ			Dire	ctly	con	nect	ed n	noto	or di	mer	nsio	n tak	ole				
4极 4-pole	适用 Range				MS						N	IH					M	P					l	MА			
功率 power (kW) (kW)	速比 of 范围 Ratio	L1	L2	L3	L4	L5	L6	L7	L1	L2	L3	L5	L6	L7	L1	L2	L3	L5	L6	L7	L1	L2	L3	L5	L6	L7	
0. 25	112-160	/	269	264	/	314	314	354	224	269	264	314	314	354	224	269	264	314	314	354	224	274	264	319	319	359	1
0. 37	71-160	/	269	264	/	314	314	354	224	269	264	314	314	354	224	269	264	314	314	354	224	274	264	319	319	359	1
0.55	50-160	300	345	360	420	405	405	455	300	345	360	405	405	455	300	345	360	405	405	455	300	345	360	405	405	450	, ]
0.75	35. 5-160	300	345	360	420	405	405	455	300	345	360	405	405	455	300	345	360	405	405	455	300	345	360	405	405	450	1
1. 1	20-100	323	368	378	438	423	423	478	323	368	378	423	423	478	323	368	378	423	423	478	348	393	403	453	453	498	1
1.5	14-80	323	368	378	438	423	423	478	323	368	378	423	423	478	348	393	403	448	448	503	348	393	403	453	453	498	: ]
2. 2	9-56	395	435	470	530	510	510	565	395	435	470	510	510	565	395	435	470	510	510	565	395	450	470	530	530	575	-
3	5. 6-40	395	435	470	530	510	510	565	395	435	470	510	510	565	395	435	470	510	510	565	395	450	470	530	530	575	-
4	4. 5-28	391	441	466	526	516	516	571	459	509	534	584	584	639	459	509	534	584	584	639	459	519	534	599	599	639	2
5. 5	4.5-11.2	432	482	512	577	557	557	612	432	482	512	557	557	612	470	520	550	595	595	650	508	573	588	658	658	688	
7. 5	4.5-11.2	470	520	550	615	595	595	650	470	520	550	595	595	650	508	558	588	633	633	688	508	573	588	658	658	688	
						直	联马	达重	量表	/kg			Dire	ctly	con	nect	ed n	noto	or we	eigh	t tal	ole /	kg				
4极 4-pole	适用 Range				MS						N	ΙΗ					M	Р					]	ИA			T
功率 power (kW) (kW)	速比 of 范围 Ratio	M1	M2	М3	M4	M5	M6	М7	M1	M2	М3	M5	M6	М7	M1	M2	М3	M5	M6	М7	M1	M2	М3	М5	M6	M7	Ť
0. 25	112-160	/	9	10	/	11	10	12	8	9	10	11	10	12	9	10	11	12	11	13	9	10	10.5	11.5	10. 5	12. 5	;
0. 37	71-160	/	10	11	/	12	11	13	9	10	11	12	11	13	10	11	12	13	12	14	10	11	11.5	12.5	11. 5	13. 5	;
0.55	50-160	13	14	17	21	18	15	19	14	15	18	19	16	20	15	16	19	20	17	21	15	16	19	20	16. 5	21	Ī
0.75	35. 5-160	14	15	18	22	19	16	20	15	16	19	20	17	21	16	17	20	21	18	22	16	17	20	21	17. 5	22	Ī
1.1	20-100	16	17	20	24	21	18	22	18	19	22	23	20	24	21	22	25	26	23	27	21	22	25	26	22. 5	27	Ī
1.5	14-80	17	18	21	25	22	19	23	19	20	23	24	21	25	23	24	27	28	25	29	23	24	27	28	24. 5	29	I
2. 2	9-56	27	28	35	42	36	29	37	30	31	38	39	32	40	32	33	40	41	34	42	36	37	44	45	38	45	Ī
3	5.6-40	30	31	38	45	39	32	40	33	34	41	42	35	43	36	37	44	45	38	46	36	37	44	45	38	45	
4	4. 5-28	45	46	53	61	54	47	55	52	53	60	61	54	62	56	57	64	65	58	66	56	57	64	65	58	66	
5. 5	4.5-11.2	63	65	74	85	76	66	77	67	69	78	80	70	81	77	79	88	90	80	91	77	79	88	90	80	91	
7. 5	4, 5-11, 2	73	75	84	95	86	76	87	80	82	91	93	83	94	88	90	99	101	91	102	88	90	99	101	91	102	Ţ




#### C207/C307

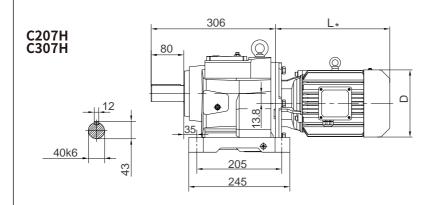




Horizontal foot-mounted


Weight: 33kg (Without motor and oil)

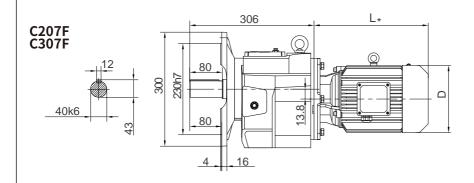




Flange - mounted

Weight:36kg (Without motor and oil)

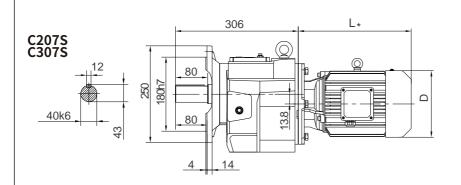



Short flange-mounted

Weight: 34kg (Without motor and oil)



+ Encorder


+ Driven fan

#### 配C207/C307对应马达 的外形尺寸图表

## Corresponding motor dimension table for C207/307

+Driven fan

+ Driven fan

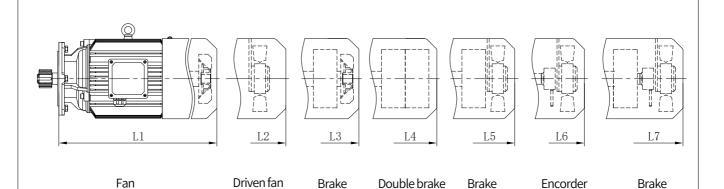



+ Fan

							Ī	直联.	马达	尺寸	表			Dire	ectly	/ cor	nnec	ted	mo	tord	dim	ensi	on t	able	į			
4极 4-pole	适用 Range				MS							MH						MP						N	[A			T
功率 power (kW) (kW)	速比 of 范围 Ratio	L1	L2	L3	L4	L5	L6	L7	L1	L2	L3	L4	L5	L6	L7	L1	L2	L3	L5	L6	L7	L1	L2	L3	L5	L6	L7	
0. 25	140-180	/	261	256	/	306	306	346	216	261	256	/	306	306	346	216	261	256	306	306	346	216	266	256	311	311	351	l 1
0.37	90-180	/	261	256	/	306	306	346	216	261	256	/	306	306	346	216	261	256	306	306	346	216	266	256	311	311	351	[ 1
0.55	71-180	292	337	352	412	397	397	447	292	337	352	/	397	397	447	292	337	352	397	397	447	292	337	352	397	397	442	2 1
0.75	50-180	292	337	352	412	397	397	447	292	337	352	/	397	397	447	292	337	352	397	397	447	292	337	352	397	397	442	2 1
1.1	31. 5-100	315	360	370	430	415	415	470	315	360	370	/	415	415	470	315	360	370	415	415	470	340	385	395	445	445	490	ე 1
1.5	22. 4-100	315	360	370	430	415	415	470	315	360	370	/	415	415	470	340	385	395	440	440	495	340	385	395	445	445	490	) 1
2.2	14-80	387	427	462	522	502	502	557	387	427	462	/	502	502	557	387	427	462	502	502	557	387	442	462	522	522	567	7 2
3	9-56	387	427	462	522	502	502	557	387	427	462	/	502	502	557	387	427	462	502	502	557	387	442	462	522	522	567	7 2
4	7. 1-40	383	433	458	518	508	508	563	451	501	526	/	576	576	631	451	501	526	576	576	631	451	511	526	591	591	631	1 2
5.5	5-28	421	471	501	566	546	546	601	421	471	501	/	546	546	601	459	509	539	584	584	639	497	562	577	647	647	677	7 2
7.5	4-18	459	509	539	604	584	584	639	459	509	539	/	584	584	639	497	547	577	622	622	677	497	562	577	647	647	677	7 2
11	4-12.5	/	542	602	/	632	632	682	507	542	602	652	632	632	682	551	586	646	676	676	726	551	601	646	701	701	736	3 :
15	4-8	/	586	646	/	676	676	726	551	586	646	696	676	676	726	581	616	676	706	706	756	581	631	676	731	731	766	3 ;
						直形	(马达	重重	₫表/	kg		D	irec	tly	conr	ect	ed n	noto	or we	eigh	t ta	ble/	′ kg					
4极 4-pole	适用 Range				MS							MH						MP						N	ΙA			T
功率 power (kW) (kW)	速比 of 范围 Ratio	M1	M2	М3	M4	М5	M6	M7	M1	M2	М3	M4	M5	M6	М7	M1	M2	М3	M5	M6	M7	M1	M2	М3	M5	M6	М7	
0.25	140-180	/	9	10	/	11	10	12	8	9	10	/	11	10	12	9	10	11	12	11	13	9	10	10.5	11.5	10.5	12. 5	5
0.37	90-180	/	10	11	/	12	11	13	9	10	11	/	12	11	13	10	11	12	13	12	14	10	11	11.5	12.5	11.5	13. 5	5
0.55	71-180	13	14	17	21	18	15	19	14	15	18	/	19	16	20	15	16	19	20	17	21	15	16	19	20	16. 5	21	
0.75	50-180	14	15	18	22	19	16	20	15	16	19	/	20	17	21	16	17	20	21	18	22	16	17	20	21	17. 5	22	
1.1	31.5-100	16	17	20	24	21	18	22	18	19	22	/	23	20	24	21	22	25	26	23	27	21	22	25	26	22.5	27	
1.5	22. 4-100	17	18	21	25	22	19	23	19	20	23	/	24	21	25	23	24	27	28	25	29	23	24	27	28	24. 5	29	
2. 2	14-80	27	28	35	42	36	29	37	30	31	38	/	39	32	40	32	33	40	41	34	42	36	37	44	45	38	45	T
3	9-56	30	31	38	45	39	32	40	33	34	41	/	42	35	43	36	37	44	45	38	46	36	37	44	45	38	45	T
4	7. 1-40	45	46	53	61	54	47	55	52	53	60	/	61	54	62	56	57	64	65	58	66	56	57	64	65	58	66	Ī
5. 5	5-28	63	65	74	85	76	66	77	67	69	78	/	80	70	81	77	79	88	90	80	91	77	79	88	90	80	91	Ī
7. 5	4-18	73	75	84	95	86	76	87	80	82	91	/	93	83	94	88	90	99	101	91	102	88	90	99	101	91	102	I
	4 10 5	,	4.00	1.40	/	1/12	124	144	121	123	142	162	143	124	144	129	131	150	151	132	159	129	191	150	151	132	152	Ť
11	4-12.5	/	123	142	/	145	124	ITT	141	120	1 12	102	140	141	111	140	101	100	TOI	104	102	140	101	150	101	102	102	٠ [




#### C208/C308

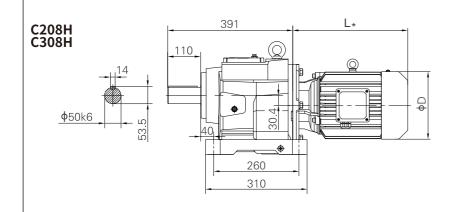




Horizontal foot-mounted


Weight: 60kg (Without motor and oil)

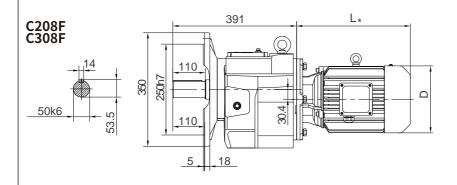




Flange-mounted

Weight: 66kg (Without motor and oil)

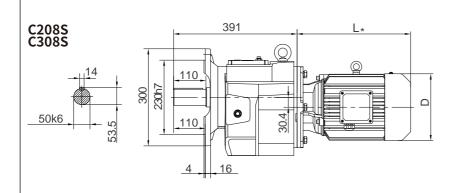




Short flange-mounted

Weight: 64kg (Without motor and oil)



#### 配C208/C308对应马达 的外形尺寸图表

# Corresponding motor dimension table for C208/308

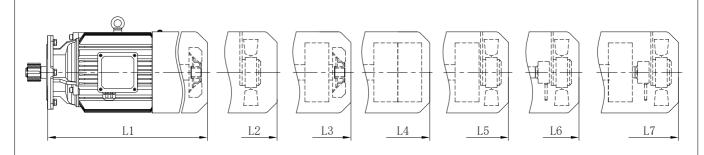

Fan

Driven fan

Brake + Fan Double brake


Brake + Driven fan Encorder +Driven fan Brake + Encorder


+ Driven fan

							直联	(马)	大尺寸	<b></b>				Dire	ctly	con	nec	ted	mot	or d	lime	ensi	on ta	able				
4极 4-pole	适用 Range				MS							МН						MP						N	ÍΑ			
功率 power (kW) (kW)	速比 of 范围 Ratio	L1	L2	L3	L4	L5	L6	L7	L1	L2	L3	L4	L5	L6	L7	L1	L2	L3	L5	L6	L7	L1	L2	L3	L5	L6	L7	D
0.55	140-200	283	328	343	403	388	388	438	283	328	343	/	388	388	438	283	328	343	388	388	438	283	328	343	388	388	433	162
0.75	100-200	283	328	343	403	388	388	438	283	328	343	/	388	388	438	283	328	343	388	388	438	283	328	343	388	388	433	162
1.1	63-160	306	351	361	421	406	406	461	306	351	361	/	406	406	461	306	351	361	406	406	461	331	376	386	436	436	481	176
1.5	50-160	306	351	361	421	406	406	461	306	351	361	/	406	406	461	331	376	386	431	431	486	331	376	386	436	436	481	176
2. 2	31.5-160	378	418	453	513	493	493	548	378	418	453	/	493	493	548	378	418	453	493	493	548	378	433	453	513	513	558	202
3	20-112	378	418	453	513	493	493	548	378	418	453	/	493	493	548	378	418	453	493	493	548	378	433	453	513	513	558	202
4	12. 5-80	374	424	449	509	499	499	554	442	492	517	/	567	567	622	442	492	517	567	567	622	442	502	517	582	582	622	220
5. 5	9-56	413	463	493	558	538	538	593	413	463	493	/	538	538	593	451	501	531	576	576	631	489	554	569	639	639	669	259
7. 5	7. 1-45	451	501	531	596	576	576	631	451	501	531	/	576	576	631	489	539	569	614	614	669	489	554	569	639	639	669	259
11	4. 5-28	/	541	601	/	631	631	681	506	541	601	651	631	631	681	550	585	645	675	675	725	550	600	645	700	700	735	314
15	4. 5-18	/	585	645	/	675	675	725	550	585	645	695	675	675	725	580	615	675	705	705	755	580	630	675	730	730	765	314
18. 5	4. 5-12. 5	/	651	731	/	756	756	796	621	651	731	786	731	756	801	621	651	731	756	756	801	621	666	731	776	776	816	356
22	4.5-10	/	699	779	/	804	804	849	669	699	779	834	779	804	849	669	699	779	804	804	849	669	714	779	824	824	864	356
'						直耶	(马)	大重量	量表/	'kg			Dir	ectl	у со	nne	cted	l mc	tor	wei	ght	tabl	e/k	g				
4极 4-pole	适用 Range				MS							MH						MP						N	ſΑ			
功率 power (kW) (kW)	速比 of 范围 Ratio	M1	M2	М3	M4	М5	M6	М7	M1	M2	М3	M4	M5	M6	М7	M1	M2	M3	M5	M6	М7	M1	M2	М3	M5	M6	M7	
0.55	140-200	13	14	17	21	18	15	19	14	15	18	/	19	16	20	15	16	19	20	17	21	15	16	19	20	16. 5	21	
0.75	100-200	14	15	18	22	19	16	20	15	16	19	/	20	17	21	16	17	20	21	18	22	16	17	20	21	17. 5	22	
1. 1	63-160	16	17	20	24	21	18	22	18	19	22	/	23	20	24	21	22	25	26	23	27	21	22	25	26	22. 5	27	
1.5	50-160	17	18	21	25	22	19	23	19	20	23	/	24	21	25	23	24	27	28	25	29	23	24	27	28	24. 5	29	
2. 2	31. 5-160	27	28	35	42	36	29	37	30	31	38	/	39	32	40	32	33	40	41	34	42	36	37	44	45	38	45	
3	20-112	30	31	38	45	39	32	40	33	34	41	/	42	35	43	36	37	44	45	38	46	36	37	44	45	38	45	
4	12. 5-80	45	46	53	61	54	47	55	52	53	60	/	61	54	62	56	57	64	65	58	66	56	57	64	65	58	66	Т
5. 5	9-56	63	65	74	85	76	66	77	67	69	78	/	80	70	81	77	79	88	90	80	91	77	79	88	90	80	91	T
7. 5	7. 1-45	73	75	84	95	86	76	87	80	82	91	/	93	83	94	88	90	99	101	91	102	88	90	99	101	91	102	T
11	4. 5-28	/	123	142	/	143	124	144	121	123	142	162	143	124	144	129	131	150	151	132	152	129	131	150	151	132	152	$\vdash$
15	4. 5-18	/	141	160	/	161	142	162	139	141	160	180	161	142	162	161	163	182	183	164	184	161	163	182	183	164	184	$\vdash$
18. 5	4.5-12.5	/	184	214	/	215	185	217	182	184	214	246	215	185	217	200	202	232	233	203	235	200	202	232	233	203	235	$\vdash$
22	4, 5-10	٠,	<del>   </del>	236	,	005	005	000	004	000	000	0.00	005	005	000	000		0.50	0.50	000	055	000	000	0.50	0.50	223	0.5.5	+-




#### C209/C309

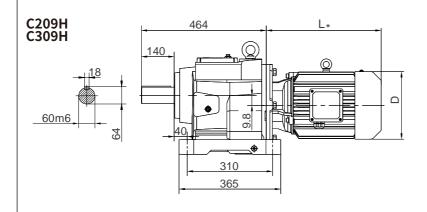




Horizontal foot-mounted


Weight: 110kg (Without motor and oil)

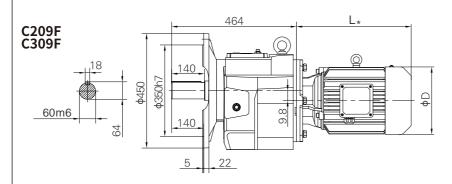




Flange-mounted

Weight: 120kg (Without motor and oil)

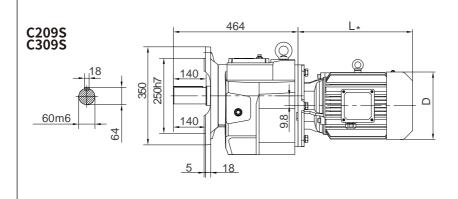




Short flange-mounted

Weight: 115kg (Without motor and oil)



#### 配C209/C309对应马达 的外形尺寸图表

## Corresponding motor dimension table for C209/309

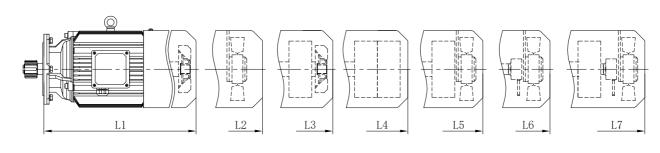

Fan

 $\hbox{Driven fan}$ 

Brake + Fan Double brake


Brake + Driven fan Encorder +Driven fan Brake + Encorder


+ Driven fan

							直	联马	达尺	寸表	£				Dire	ectly	/ cor	nec	cted	mo	tor	dim	ensi	on t	able	j	
4极 4-pole	适用 Range				MS							MH						MP						N	ÍΑ		
功率 power (kW) (kW)	速比 of 范围 Ratio	L1	L2	L3	L4	L5	L6	L7	L1	L2	L3	L4	L5	L6	L7	L1	L2	L3	L5	L6	L7	L1	L2	L3	L5	L6	L7
0.55	250-280	280	325	340	400	385	385	435	280	325	340	/	385	385	435	280	325	340	385	385	435	280	325	340	385	385	430
0.75	180-280	280	325	340	400	385	385	435	280	325	340	/	385	385	435	280	325	340	385	385	435	280	325	340	385	385	430
1.1	125-224	303	348	358	418	403	403	458	303	348	358	/	403	403	458	303	348	358	403	403	458	328	373	383	433	433	478
1.5	90-224	303	348	358	418	403	403	458	303	348	358	/	403	403	458	328	373	383	428	428	483	328	373	383	433	433	478
2. 2	63-224	374	414	449	509	489	489	544	374	414	449	/	489	489	544	374	414	449	489	489	544	374	429	449	509	509	554
3	45-200	374	414	449	509	489	489	544	374	414	449	/	489	489	544	374	414	449	489	489	544	374	429	449	509	509	554
4	31. 5-140	370	420	445	505	495	495	550	438	488	513	/	563	563	618	438	488	513	563	563	618	438	498	513	578	578	618
5. 5	20-112	412	462	492	557	537	537	592	412	462	492	/	537	537	592	450	500	530	575	575	630	488	553	568	638	638	668
7. 5	12. 5-80	450	500	530	595	575	575	630	450	500	530	/	575	575	630	488	538	568	613	613	668	488	553	568	638	638	668
11	8-56	/	535	595	/	625	625	675	500	535	595	645	625	625	675	544	579	639	669	669	719	544	594	639	694	694	729
15	5-40	/	579	639	/	669	669	719	544	579	639	689	669	669	719	574	609	669	699	699	749	574	624	669	724	724	759
18. 5	4-31.5	/	645	725	/	750	750	795	615	645	725	780	725	750	795	615	645	725	750	750	795	615	660	725	770	770	810
22	4-25	/	693	773	/	798	798	843	663	693	773	828	773	798	843	663	693	773	798	798	843	663	708	773	818	818	858
30	4-16	/	710	820	/	825	825	870	705	710	820	845	825	825	870	705	710	820	825	825	870	705	725	820	845	845	890
						直耳	眹马:	大重	量表	/kg				Di	rect	ly co	onne	ecte	d m	oto	rwe	ight	tab	le /	kg		
4极 4-pole	适用 Range				MS							MH						MP						N	1A		
功率 power (kW) (kW)	速比 of 范围 Ratio	M1	M2	М3	M4	М5	M6	M7	M1	M2	М3	M4	M5	M6	M7	M1	M2	М3	М5	M6	M7	M1	M2	МЗ	M5	M6	M7
0.55	250-280	13	14	17	21	18	15	19	14	15	18	/	19	16	20	15	16	19	20	17	21	15	16	19	20	16.5	21
0.75	180-280	14	15	18	22	19	16	20	15	16	19	/	20	17	21	16	17	20	21	18	22	16	_	20	21	17.5	22
1.1	125-224	16	17	20	24	21	18	22	18	19	22	/	23	20	24	20	21	24	25	22	26	21	22	25	26	22.5	27
1.5	90-224	17	18	21	25	22	19	23	19	20	23	/	24	21	25	22	23	26	27	24	28	23	_	27	28	24.5	-
2.2	63-224	27	28	35	42	36	29	37	30	31	38	/	39	32	40	32	33	40	41	34	42	36		44	45	38	45
3	45-200	30	31	38	45	39	32	40	33	34	41	/	42	35	43	36	37	44	45	38	46	36	_	44	45	38	45
4	31. 5-140	45	46	53	61	54	47	55	52	53	60	/	61	54	62	56	57	64	65	58	66	56	_	64	65	58	66
5. 5	20-112	63	65	74	85	76	66	77	67	69	78	/	80	70	81	77	79	88	90	80	91	77	79	88	90	80	91
7. 5	12. 5-80	73	75	84	95	86	76	87	80	82	91	100	93	83	94	88	90	99	101	91	102	_	90	99	101	91	102
11	8-56	/		142	/	143	124	144	121	123	_	162	_	124	144					_	_	_	131			132	152
15	5-40	<del>                                     </del>	141		/	-	142		_				161							_		-	_	_	183	_	184
18. 5	4-31.5	/	_	214	/				182		214												202		233		235
22	4-25	1 /	206	236																							




#### C210/C310

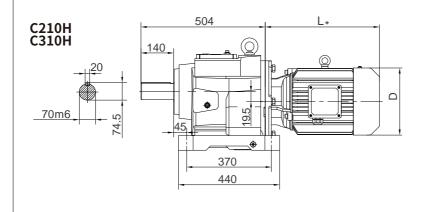




Horizontal foot-mounted


Weight: 150kg (Without motor and oil)

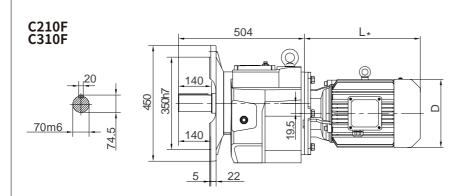




Flange-mounted

Weight: 165kg (Without motor and oil)

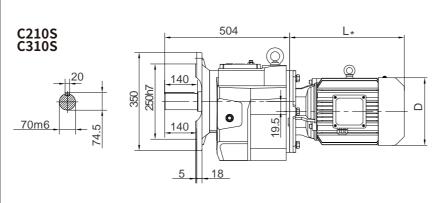



Short flange-mounted

Weight: 158kg (Without motor and oil)




#### 配C210/C310对应马达 的外形尺寸图表

## Corresponding motor dimension table for C210/310

/ 891 891 936 746 776 861 891 891 936 746 781 861 901 901 941 446

/ 891 891 936 746 776 861 891 891 936 746 781 861 901 901 941 446

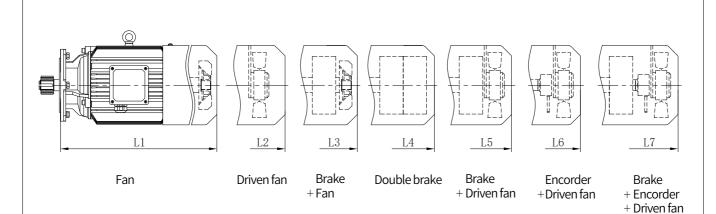

							直	联马	达尺	寸表	Ē				Dire	ectly	/ COI	nne	cted	mo	tor	dim	ensi	on t	able	÷		
4极 4-pole	适用 Range				MS							MH						MP						M	ſΑ			
功率 power (kW) (kW)	速比 of 范围 Ratio	L1	L2	L3	L4	L5	L6	L7	L1	L2	L3	L4	L5	L6	L7	L1	L2	L3	L5	L6	L7	L1	L2	L3	L5	L6	L7	D
1.5	112-224	300	345	355	415	400	400	455	300	345	355	/	400	400	455	325	370	380	425	425	480	325	370	380	430	430	475	176
2. 2	80-224	370	410	445	505	485	485	540	370	410	445	/	485	485	540	370	410	445	485	485	540	370	425	445	505	505	550	202
3	63-224	370	410	445	505	485	485	540	370	410	445	/	485	485	540	370	410	445	485	485	540	370	425	445	505	505	550	202
4	45-200	366	416	441	501	491	491	546	434	484	509	/	559	559	614	434	484	509	559	559	614	434	494	509	574	574	614	220
5. 5	31.5-140	401	451	481	546	526	526	581	401	451	481	/	526	526	581	439	489	519	564	564	619	477	542	557	627	627	657	259
7. 5	25-100	439	489	519	584	564	564	619	439	489	519	/	564	564	619	477	527	557	602	602	657	477	542	557	627	627	657	259
11	18-71	/	524	584	/	614	614	664	489	524	584	634	614	614	664	533	568	628	658	658	708	533	583	628	683	683	718	314
15	12. 5-56	/	568	628	/	658	658	708	533	568	628	678	658	658	708	563	598	658	688	688	738	563	613	658	713	713	748	314
18.5	10-45	/	634	714	/	739	739	784	604	634	714	769	714	739	784	604	634	714	739	739	784	604	649	714	759	759	799	356
22	7. 1-40	/	682	762	/	787	787	832	652	682	762	817	762	787	832	652	682	762	787	787	832	652	697	762	807	807	847	356
30	4.5-28	/	710	820	/	825	825	870	705	710	820	845	825	825	870	705	710	820	825	825	870	705	725	820	845	845	890	398

/ 891 891 936 746 776 861

/ 891 891 936 746 776 861

37

45

4-22.4


4-20


/ 776 861 / 776 861

						直耳	美马:	达重	量表	/kg				Di	rect	ly co	onne	ecte	d m	otoı	r we	ight	tab	le/	kg		
4极 4-pole	适用 Range		MS									МН						MP						N	ÍΑ		
功率 power (kW) (kW)	速比 of 范围 Ratio	M1	M2	М3	M4	М5	M6	М7	M1	M2	МЗ	M4	М5	M6	М7	M1	M2	М3	M5	M6	М7	M1	M2	М3	М5	M6	M7
1.5	112-224	17	18	21	25	22	19	23	19	20	23	/	24	21	25	23	24	27	28	25	29	23	24	27	28	24.5	29
2. 2	80-224	27	28	35	42	36	29	37	30	31	38	/	39	32	40	32	33	40	41	34	42	36	37	44	45	38	45
3	63-224	30	31	38	45	39	32	40	33	34	41	/	42	35	43	36	37	44	45	38	46	36	37	44	45	38	45
4	45-200	45	46	53	61	54	47	55	52	53	60	/	61	54	62	56	57	64	65	58	66	56	57	64	65	58	66
5. 5	31. 5-140	63	65	74	85	76	66	77	67	69	78	/	80	70	81	77	79	88	90	80	91	77	79	88	90	80	91
7. 5	25-100	73	75	84	95	86	76	87	80	82	91	/	93	83	94	88	90	99	101	91	102	88	90	99	101	91	102
11	18-71	/	123	142	/	143	124	144	121	123	142	162	143	124	144	129	131	150	151	132	152	129	131	150	151	132	152
15	12. 5-56	/	141	160	/	161	142	162	139	141	160	180	161	142	162	161	163	182	183	164	184	161	163	182	183	164	184
18. 5	10-45	/	184	214	/	215	185	217	182	184	214	246	215	185	217	200	202	232	233	203	235	200	202	232	233	203	235
22	7. 1-40	/	206	236	/	237	207	239	204	206	236	268	237	207	239	220	222	252	253	223	255	220	222	252	253	223	255
30	4.5-28	/	260	310	/	308	261	310	260	260	310	360	308	261	310	280	280	330	328	281	330	280	280	330	328	281	330
37	4-22.4	/	332	380	/	381	334	383	330	332	380	/	381	334	383	345	347	395	396	349	398	345	347	395	396	349	398
45	4-20	/	347	395	/	396	349	398	345	347	395	/	396	349	398	365	367	415	416	369	418	365	367	415	416	369	418




#### C212/C312

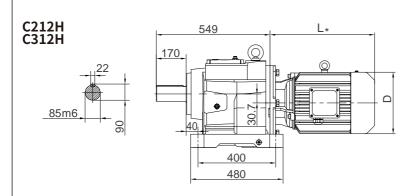




Horizontal foot-mounted


Weight: 175kg (Without motor and oil)

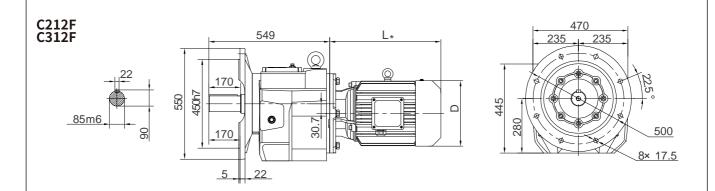

Flange-mounted

Weight: 205kg (Without motor and oil)

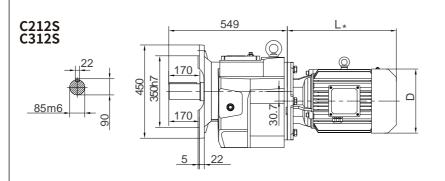




Short flange-mounted

Weight: 195kg (Without motor and oil)



# 配C212/C312对应马达 的外形尺寸图表

#### **Corresponding motor** dimension table for C212/312

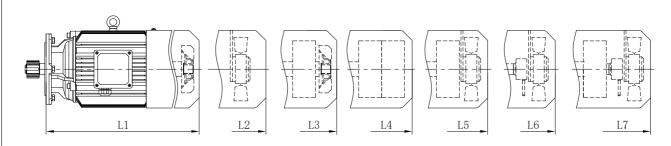

Fan

Driven fan

Brake +Fan

Double brake

Brake

Encorder + Driven fan + Driven fan


Brake + Encorder


+ Driven fan

							直	联马	达尺	寸表					Dire	ectly	/ cor	nned	ted	mo	tor	dim	ensi	on t	able	—— е		
4极 4-pole 功率 power	适用 Range 速比 of				MS							MH						MP						N	<b>I</b> A			D
<sub>(kW)</sub> (kW)	范围 Ratio	L1	L2	L3	L4	L5	L6	L7	L1	L2	L3	L4	L5	L6	L7	L1	L2	L3	L5	L6	L7	L1	L2	L3	L5	L6	L7	D
1.5	160-280	300	345	355	415	400	400	455	300	345	355	/	400	400	455	325	370	380	425	425	480	325	370	380	430	430	475	176
2. 2	112-280	370	410	445	505	485	485	540	370	410	445	/	485	485	540	370	410	445	485	485	540	370	425	445	505	505	550	202
3	80-280	370	410	445	505	485	485	540	370	410	445	/	485	485	540	370	410	445	485	485	540	370	425	445	505	505	550	202
4	63-280	366	416	441	501	491	491	546	434	484	509	/	559	559	614	434	484	509	559	559	614	434	494	509	574	574	614	220
5. 5	50-140	401	451	481	546	526	526	581	401	451	481	/	526	526	581	439	489	519	564	564	619	477	542	557	627	627	657	259
7. 5	35. 5-140	439	489	519	584	564	564	619	439	489	519	/	564	564	619	477	527	557	602	602	657	477	542	557	627	627	657	259
11	20-100	/	524	584	/	614	614	664	489	524	584	634	614	614	664	533	568	628	658	658	708	533	583	628	683	683	718	314
15	16-71	/	568	628	/	658	658	708	533	568	628	678	658	658	708	563	598	658	688	688	738	563	613	658	713	713	748	314
18.5	12.5-63	/	634	714	/	739	739	784	604	634	714	769	714	739	784	604	634	714	739	739	784	604	649	714	759	759	799	356
22	11. 2-56	/	682	762	/	787	787	832	652	682	762	817	762	787	832	652	682	762	787	787	832	652	697	762	807	807	847	356
30	5. 6-40	/	710	820	/	825	825	870	705	710	820	845	825	825	870	705	710	820	825	825	870	705	725	820	845	845	890	398
37	4. 5-31. 5	/	776	861	/	891	891	936	746	776	861	/	891	891	936	746	776	861	891	891	936	746	781	861	901	901	941	446
45	4. 5-25	/	776	861	/	891	891	936	746	776	861	/	891	891	936	746	776	861	891	891	936	746	781	861	901	901	941	446
-						直	 	大重	量表	/kg				Di	rect	tly co	onne	ecte	d m	otor	r we	ight	tab	le /	kg	_		
4极 4-pole	适用 Range				MS							MH						MP						N	ſA			
功率 power (kW) (kW)	速比 of 范围 Ratio	M1	M2	М3	M4	М5	M6	M7	M1	M2	М3	M4	M5	M6	M7	M1	M2	М3	M5	M6	М7	M1	M2	М3	М5	M6	М7	
1.5	160-280	17	18	21	25	22	19	23	19	20	23	/	24	21	25	23	24	27	28	25	29	23	24	27	28	24. 5	5 29	
2. 2	112-280	27	28	35	42	36	29	37	30	31	38	/	39	32	40	32	33	40	41	34	42	36	37	44	45	38	45	
3	80-280	30	31	38	45	39	32	40	33	34	41	/	42	35	43	36	37	44	45	38	46	36	37	44	45	38	45	
4	63-280	45	46	53	61	54	47	55	52	53	60	/	61	54	62	56	57	64	65	58	66	56	57	64	65	58	66	
5. 5	50-140	63	65	74	85	76	66	77	67	69	78	/	80	70	81	77	79	88	90	80	91	77	79	88	90	80	91	
7. 5	35. 5-140	73	75	84	95	86	76	87	80	82	91	/	93	83	94	88	90	99	101		102		90	99				
11	20-100	/	123	142	/	143	124	144	121	123	142	162	143	124	144	129	131	150	151	132	152	129	131	150	151	132	152	
15	16-71	/	141	160	/																					164		<u> </u>
18. 5	12. 5-63	/	184	214	/				_		_					_					_		_			203	_	_
22	11. 2-56	/	206	236	/		207									220										223		_
30	5. 6-40	/	260	310	/	308	261	_	_	_		360	308			_					_	_	_	_	_	281	_	_
37	4.5-31.5	/	332	380	/	381	334	383	330	332	380	/	381										_		_	349	_	_
45	4. 5-25	/	347	395	/	396	349	398	345	347	395	/	396	349	398	365	367	415	416	369	418	365	367	415	416	369	418	




#### C213/C313

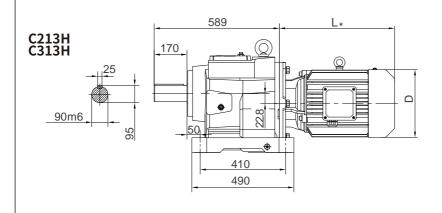




Horizontal foot-mounted


Weight: 225kg (Without motor and oil)

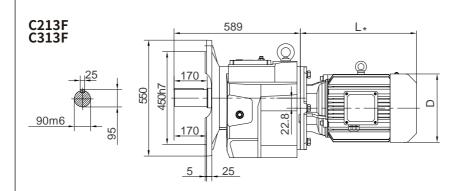




Flange-mounted

Weight: 278kg (Without motor and oil)

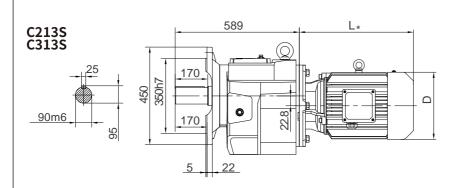




Short flange-mounted

Weight: 262kg (Without motor and oil)



# 配C213/C313对应马达 的外形尺寸图表

#### **Corresponding motor** dimension table for C213/313

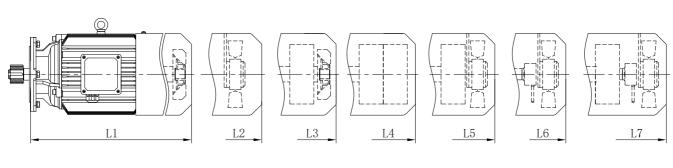

Fan

Driven fan

Brake + Fan

Double brake

Brake


Encorder + Driven fan + Driven fan Brake


+ Encorder + Driven fan

																									' '	יייוכ	CITIC	ווג
							直	联马	达尺	寸表					Dire	ectly	cor	nnec	ted	mo	tor	dime	ensi	on t	able	<u>,</u>		
4极 <b>4</b> -pole	适用 Range				MS							MH						MP						М	ΙA			
功率 power	速比 of	T 1	1.0	1.9	1.4	1.5	1.6	1.7	T 1	1.0	1.0	1.4	1.5	L6	L7	L1	L2	1.2	I E	L6	1.7	T 1	L2	1.9	1.5	I.C	L7	D
(kW) (kW)	范围 Ratio	L1	L2	L3	L4	L5	L6	L7	L1	L2	L3	L4	L5					L3	L5		L7	L1		L3	L5	L6		
2. 2	160-224		399			_			_			/				_	_										539	_
3	112-224	359	399							399		/		474													539	-
4	80-224	355	405	430	490	480	480	535	423	473	498	/	548	548	603	423	473	498	548	548	603	423	483	498	563	563	603	220
5. 5	56-125	391	441	471	536	516	516	571	391	441	471	/	516	516	571	429	479	509	554	554	609	467	532	547	617	617	647	259
7. 5	45-125	429	479	509	574	554	554	609	429	479	509	/	554	554	609	467	517	547	592	592	647	467	532	547	617	617	647	259
11	28-125	/	508	568	/	598	598	648	473	508	568	618	598	598	648	517	552	612	642	642	692	517	567	612	667	667	702	314
15	22. 4-100	/	552	612	/	642	642	692	517	552	612	662	642	642	692	547	582	642	672	672	722	547	597	642	697	697	732	314
18. 5	18-80	/	618	698	/	723	723	768	588	618	698	753	698	723	768	588	618	698	723	723	768	588	633	698	743	743	783	356
22	14-63	/	666	746	/	771	771	816	636	666	746	801	746	771	816	636	666	746	771	771	816	636	681	746	791	791	831	356
30	10-50	/	689	799	/	804	804	849	684	689	799	824	804	804	849	684	689	799	804	804	849	684	704	799	824	824	869	398
37	9-40	/	755	840	/	870	870	915	725	755	840	/	870	870	915	725	755	840	870	870	915	725	760	840	880	880	920	446
45	4-31.5	/	755	840	/	870	870	915	725	755	840	/	870	870	915	725	755	840	870	870	915	725	760	840	880	880	920	446
55	4-25	/	856	981	/	991	991	1026	841	856	981	/	991	991	1036	841	856	981	991	991	1036	841	866	981	1021	1021	11041	485
'						直耳	 镁马:	大重	量表	/kg				•								-	tab					
147 4 1-	适用 Range				MS							MH				.,		MP						M				
4极 4-pole   功率 power	速比 of																											
(kW) (kW)	范围 Ratio	M1	M2	М3	M4	M5	M6	M7	M1	M2	М3	M4	M5	M6	M7	M1	M2	М3	M5	M6	М7	M1	M2	М3	M5	M6	M7	
2. 2	160-224	27	28	35	42	36	29	37	30	31	38	/	39	32	40	32	33	40	41	34	42	36	37	44	45	38	45	
3	112-224	30	31	38	45	39	32	40	33	34	41	/	42	35	43	36	37	44	45	38	46	36	37	44	45	38	45	
4	80-224	45	46	53	61	54	47	55	52	53	60	/	61	54	62	56	57	64	65	58	66	56	57	64	65	58	66	
5. 5	56-125	63	65	74	85	76	66	77	67	69	78	/	80	70	81	77	79	88	90	80	91	77	79	88	90	80	91	
7. 5	45-125	73	75	84	95	86	76	87	80	82	91	/	93	83	94	88	90	_	101		102	_	90	99	101	91	102	
11	28-125	/	123	142	/	143			121	123			_				_	_						_	151			<u></u>
15	22. 4-100	/	141	160	/	161			139		160	_	_		162		_				_	_	163	182			_	
18. 5	18-80	/	184	214	/	215				184							_	_			_		202			203		
22	14-63	/	206		/	_	_			$\overline{}$				_			_	_		_	_				253		_	_
30	10-50	/	260		/	_			_	-		360											280					<u> </u>
37	9-40	/	332		/					332		/											347					<u> </u>
45	4-31.5	/	347	395	/				_	347		/	396	-			_	_	_				367	_				-
55	4-25	/	436	540	/	535	436	537	435	436	540	/	535	436	537	470	471	575	570	471	572	470	471	575	570	470	572	




#### C214/C314

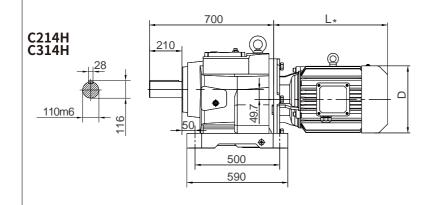




Horizontal foot-mounted


Weight: 365kg (Without motor and oil)

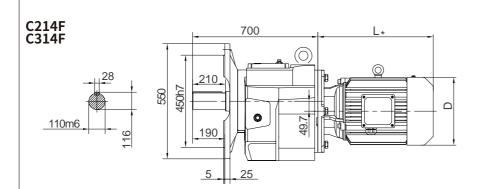




Flange-mounted

Weight: 395kg (Without motor and oil)

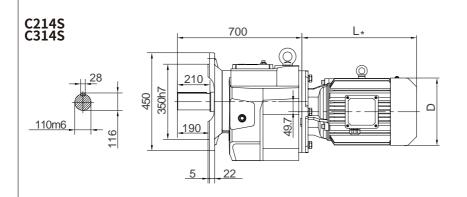




Short flange-mounted


Weight: 380kg (Without motor and oil)





#### 配C214/C314对应马达 的外形尺寸图表


## Corresponding motor dimension table for C214/314

















Fan

Driven fan

Brake + Fan Double brake

Brake E + Driven fan +D


Encorder +Driven fan Brake + Encorder


+ Driven fan

							直	联马	达尺	寸表					Dire	ectly	/ cor	nnec	ted	mo	tor	dime	ensi	on t	able	, 		
4极 4-pole	适用 Range				MS							MH						MP						M	ΙA			
功率 power (kW) (kW)	速比 of 范围 Ratio	L1	L2	L3	L4	L5	L6	L7	L1	L2	L3	L4	L5	L6	L7	L1	L2	L3	L5	L6	L7	L1	L2	L3	L5	L6	L7	D
2. 2	250	359	399	434	494	474	474	529	359	399	434	/	474	474	529	359	399	434	474	474	529	359	414	434	494	494	539	202
3	180-250	359	399	434	494	474	474	529	359	399	434	/	474	474	529	359	399	434	474	474	529	359	414	434	494	494	539	202
4	140-280	355	405	430	490	480	480	535	423	473	498	/	548	548	603	423	473	498	548	548	603	423	483	498	563	563	603	220
5. 5	100-200	391	441	471	536	516	516	571	391	441	471	/	516	516	571	429	479	509	554	554	609	467	532	547	617	617	647	259
7. 5	71-200	429	479	509	574	554	554	609	429	479	509	/	554	554	609	467	517	547	592	592	647	467	532	547	617	617	647	259
11	50-200	/	508	568	/	598	598	648	473	508	568	618	598	598	648	517	552	612	642	642	692	517	567	612	667	667	702	314
15	35. 5-160	/	552	612	/	642	642	692	517	552	612	662	642	642	692	547	582	642	672	672	722	547	597	642	697	697	732	314
18. 5	28-140	/	618	698	/	723	723	768	588	618	698	753	698	723	768	588	618	698	723	723	768	588	633	698	743	743	783	356
22	25-112	/	666	746	/	771	771	816	636	666	746	801	746	771	816	636	666	746	771	771	816	636	681	746	791	791	831	356
30	18-80	/	689	799	/	804	804	849	684	689	799	824	804	804	849	684	689	799	804	804	849	684	704	799	824	824	869	398
37	14-71	/	755	840	/	870	870	915	725	755	840	/	870	870	915	725	755	840	870	870	915	725	760	840	880	880	920	446
45	12. 5-56	/	755	840	/	870	870	915	725	755	840	/	870	870	915	725	755	840	870	870	915	725	760	840	880	880	920	446
55	10-45	/	856	981	/	991	991	1026	841	856	981	/	991	991	1036	841	856	981	991	991	1036	841	866	981	1021	1021	1041	485
75	5.6-31.5	/	916	1026	/	1061	1061	1106	886	916	1026	/	1061	1061	1106	886	916	1026	1061	1061	1106	886	916	1026	1066	1066	1106	547
90	4.5-25	/	967	1077	/	1112	1112	1157	937	967	1077	/	1112	1112	1157	937	967	1077	1112	1112	1157	937	967	1077	1117	1117	1157	547
						直耳	<b></b> 送马	达重	量表	/kg				Di	rect	ly co	onne	ecte	d m	otor	we	ight	tab	le / l	kg			
4极 4-pole	适用 Range				MS							MH						MP						M	ΙA			
功率 power (kW) (kW)	速比 of 范围 Ratio	M1	M2	М3	M4	М5	M6	М7	M1	M2	М3	M4	M5	M6	M7	M1	M2	М3	М5	M6	М7	M1	M2	М3	М5	M6	М7	
2. 2	250	27	28	35	42	36	29	37	30	31	38	/	39	32	40	32	33	40	41	34	42	36	37	44	45	38	45	
3	180-250	30	31	38	45	39	32	40	33	34	41	/	42	35	43	36	37	44	45	38	46	36	37	44	45	38	45	
4	140-280	45	46	53	61	54	47	55	52	53	60	/	61	54	62	56	57	64	65	58	66	56	57	64	65	58	66	
5.5	100-200	63	65	74	85	76	66	77	67	69	78	/	80	70	81	77	79	88	90	80	91	77	79	88	90	80	91	
7.5	71-200	73	75	84	95	86	76	87	80	82	91	/	93	83	94	88	90	99	101	91	102	88	90	99	101	91	102	
11	50-200	/	123	142	/	143	124	144	121	123	142	162	143	124						132		129		150		-	152	
15	35. 5-160	/	141	160	/	161	142	162	_	141	160	180		142	162	161	_	182		_	184	161	163	182	_		184	
18.5	28-140	/		214	/	215		217	_	184		246		185		_	_				_	200		232			235	
22	25-112	/	206	236	/	237		_	_	206	236	268			239	_	_			223					253		255	$\vdash$
30	18-80	/	260	310	/	308	_	_	_	260	310	360	308	261		280	_			281	330	280	_	330			330	$\vdash$
37	14-71	/	332	380	/	381		383	_	332	380	/	381	334	383	345	_			349	_			395		_	398	$\vdash\vdash$
45 55	12. 5-56 10-45	/	347 436	395 540	/	396 535		_	_	347 436	395 540	/	396 535	349 436	398	365	367 471					365			416		418 572	$\vdash\vdash$
75	5. 6-31. 5	/	577	680	/	678	578	680	575	577	680	/	678	578	680	630	_	735		633	735	630	-	735	_		735	$\vdash\vdash$
90	4. 5-25	/	647		/	748		_	645		750	/														713		$\vdash$
30	4.0 40	/	047	190	_/_	140	046	190	040	047	100	/	140	040	790	110	112	010	010	113	010	110	114	010	019	(13	010	ш




#### C216/C316

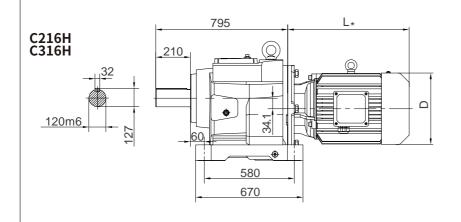




Horizontal foot-mounted

Weight: 615kg (Without motor and oil)

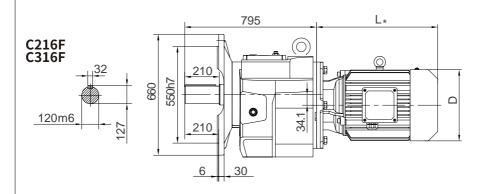




Flange-mounted

Weight: 645kg (Without motor and oil)



#### 配C216/C316对应马达 的外形尺寸图表

# Corresponding motor dimension table for C216/316

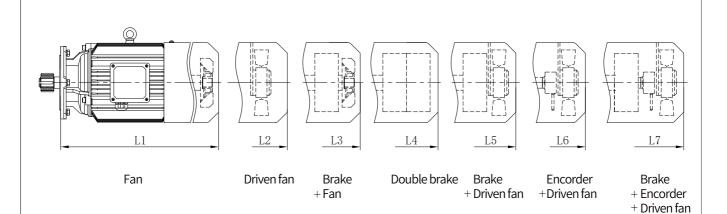


							直]	联马	达尺	十表					Dire	ectly	cor	nec	ted	mο	tor	dim	ensi	on t	able	,		
4极 4-pole	 适用 Range				MS			7/ 7		. 1 1		MH						MP		1110	-				A			
功率 power (kW) (kW)	速比 of 范围 Ratio	L1	L2	L3	L4	L5	L6	L7	L1	L2	L3	L4	L5	L6	L7	L1	L2	L3	L5	L6	L7	L1	L2	L3	L5	L6	L7	D
7. 5	100-224	429	479	509	574	554	554	609	429	479	509	/	554	554	609	467	517	547	592	592	647	467	532	547	617	617	647	259
11	71-224	/	493	553	/	583	583	633	458	493	553	603	583	583	633	502	537	597	627	627	677	502	552	597	652	652	687	314
15	50-224	/	537	597	/	627	627	677	502	537	597	647	627	627	677	532	567	627	657	657	707	532	582	627	682	682	717	314
18.5	40-180	/	603	683	/	708	708	753	573	603	683	738	683	708	753	573	603	683	708	708	753	573	618	683	728	728	768	356
22	35. 5-160	/	651	731	/	756	756	801	621	651	731	786	731	756	801	621	651	731	756	756	801	621	666	731	776	776	816	356
30	25-112	/	679	789	/	794	794	839	674	679	789	814	794	794	839	674	679	789	794	794	839	674	694	789	814	814	859	398
37	20-90	/	745	830	/	860	860	905	715	745	830	/	860	860	905	715	745	830	860	860	905	715	750	830	870	870	910	446
45	16-80	/	745	830	/	860	860	905	715	745	830	/	860	860	905	715	745	830	860	860	905	715	750	830	870	870	910	446
55	12. 5-63	/	846	971	/	981	981	1016	831	846	971	/	981	981	1026	831	846	971	981	981	1026	831	856	971	1011	1011	1031	485
75	9-45	/	906	1016	/	1051	1051	1096	876	906	1016	/	1051	1051	1096	876	906	1016	1051	1051	1096	876	906	1016	1056	1056	1096	547
90	7. 1-35. 5	/	957	1067	/	1102	1102	1147	927	957	1067	/	1102	1102	1147	927	957	1067	1102	1102	1147	927	957	1067	1107	1107	1147	547
						直耳	<b></b>	大重	量表	/kg				Di	rect	ly co	onne	ecte	d m	oto	r we	ight	tab	le/	kg			
4极 4-pole	适用 Range				MS							MH						MP						M	Α			
功率 power (kW) (kW)	速比 of 范围 Ratio	M1	M2	МЗ	M4	М5	M6	M7	M1	M2	МЗ	M4	M5	M6	М7	M1	M2	М3	M5	M6	М7	M1	M2	М3	М5	M6	M7	
7. 5	100-224	73	75	84	95	86	76	87	80	82	91	/	93	83	94	88	90	99	101	91	102	88	90	99	101	91	102	
11	71-224	/	123	142	/	143	124	144	121	123	142	162	143	124	144	129	131	150	151	132	152	129	131	150	151	132	152	
15	50-224	/	141	160	/	161	142	162	139	141	160	180	161	142	162	161	163	182	183	164	184	161	163	182	183	164	184	
18. 5	40-180	/	184	214	/	215	185	217	182	184	214	246	215	185	217	200	202	232	233	203	235	200	202	232	233	203	235	
22	35. 5-160	/	206	236	/	237	207	239	204	206	236	268	237	207	239	220	222	252	253	223	255	220	222	252	253	223	255	
30	25-112	/	260	310	/	308	261	310	260	260	310	360	308	261	310	280	280	330	328	281	330	280	280	330	328	281	330	
37	20-90	/	332	380	/	381	334	383	330	332	380	/	381	334	383	345	347	395	396	349	398	345	347	395	396	349	398	
45	16-80	/	347	395	/	396	349	398	345	347	395	/	396	349	398	365	367	415	416	369	418	365	367	415	416	369	418	
55	12. 5-63	/	436	540	/	535	436	537	435	436	540	/	535	436	537	470	471	575	570	471	572	470	471	575	570	470	572	
75	9-45	/	577	680	/	678	578	680	575	577	680	/	678	578	680	630	632	735	733	633	735	630	632	735	733	633	735	
90	7. 1-35. 5	/	647	750	/	748	648	750	645	647	750	/	748	648	750	710	712	815	813	713	815	710	712	815	813	713	815	i



## 7 输入法兰和输入轴


7.1 C系列AP输入法兰外形尺寸图表

# 7 Input Flange and Input Shaft 7.1 C series dimensions of AP input flange

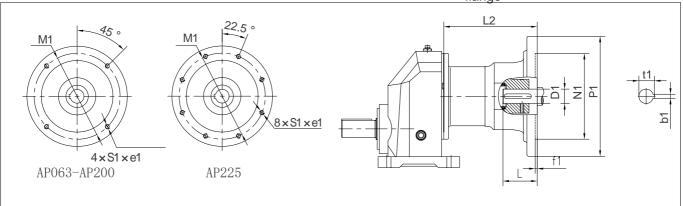


规格 Size	法兰 型号 Flange	适用 Range 速比 of 范围 Ratio	e1	D1	N1	M1	P1	f1	b1	t1	L	S1	L2	重量 Weight (kg)(kg)
	AP063	1. 25-4	14	11H7	95H7	115	140	4	4	12.8	23	M8	59	4.8
C103	AP071	1. 25-4	14	14H7	110H7	130	160	4	5	16. 3	30	M8	59	4.8
	AP080	1. 25-4	18	19H7	130Н7	165	200	4	6	21.8	40	M10	74	7.6
	AP063	1. 25-4. 5	14	11H7	95H7	115	140	4	4	12.8	23	M8	61	5. 1
	APO71	1. 25-4. 5	14	14H7	110H7	130	160	4	5	16. 3	30	M8	61	5. 1
C104	AP080	1. 25-4. 5	18	19H7	130Н7	165	200	4	6	21.8	40	M10	76	8.6
C104	AP090	1. 25-2. 8	18	24H7	130Н7	165	200	4	8	27. 3	50	M10	81	9.2
	AP100	1. 25-2. 8	28	28Н7	180H7	215	250	5	8	31. 3	60	M12	191	14. 1
	AP112	1. 25-2. 8	28	28Н7	180H7	215	250	5	8	31. 3	60	M12	191	14. 1
	AP063	1. 25-5. 6	14	11H7	95H7	115	140	4	4	12.8	23	M8	61	5. 1
	AP071	1. 25-5. 6	14	14H7	110H7	130	160	4	5	16. 3	30	M8	61	5. 1
	AP080	1. 25-5. 6	18	19H7	130Н7	165	200	4	6	21.8	40	M10	76	8.6
C106	AP090	1. 25-3. 55	18	24H7	130Н7	165	200	4	8	27. 3	50	M10	81	9.2
	AP100	1. 25-3. 55	28	28H7	180H7	215	250	5	8	31. 3	60	M12	191	14. 1
	AP112	1. 25-3. 55	28	28H7	180H7	215	250	5	8	31. 3	60	M12	191	14. 1
	AP071	1. 25-7. 1	14	14H7	110H7	130	160	4	5	16. 3	30	M8	53	6.7
	AP080	1. 25-7. 1	18	19H7	130Н7	165	200	4	6	21.8	40	M10	68	10. 3
	AP090	1. 25-4. 5	18	24H7	130Н7	165	200	4	8	27. 3	50	M10	73	11.1
C107	AP100	1. 25-4. 5	28	28Н7	180H7	215	250	5	8	31. 3	60	M12	181	15. 5
	AP112	1. 25-4. 5	28	28Н7	180Н7	215	250	5	8	31. 3	60	M12	181	15. 5
	AP132	1.25-2	28	38Н7	230H7	265	300	5	10	41.3	80	M12	210	22. 3



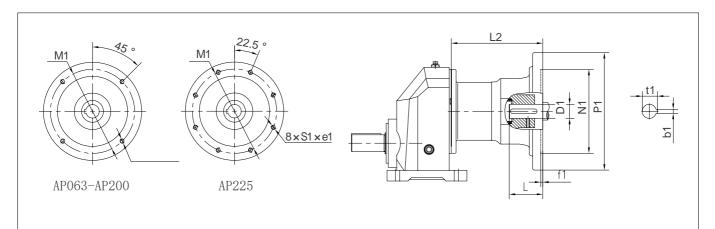


规格 Size	法兰 型号Flange	适用 Range 速比 of 范围 Ratio	e1	D1	N1	M1	P1	f1	b1	t1	L	S1	L2	重量 Weight (kg)(kg)
	AP080	3. 15-7. 1	18	19H7	130H7	165	200	4	6	21.8	40	M10	65	10.4
	AP090	1. 25-5. 6	18	24H7	130Н7	165	200	4	8	27. 3	50	M10	66	12. 1
C108	AP100	1. 25-5. 6	28	28Н7	180H7	215	250	5	8	31. 3	60	M12	171	18. 2
	AP112	1. 25-5. 6	28	28H7	180H7	215	250	5	8	31.3	60	M12	171	18. 2
	AP132	1. 25-2. 8	28	38H7	230H7	265	300	5	10	41.3	80	M12	203	24. 9
	AP160	1. 25-2. 8	40	42H7	250H7	300	350	6	12	45. 3	110	M16	272	46. 4
	AP180	1. 25-2. 8	40	48H7	250H7	300	350	6	14	51.8	110	M16	272	46. 4
	AP090	1. 25-7. 1	18	24H7	130Н7	165	200	4	8	27. 3	50	M10	61	14. 7
	AP100	1. 25-7. 1	28	28H7	180H7	215	250	5	8	31. 3	60	M12	172	21.5
	AP112	1. 25-7. 1	28	28H7	180H7	215	250	5	8	31. 3	60	M12	172	21.5
C109	AP132	1. 25-4	28	38Н7	230Н7	265	300	5	10	41.3	80	M12	202	28. 3
	AP160	1. 25-4	40	42H7	250H7	300	350	6	12	<b>45.</b> 3	110	M16	270	49.9
	AP180	1. 25-4	40	48H7	250H7	300	350	6	14	51.8	110	M16	270	49.9
	AP200	1. 25-2. 8	40	55H7	300H7	350	400	6	16	59. 3	110	M16	327	72.8
	AP100	1. 25-6. 3	28	28Н7	180H7	215	250	5	8	31.3	60	M12	162	25.6
	AP112	1. 25-6. 3	28	28H7	180H7	215	250	5	8	31. 3	60	M12	162	25.6
	AP132	1. 25-4. 5	28	38Н7	230Н7	265	300	5	10	41.3	80	M12	189	33. 7
C110	AP160	1. 25-4. 5	40	42H7	250Н7	300	350	6	12	<b>45.</b> 3	110	M16	257	52.3
	AP180	1. 25-4. 5	40	48H7	250Н7	300	350	6	14	51.8	110	M16	257	<b>52.</b> 3
	AP200	1. 25-3. 55	40	55H7	300H7	350	400	6	16	59. 3	110	M16	327	77. 4
	AP225	1. 25-3. 55	30	60H7	350H7	400	450	6	18	64. 4	140	M16	354	85. 1



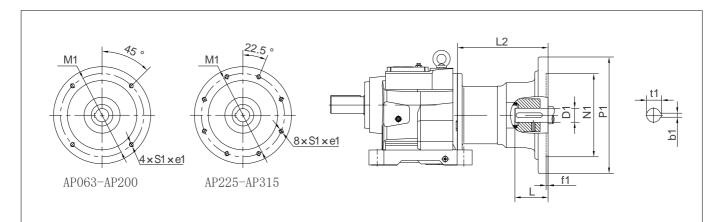

规格 Size	法兰 型号Flange	适用 Range 速比 of 范围 Ratio	e1	D1	N1	M1	P1	f1	b1	t1	L	S1	L2	重量 Weight (kg)(kg)
	AP063	4-90	14	11H7	95H7	115	140	4	4	12.8	23	M8	59	4.8
C203	AP071	4-90	14	14H7	110H7	130	160	4	5	16. 3	30	M8	59	4.8
C303	AP080	4-71	18	19H7	130H7	165	200	4	6	21.8	40	M10	74	7.6
	AP063	4-125	14	11H7	95H7	115	140	4	4	12.8	23	M8	61	5. 1
	AP071	4-125	14	14H7	110H7	130	160	4	5	16. 3	30	M8	61	5. 1
C204	AP080	4-100	18	19H7	130H7	165	200	4	6	21.8	40	M10	76	8.6
C304	AP090	4-50	18	24H7	130H7	165	200	4	8	27. 3	50	M10	81	9. 2
	AP100	4-25	28	28H7	180H7	215	250	5	8	31.3	60	M12	191	14. 1
	AP112	4-11.2	28	28H7	180H7	215	250	5	8	31.3	60	M12	191	14. 1
	AP063	4. 5-140	14	11H7	95H7	115	140	4	4	12.8	23	M8	61	5. 1
	AP071	4. 5-140	14	14H7	110H7	130	160	4	5	16. 3	30	M8	61	5. 1
C205	AP080	4. 5-140	18	19H7	130H7	165	200	4	6	21.8	40	M10	76	8.6
C305	AP090	4.5-80	18	24H7	130H7	165	200	4	8	27. 3	50	M10	81	9. 2
	AP100	4.5-40	28	28H7	180H7	215	250	5	8	31.3	60	M12	191	14. 1
	AP112	4. 5-22. 4	28	28H7	180H7	215	250	5	8	31.3	60	M12	191	14. 1
	AP063	4.5-160	14	11H7	95H7	115	140	4	4	12.8	23	M8	61	5. 1
	AP071	4.5-160	14	14H7	110H7	130	160	4	5	16. 3	30	M8	61	5. 1
C206	AP080	4. 5-160	18	19H7	130H7	165	200	4	6	21.8	40	M10	76	8.6
C306	AP090	4. 5-100	18	24H7	130H7	165	200	4	8	27. 3	50	M10	81	9. 2
	AP100	4. 5-56	28	28H7	180H7	215	250	5	8	31.3	60	M12	191	14. 1
	AP112	4.5-31.5	28	28H7	180H7	215	250	5	8	31.3	60	M12	191	14. 1
	AP071	4-180	14	14H7	110H7	130	160	4	5	16. 3	30	M8	53	6. 7
	AP080	4-180	18	19H7	130H7	165	200	4	6	21.8	40	M10	68	10.3
C207	AP090	4-100	18	24H7	130H7	165	200	4	8	27. 3	50	M10	73	11.1
C307	AP100	4-71	28	28H7	180H7	215	250	5	8	31.3	60	M12	181	15.5
	AP112	4-40	28	28H7	180H7	215	250	5	8	31.3	60	M12	181	15.5
	AP132	4-28	28	38H7	230Н7	265	300	5	10	41.3	80	M12	210	22.3
	AP080	20-200	18	19H7	130H7	165	200	4	6	21.8	40	M10	65	10.4
	AP090	4. 5-200	18	24H7	130H7	165	200	4	8	27. 3	50	M10	66	12. 1
C208	AP100	4.5-125	28	28H7	180H7	215	250	5	8	31.3	60	M12	171	18. 2
C208 C308	AP112	4.5-80	28		180H7		250	5	8	31.3	60	M12	171	18. 2
0000	AP132	4. 5-56	28	38H7	230Н7	265	300	5	10	41.3	80	M12	203	24. 9
	AP160	4. 5-28	40	42H7	250Н7	300	350	6	12	45. 3	110	M16	272	46. 4
	AP180	4. 5–12. 5	40	48H7	250H7	300	350	6	14	51.8	110	M16	272	46. 4



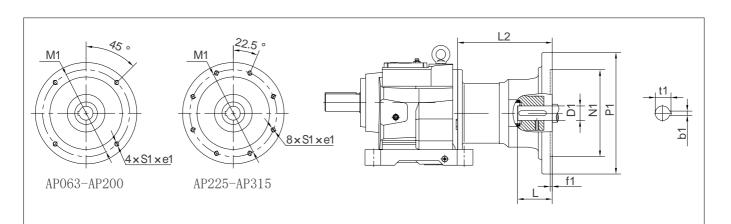


规格 Size	法兰 型号Flange	适用 Range 速比 of 范围 Ratio	e1	D1	N1	M1	P1	f1	b1	t1	L	S1	L2	重量 Weight (kg)(kg)
	AP090	4-224	18		130H7		200	4	8	27. 3	50	M10	61	14.7
	AP100	4-224	28	28H7	180H7		250	5	8	31. 3	60	M12	172	21.5
C209	AP112	4-125	28	28H7	180H7	215	250	5	8	31.3	60	M12	172	21.5
C309	AP132	4-125	28		230H7		300	5	10	41.3	80	M12	202	28. 3
0303	AP160	4-56	40		250H7		350	6	12	45. 3	110	M16	270	49.9
	AP180	4-31.5	40		250H7		350	6	14	51.8	110	M16	270	49. 9
	AP200	4-16	40	55H7	300H7		400	6	16	59. 3	110	M16	327	72.8
	AP100	4-224	28	28H7	180H7		250	5	8	31.3	60	M12	162	25. 6
	AP112	4-200	28		180H7		250	5	8	31. 3	60	M12	162	25. 6
C210	AP132	4-140	28		230H7		300	5	10	41.3	80	M12	189	33. 7
C310	AP160	4-71	40		250H7		350	6	12	45. 3	110	M16	257	52. 3
0010	AP180	4-45	40		250H7		350	6	14	51.8	110	M16	257	52. 3
	AP200	4-28	40		300H7		400	6	16	59.3	110	M16	327	77. 4
	AP225	4-22.4	30		350H7		450	6	18	64. 4	140	M16	354	85. 1
	AP100	4. 5-280	28		180H7		250	5	8	31. 3	60	M12	162	25. 6
	AP112	4. 5-280	28		180H7		250	5	8	31.3	60	M12	162	25. 6
0010	AP132	4. 5-140	28	38H7	230H7	265	300	5	10	41.3	80	M12	189	33. 7
C212	AP160	4.5-100	40	42H7	250H7	300	350	6	12	45. 3	110	M16	257	52. 3
C312	AP180	4. 5-63	40		250H7		350	6	14	51.8	110	M16	257	52. 3
	AP200	4. 5-40	40		300H7		400	6	16	59.3	110	M16	327	77. 4
	AP225	4. 5-31. 5	30		350H7		450	6	18	64.4	140	M16	354	85. 1
	AP132	4-125	28		230H7		300	5	10	41.3	80	M12	175	46. 4
	AP160	4-125	40		250H7		350	6	12	45. 3	110	M16	243	66. 9
C213	AP180	4-80	40		250H7		350	6	14	51.8	110	M16	243	66. 9
C313	AP200	4-50	40		300H7		400	6	16	59.3	110	M16	316	89.8
	AP225	4-40	30	60H7	350H7	400	450	6	18	64. 4	140	M16	343	97. 5
	AP250	4-20	32	65H7	450H7	500	550	7	18	69.4	140	M16	361	131. 3
	AP132	4-200	28		230H7		300	5	10	41.3	80	M12	175	46. 4
	AP160	4-200	40		250H7		350	6	12	45. 3	110	M16	243	66. 9
C214	AP180	4-140	40		250H7		350	6	14	51.8	110	M16	243	66. 9
C214 C314	AP200	4-80	40		300H7		400	6	16	59. 3	110	M16	316	89.8
0314	AP225	4-71	30		350H7		450	6	18	64. 4	140	M16	343	97. 5
	AP250	4-45	32	65H7	450H7	500	550	7	18	69.4	140	M16	361	131.3
	AP280	4-31.5	32		450H7		550	7	20	79. 9	140	M16	361	131.3
	AP160	18-224	40		250H7		350	6	12	45. 3	110	M16	233	90. 9
	AP180	18-180	40		250H7		350	6	14	51.8	110	M16	233	90. 9
0010	AP200	4. 5-112	40		300H7		400	6	16	59. 3	110	M16	298	109. 4
C216	AP225	4. 5-90	30	60H7	350H7	400	450	6	18	64. 4	140	M16	325	117. 1
C316	AP250	4. 5-63	32	65H7	450H7	500	550	7	18	69.4	140	M16	343	147.8
	AP280	4. 5-45	32	75H7	450H7	500	550	7	20	79. 9	140	M16	343	147.8
	AP315	4. 5-31. 5	35	80H7	550H7	600	660	7	22	85. 4	170	M20	447	262. 5




#### 7.2 C系列AS输入法兰 外形尺寸图表

## 7.2 C series dimensions of AS input flange

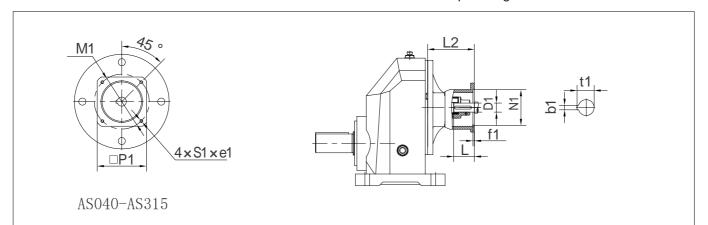


规格 Size	法兰 型号Flange	适用 Range 速比 of 范围 Ratio	e1	D1	N1	M1	P1	f1	b1	t1	L	S1	L2	重量 Weigh (kg)(kg)
	AS040	1. 25-4	4	8H7	30H7	46	78	4	2	9	25	M4	70	2.5
	AS055	1. 25-4	4	9H7	40H7	63	78	4	3	10.4	25	M5	70	2.5
	AS060	1. 25-4	10	14H7	50H7	70	60	4	5	16. 3	30	M5	114	3. 2
	AS070	1. 25-4	10	14H7	60H7	75	70	4	5	16. 3	30	M5	114	3. 3
C103	AS080	1. 25-4	10	19H7	70H7	90	80	4	6	21.8	35	M6	120	3. 4
	AS090	1. 25-4	10	19H7	80H7	100	90	4	6	21.8	40	M6	125	3.6
	AS100	1. 25-2. 24	14	19H7	95H7	115	100	4	6	21.8	45	M8	122	3. 9
	AS125	1. 25-2. 24	15	24H7	110H7	130	130	5	8	27	50	M8	133	4.9
	AS140	1. 25-2. 24	15	24H7	110H7	145	130	6.5	8	27	55	M8	133	4.8
	AS060	1. 25-4. 5	10	14H7	50H7	70	60	4	5	16. 3	30	M5	116	4.1
	AS070	1. 25-4. 5	10	14H7	60H7	75	70	4	5	16. 3	30	M5	116	4. 2
	AS080	1. 25-4. 5	10	19H7	70H7	90	80	4	6	21.8	35	M6	122	4. 3
C104	AS090	1. 25-4. 5	10	19H7	80H7	100	90	4	6	21.8	40	M6	127	4. 5
C104	AS100	1. 25-2. 8	14	19H7	95H7	115	100	4	6	21.8	45	M8	124	4.8
	AS125	1. 25-2. 8	15	24H7	110H7	130	130	5	8	27	50	M8	135	5.8
	AS140	1. 25-2. 8	15	24H7	110H7	145	130	6.5	8	27	55	M8	135	5. 7
	AS160	1. 25-2. 8	15	32H7	130H7	165	155	5	10	35. 3	60	M10	190	9.9
	AS060	1. 25-5. 6	10	14H7	50H7	70	60	4	5	16. 3	30	M5	116	4. 1
	AS070	1. 25-5. 6	10	14H7	60H7	75	70	4	5	16. 3	30	M5	116	4. 2
	AS080	1. 25-5. 6	10	19H7	70H7	90	80	4	6	21.8	35	M6	122	4. 3
	AS090	1. 25-5. 6	10	19H7	80H7	100	90	4	6	21.8	40	M6	127	4. 5
C106	AS100	1. 25-3. 55	14	19H7	95H7	115	100	4	6	21.8	45	M8	124	4.8
	AS125	1. 25-3. 55	15	24H7	110H7	130	130	5	8	27	50	M8	135	5.8
	AS140	1. 25-3. 55	15	24H7	110H7	145	130	6.5	8	27	55	M8	135	5. 7
	AS160	1. 25-3. 55	15	32H7	130H7	165	155	5	10	35. 3	60	M10	190	9. 9
	AS060	1. 25-7. 1	10	14H7	50H7	70	60	4	5	16. 3	30	M5	108	5. 6
	AS070	1. 25-7. 1	10	14H7	60H7	75	70	4	5	16. 3	30	M5	108	5. 7
	AS080	1. 25-7. 1	10	19H7	70H7	90	80	4	6	21.8	35	M6	114	5.8
	AS090	1. 25-7. 1	10	19H7	80H7	100	90	4	6	21.8	40	M6	119	6
	AS100	1. 25-4. 5	14	19H7	95H7	115	100	4	6	21.8	45	M8	116	6. 3
C107	AS125	1. 25-4. 5	15	24H7	110H7	130	130	5	8	27	50	M8	127	7.3
	AS140	1. 25-4. 5	15		110H7	145	130	6.5	8	27	55	M8	127	7.2
	AS160	1. 25-4. 5	15	32H7	130H7	165	155	5	10	35. 3	60	M10	180	11.3
	AS180	1. 25-2	16	35H7	114. 3H7	200	180	7	10	38. 3	80	M12	210	16. 7
	AS190	1. 25-2	18	38H7	180H7	215	190	6	10	41.3	80	M12	210	17. 1
	AS240	1. 25-2	28	38H7	230H7	265	240	5	10	41.3	80	M12	210	22. 3



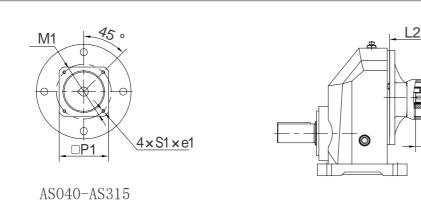


规格 Size	法兰 型号Flange	适用 Range 速比 of 范围 Ratio	e1	D1	N1	M1	P1	f1	b1	t1	L	S1	L2	重量 Weight (kg)(kg)
	AS070	1. 25-7. 1	10	14H7	60H7	75	70	4	5	16. 3	30	M5	105	8
	AS080	1. 25-7. 1	10	19H7	70H7	90	80	4	6	21.8	35	M6	111	8. 1
	AS090	1. 25-7. 1	10	19H7	80H7	100	90	4	6	21.8	40	M6	116	8. 3
	AS100	1. 25-5. 6	14	19H7	95H7	115	100	4	6	21.8	45	M8	113	8. 6
	AS125	1. 25-5. 6	15	24H7	110H7	130	130	5	8	27	50	M8	124	9.6
C108	AS140	1. 25-5. 6	15	24H7	110H7	145	130	6.5	8	27	55	M8	124	9. 5
	AS160	1. 25-5. 6	15	32H7	130H7	165	155	5	10	35. 3	60	M10	170	14
	AS180	1. 25-2. 8	16	35H <b>7</b> 1	14.3H	7200	180	7	10	38. 3	80	M12	203	19.3
	AS190	1. 25-2. 8	18	38H7	180H7	215	190	6	10	41. 3	80	M12	203	19.7
	AS240	1. 25-2. 8	28	38H7	230Н7	265	240	5	10	41.3	80	M12	203	24.9
	AS260	1. 25-2. 8	40	48H7	250H7	300	260	6	14	51.8	110	M16	272	46.4
	AS160	1. 25-7. 1	15	32H7	130H7	165	155	5	10	35. 3	60	M10	171	17.3
	AS180	1. 25-4	16	35H71	14.3H	7200	180	7	10	38. 3	80	M12	202	22.7
	AS190	1. 25-4	18	38H7	180H7	215	190	6	10	41. 3	80	M12	202	23. 1
C109	AS240	1. 25-4	28	38H7	230Н7	265	240	5	10	41. 3	80	M12	202	28. 3
	AS260	1. 25-4	40	48H7	250H7	300	260	6	14	51.8	110	M16	271	49.9
	AS315	1. 25-2. 8	40	55H7	300H7	350	315	6	16	59. 3	110	M16	327	72.8
	AS160	1. 25-6. 3	15	32H7	130H7	165	155	5	10	35. 3	60	M10	161	21.4
	AS180	1. 25-4. 5	16	35H71	14.3H	7200	180	7	10	38. 3	80	M12	189	28. 1
	AS190	1. 25-4. 5	18	38H7	180H7	215	190	6	10	41.3	80	M12	189	28.5
C110	AS240	1. 25-4. 5	28	38H7	230Н7	265	240	5	10	41.3	80	M12	189	33.7
	AS260	1. 25-4. 5	40	48H7	250Н7	300	260	6	14	51.8	110	M16	258	52. 3
	AS315	1. 25-3. 55	40	55H7	300H <b>7</b>	350	315	6	16	59. 3	110	M16	327	77. 4



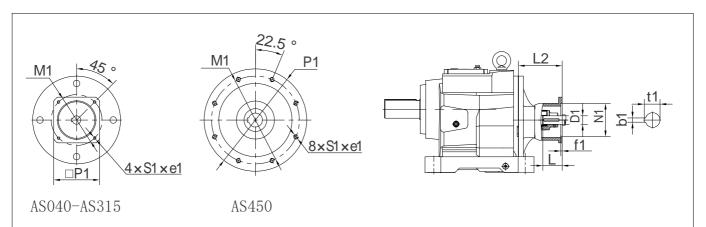

规格 Size	法兰 <sub>Flange</sub> 型号	适用 Range 速比 of 范围 Ratio	e1	D1	N1	M1	P1	f1	b1	t1	L	S1	L2	重量 Weight (kg)(kg)
	AS040	4-90	4	8H7	30H7	46	78	4	2	9	25	M4	70	2.5
	AS055	4-90	4	9H7	40H7	63	78	4	3	10.4	25	М5	70	2.5
	AS060	4-90	10	14H7	50H7	70	60	4	5	16.3	30	M5	114	3.2
C203	AS070	4-90	10	14H7	60H7	75	70	4	5	16.3	30	M5	114	3.3
C303	AS080	4-90	10			90	80	4	6	21.8	35	M6	120	3.4
0303	AS090	4-90	10	19H7	80H7	100	90	4	6	21.8	40	M6	125	3.6
	AS100	4-50	14		95H7		100	4	6	21.8	45	M8	122	3.9
	AS125	4-50	15		110H7		130	5	8	27	50	M8	133	4.9
	AS140	4-50	15		110H7		130	6.5	8	27	55	M8	133	4.8
	AS060	4-125	10		50H7	70	60	4	5	16. 3	30	M5	116	4.1
	AS070	4-125	10	14H7	60H7	75	70	4	5	16.3	30	M5	116	4.2
	AS080	4-125	10	19H7	70H7	90	80	4	6	21.8	35	M6	122	4.3
C204	AS090	4-125	10		80H7	100	90	4	6	21.8	40	M6	127	4.5
C304	AS100	4-71	14	19H7	95H7	115	100	4	6	21.8	45	M8	124	4.8
0304	AS125	4-71	15		110H7		130	5	8	27	50	M8	135	5.8
	AS140	4-71	15		110H7		130	6.5	8	27	55	M8	135	5. 7
	AS160	4-71	15		130H7	165	155	5	10	35. 3	60	M10	190	9.9
	AS060	4.5-140	10		50H7	70	60	4	5	16.3	30	M5	116	4.1
	AS070	4.5-140	10	14H7		75	70	4	5	16. 3	30	M5	116	4.2
	AS080	4.5-140	10		70H7	90	80	4	6	21.8	35	M6	122	4.3
C205	AS090	4.5-140	10		80H7	100	90	4	6	21.8	40	M6	127	4.5
C305	AS100	4. 5-80	14		95H7	115	100	4	6	21.8	45	M8	124	4.8
	AS125	4. 5-80	15		110H7		130	5	8	27	50	M8	135	5.8
	AS140	4. 5-80	15		110H7		130	6.5	8	27	55	M8	135	5. 7
	AS160	4. 5-80	15		130H7	165	155	5	10	35. 3	60	M10	190	9.9
	AS060	4.5-160	10		50H7	70	60	4	5	16. 3	30	M5	116	4. 1
	AS070	4.5-160	10		60H7	75	70	4	5	16. 3	30	M5	116	4.2
	AS080	4.5-160	10		70H7	90	80	4	6	21.8	35	M6	122	4. 3
C206	AS090	4.5-160	10		80H7	100	90	4	6	21.8	40	M6	127	4. 5
C306	AS100	4.5-100	14		95H7	115	100	4	6	21.8	45	M8	124	4.8
	AS125	4.5-100	15		110H7		130	5	8	27	50	M8	135	5. 8
	AS140	4.5-100	15		110H7		130	6.5	8	27	55	M8	135	5. 7
	AS160	4.5-100	15		130H7	165	155	5	10	35. 3	60	M10	190	9.9
-	AS060	4-180	10		50H7	70	60	4	5	16. 3	30	M5	108	5. 6
	AS070	4-180	10	14H7	60H7	75	70	4	5	16. 3	30	M5	108	5. 7
	AS080	4-180	10		70H7	90	80	4	6	21.8	35	M6	114	5.8
	AS090	4-180	10	19H7	80H7	100	90	4	6	21.8	40	M6	119	6
22.5	AS100	4-100	14		95H7	115	100	4	6	21.8	45	M8	116	6. 3 7. 3
C207	AS125	4-100	15		110H7		130	5	8	27	50	M8	127	7.2
C307	AS140	4-100	15		110H7		130	6.5	8	27	55	M8	127	11.3
	AS160	4-100	15		130H7		155	5	10	35. 3	60	M10	180	11. 3
	AS180	4-31.5	16		114. 3H7		180	7	10	38. 3	80	M12	210	
	AS190	4-31.5	18		180H7		190	6	10	41. 3	80	M12	210	17. 1 22. 3
	AS240	4-31.5	28	38H7	230H7	265	240	5	10	41.3	80	M12	210	22. 3



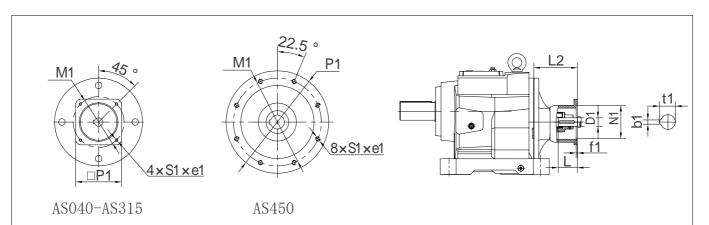


规格 Size	法兰 型号Flange	适用 Range 速比 of 范围 Ratio	e1	D1	N1	M1	P1	f1	b1	t1	L	S1	L2	重量 Weight (kg)(kg)
	AS070	20-200	10	14H7	60H7	75	70	4	5	16.3	30	M5	105	8
	AS080	20-200	10	19H7	70H7	90	80	4	6	21.8	35	M6	111	8. 1
	AS090	20-200	10	19H7	80H7	100	90	4	6	21.8	40	M6	116	<b>8.</b> 3
	AS100	4. 5-160	14	19H7	95H7	115	100	4	6	21.8	45	M8	113	8.6
C208	AS125	4.5-160	15	24H7	110H7	130	130	5	8	27	50	M8	124	9.6
C308	AS140	4. 5-160	15	24H7	110H7	145	130	6.5	8	27	55	M8	124	9. 5
C300	AS160	4. 5-160	15	32H7	130H7	165	155	5	10	35.3	60	M10	170	14
	AS180	4. 5-71	16	35H7	114. 3H7	200	180	7	10	38.3	80	M12	203	19. 3
	AS190	4. 5-71	18	38H7	180H7	215	190	6	10	41.3	80	M12	203	19. 7
	AS240	4. 5-71	28	38H7	230H7	265	240	5	10	41.3	80	M12	203	24. 9
	AS260	4. 5-71	40	48H7	250H7	300	260	6	14	51.8	110	M16	272	46. 4
	AS160	4-224	15	32H7	130H7	165	155	5	10	35. 3	60	M10	171	17. 3
	AS180	4-112	16	35H7	114. 3H7	200	180	7	10	38. 3	80	M12	202	22.7
C209	AS190	4-112	18	38H7	180H7	215	190	6	10	41.3	80	M12	202	23. 1
C309	AS240	4-112	28	38H7	230H7	265	240	5	10	41.3	80	M12	202	28. 3
	AS260	4-112	40	48H7	250H7	300	260	6	14	51.8	110	M16	271	49. 9
	AS315	4-18	40	55H7	300H7	350	315	6	16	59. 3	110	M16	327	72.8
	AS160	4-224	15	32H7	130H7	165	155	5	10	35. 3	60	M10	161	21.4
	AS180	4-140	16	35H7	114. 3H7	200	180	7	10	38. 3	80	M12	189	28. 1
C210	AS190	4-140	18	38H7	180H7	215	190	6	10	41.3	80	M12	189	28. 5
C310	AS240	4-140	28	38H7	230H7	265	240	5	10	41.3	80	M12	189	33. 7
	AS260	4-140	40	48H7	250H7	300	260	6	14	51.8	110	M16	258	<b>52.</b> 3
	AS315	4-100	40	55H7	300H7	350	315	6	16	59.3	110	M16	327	77. 4
	AS160	4. 5-280	15	32H7	130H7	165	155	5	10	35. 3	60	M10	161	21.4
	AS180	4. 5-140	16		114. 3H7	200	180	7	10	38.3	80	M12	189	28. 1
C212	AS190	4.5-140	18	38H7	180H7	215	190	6	10	41.3	80	M12	189	28. 5
C312	AS240	4. 5-140	28	38H7	230H7	265	240	5	10	41.3	80	M12	189	33. 7
	AS260	4. 5-140	40	48H7	250H7	300	260	6	14	51.8	110	M16	258	52. 3
	AS315	4.5-100	40	55H7	300H7	350	315	6	16	59.3	110	M16	327	77. 4
	AS180	4-125	16		114. 3H7	200	180	7	10	38.3	80	M12	175	40.8
C213	AS190	4-125	18	38H7	180H7	215	190	6	10	41.3	80	M12	175	41. 2
	AS240	4-125	28	38H7	230H7	265	240	5	10	41.3	80	M12	175	46. 4
C313	AS260	4-125	40	48H7	250H7	300	260	6	14	51.8	110	M16	244	66. 9
	AS315	4-100	40	55H7	300H7	350	315	6	16	59.3	110	M16	316	89.8
	AS180	4-200	16		114. 3H7	200	180	7	10	38. 3	80	M12	175	40.8
	AS190	4-200	18	38H7	180H7	215	190	6	10	41.3	80	M12	175	41. 2
C214	AS240	4-200	28	38H7	230H7	265	240	5	10	41.3	80	M12	175	46. 4
C314	AS260	4-200	40	48H7	250H7	300	260	6	14	51.8	110	M16	244	66. 9
	AS315	4-160	40	55H7	300H7	350	315	6	16	59.3	110	M16	316	89.8
	AS450	4-125	30	55H7	350H7	400	450	6	16	59.3	140	M16	343	97. 5
C216	AS260	4-200	40	48H7	250H7	300	260	6	14	51.8	110	M16	234	90. 9
C316	AS315	4-160	40	55H7	300H7	350	315	6	16	59.3	110	M16	298	109. 4
0310	AS450	4-125	30	55H7	350H7	400	450	6	16	59.3	140	M16	325	117. 1




#### 7.3 C系列AE输入轴 外形尺寸图表

# 7.3 C series dimensions of AE input shaft

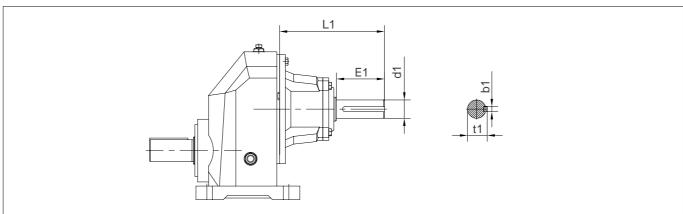


规格 Size	输入轴 Input 型号 Shaft	适用 Range 功率 of 范围 Ratio	适用 Range 速比 of 范围 Ratio	d1	E1	L1	b1	t1	重量 Weight (kg)(kg)
C103	AE2	0.12-0.75kW	1. 25-4	19k6	40	117	6	21.5	2.5
G104	AE2	0. 12-0. 75kW	1. 25-4. 5	19k6	40	119	6	21.5	3. 4
C104	AE3	1.1-4kW	1. 25-2. 8	28k6	60	175	8	31	6. 1
C106	AE2	0. 12-0. 75kW	1. 25-5. 6	19k6	40	119	6	21.5	3. 4
C100	AE3	1.1-4kW	1. 25-3. 55	28k6	60	175	8	31	6. 1
	AE2	0. 12-0. 75kW	1. 25-7. 1	19k6	40	111	6	21.5	4.9
C107	AE3	1.1-4kW	1. 25-4. 5	28k6	60	165	8	31	7. 5
	AE4	5. 5-7. 5kW	1. 25-2	38k6	80	211	10	41	10. 5
	AE2	0. 12-0. 75kW	3. 15-7. 1	19k6	40	108	6	21.5	7.2
C108	AE3	1.1-4kW	1. 25-5. 6	28k6	60	155	8	31	10. 2
C108	AE4	5.5-11kW	1. 25-2. 8	38k6	80	204	10	41	13. 1
	AE5	15-22kW	1. 25-2. 8	42k6	110	266	12	45	23. 3
	AE3	1.1-4kW	1. 25-7. 1	28k6	60	156	8	31	10.2
C100	AE4	5.5-11kW	1. 25-4	38k6	80	203	10	41	13. 1
C109	AE5	15-22kW	1. 25-4	42k6	110	265	12	45	23. 3
	AE6	30-45KW	1. 25-2. 8	48k6	110	309	14	51. 5	40.9
	AE3	1.1-4kW	1. 25-6. 3	28k6	60	146	8	31	17. 6
C110	AE4	5.5-11kW	1. 25-4. 5	38k6	80	190	10	41	21.9
	AE5	15-22kW	1. 25-4. 5	42k6	110	252	12	45	29. 2
	AE6	30-45KW	1. 25-3. 55	48k6	110	309	14	51.5	45. 5



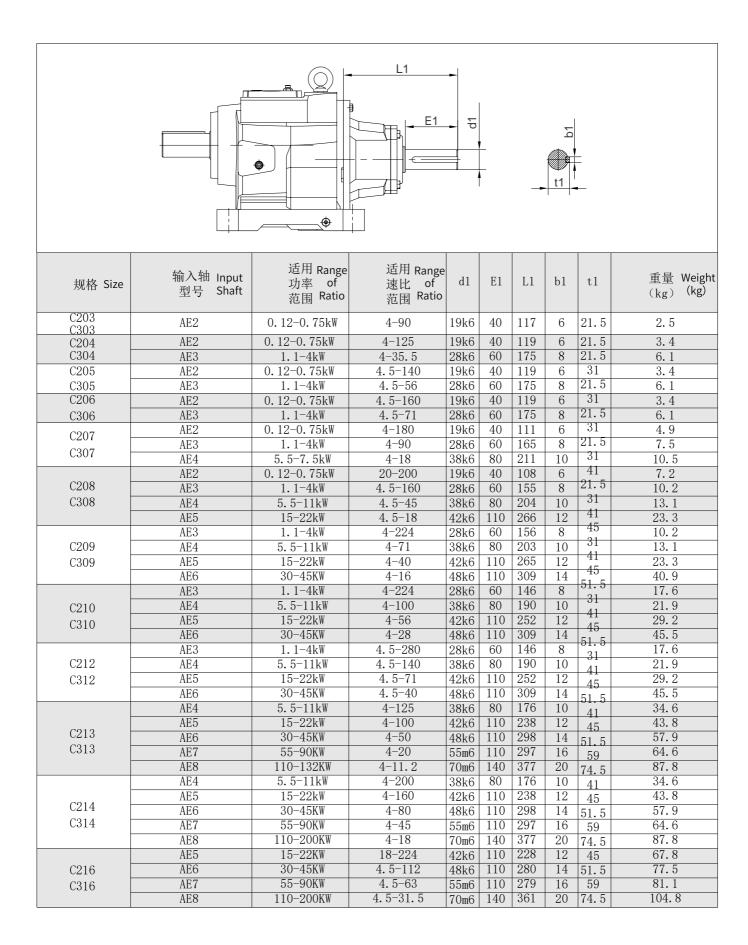



## 8 组合型尺寸图表 8 Combi-type Dimensions

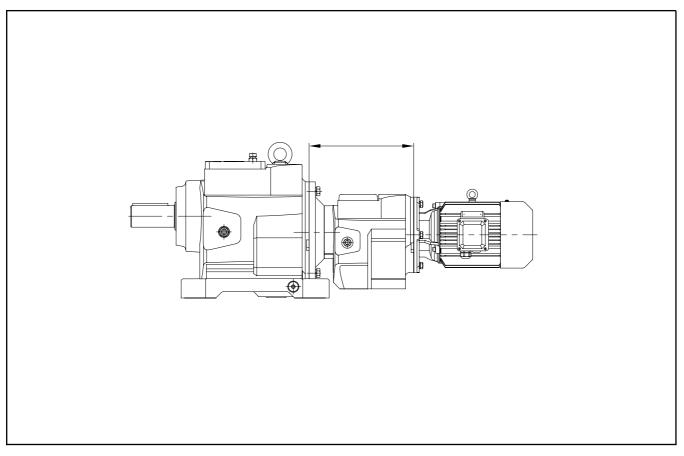

型号 Type	C203/C201 C203/C301 C303/C201 C303/C301	C204/C203 C204/C303 C304/C203 C304/C303	C205/C203 C205/C303 C305/C203 C305/C303	C206/C203 C206/C303 C306/C203 C306/C303	C207/C203 C207/C303 C307/C203 C307/C303	C208/C205 C208/C305 C308/C205 C308/C305	C209/C205 C209/C305 C309/C205 C309/C305
L	134	170	170	170	162	182	183
Rangeof 适用马达 Motor 功率范围 Power (kW) (kW)	0. 12-0. 37	0. 12-0. 55	0. 12-1. 1	0. 12-1. 1	0. 12-1. 5	0.12-3	0.12-4
型号 Type	C210/C207 C210/C307 C310/C207 C310/C307	C213/C207 C213/C307 C313/C207 C313/C307	C314/C207 C314/C307	C214/C208 C214/C308	C316/C209 C316/C309	C216/C210 C216/C310	
L	226	226	226	258	321	361	
居和geof 适用马达 Motor 功率范围 Power (kW) (kW)	0. 12-7. 5	0.12-15	0. 12-15	0. 55-22	0. 55-18. 5	1. 5-37	




#### 9 可选附件和指定配置

9.1 补偿油箱 (代号6)

# 9 Accessories and Specific Configuration

9.1 Oil compensating tank (code 6)

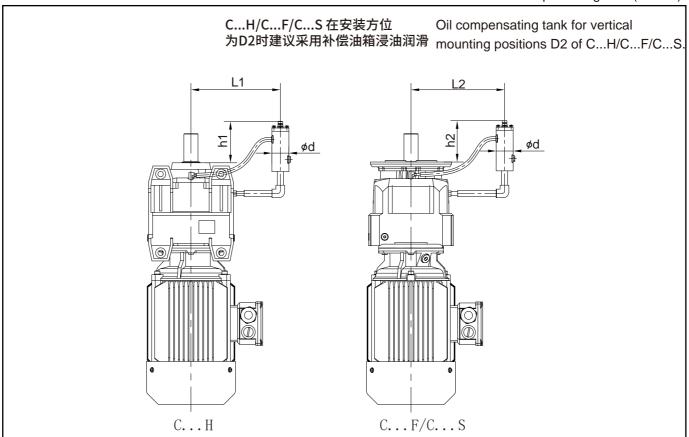

型号 型号 Type	L1	L2	h1	h2	d
C203 C303	150	150	80	70	42
C204 C304	160	160	80	80	42
C205 C305	160	160	80	80	42
C206 C306	180	180	75	75	42
C207 C307	225	225	150	150	80
C208 C308	250	250	130	130	80
C209 C309	330	330	120	120	80
C210 C310	370	370	160	160	120
C212 C312	380	380	170	170	120
C213 C313	390	390	160	160	120
C214 C314	440	440	130	130	120
C216 C316	470	470	140	140	120

注:在轴头向上的安装条件下,正常的 润滑方式很难给予顶端轴承提供润滑 油,为了确保润滑油的供应,如上图的 (D2)所示,通过补偿油箱加高油位。 Note: In case of an upward output shaft normal lubrication system would fail to feed the overhead rolling bearings, To ensure an adequate supply of lubricants, the oil level has to be increased accordingly. As shown above (D2), an oil compensating tank with breather is attached for this purpose.



## 10 润滑油

## 10 oil

安装 方位 Mounting position  型号 Size	D1	D2	D3	D4	D5	D6
C103F	0. 52	0.36	0.45	0.6	0.36	0.36
C104F	0.7	0. 45	0.6	0.8	0.45	0.45
C106F	0.8	0.5	0.7	0.9	0.5	0.5
C107F	1.6	1	1.6	2	1	1
C108F	2. 5	1.8	2.7	3. 1	1.6	1.6
C109F	3. 5	2.5	3.7	4. 3	2.2	2. 2
C110F	6.2	4. 1	7.7	8. 5	4. 1	4. 1
C200F C300F	0.2	0.2	0.2	0.3	0.2	0. 2
C201F/S C301F/S	0.4	0.4	0.4	0.5	0.4	0. 4
C203F/S C303F/S	0.5	1	1.1	1.2	0.9	1.1
C204F/S C304F/S	1	1.7	1.3	1.8	1.8	1.7
C205F/S C305F/S	1.5	1.9	1.8	2. 1	2.6	2. 5
C206F/S C306F/S	2	2.9	2. 4	3. 5	3. 3	3. 2
C207F/S C307F/S	2. 3	3.9	2.8	4.9	3.6	3. 5
C208F/S C308F/S	3. 9	7. 1	5. 5	8. 1	7.8	7. 5
C209F/S C309F/S	7.8	12. 2	9. 5	14	13. 1	12.8
C210F/S C310F/S	11	17	15	20	20	19
C212F/S C312F/S	15	22	20	28	27	26
C213F/S C313F/S	19	28	26	33	34	34
C214F/S C314F/S	29	48	36	53	52	48
C216F C316F	50	84	62	90	89	88




安装 方位 方位 position 型号 Size	D1	D2	D3	D4	D5	D6
С103Н	0. 52	0.36	0.45	0.6	0.36	0.36
С104Н	0.7	0.45	0.6	0.8	0.45	0.45
С106Н	0.8	0.5	0.7	0.9	0.5	0.5
С107Н	1.6	1	1.6	2	1	1
С108Н	2. 5	1.8	2.7	3. 1	1.6	1.6
С109Н	3. 5	2. 5	3.7	4. 3	2. 2	2.2
С110Н	6. 2	4.1	7.7	8.5	4.1	4.1
С200H С300H	0.2	0.2	0.2	0.3	0.2	0.2
С201Н С301Н	0.4	0.4	0.4	0.5	0.4	0.4
С203Н С303Н	0. 5	1	1.1	1.2	0.9	1.1
С204Н С304Н	1	1.7	1.3	1.8	1.8	1.7
С205Н С305Н	1.5	1.9	1.8	2. 1	2.6	2.5
С206Н С306Н	2	2. 9	2. 4	3. 5	3. 3	3.2
С207Н С307Н	2. 3	3. 9	2.8	4. 9	3.6	3.5
С208Н С308Н	3. 9	7. 1	5. 5	8. 1	7.8	7.5
С209Н С309Н	7.8	12. 2	9.5	14	13. 1	12.8
С210H С310H	11	17	15	20	20	19
С212Н С312Н	15	22	20	28	27	26
С213Н С313Н	19	28	26	33	34	34
С214Н С314Н	29	48	36	53	52	48
C216H C316H	50	84	62	90	89	88



## 11 马达防雨罩尺寸


# 11 Motor Rainproof Cover Dimensions

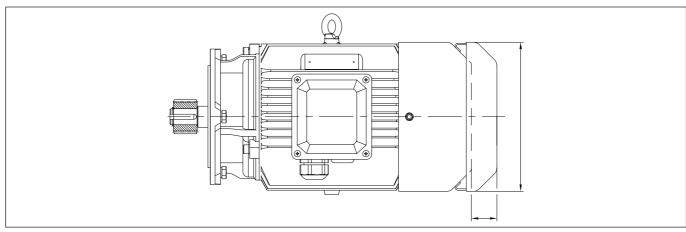

机座 Frame 号 Size	Н63	H71	Н80	Н90	H100	H112	H132	H160	H180	H200	H225	Н250	H280
D	124	139	159	176	199	220	259	314	356	398	446	485	547
Н	25	30	30	35	40	40	40	60	60	70	70	80	80

### 12 轴端中心孔


#### 12 Shaft End Centre Hole

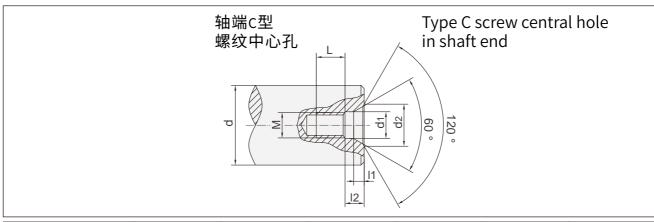

d	M	L	12	11	D1	D2
7 <d≤10< td=""><th>М3</th><td>10</td><td>2.6</td><td>1.8</td><td>3.2</td><td>5.8</td></d≤10<>	М3	10	2.6	1.8	3.2	5.8
10 <d≤13< td=""><th>M4</th><td>10</td><td>3.2</td><td>2.1</td><td>4.3</td><td>7.4</td></d≤13<>	M4	10	3.2	2.1	4.3	7.4
13 <d≤16< td=""><th>M5</th><td>10</td><td>4</td><td>2.4</td><td>5.3</td><td>8.8</td></d≤16<>	M5	10	4	2.4	5.3	8.8
16 <d≤21< td=""><th>M6</th><td>12</td><td>5</td><td>2.8</td><td>6.4</td><td>10.5</td></d≤21<>	M6	12	5	2.8	6.4	10.5
21 <d≤24< td=""><th>M8</th><td>12</td><td>6</td><td>3.3</td><td>8.4</td><td>13.2</td></d≤24<>	M8	12	6	3.3	8.4	13.2
24 <d≤30< td=""><th>M10</th><td>15</td><td>7.5</td><td>3.8</td><td>10.5</td><td>16.3</td></d≤30<>	M10	15	7.5	3.8	10.5	16.3
30 <d≤38< td=""><th>M12</th><td>20</td><td>9.5</td><td>4.4</td><td>13</td><td>19.8</td></d≤38<>	M12	20	9.5	4.4	13	19.8
38 <d≤50< td=""><th>M16</th><td>25</td><td>12</td><td>5.2</td><td>17</td><td>25.3</td></d≤50<>	M16	25	12	5.2	17	25.3
50 <d≤85< td=""><th>M20</th><td>30</td><td>15</td><td>6.4</td><td>21</td><td>31.3</td></d≤85<>	M20	30	15	6.4	21	31.3
85 <d≤130< td=""><th>M24</th><td>35</td><td>18</td><td>8</td><td>25</td><td>38</td></d≤130<>	M24	35	18	8	25	38
130 <d≤225< td=""><th>M30</th><td>45</td><td>18</td><td>11</td><td>31</td><td>48</td></d≤225<>	M30	45	18	11	31	48



# 13 平键与键槽的尺寸 13 Dimension of Parallel Key and Keyway

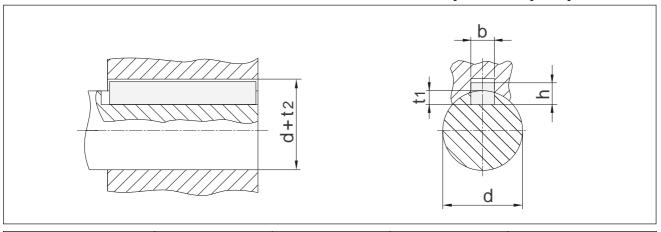


d	b	h	tı	d+t2
8 <d≤10< td=""><td>3</td><td>3</td><td>1.8</td><td>d+1.4</td></d≤10<>	3	3	1.8	d+1.4
10 <d≤12< td=""><td>4</td><td>4</td><td>2.5</td><td>d+1.8</td></d≤12<>	4	4	2.5	d+1.8
12 <d≤17< td=""><td>5</td><td>5</td><td>3</td><td>d+2.3</td></d≤17<>	5	5	3	d+2.3
17 <d≤22< td=""><td>6</td><td>6</td><td>3.5</td><td>d+2.8</td></d≤22<>	6	6	3.5	d+2.8
22 <d≤30< td=""><td>8</td><td>7</td><td>4</td><td>d+3.3</td></d≤30<>	8	7	4	d+3.3
30 <d≤38< td=""><td>10</td><td>8</td><td>5</td><td>d+3.3</td></d≤38<>	10	8	5	d+3.3
38 <d≤44< td=""><td>12</td><td>8</td><td>5</td><td>d+3.3</td></d≤44<>	12	8	5	d+3.3
44 <d≤50< td=""><td>14</td><td>9</td><td>5.5</td><td>d+3.8</td></d≤50<>	14	9	5.5	d+3.8
50 <d≤58< td=""><td>16</td><td>10</td><td>6</td><td>d+4.3</td></d≤58<>	16	10	6	d+4.3
58 <d≤65< td=""><td>18</td><td>11</td><td>7</td><td>d+4.4</td></d≤65<>	18	11	7	d+4.4
65 <d≤75< td=""><td>20</td><td>12</td><td>7.5</td><td>d+4.9</td></d≤75<>	20	12	7.5	d+4.9
75 <d≤85< td=""><td>22</td><td>14</td><td>9</td><td>d+5.4</td></d≤85<>	22	14	9	d+5.4
85 <d≤95< td=""><td>25</td><td>14</td><td>9</td><td>d+5.4</td></d≤95<>	25	14	9	d+5.4
95 <d≤110< td=""><td>28</td><td>16</td><td>10</td><td>d+6.4</td></d≤110<>	28	16	10	d+6.4
110 <d≤130< td=""><td>32</td><td>18</td><td>11</td><td>d+7.4</td></d≤130<>	32	18	11	d+7.4
130 <d≤150< td=""><td>36</td><td>20</td><td>12</td><td>d+8.4</td></d≤150<>	36	20	12	d+8.4
150 <d≤170< td=""><td>40</td><td>22</td><td>13</td><td>d+9.4</td></d≤170<>	40	22	13	d+9.4
170 <d≤200< td=""><td>45</td><td>25</td><td>15</td><td>d+10.4</td></d≤200<>	45	25	15	d+10.4
200 <d≤230< td=""><td>50</td><td>28</td><td>17</td><td>d+11.4</td></d≤230<>	50	28	17	d+11.4
230 <d≤260< td=""><td>56</td><td>32</td><td>20</td><td>d+12.4</td></d≤260<>	56	32	20	d+12.4

随着技术迭代进步,博能产品样本将会同步更新,请见谅。 Along with the technology advancedet.,the product of the manual of Boneng will be changed,please forgive.

## 博能产品集成图

## **Boneng Product Integration Diagram**

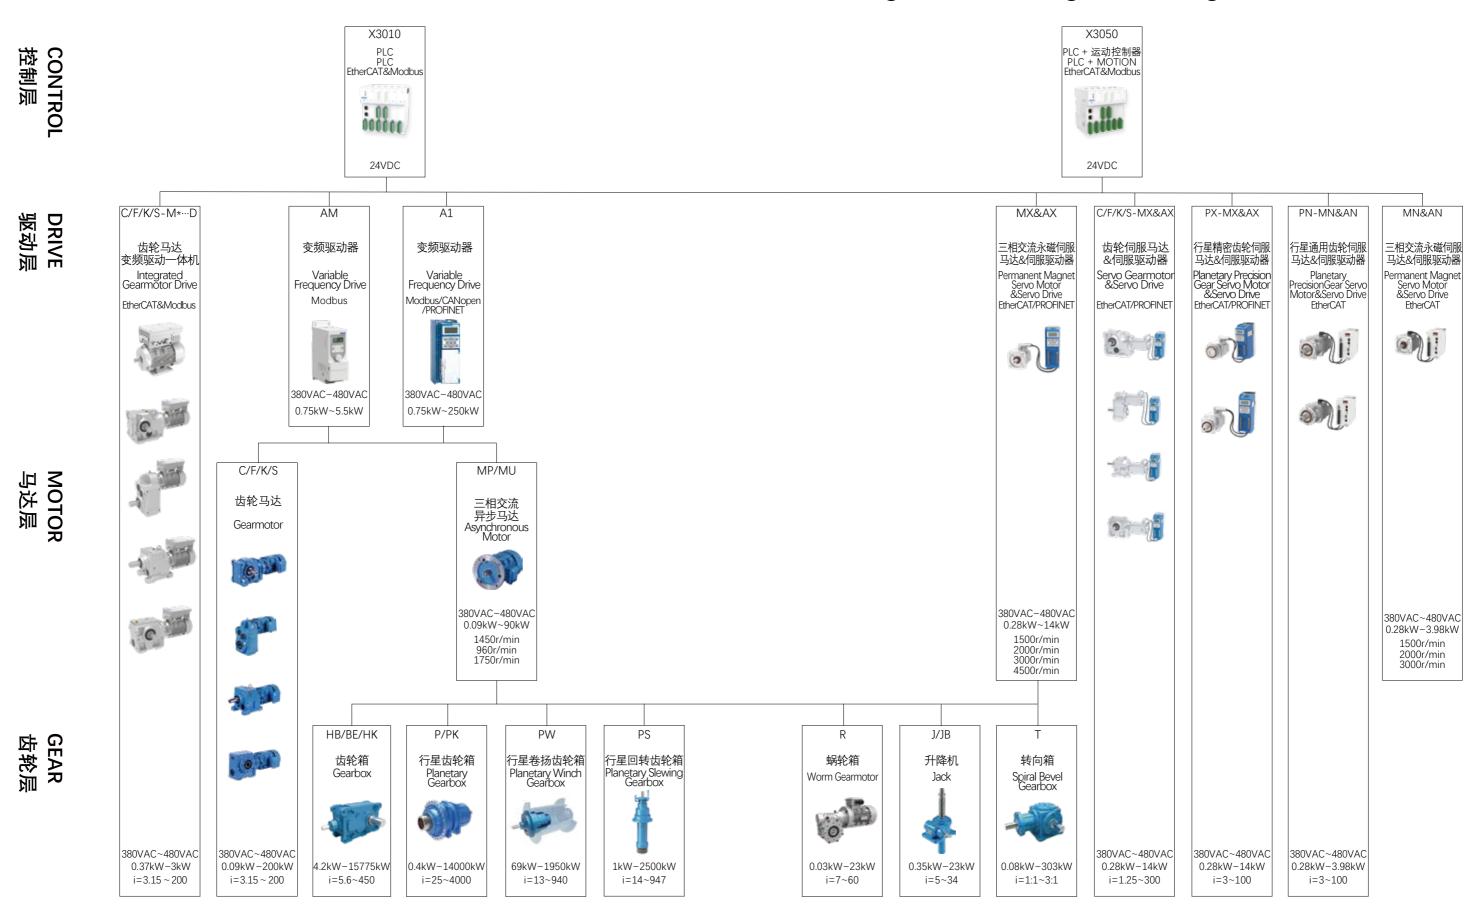

博能传动(沈阳)有限公司	BONENG TRANSMISSION(SHENYANG)CO.,LTD.
辽宁省沈阳市沈北新区 太平洋工业城A区A73-6号 电话: 024-31271571	No. A73-6, Area A, Pacific Industrial City, Shenbei New District, Shenyang, Liaoning Province, China TEL: 024-31271571
博能传动(天津)有限公司	BONENG TRANSMISSION(TIANJIN)CO.,LTD.
天津市北辰区双海道6号 宏鹏工业园7号车间 电话: 022-26929556	7th Workshop, Hongpeng Industrial Park, No. 6 Shuanghai Road, Beichen District, Tianjin City,China TEL: 022-26929556
博能传动(潍坊)有限公司	BONENG TRANSMISSION(WEIFANG)CO.,LTD.
山东省潍坊市安丘市经济开发区 汶水路与昆仑大街交叉口往北 100米路东1号车间 电话: 0536-2141166	1st Workshop, Economic Development Zone, Anqiu, Weifang City, Shandong Province, China TEL: 0536-2141166
博能传动(开封)有限公司	BONENG TRANSMISSION(KAIFENG)CO.,LTD.
河南省开封市宋城路四大街11号 海神机械院内五号厂房 电话: 0371-23335238	5th Workshop, Haishen Machinery, No.11, Fourth Street, Songcheng Road, New District, Kaifeng City, Henan Province, China TEL: 0371-23335238
博能传动(长沙)有限公司	BONENG TRANSMISSION(CHANGSHA)CO.,LTD.
博能传动(长沙)有限公司 湖南省长沙市望城经济开发区 普瑞大道1288号 电话: 0731-88386958	BONENG TRANSMISSION(CHANGSHA)CO.,LTD.  No. 1288 Puri Avenue, Wangcheng Economic Development Zone, Changsha City, Hunan Province, China TEL: 0731-88386958
湖南省长沙市望城经济开发区 普瑞大道1288号	No. 1288 Puri Avenue, Wangcheng Economic Development Zone, Changsha City, Hunan Province, China
湖南省长沙市望城经济开发区 普瑞大道1288号 电话: 0731-88386958	No. 1288 Puri Avenue, Wangcheng Economic Development Zone, Changsha City, Hunan Province, China TEL: 0731-88386958
湖南省长沙市望城经济开发区 普瑞大道1288号 电话: 0731-88386958 <b>博能传动设备(成都)有限公司</b> 四川省成都市金牛区金牛坝路9号5栋 向荣中心A座7楼-703	No. 1288 Puri Avenue, Wangcheng Economic Development Zone, Changsha City, Hunan Province, China TEL: 0731-88386958  BONENG TRANSMISSION EQUIPMENT (CHENGDU) CO., LTD.  703, 7th Floor, Block A, Xiangrong Center, Building 5, No. 9 Jinniuba Road, Jinniu District, Chengdu City, Sichuan Province, China
湖南省长沙市望城经济开发区 普瑞大道1288号 电话: 0731-88386958 博能传动设备(成都)有限公司 四川省成都市金牛区金牛坝路9号5栋 向荣中心A座7楼-703 电话: 028-87741100	No. 1288 Puri Avenue, Wangcheng Economic Development Zone, Changsha City, Hunan Province, China TEL: 0731-88386958  BONENG TRANSMISSION EQUIPMENT (CHENGDU) CO., LTD.  703, 7th Floor, Block A, Xiangrong Center, Building 5, No. 9 Jinniuba Road, Jinniu District, Chengdu City, Sichuan Province, China TEL: 028-87741100
湖南省长沙市望城经济开发区 普瑞大道1288号 电话: 0731-88386958 博能传动设备(成都)有限公司 四川省成都市金牛区金牛坝路9号5栋 向荣中心A座7楼-703 电话: 028-87741100 博能传动(肇庆)有限公司 广东省肇庆市鼎湖区肇庆新区 科创大道7号平谦国际现代产业园 一期A12北厂房	No. 1288 Puri Avenue, Wangcheng Economic Development Zone, Changsha City, Hunan Province, China TEL: 0731-88386958  BONENG TRANSMISSION EQUIPMENT (CHENGDU) CO., LTD.  703, 7th Floor, Block A, Xiangrong Center, Building 5, No. 9 Jinniuba Road, Jinniu District, Chengdu City, Sichuan Province, China TEL: 028-87741100  BONENG TRANSMISSION (ZHAOQING) CO., LTD.  No. 7 Science and Technology Innovation Avenue, Zhaoqing New Area, Dinghu District, Zhaoqing City, Guangdong Province, China

博能传动(美国)有限公司	BONENG TRANSMISSION(USA)LLC.
1250 E 222nd Euclid, OH 44117,	1250 E 222nd Euclid, OH 44117,
United Staes	United Staes
TEL: 1-216-618-0138	TEL: 1-216-618-0138
TEL: 1-216-618-0496	TEL: 1-216-618-0496
TEL: 1-216-618-3099	TEL: 1-216-618-3099
出化(大工(CD克) 大四八三	DOMENIC TRANSMISSION/INDIA/DVT LTD
博能传动(印度)有限公司	BONENG TRANSMISSION(INDIA)PVT.LTD
博能传动(印度) 有限公司 Plot No. E-10/3, MIDC sinnar	Plot No. E-10/3, MIDC sinnar
	,
Plot No. E-10/3, MIDC sinnar	Plot No. E-10/3, MIDC sinnar
Plot No. E-10/3, MIDC sinnar (Malegaon) Industrial Area, Nashik,	Plot No. E-10/3, MIDC sinnar (Malegaon) Industrial Area, Nashik,
Plot No. E-10/3, MIDC sinnar (Malegaon) Industrial Area, Nashik, 422123, Maharashtra, India.	Plot No. E-10/3, MIDC sinnar (Malegaon) Industrial Area, Nashik, 422123, Maharashtra, India.
Plot No. E-10/3, MIDC sinnar (Malegaon) Industrial Area, Nashik, 422123, Maharashtra, India. TEL:+91-11-4507 6293 (DELHI)	Plot No. E-10/3, MIDC sinnar (Malegaon) Industrial Area, Nashik, 422123, Maharashtra, India. TEL:+91-11-4507 6293 (DELHI)



