
TESSERA

INFINITY LAMPS

VERSION 2.0 - NOVEMBER 2026

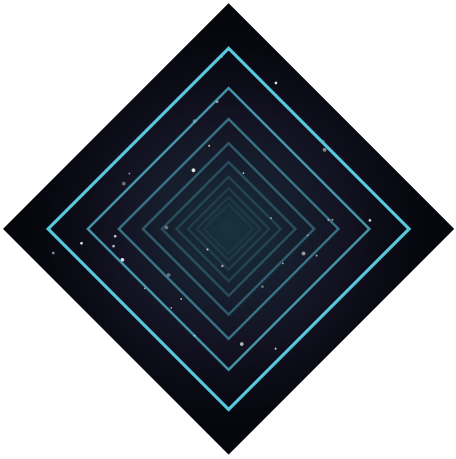

Quick Start

[EDGE LENGTH] MM [SHAPE]

Your lamp is a hand-built infinity light with 34 built-in effects, a control page you open in any browser, and sensors that let it react to sound and to being picked up. This card gets it lit in five minutes. The **User Guide** covers everything else.

MADE BY RYAN IN SCOTLAND

01 Plug it in

1. Plug a **USB-C PD charger** into the wall and the cable into the lamp's power socket.
2. Set the **power switch** to **ON**.

The lamp starts by itself a few seconds later.

> ■ WARNING
>
> The lamp needs a **USB-C Power Delivery (PD) charger that offers 20 V**, of at least **[CHARGER WATTAGE] W**. A phone charger, a laptop USB port or a car socket will not run it. Look for `20V` in the list printed on the charger.

02 Use the button

There is one button, on the base.

ACTION	WHAT IT DOES
Press	Next effect
Double press	Previous effect
Hold about 1 second	LEDs on / off
Hold 3 seconds (LEDs flash amber)	Shut down completely
Hold about 1 second while shut down	Wake up

Everything else is on the control page.

03 Open the control page

The first time it starts, the lamp creates its own WiFi network.

1. On your phone, tablet or laptop, open **WiFi settings**.
2. Join the network **`infinity-lamp`**. There is no password.
3. The control page should open by itself. If not, open a browser and go to **http://infinity.lamp** (or **http://192.168.4.1**).

You now have power, brightness, speed, effects and colours.

---

04 Put it on your home WiFi

This lets you reach the lamp from any device in the house, and turns on the timed schedule and automatic update checks.

1. On the control page, find the **Network** panel.
2. Enter your WiFi name and password. Press **Save network settings**.
3. Press **Reboot device**. Network changes only apply after a restart.
4. From then on, open **http://infinity-lamp.local** from any browser on your home network.

If the lamp cannot find your WiFi, it brings its own `infinity-lamp` network back so you are never locked out.

---

05 Add a power bank (optional)

If your lamp has a power-bank bay, a USB-C power bank lets it run unplugged and keeps it going through a power cut. No bank is supplied. Yours needs:

- a **USB-C PD output that offers [BANK PD VOLTAGE] V**,
- **20 W** or more,
- a **UKCA or CE mark**, bought from a proper retailer,
- to fit the bay: **[BAY DIMENSIONS]**.

Set the power switch to OFF, plug the bay's lead into the bank's USB-C port, seat the bank, then switch back on. The lamp charges the bank while it is plugged in and switches to it when it is not. **User Guide section 13** has the full detail.

06 Things to try

- **Pick it up and turn it.** *Rain*, *Gravity Fill* and *Spirit Level* follow which way is down.
- **Play some music.** Try *Spectrum*, *Bass Bloom* or *Sound Ripple*.
- **Give it a shake.** *Shake Sparkle* bursts when it is handled.
- **Turn on Auto-cycle** and let it work through the effects by itself.
- **Set it down and walk away.** After a few seconds without movement the face resting on the table turns off to save power. Pick it up and it comes back.

07 Switching off

	USE IT FOR
Off (hold the button 1 s)	Every day. Dark, but your phone and schedule can still switch it on
Shut down (hold the button 3 s)	Leaving it unused. Draws almost nothing; hold the button 1 s to wake it
Power switch OFF	Storage, and before moving it. Draws nothing at all

On a power bank, *Off* still draws a little to keep the bank awake. Plug back into the mains or shut down when you have finished.

Safety, briefly

- Indoor use only. Keep it dry, and do not cover it or put it in a cabinet.
- Use only a certified USB-C PD power bank. Never use one that is damaged or swollen, and recycle it at a battery collection point, not in the bin.
- If the lamp ever gets hot, swells or smells odd: unplug it, switch it off, move it somewhere non-flammable and contact me.
- Some effects flash or strobe. If you are sensitive to flashing light, avoid *Beat Strobe*, *Beat Pulse* and *Theatre Chase*.
- Not a toy. It is heavy and has rigid panels.

Full safety notes are in the User Guide.

If something goes wrong

SYMPTOM	FIRST THING TO CHECK
Nothing lights up	Power switch ON? A **PD** charger that offers 20 V? Hold the button for 1 second
LEDs blink when the mains goes	Normal with a power bank: the lamp is switching over
Cannot find `infinity-lamp` WiFi	It has already joined your home network. Try http://infinity-lamp.local
`infinity-lamp.local` does not load	Find the lamp's IP address in your router's device list and use that
Some effects are missing	Your lamp was built without that sensor. See the User Guide

Made by Ryan in Scotland

Questions, spares or repairs: **[SUPPORT EMAIL]**

Guides and updates: **infinity-lamps.github.io/tessera**