

# RoHS

# Specification

# 规格书

Customer Name :_	
客户名称:	
Customer P/N :_	
客户品号:	
Factory P/N:	HL-PST-1608S9AC
公司品号:	
Sending Date :	
送样日期:	

Client approval		Hongli approval			
客户审核		鸿利智汇审核			
Approval			Audit	Confirmation	
核准			_ 确认	制作	
		杨子、	fraids	揭秒业	
□ Qualified 接受	☐ Disqualified 不接受	DATE: 日期:		LEUNTY	

Adr: No.1, Xianke Yi Road, Huadong Town, Huadu District, Guangzhou, China

地址:中国广州市花都区花东镇先科一路1号

Tel/电话: 020-86733333 Fax/传真: 020-86733883 86733938 86733265

Web/网址: www.honglitronic.com

注:1. 此规格书以中英文方式书写, 若有冲突以中文版本为准文本.

2. 此规格书的最终解释权归鸿利智汇集团股份有限公司

3. 此规格书的有效期限为两年, 自盖章或签字之日起计算, 期满时双方可以续签协议, 但应采用书面形式

SPEC NO: B-15-A-0397 REV NO: A/2 DATE: AUG/11/2017 PAGE: 1 OF 8



### Features(特征)

- Extremely wide viewing angle. (宽的发光角度)
- Suitable for all SMT assembly and solder process. (适用于所有的SMT组装和焊接工艺)
- Available on tape and reel. (适用于载带及卷轴)
- Moisture sensitivity level: Level 4. (防潮等级 Level 4)
- Package:4000pcs/reel..(包装每卷4000PCS)
- RoHS compliant. (RoHS 认证)

### Description(描述)

The Red source color devices are made with AlGalnP on Substrate Light **Emitting Diode** 

红光LED由AlGaInP四种元素芯片激发而成



## ATTENTION


OBSERVE PRECAUTIONS FOR HANDLING ELECTROSTATIC DISCHARGE SENSITIVE

操作时应注意静电敏感 释放设备装置

### **Applications**(应用)


- Optical indicator (光学指示)
- Backlight for LCD, switch and Symbol, display (LCD背光、转换器,开关和标志,显示器等)
- General use (一般应用)

### Package Dimensions (封装尺寸)

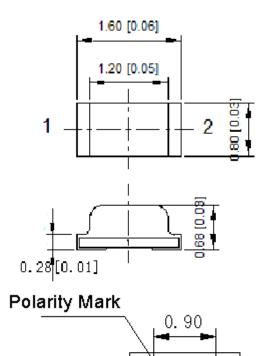

### **Recommended Soldering Pattern**

(建议焊盘尺寸图)



Notes: (备注)

- 1. Mark the size of the unit is mm.marked in brackets (标注尺寸单位为毫米,括号内标注为英寸)
- 2. All dimensions allow tolerance ± 0.1mm (所有尺寸允许公差±0.1mm )

SPEC NO: B-15-A-0397 REV NO: A/2 DATE: AUG/11/2017 PAGE: 2 OF 8

Under Development	
Mass production	•

### Selection Guide (选择指南)

Part No. 型号	Dice	Dice Lens Type 胶体类型	**		, ,	Viewing Angle 角度
			Min	Тур	201/2	
HL-PST-1608S9AC	Red(AlGaInP)	Water Clear	90	120	130°	

#### Note:(备注)

- 1. The 2θ1/2 measurement error ±10 degrees(角度测试误差为±10°)
- 2. the above luminous intensity measurement allowance tolerance ±10%. 上述发光强度的测试允许公差为±10%

### Electrical / Optical Characteristics at Ta=25°C 电性与光学特性

Parameter (参数)	Symbol (符号)	Min. (最小)	Typ. (平均)	Max. (最大)	Units (单位)	Test Conditions 测试条件
Forward Voltage 正向电压	VF	1.8		2.4	V	Ir=20mA
Reverse Current 反向电流	lR			10	μΑ	V <sub>R</sub> = 5V
Dominate Wavelength 主波长	λd	626		636	nm	IF=20mA

### Absolute Maximum Ratings at Ta=25°C 绝对最大额定值

Parameter (参数)	Symbol (符号)	Rating(值)	Units(单位)
Power Dissipation(功耗)	Pd	48	mW
Forward Current(正向电流)	lF	20	mA
Peak Forward Current [1](峰值正向电流)	<b>I</b> FP	140	mA
Reverse Voltage(反向电压)	VR	5	V
Electrostatic Discharge (HBM)(静电)	ESD	2000	V
Operating Temperature (操作温度)	Topr	-40 ~ +85	$^{\circ}\!\mathbb{C}$
Storage Temperature(保存温度)	Tstg	-40 ~ +100	$^{\circ}\! \mathbb{C}$

Note: (备注)

- 1. 1/10 Duty cycle, 0.1ms pulse width. ( 脉宽0.1ms, 周期1/10 )
- 2. The above forward voltage measurement allowance tolerance is  $\pm 0.1V$ . (以上所示电压测量误差 $\pm 0.1V$ )


SPEC NO: B-15-A-0397 REV NO: A/2 DATE: AUG/11/2017 PAGE: 3 OF 8




### Typical optical characteristics curves 典型光学特性曲线

### Ambient Temperature vs. Forward Current


环境温度与正向电流特性曲线

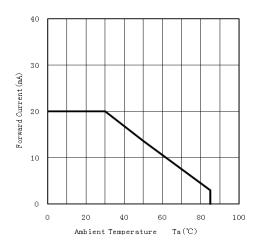

# Forward Voltage VS. Forward Current 正向电压与正向电流特性曲线




# Relative spectral emission 相对光谱分布特性曲线




### Forward Current VS. Relative Intensity


正向电流与相对光强特性曲线



Ambient Temperature VS. Relative Intensity 环境温度与相对光强特性曲线



Radiation diagram 辐射图特性曲线



SPEC NO: B-15-A-0397 REV NO: A/2 DATE: AUG/11/2017 PAGE: 4 OF 8

Under Development	
Mass production	

### Reliability Test Items And Conditions 信赖性测试项目及条件

Test Items 项目	Ref.Standard 参考标准	Test Condition 测试条件	Time 时间	Quantity 数量	Ac/Re 接收/拒收
Reflow 回流焊	JESD22-B106 Temp:260°Cma T=10 sec		3 times.	22Pcs.	0/1
Temperature Cycle 温度循环	JESD22-A104	100℃±5℃ 30 min. ↑↓5 min -40℃±5℃ 30 min.	100 Cycles	22Pcs.	0/1
High Temperature Storage 高温保存	JESD22-A103	Temp:100℃±5℃	1000Hrs.	22Pcs.	0/1
Low Temperature Storage 低温保存	JESD22-A119	Temp:-40°C±5°C	1000Hrs.	22Pcs.	0/1
Life Test 常温通电	JESD22-A108	Ta=25℃±5℃ IF=20mA	1000Hrs.	22Pcs.	0/1
High Temperature High Humidity 高温高温保存	JESD22-A101	85℃±5℃/ 85%RH	1000Hrs.	22Pcs.	0/1

### Criteria For Judging Damage 失效判定标准

Test Items	Symbol	Test Condition	Criteria For Judgement 判定标准		
项目	符号	测试条件	Min. 最小	Max. 最大	
Forward Voltage 正向电压	VF	IF=20mA		U.S.L*)x1.1	
Reverse Current 反向电流	IR	VR = 5V		U.S.L*)x2.0	
Luminous Flux 光通量	lm	IF=20mA	L.S.L*)x0.7		

U.S.L: Upper standard level 规格上限 L.S.L: Lower standard level 规格下限

SPEC NO: B-15-A-0397 REV NO: A/2 DATE: AUG/11/2017 PAGE: 5 OF 8

<sup>\*</sup>The technical information shown in the data sheets are limited to the typical characteristics and circuit examples of the referenced products. It does not constitute the warranting of industrial property nor the granting of any license.


数据工作表中所示的技术信息仅限于典型特征和电路实例引用的产品. 它既不构成工业特性的保证, 也不构成任何许 可的授权



### SMT Reflow Soldering Instructions SMT回流焊说明

- 1.Reflow soldering should not be done more than two times. 回流焊不可以做两次以上
- 2. When soldering, do not put stress on the LEDs during heating

当焊接时,不要在材料受热时用力压胶体表面



Time


### Soldering iron 烙铁焊接

- 1.When hand soldering, keep the temperature of iron below less 300℃ less than 3 seconds 当手工焊接时,烙铁的温度必须小于300℃,时间不可超过3秒
- 2.The hand solder should be done only one times 手工焊接只可焊接一次

### Repairing 修补

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed in advance whether the characteristics of LEDs will or will not be damaged by repairing.

LED回流焊后不应该修复,当修复是不可避免时,必须使用双头烙铁(如下图),但必须事先确认此种方式会或不会损坏LED本身的特性。




#### Cautions 注意事项

The encapsulated material of the LEDs is silicone. Therefore the LEDs have a soft surface on the top of package. The pressure to the top surface will be influence to the reliability of the LEDs. Precautions should be taken to avoid the strong pressure on the encapsulated part. So when use the picking up nozzle, the pressure on the silicone resin should be proper.


LED封装为硅胶,故LED胶体表面较软,用力按压胶体表面会影响LED可靠性,因此应有预防措施避免在封装的零件上的强大压力,当使用吸嘴时,胶体表面的压力应是恰当的。

3.Do not stack together assembled PCBs containing LEDs. Impact may scratch the silicone lens or damage the internal circuitry

不可将模组材料堆积在一起,它可能会损坏内部电路



不可用在PH<7的酸性场所





SPEC NO: B-15-A-0397 REV NO: A/2 DATE: AUG/11/2017 PAGE: 6 OF 8



#### Label 标签

PartNo: Part number 型号


IV: Luminous intensity rank 亮度等级

WD: Dominate Wavelength 波长等级


VF: Forward voltage rank 电压等级




Tape Specifications (Units:mm) 载带规格(单位: mm)

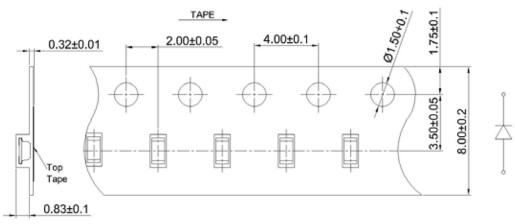


### Reel Dimensions 卷轴尺寸





### Moisture Resistant Packaging 防潮带包装

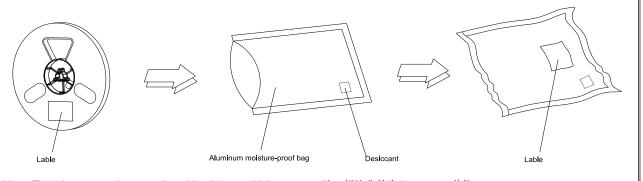

Note: The tolerances unless mentioned is ±0.1mm ,Unit: mm 注:标注公差为±0.1mm ,单位: mm

SPEC NO: B-15-A-0397 REV NO: A/2 DATE: AUG/11/2017 PAGE: 7 OF 8