


Практическая работа 29 – IP-телефония на примере разных устройств пользователя

1. Строю сеть

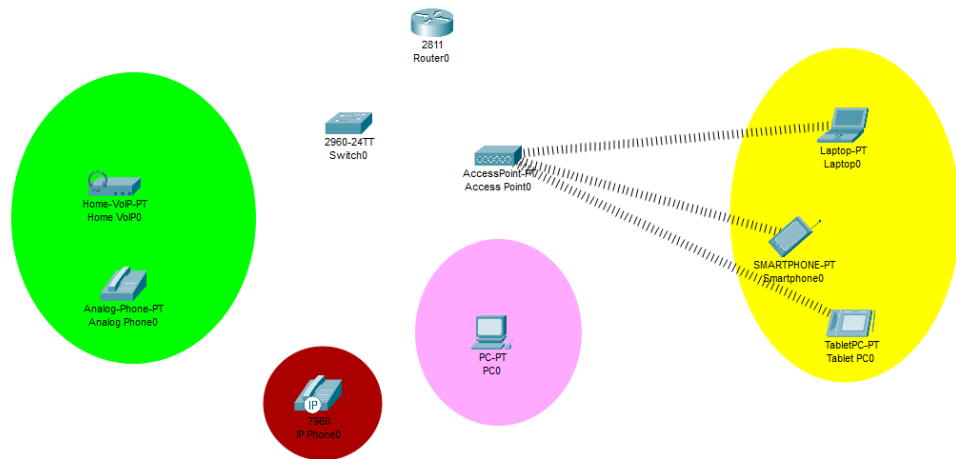

2. Настройка Home VoIP

Display Name	Home VoIP0
Server Address	10.3.0.1

3. Настройка роутера

```
Router(config)#interface fa0/0
Router(config-if)#ip address 10.3.0.1 255.255.255.0
Router(config-if)#no shutdown
```

4. DHCP для телефонии

```
Router(config)#ip dhcp excluded-address 10.3.0.1
Router(config)#ip dhcp pool Telephony
Router(dhcp-config)#network 10.3.0.0 255.255.255.0
Router(dhcp-config)#default-router 10.3.0.1
Router(dhcp-config)#option 150 ip 10.3.0.1
```

5. Конфигурация телефонии

```
Router(config)#telephony-service
Router(config-telephony)#max-ephones 10
Router(config-telephony)#
Router(config-telephony)#max-dn 10
Router(config-telephony)#ip source-address 10.3.0.1 port 2000
Router(config-telephony)#auto assign 1 to 10
```

6. Создание номеров

```
Router(config-telephony)#ephone-dn 1
Router(config-ephone-dn)%%LINK-3-UPDOWN: Interface ephone_dsp DN 1.1, ch
number 101
Router(config-ephone-dn)#ephone-dn 2
Router(config-ephone-dn)%%LINK-3-UPDOWN: Interface ephone_dsp DN 2.1, ch
number 10
%IPPHONE-6-REGISTER: ephone-1 IP:10.3.0.5 Socket:2 DeviceType:Phone has
Router(config-ephone-dn)#number 102
Router(config-ephone-dn)#ephone-dn 3
Router(config-ephone-dn)%%LINK-3-UPDOWN: Interface ephone_dsp DN 3.1, ch

Router(config-ephone-dn)#number 103
Router(config-ephone-dn)#ephone-dn 4
Router(config-ephone-dn)%%LINK-3-UPDOWN: Interface ephone_dsp DN 4.1, ch

Router(config-ephone-dn)#number 104
Router(config-ephone-dn)#ephone-dn 5
Router(config-ephone-dn)%%LINK-3-UPDOWN: Interface ephone_dsp DN 5.1, ch

Router(config-ephone-dn)#number 105
Router(config-ephone-dn)#ephone-dn 6
Router(config-ephone-dn)%%LINK-3-UPDOWN: Interface ephone_dsp DN 6.1, ch

Router(config-ephone-dn)#number 106
```

7. Регистрация первого телефона

```
Router(config)#ephone 1
Router(config-ephone)#mac-address 0009.7C34.3C01
ephone slot is already registered with 0060.706E.BD01
Cannot change MAC address.
Router(config-ephone)#mac-address 0060.706E.BD01
ephone slot is already registered with 0060.706E.BD01
Cannot change MAC address.
Router(config-ephone)#type ata
Router(config-ephone)#button 1:1
Dn already assigned.
Router(config-ephone)#exit
```

8. Регистрация IP-телефона 7960

```
Router(config)#ephone 2
Router(config-ephone)#mac-address 000C.CF09.D862
Router(config-ephone)#type 7960
Router(config-ephone)#button 1:2
Router(config-ephone)#exit
```

9. Регистрация программных телефонов (CIPC)

```
Router(config)#ephone 3
Router(config-ephone)#mac-address 0006.2A28.7710
Router(config-ephone)#type CIPC
Router(config-ephone)#button 1:3
```

10. Результат

