


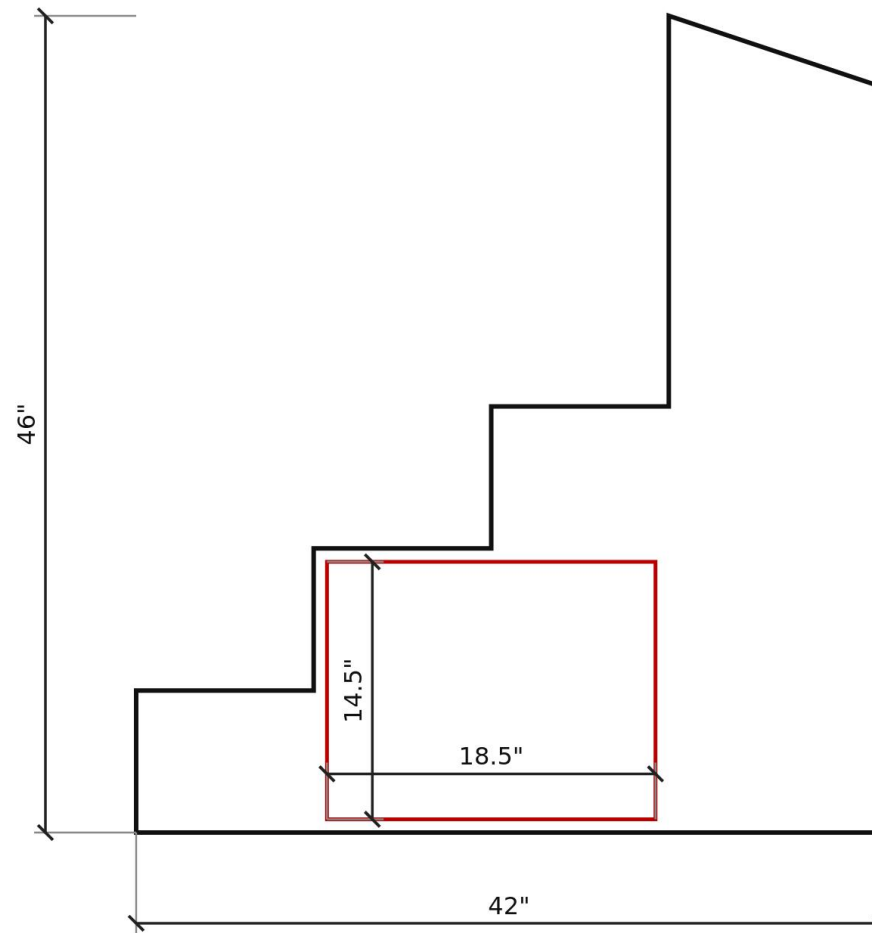

ReadingLadder — component shop drawing

Scale 1:11 inches

A Side panel (profile)

Material: 3/4" ply Qty: 2

Cut to side profile. Coords (in): (0,0)(0,8)(10,8)(10,16)
(20,16)(20,24)(30,24)(30,46)(42,46)(42,0).

LEFT panel: 18.5x14.5 shelf opening (red), 10.75 from
back, 0.75 up. RIGHT panel = mirror, NO opening.




ReadingLadder — component shop drawing

Scale 1:2 inches

B Step tread

Material: 3/4" ply Qty: 3

Horizontal. Treads at z = 8, 16, 24 (top = platform).

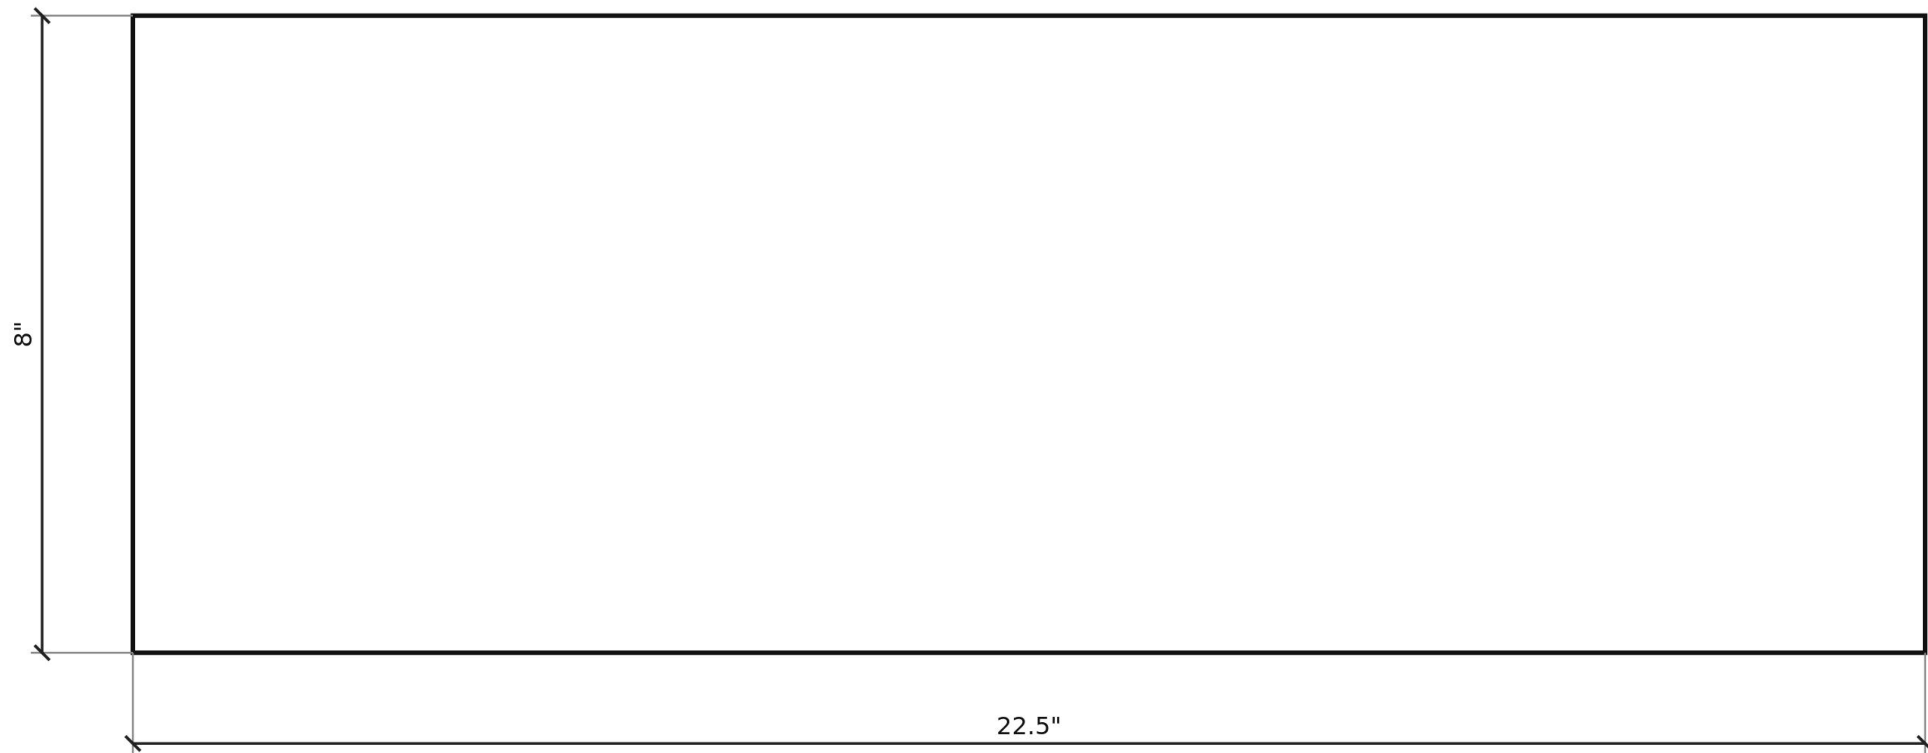


ReadingLadder — component shop drawing

Scale 1:2 inches

C Riser

Material: 3/4" ply Qty: 3
Vertical. Risers at x = 0, 10, 20.

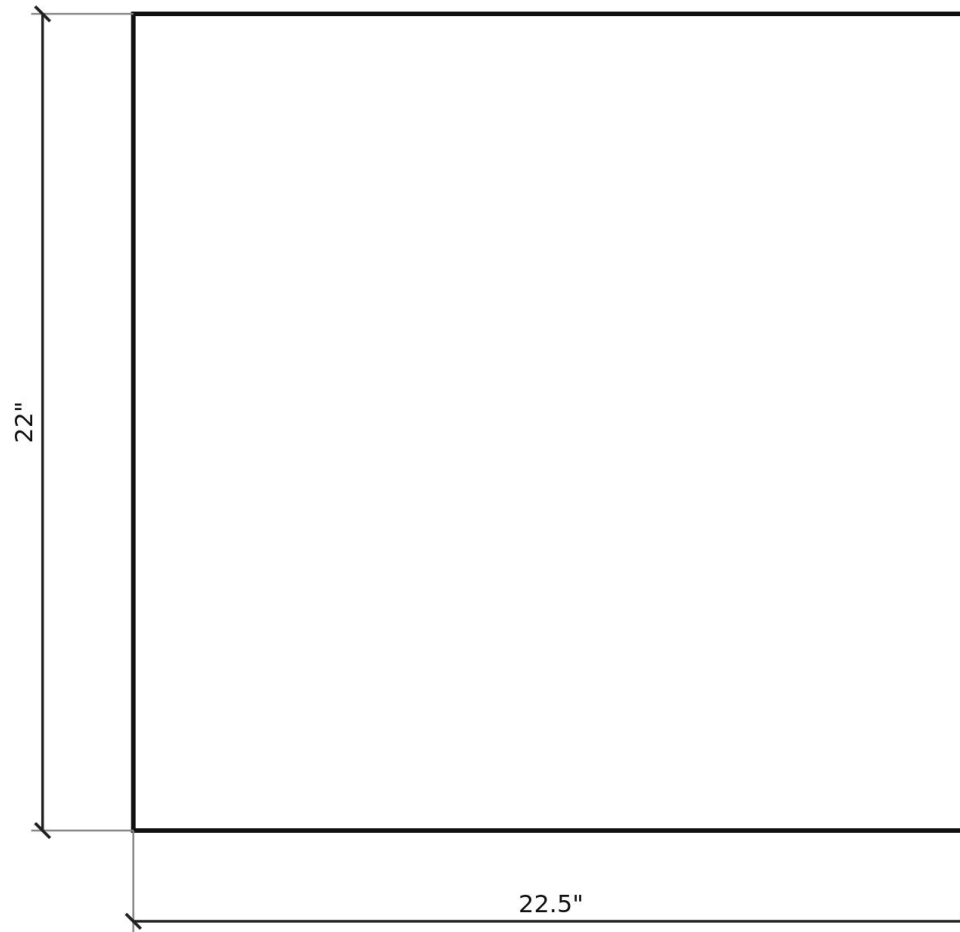


ReadingLadder — component shop drawing

Scale 1:5 inches

D Lectern back wall

Material: 3/4" ply Qty: 1
Vertical at x=30, z 24-46. Butt to sides + platform.

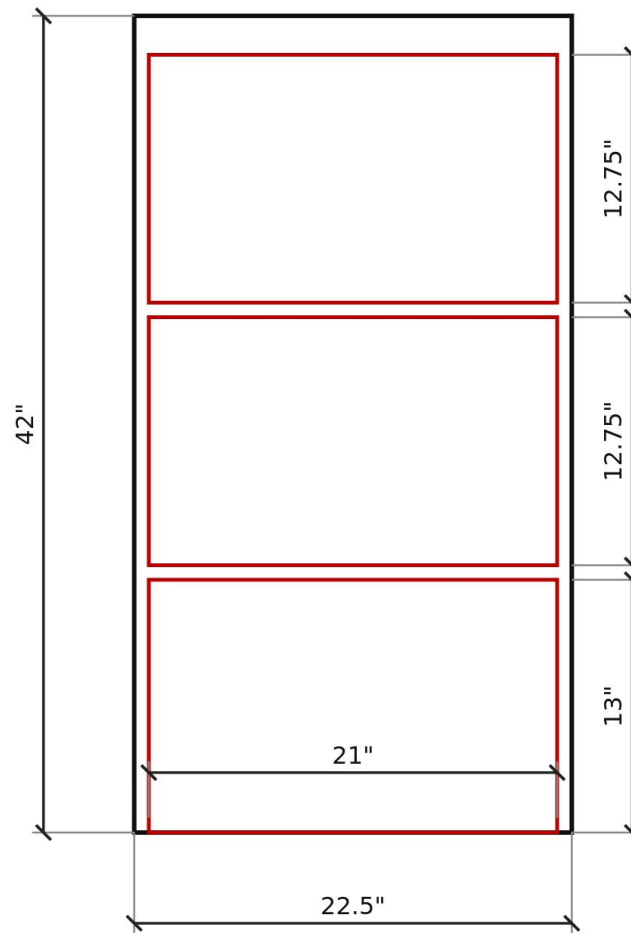

ReadingLadder — component shop drawing

Scale 1:10 inches

E Lectern front

Material: 3/4" ply Qty: 1

Three cubby openings (red), 21 wide (3/4 frame each side).

Bands z: 0-13, 13.75-26.5, 27.25-40.



ReadingLadder — component shop drawing

Scale 1:3 inches

F Reading surface

Material: 3/4" ply Qty: 1
Sloped top ~18.4 deg. Bevel both long (22.5) edges to
seat on lectern-back top and meet the front lip.




ReadingLadder — component shop drawing

Scale 1:2 inches

G Cubby shelf

Material: 3/4" ply Qty: 2
Horizontal dividers in cubby, at z = 13 and 26.5.

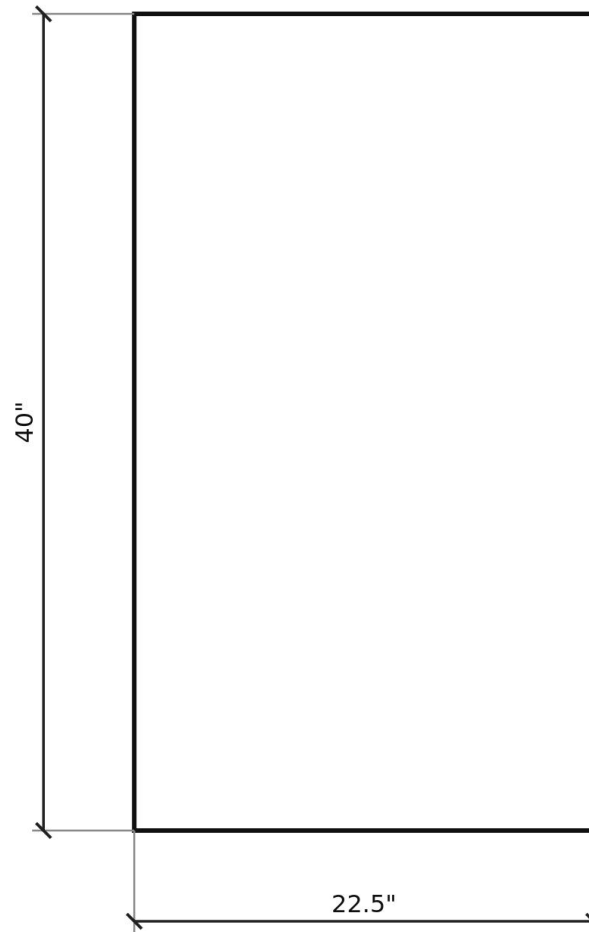


ReadingLadder — component shop drawing

Scale 1:9 inches

H Cubby back (optional)

Material: 3/4" ply Qty: 1
Vertical at x=31.5; boxes cubby off from carcass.

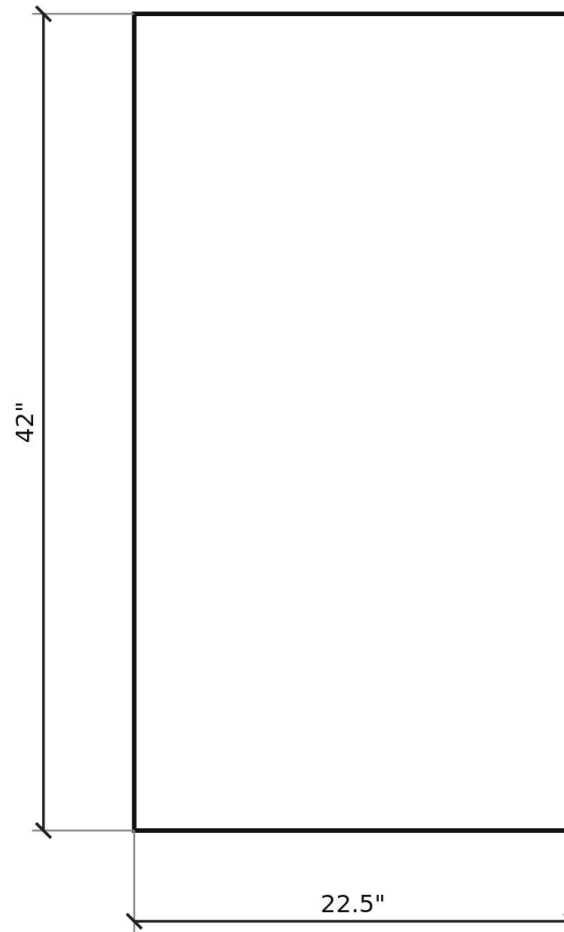


ReadingLadder — component shop drawing

Scale 1:10 inches

J Bottom panel (optional)

Material: 3/4" ply Qty: 1
Closes the underside.

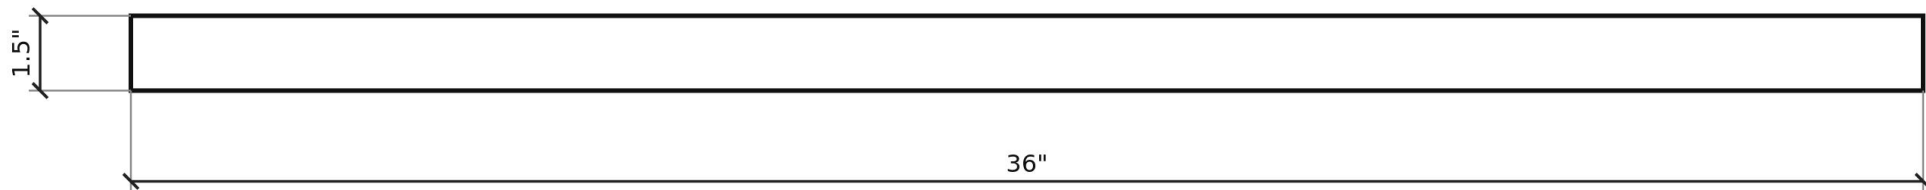


ReadingLadder — component shop drawing

Scale 1:4 inches

K Grab post

Material: lumber 2x2 Qty: 1
1.5 x 1.5 (2x2) x 36 long. Platform left-front, z 24-60.

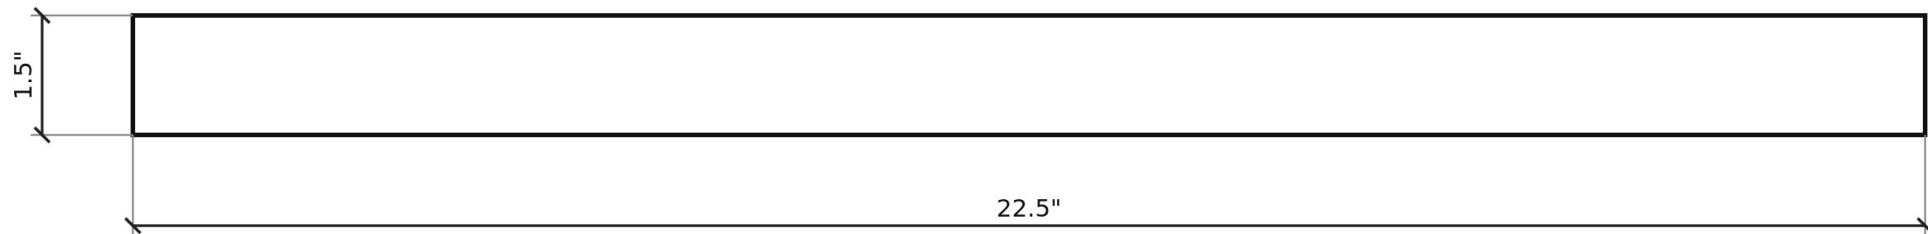

ReadingLadder — component shop drawing

Scale 1:2 inches

L Front lip

Material: lumber Qty: 1
3/4 x 1.5 x 22.5. Book stop on reading surface.