J12 D38999/26FG35SA

| FROM | PIN | SIGNAL | TO | PIN |
|---|---|---|---|---|
| J12 | 1 | VBUS | J21 | 3 |
| J12 | 2 | RETURN | J21 | 4 |
| J12 | 3 | TXD_P | J21 | 5 |
| J12 | 4 | TXD_N | J21 | 6 |



CONNECTOR P2 PINOUT

| PIN | SIGNAL | WIRE | COLOR | DESTINATION |
|---|---|---|---|---|
| A | +28V | W101 | RED | TB1-4 |
| B | 28V_RTN | W102 | BLK | TB1-5 |
| C | CHASSIS | W103 | GRN | TB1-6 |

J12 FACE VIEW

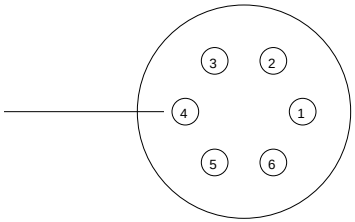

## BILL OF MATERIALS

| ITEM | QTY | PART NUMBER | DESCRIPTION | REF DES |
|---|---|---|---|---|
| 1 | 1 | D38999/26FG35SA | CONNECTOR PLUG | J12 |
| 2 | 79 | M39029/56-348 | CONTACT SOCKET 22D | J12 |
| 3 | A/R | M23053/5-104-0 | HEAT SHRINK SLEEVE | |