

Introduction

The EFP fan assembly is a fully integrated fan assembly which has been aerodynamically designed by our Engineering team in UK to deliver high efficiency flow rates at static operating point 50 Pascal (0.2 In-H2O) and below


At the heart of the EFP fan assembly is the ECY Series motor which allows the customer to define a single speed version, two speed version (high & trickle speeds) or a bi-directional version where the reverse speed can be time defined or on demand




Outline Specification

Model	Motor	Voltage	Frequency (Hz)	Current Max (A)	RPM	Air Flow MAX (CFM)	m³/h	Air Pressure MAX (inAq)	Pa	Input Power 0 inAq(W)	Noise (dB)
EFP-172-120-1330-XXX	ECY	120VAC	50/60Hz	0.45	1330	163	277	0.27	66	7.7	58
EFP-172-120-1550-XXX	ECY	120VAC	50/60Hz	0.45	1550	192	327	0.36	90	11.8	62
EFP-172-120-1800-XXX	ECY	120VAC	50/60Hz	0.45	1800	224	381	0.48	120	17.8	62
EFP-172-120-2100-XXX	ECY	120VAC	50/60Hz	0.45	2100	264	449	0.65	161	27.1	62
EFP-172-120-2500-XXX	ECY	120VAC	50/60Hz	0.45	2500	312	530	0.70	174	31.0	62
EFP-172-230-1330-XXX	ECY	230VAC	50/60Hz	0.25	1330	163	277	0.27	66	7.7	58
EFP-172-230-1550-XXX	ECY	230VAC	50/60Hz	0.25	1550	192	327	0.36	90	11.8	62
EFP-172-230-1800-XXX	ECY	230VAC	50/60Hz	0.25	1800	224	381	0.48	120	17.8	62
EFP-172-230-2100-XXX	ECY	230VAC	50/60Hz	0.25	2100	264	449	0.65	161	27.1	62
EFP-172-230-2500-XXX	ECY	230VAC	50/60Hz	0.25	2500	312	530	0.70	174	31.0	62

Fan Curves

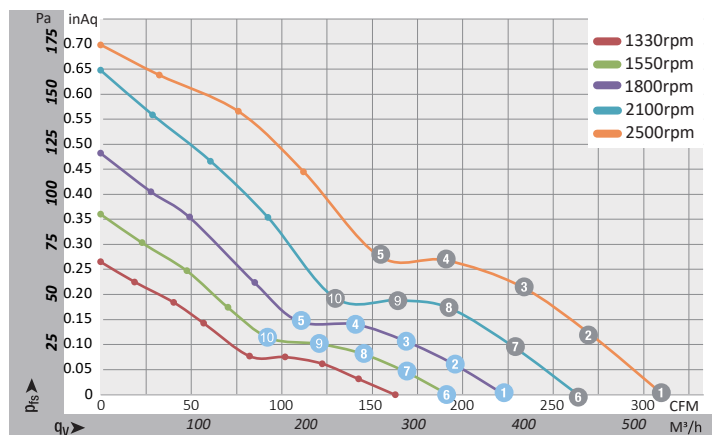

Power Curves

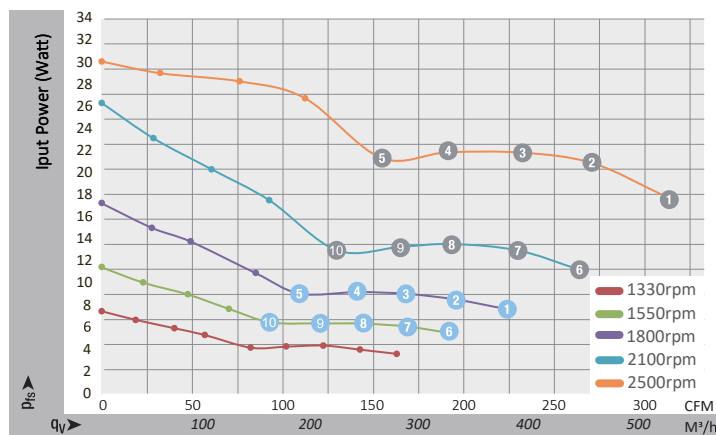


Fan Performance


n rpm	P _e W	Q _v M³/h	Q _v CFM	n rpm	P _e W	Q _v M³/h	Q _v CFM	n rpm	P _e W	Q _v M³/h	Q _v CFM	n rpm	P _e W	Q _v M³/h	Q _v CFM
1 2500	18.4	530	312	6 2100	11.6	449	264	1 1800	7.9	381	224	6 1550	5.7	327	192
2 2500	21.5	461	272	7 2100	13.4	391	230	2 1800	8.8	333	196	7 1550	6.3	286	168
3 2500	22.5	396	233	8 2100	14.0	329	193	3 1800	9.3	287	169	8 1550	6.6	246	144
4 2500	22.5	325	191	9 2100	13.7	281	165	4 1800	9.5	240	141	9 1550	6.3	206	121
5 2500	22.0	262	154	10 2100	13.4	221	130	5 1800	9.4	186	110	10 1550	5.7	159	93

Motor Control

ECY-01 Wiring Schematic

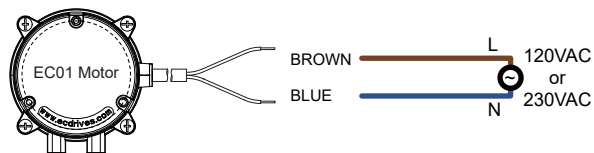

ECY-02 Wiring Schematic

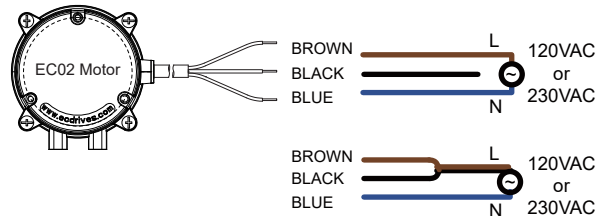

Connection	Colour	Assignment / Function
Phase	Brown	VAC ~ Connect to Phase (L)
Neutral	Blue	VAC ~ Connect to Neutral (N)
Speed	Black	Speed Control ~ Second Speed or Reverse Function Speed 1 ~ Black Disconnected (disabled) Speed 2 ~ Black Connected to Brown (enabled)

Outline Dimensions (mm)

