

CLEARWATER cIMS

Jitsi 通話測試

01 進入 ellis dashboard 註冊使用者

Signup code 為 "secret"

Sign up

Please enter your details

Your name:

This will be your name in the address book

Email:

This will be the email address you log in with

Password:

At least 8 characters, common passwords like "password", "1234" and "qwerty" are not allowed.

Confirm Password:

Confirm the password you entered above.

☒ Demo account?


Demo accounts automatically expire after one week.

Signup code:

You should have been sent a signup-code when

02 使用 Jitsi 登入

工具→選項→新增→網路→SIP

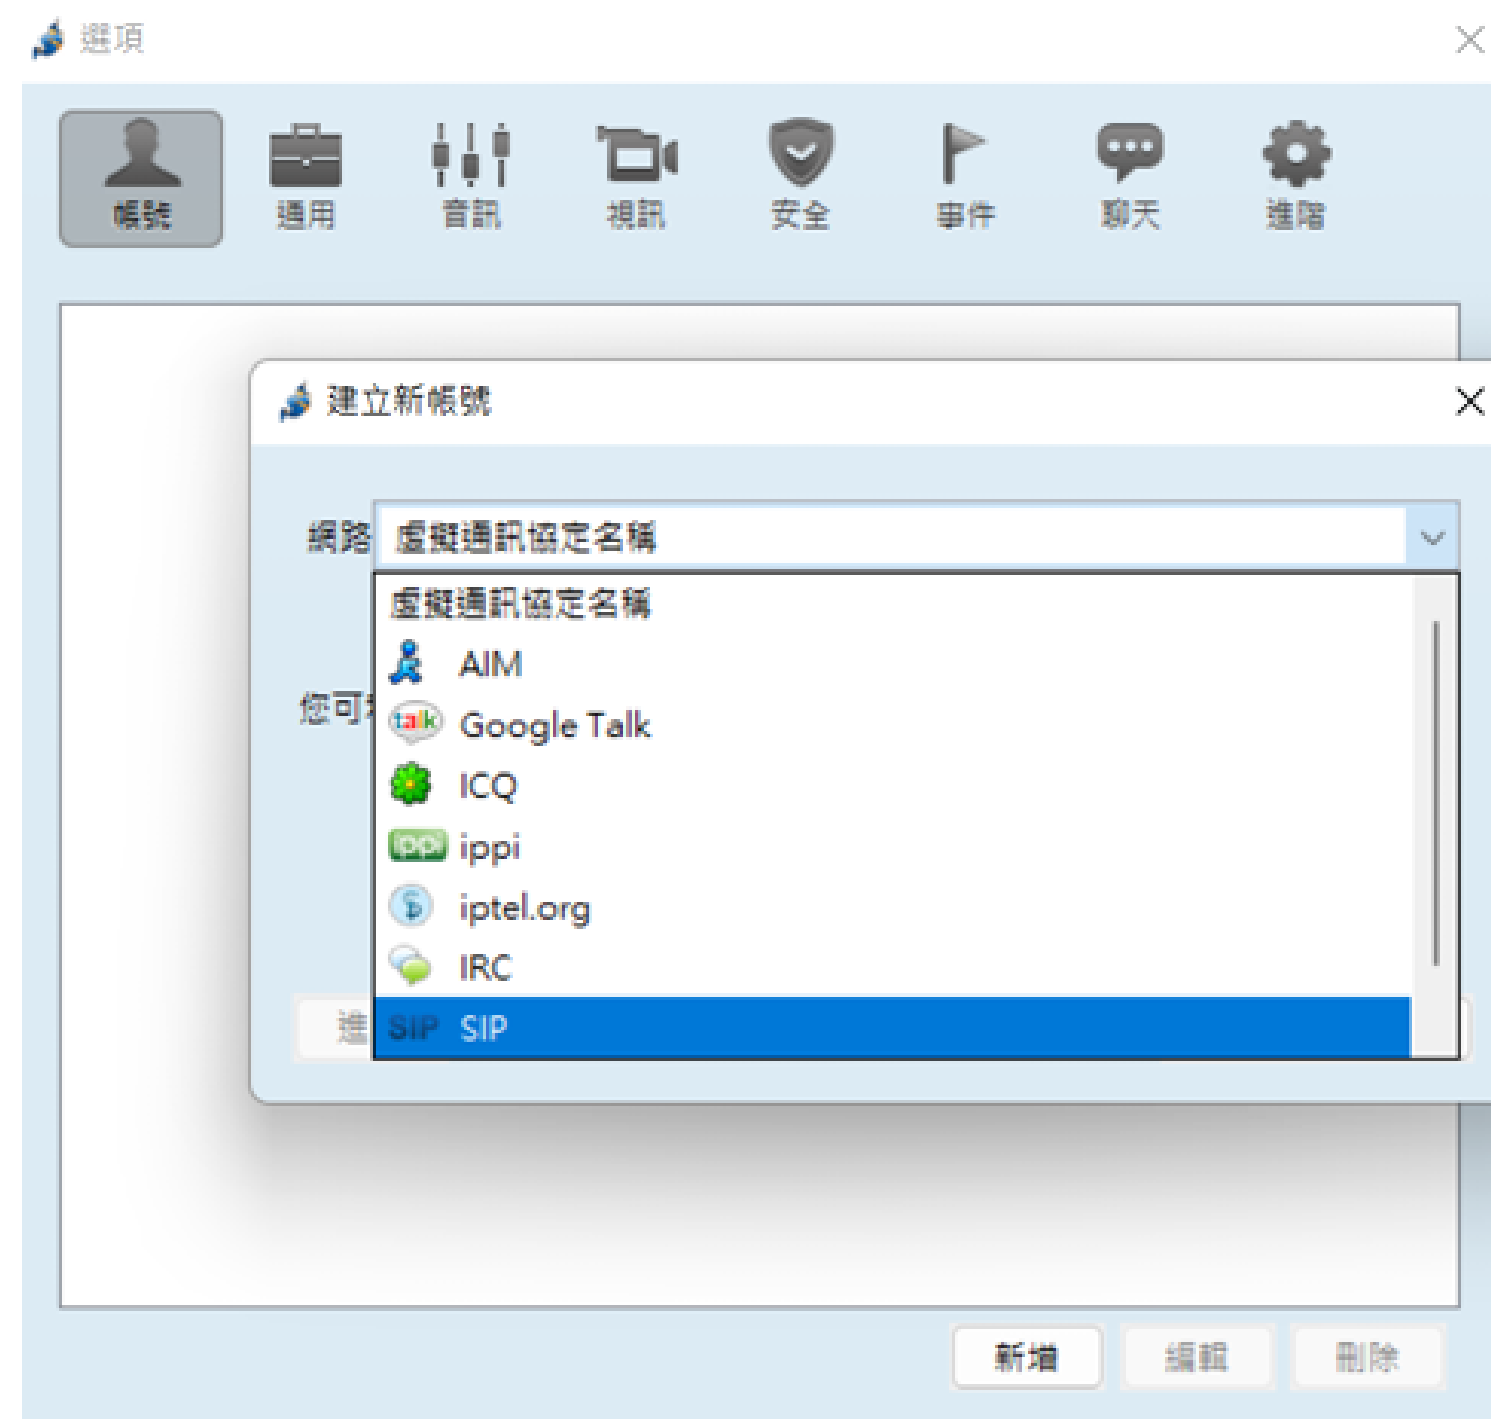

03 進階→連線

將代理伺服器 IP 設定為可連接 Bono 之 IP 與 port

傳輸方式設定為 TCP

註冊	clearwater.opnfv	通訊埠	5060
授權名稱			
客戶 TLS 憑證	<none>(使用一般身份驗證)		
代理選項			
☐ 在 HA 的情況下跳過代理安全檢查 (請僅在需要時使用)			
☐ 自動設定代理伺服器			
代理伺服器		通訊埠	5060
首選傳輸方式	TCP		
保持連線			
保持連線方式	OPTIONS		
保持連接自動觸發間隔時間	25		
	1 到 3600 秒		
語音信箱			
☒ 留言等待 (MWI)			
語音信箱訂閱網址 (URI)			
語音信箱查閱網址 (URI)			

04

ellis 內有提供帳號密碼

Reset Password

Private Identity:
6505550301@clearwater.opnfv
Password: **Not available**
only shown once

Reset

Associated Public Identities:
sip:6505550301@clearwater.opnfv

Configure

Delete

New Public Identity

▼

Private Identity:
6505550563@clearwater.opnfv
Password: **Not available**
only shown once

Reset

Associated Public Identities:
sip:6505550563@clearwater.opnfv

Configure

Delete

New Public Identity

▼

Add Private Identity
Create new Private Identity
details

Create

▼

05 使用者登入

	帳號	連線	安全	上線狀況	編碼
帳號和密碼					
SIP ID	6505550301@clearwater.opnfv				
	Ex: john@voipphone.net or simply "john" for no server				
密碼	●●●●●●●●				
顯示名稱					
☒ 記住密碼					

06 另一台裝置使用另一組帳號登入

進行撥號

