


Surface Mount Wideband RF Transformers

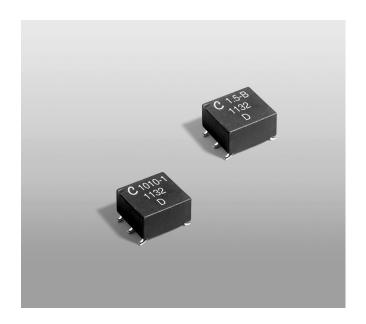

- · Cost effective surface mount wideband transformers
- 300 V interwinding isolation, 1/4 Watt RF input power
- · 250 mA max current rating.

Core material Ferrite

Terminations RoHS compliant tin-silver-copper over tin over nickel over phos bronze. Other terminations available at additional cost.

Weight 250 – 270 mg

Ambient temperature -40°C to +85°C

Storage temperature Component: -40°C to +85°C.

Tape and reel packaging: -40°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles


Moisture Sensitivity Level (MSL) 1 (unlimited floor life at $<30^{\circ}$ C / 85% relative humidity)

Packaging 250/7"reel; 1000/13" reel Plastic tape: 16 mm wide, 0.35 mm thick, 12 mm pocket spacing, 5.0 mm pocket depth

PCB washing Tested to MIL-STD-202 Method 215 plus an additional aqueous wash. See Doc787_PCBt_Washing.pdf.

Typical Frequency Response

, -	_ ,	-			
Part	3 dB	2 dB	1 dB		
number	(MHz)	(MHz)	(MHz)		
PWB-1-AL_	0.08 - 450	0.13 - 325	0.30 - 190		
PWB-1.5-AL_	0.03 - 300	0.035 - 250	0.06 - 150		
PWB-2-AL_	0.05 - 200	0.06 - 160	0.10 - 100		
PWB-4-AL_	0.15 - 500	0.24 - 300	0.60 - 140		
PWB-16-AL_	0.05 - 80	0.06 – 75	0.11 – 30		
PWB1010L_	0.0035 - 125	0.0045 - 100	0.007 - 80		
PWB1010-1L_	0.03 - 250	0.04 - 225	0.06 - 200		
PWB1015L_	0.07 - 225	0.10 - 200	0.20 - 125		
PWB1040L_	0.15 - 400	0.25 - 350	0.80 - 250		
PWB-1-BL_	0.13 - 425	0.18 - 325	0.32 - 190		
PWB-1.5-BL_	0.50 - 250	0.80 - 175	1.50 - 120		
PWB-2-BL_	0.20 - 400	0.225 - 275	0.50 - 150		
PWB-4-BL_	0.14 - 700	0.20 - 400	0.40 - 150		
PWB-16-BL_	0.075 – 90	0.11 – 75	0.20 – 65		
PWB2010L_	0.0035 - 125	0.0045 - 100	0.007 - 80		
PWB2010-1L_	0.03 - 250	0.04 - 225	0.06 - 200		
PWB2040L_	0.15 - 400	0.25 - 350	0.80 - 250		
PWB-1-CL_	0.10 - 300	0.13 - 200	0.20 - 150		
PWB-1.5-CL_	0.15 - 200	0.225 - 150	0.35 - 100		
PWB-2-CL_	0.13 - 285	0.20 - 175	0.325 - 125		
PWB-4-CL_	0.14 - 500	0.20 - 230	0.40 - 110		
PWB3010L_	0.0035 - 125	0.0045 - 100	0.007 - 80		
PWB3010-1L_	0.03 - 250	0.04 - 225	0.06 - 200		
PWB3015L_	0.07 - 225	0.10 - 200	0.20 - 125		
PWB3040L_	0.15 - 400	0.25 - 350	0.80 - 250		

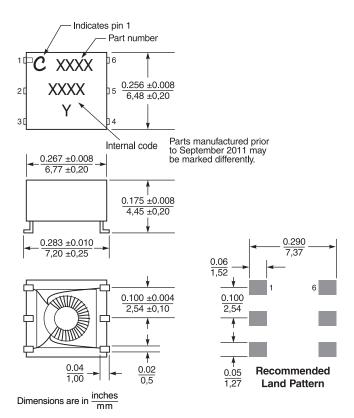



US +1-847-639-6400 sales@coilcraft.com
UK +44-1236-730595 sales@coilcraft-europe.com
Taiwan +886-2-2264 3646 sales@coilcraft.com.tw
China +86-21-6218 8074 sales@coilcraft.com.cn
Singapore + 65-6484 8412 sales@coilcraft.com.sg

Document 591-1 Revised 06/02/22

© Coilcraft Inc. 2023

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.



Surface Mount Wideband RF Transformers

Туре	Part number ¹	Impedance ratio ² pri:sec	Bandwidth (MHz)	Idc (mA)	Insertion loss max (dB)	Primary L min ³ (µH)	DCR max (Ohms)	Secondar L min ³ (µH)	ry (pins 6-4) DCR max (Ohms)
Pri Sec 10 (4000) 30 30 4	PWB-1-AL_	1:1	0.08 - 450	250	0.60	40	0.070	40	0.070
	PWB-1.5-AL_	1:1.5	0.03 - 300	250	0.35	110	0.080	160	0.110
	PWB-2-AL_	1:2	0.05 - 200	250	0.25	75	0.088	150	0.120
	PWB-4-AL_	1:4	0.15 - 500	250	0.50	25	0.075	98	0.135
	PWB-16-AL_	1:16	0.05 - 80	250	0.35	75	0.260	1250	0.910
	PWB1010L_	1:1	0.0035 - 125	250	0.20	780	0.320	780	0.320
	PWB1010-1L_	1:1	0.03 - 250	250	0.20	95	0.200	95	0.200
	PWB1015L_	1:1.5	0.07 - 225	250	0.40	51	0.130	80	0.145
	PWB1040L_	1:4	0.15 - 400	250	0.40	25	0.115	95	0.160
Pri Sec 1000000000000000000000000000000000000	PWB-1-BL_	1:1	0.13 - 425	250	0.40	22	0.070	22	0.070
	PWB-1.5-BL	1:1.5	0.50 - 250	250	0.40	140	0.100	200	0.120
	PWB-2-BL_	1:2	0.20 - 400	250	0.35	75	0.088	150	0.130
	PWB-4-BL_	1:4	0.14 - 700	250	0.50	25	0.075	98	0.135
	PWB-16-BL_	1:16	0.075 - 90	250	0.30	75	0.260	1250	0.910
	PWB2010L_	1:1	0.0035 - 125	250	0.20	780	0.320	780	0.320
	PWB2010-1L_	1:1	0.03 - 250	250	0.20	95	0.200	95	0.200
	PWB2040L_	1:4	0.15 - 400	250	0.40	25	0.115	95	0.160
Pri Sec 10 6 2 0 5 3 0 4 Type C	PWB-1-CL_	1:1	0.10 - 300	250	0.60	22	0.070	22	0.070
	PWB-1.5-CL_	1:1.5	0.15 - 200	250	0.30	140	0.110	200	0.120
	PWB-2-CL_	1:2	0.13 - 285	250	0.30	75	0.105	150	0.130
	PWB-4-CL_	1:4	0.14 - 500	250	0.50	25	0.075	98	0.135
	PWB3010L_	1:1	0.0035 - 125	250	0.20	780	0.320	780	0.320
	PWB3010-1L_	1:1	0.03 - 250	250	0.20	95	0.200	95	0.200
	PWB3015L_	1:1.5	0.07 - 225	250	0.40	51	0.130	80	0.145
	PWB3040L_	1:4	0.15 - 400	250	0.40	25	0.115	95	0.160

1. When ordering, please specify termination and packaging codes:

PWB-3010-1LD

Termination: L = RoHS compliant tin-silver-copper over tin over nickel over phos bronze.

Special order: **S** = non-RoHS tin-lead (63/37).

Packaging: C = 7" machine ready reel. EIA-481 embossed plastic tape, 250 parts per full reel. Quantities less than full reel available: in tape (not machine ready) or with leader and trailer (\$25 charge).

- D = 13" machine ready reel. EIA-481 embossed plastic tape. Factory order only, not stocked (1000 parts per full reel).
- **B** = Less than full reel. In an effort to simplify our part numbering system, Coilcraft is eliminating the need for multiple packaging codes. When ordering, simply change the last letter of your part number from B to C.
- 2. Impedance ratio is for the full primary winding to the full secondary winding.
- 3. Inductance tested at 130 kHz, 0.1 Vrms, 0 Adc.
- 4. Electrical specifications at 25°C. Measurements are referenced to 50 Ohms.

Refer to Doc 362 "Soldering Surface Mount Components" before soldering.




risk applications without prior Coilcraft approval.

Specification subject to change without notice.

Please check web site for latest information.



PWB Type A Transformers

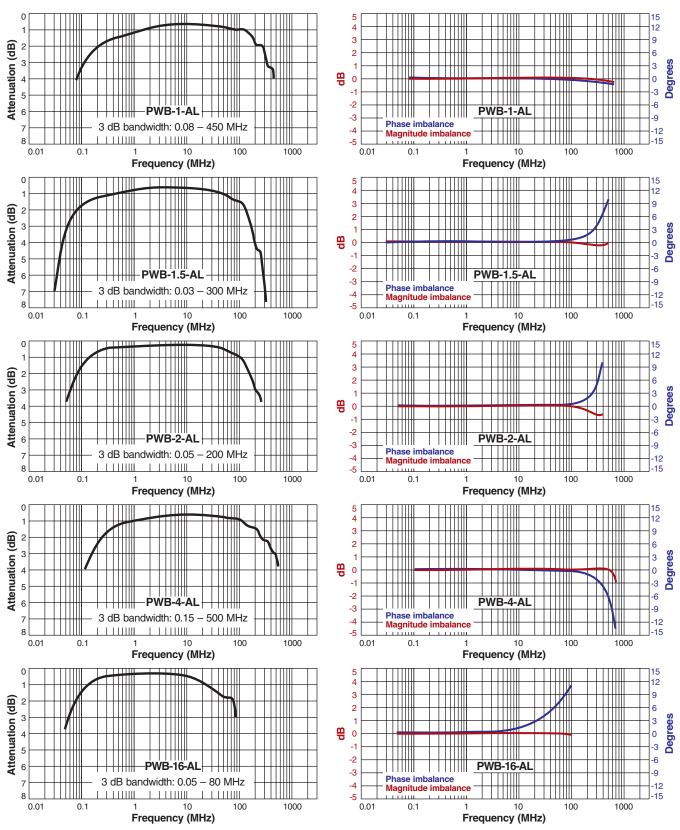

Measured on a network analyzer (re: 50 Ohms)




US +1-847-639-6400 sales@coilcraft.com
UK +44-1236-730595 sales@coilcraft-europe.com
Taiwan +886-2-2264 3646 sales@coilcraft.com.tw
China +86-21-6218 8074 sales@coilcraft.com.cn
Singapore + 65-6484 8412 sales@coilcraft.com.sg

Document 591-3 Revised 06/02/22

© Coilcraft Inc. 2023
This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.



PWB Type A Transformers

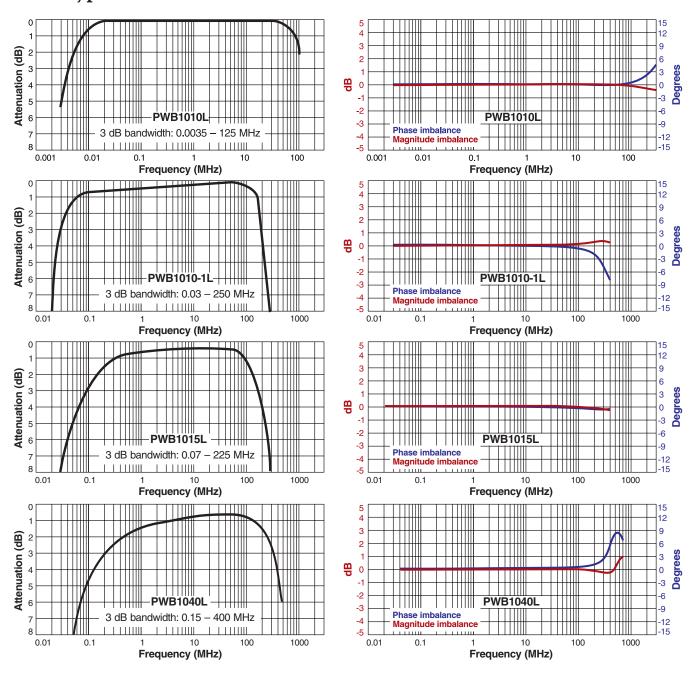


Measured on a network analyzer (re: 50 Ohms)





PWB Type B Transformers

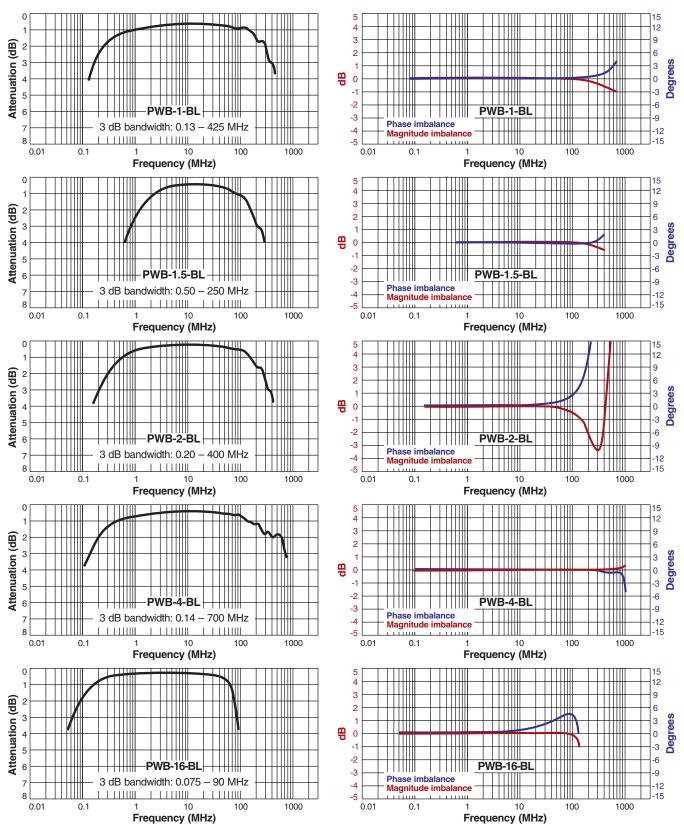

Measured on a network analyzer (re: 50 Ohms)




US +1-847-639-6400 sales@coilcraft.com
UK +44-1236-730595 sales@coilcraft-europe.com
Taiwan +886-2-2264 3646 sales@coilcraft.com.tw
China +86-21-6218 8074 sales@coilcraft.com.cn
Singapore + 65-6484 8412 sales@coilcraft.com.sg

Document 591-5 Revised 06/02/22

© Coilcraft Inc. 2023
This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.



PWB Type B Transformers

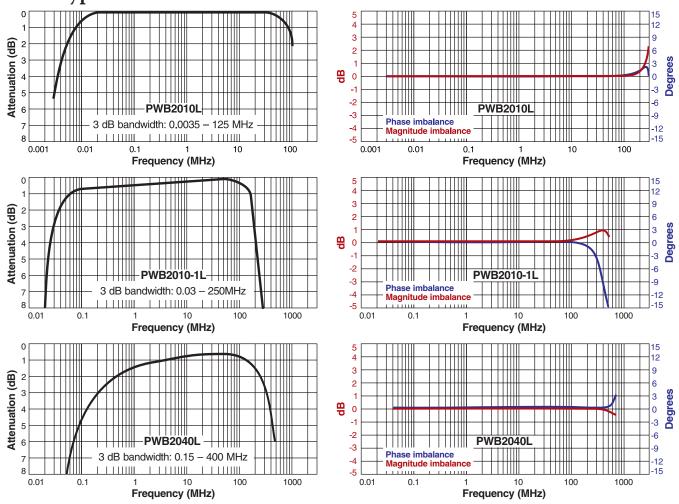




China +86-21-6218 8074 sales@coilcraft.com.cn

Singapore + 65-6484 8412 sales@coilcraft.com.sg



PWB Type C Transformers

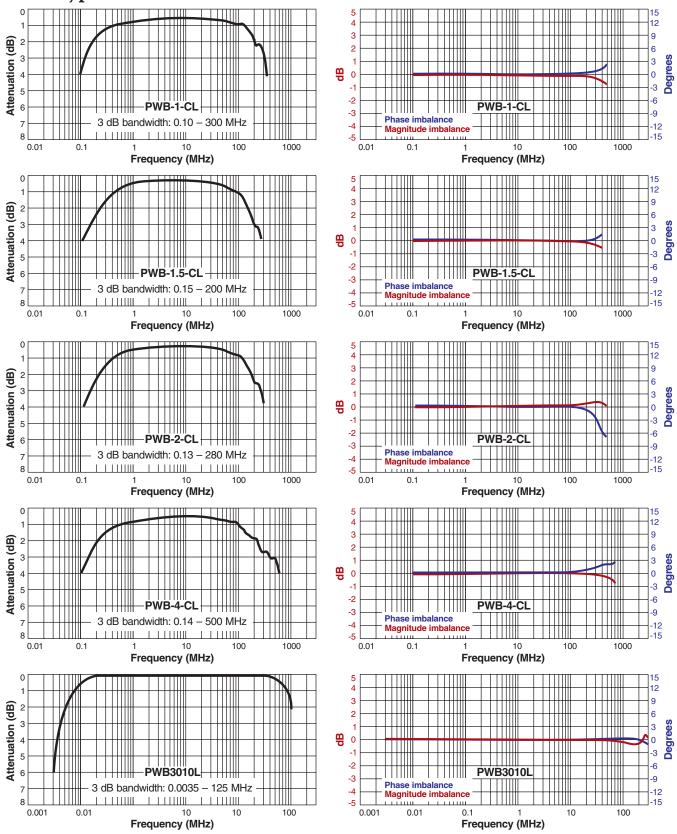

Measured on a network analyzer (re: 50 Ohms)




US +1-847-639-6400 sales@coilcraft.com
UK +44-1236-730595 sales@coilcraft-europe.com
Taiwan +886-2-2264 3646 sales@coilcraft.com.tw
China +86-21-6218 8074 sales@coilcraft.com.cn
Singapore + 65-6484 8412 sales@coilcraft.com.sg

Document 591-7 Revised 06/02/22

© Coilcraft Inc. 2023
This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.



PWB Type C Transformers

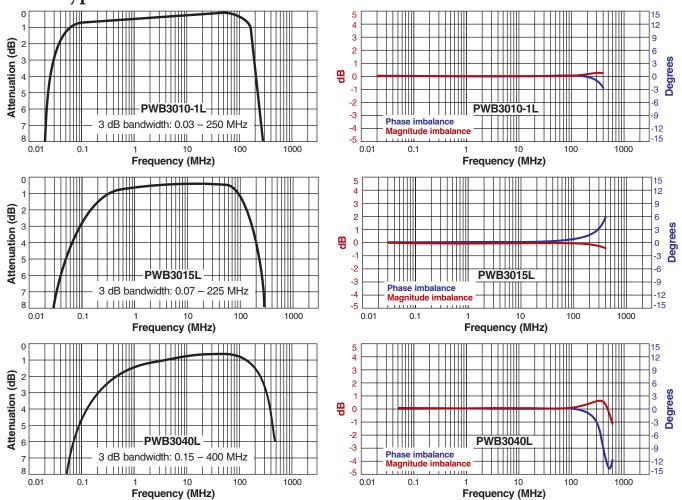



Specification subject to change without notice.
Please check web site for latest information.

US +1-847-639-6400 sales@coilcraft.com