


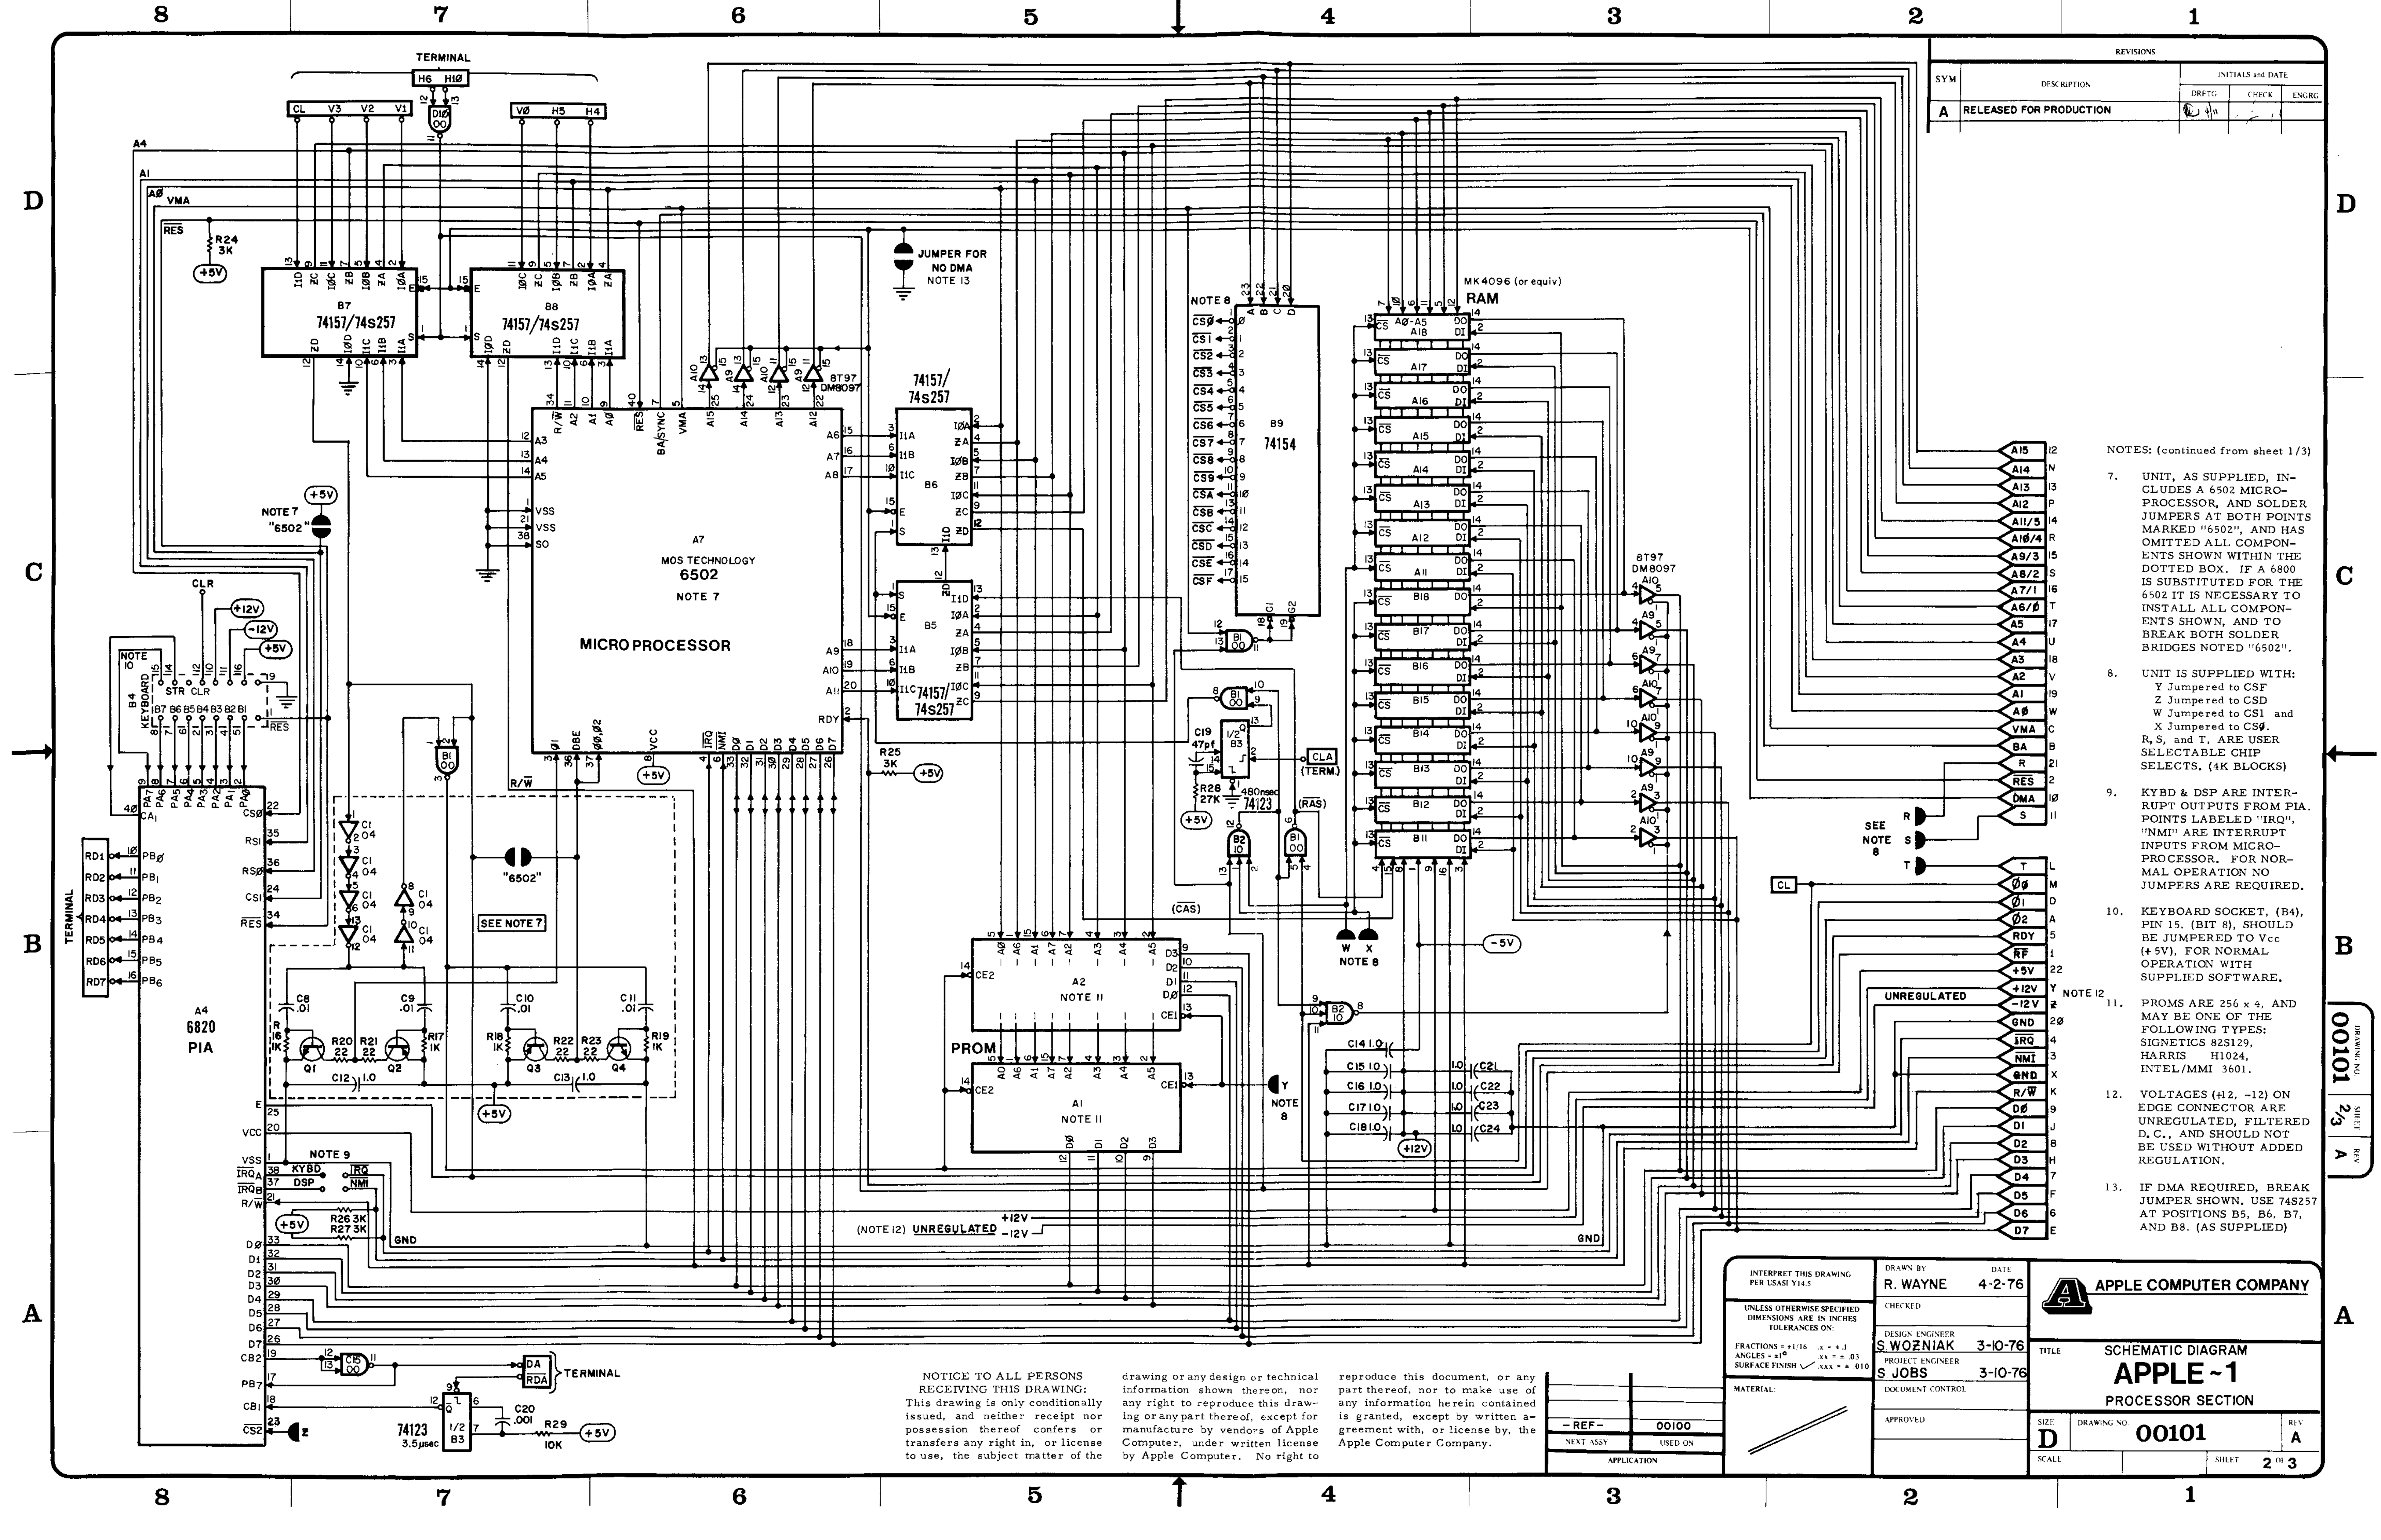

REVISIONS			INITIALS and DATE		
SYM	DESCRIPTION		DRFTG	CHECK	ENGRG
A	RELEASED FOR PRODUCTION				

NOTES: (continued from sheet 1/3)

- UNIT, AS SUPPLIED, INCLUDES A 6502 MICRO-PROCESSOR, AND SOLDER JUMPERS AT BOTH POINTS MARKED "6502", AND HAS OMITTED ALL COMPONENTS SHOWN WITHIN THE DOTTED BOX. IF A 6800 IS SUBSTITUTED FOR THE 6502 IT IS NECESSARY TO INSTALL ALL COMPONENTS SHOWN, AND TO BREAK BOTH SOLDER BRIDGES NOTED "6502".
- UNIT IS SUPPLIED WITH:
Y Jumped to CSF
Z Jumped to CSD
W Jumped to CS1 and X Jumped to CS0.
R, S, and T, ARE USER SELECTABLE CHIP SELECTS, (4K BLOCKS)
- KYBD & DSP ARE INTERRUPT OUTPUTS FROM PIA. POINTS LABELED "IRQ", "NMI" ARE INTERRUPT INPUTS FROM MICRO-PROCESSOR. FOR NORMAL OPERATION NO JUMPERS ARE REQUIRED.
- KEYBOARD SOCKET, (B4), PIN 15, (BIT 8), SHOULD BE JUMPED TO Vcc (+5V), FOR NORMAL OPERATION WITH SUPPLIED SOFTWARE.
- PROMS ARE 256 x 4, AND MAY BE ONE OF THE FOLLOWING TYPES: SIGNETICS 82S129, HARRIS H1024, INTEL/MMI 3601.
- VOLTAGES (+12, -12) ON EDGE CONNECTOR ARE UNREGULATED, FILTERED D.C., AND SHOULD NOT BE USED WITHOUT ADDED REGULATION.
- IF DMA REQUIRED, BREAK JUMPER SHOWN. USE 74S257 AT POSITIONS B5, B6, B7, AND B8. (AS SUPPLIED)

NOTICE TO ALL PERSONS RECEIVING THIS DRAWING: This drawing is only conditionally issued, and neither receipt nor possession thereof confers or transfers any right in, or license to use, the subject matter of the drawing or any design or technical information shown thereon, nor any right to reproduce this drawing or any part thereof, except for manufacture by vendors of Apple Computer, under written license by Apple Computer. No right to reproduce this document, or any part thereof, nor to make use of any information herein contained is granted, except by written agreement with, or license by, the Apple Computer Company.

INTERPRET THIS DRAWING PER LSASI Y14.5		DRAWN BY R. WAYNE		DATE 4-2-76		APPLE COMPUTER COMPANY	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON:		CHECKED		DESIGN ENGINEER S. WOZNIAK		TITLE SCHEMATIC DIAGRAM APPLE-1 PROCESSOR SECTION	
FRACTIONS = +1/16 x = +.1		PROJECT ENGINEER S. JOBS		3-10-76		SIZE D	
ANGLES = 90° xx = ±.03		DOCUMENT CONTROL		3-10-76		DRAWING NO. 00101	
SURFACE FINISH xxx = .010		APPROVED				SCALE	
MATERIAL:		APPLICATION				SHEET 2 OF 3	
- REF -		00100				REV A	
NEXT ASSY		USED ON					