
# CALL CLOSING WEB SITE USERS GUIDE

**To get started go to https://ftss.fujifilmgs.com**


**You can get there by using any device that has an internet connection……you DO NOT have to be on any special network (no VPN required). Connect with……**

- **Pocket PC using internet browser**
- **Laptop with internet connection**
- **Customer's PC with internet connection**

**If you see the screen below after typing the web address, simply select "continue to this website".**

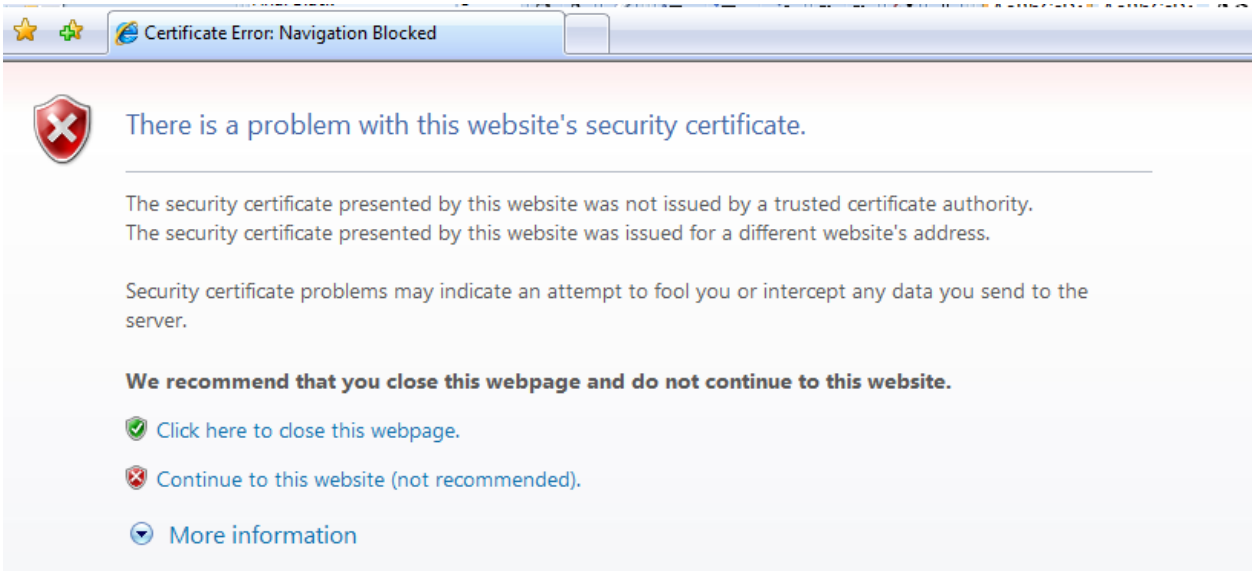


**Once on the web site, click on the link titled "FTSSMobile Login"**

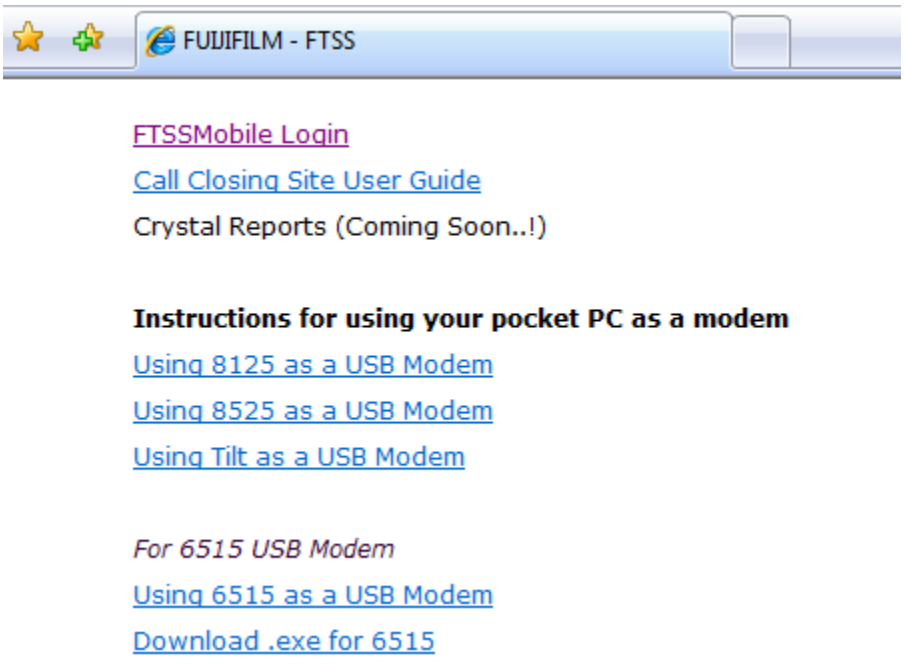

**This will bring you to the first of 3 screens, this is the "sign on" screen, and looks like this……**




**Enter your Astea user ID and password, then click the "Submit" button or press enter. *Note: these fields are case sensitive.**

**Once your ID and password have been accepted, you will be brought to the second of 3 screens. This is the "Assigned Orders" screen, and looks like this……**


| Order ID | Site Name | Model | Problem Descr |
|---|---|---|---|
| 47008718@@1 | MIGU PRESS INC | EIFINALPF | ***BASIC***04/19/07 PM DUE. SS,jaimie 6/13/07.ds |
| 47013833@@1 | ICS CORPORATION | EIJAVHS-S | ***CRITICAL 12***06/06/07 PM DUE. SS,jaimie 6/14/07.ds |
| 47019579@@1 | ON THE MARK | ACUITY | sericol - install - acuity hd 2504 flatbed uv printer,ds **12,000**.jaimie 8/13 - 8/16???.ds |
| 47021186@@1 | STANDARD PUBLISHING | EIDARTIII | ***PREFERRED***856-696-4006 after 5:30 EST.....got an overheating msg, and then |

Logout

**This screen lists all open calls that have been assigned to you, and they are listed with the oldest call at the top. If you have no assigned calls that are currently open, the only thing you will see on this screen is the "logout" button.**

**To start the call closing procedure, find the call you want to close, and then single click on the call number.**


**This will bring you to the third screen known as the "Order Info" screen. This is a long page and the top of it looks like this…….**

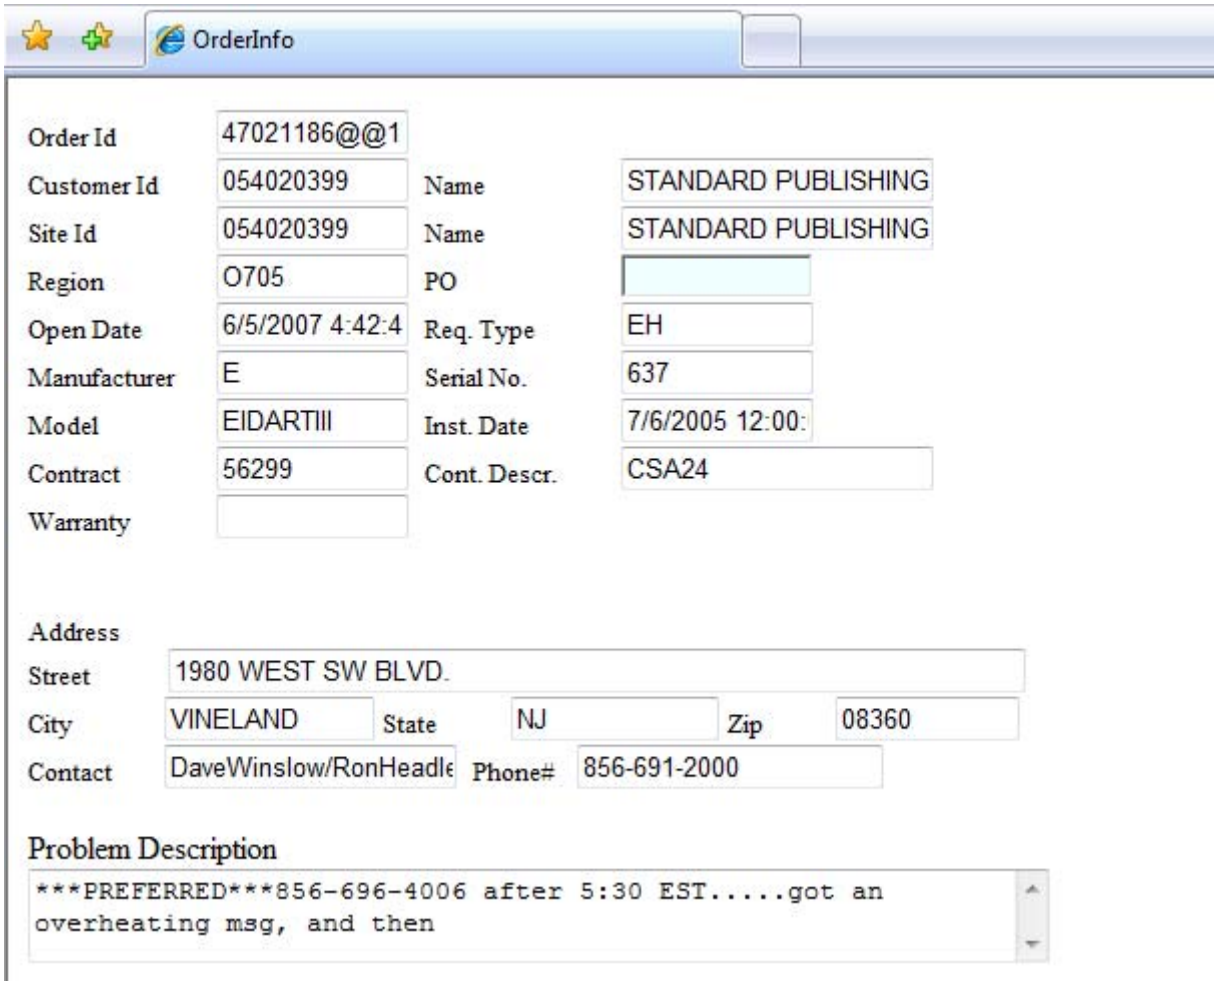


**As you can see this page starts with information pertaining to the selected call; none of this information can be changed except for the PO #. *Note: Do not attempt to change or add a PO # at this time.**


**After confirming the information listed at the top of the page and assuring you have chosen the correct call you are now ready to close the call.**

**The middle of the page starts with "Activities" and looks like this….**

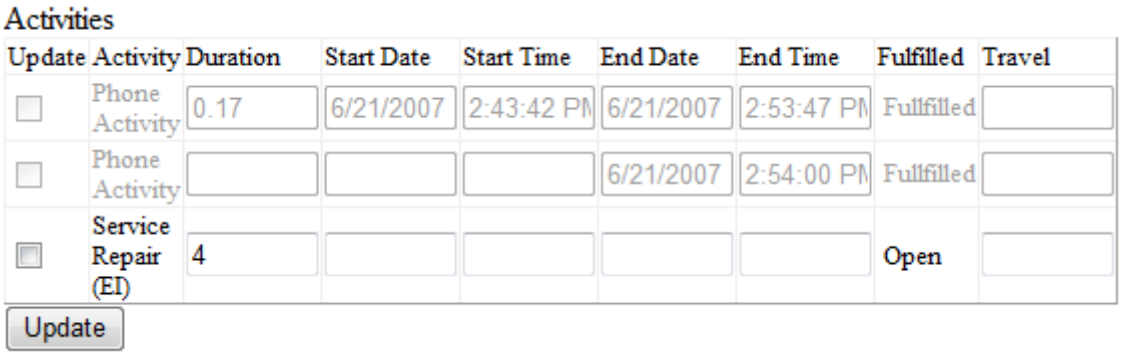


***Note: You must make "Activities" your first step….when this updates it erases everything below it. So if you skip this step and go to the next, when you come back here and update you will lose anything you've already entered.**

**All activities that are not grayed out will need to be fulfilled. In the example above there were two activities opened for phone support which will always be fulfilled by a phone support technician, and one activity for service repair that is yet to be fulfilled. In order to fulfill this activity you must <u>start by checking the "update" box to the left.</u>**

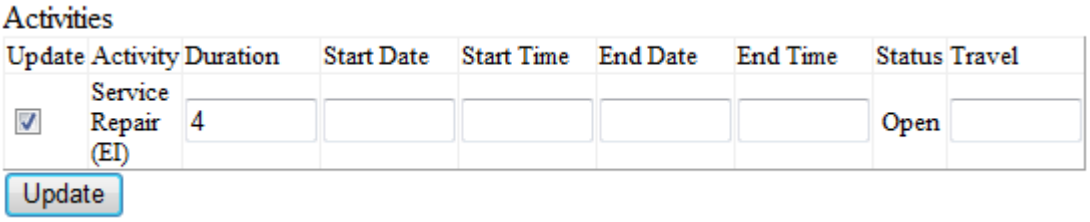



**Now follow these steps:**

- **Enter the total number of hours you worked on this activity in the duration box (there may be a number there already, just type over it if it is incorrect). This entry can be any number (.50, 1.25, 34, etc). The duration number is a total of your hours spent on site (in the case of an install, it might be 32 hours over 4 days).**

- **Enter the start date, start time, end date, and end time in the appropriate boxes. The date boxes are formatted to except many different forms of entry (11/20/07, 11-20-07, 11/20/2007, etc); if you enter a format that the program will not accept you will be given an error message and have to re-type the date. The time boxes must be entered as military time using a colon between hours and minutes (9:00, 14:30, 17:00, etc).**

- **Enter the total hours of travel for this activity (0,.25,13, etc). Remember, the FTSS travel policy is that travel is charged from the site of the previous call to the site of your existing call.**

  **Now click on the "update" button right below the activities box. This will update the activities and refresh the page…it should now look like this….**

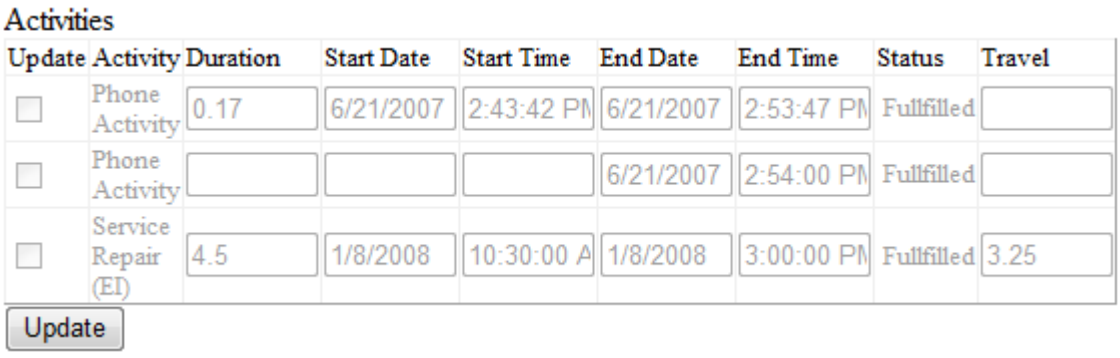


**Notice that all activities are now grayed out and the status for the service repair has been changed from "open" to "fulfilled".**

**Now is the time to enter or change the PO number at the top of the page if you have the need. If you attempt to enter or change the PO number before updating the activities, it will not work as the update must be done first.**

**The next section you come to will be "Materials", this is where the parts ordered on the call will be updated. If there are no parts ordered on the call, it will look like this……**

Materials

| Update | Product ID | Quantity | Usage | Description | Comments |
|---|---|---|---|---|---|

Update

**If there were parts ordered on the call, it will look like this……**

Materials

| Update | Product ID | Quantity | Usage | Description | Comments |
|---|---|---|---|---|---|
| ☐ | 70516584-02 | 1 | NYD | FILTER (SCREEN) | |
| ☐ | 100046505V00 | 1 | NYD | FILTER (SCREEN) FILTER TO AF10-M5-2 | |
| ☐ | 100037254V00 | 1 | NYD | AIR FILTER ZFC200-08B | |

Update

**To update the parts usage first check the update box to the left, then use the drop down box to choose the correct status; NYD (Not Yet Determined), Used/BPE (Bad Part Expected), or Not Used/GPE (Good Part Expected). Please note that all material demands default to "NYD". If there is a specific comment that was sent along with the part you will see it in the column to the right. Once you have updated all parts click the "update" button. The program will update the data and refresh the page to look like this……**


Materials

| Update | Product ID | Quantity | Usage | Description | Comments |
|---|---|---|---|---|---|
| ☐ | 70516584-02 | 1 | Used/BPE | FILTER (SCREEN) | |
| ☐ | 100046505V00 | 1 | Not Used/GF | FILTER (SCREEN) FILTER TO AF10-M5-2 | |
| ☐ | 100037254V00 | 1 | Used/BPE | AIR FILTER ZFC200-08B | |


Update

***Note: If you make a mistake while updating the parts and they get grayed out, you can click the "Back to List" button at the bottom of the page and select the call again. When you go back into the call the parts will be un-grayed and you will be able to make the proper changes.**

**The lower section of the page starts with "Expenses", and looks like this……**

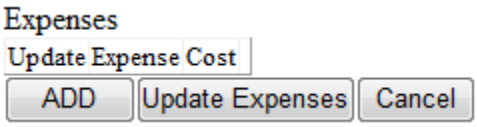



**This function should only be used by Professional Service Advisors. It is used for a service that has a flat rate charge associated with it. For instance, if a Professional Service Advisor is on site performing a service that has a day rate of $1,800 he would click the "add" button to open this function and would find the following……..**

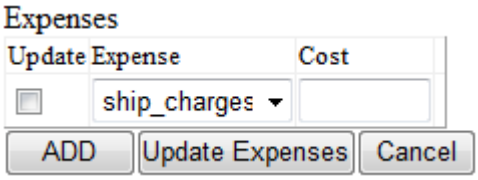


**Now follow the steps below to update the "Expense" action.**

- **Check the update box to the left**
- **Search the drop down box for the desired service**
- **Enter the cost of the service**
- **Click the "Update Expenses" button to finish**

**After the Expenses are updated and the page is refreshed, it will appear like this…..**

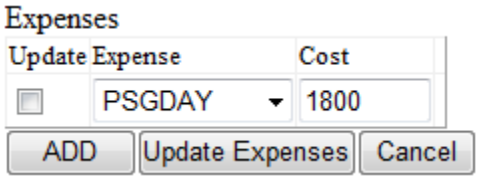



***Note: The Expenses box does not gray out even after updating. Also if you find yourself in "Expenses" accidently, simply click the "cancel" button to exit.**

**The next section is titled "Management" and is where comments can be added that will not be seen be the customer. It will look like this…….**




**To add comments simply click on the "Add Comments" button; a drop down box will appear where you can choose from several management activities.**

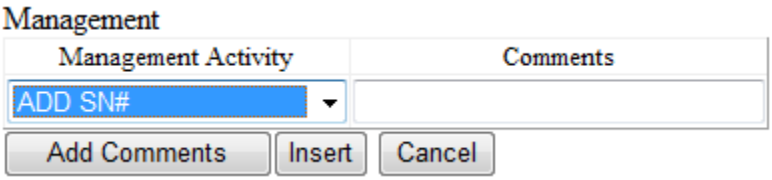



**Some of the choices are "ADD SERIAL #" for when you need to add a s/n to an installation call, and "TRACK #" for when you need to include a Fed Ex tracking number. Keep in mind that you can add more than one management activity to a single call.**

***Note: For ALL install calls, you will need to select "add serial #" as the management activity and then type the serial number in the comments box. It is crucial that every install call being closed has a s/n attached to it.**

**Once you've finished adding your comments, you must click the "insert button" to complete the process. After the page refreshes you should not be able to see your comments…..if they're gone, they've been accepted.**

***Note: You may click the "cancel" button at any time to exit the management activity function.**

**Just below "Management" you will find 3 boxes titled "Problem", "Cause", and "Repair".**

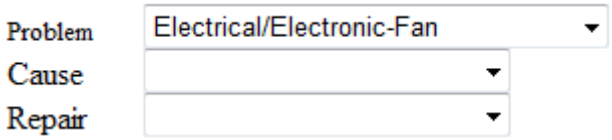



**They may or may not be populated depending on how the call was opened. These drop down boxes must be filled in, an exception would be an install call in which case "Cause" can be left blank. "Problem" and "Repair" are always mandatory.**

**Next you will find the "Resolve Text" box, please note that the resolve text box is limited to 1800 characters, if more space is needed you can open a management activity under "NOTE" and continue there (another 256 characters).**




**Enter your resolve text as you normally would keeping in mind that on installation calls the serial number should be entered as a "Management Activity" and not here with the resolve text.**


**Next you will see the "Billing Notes" box with boxes below it for email addresses and a fax number.**

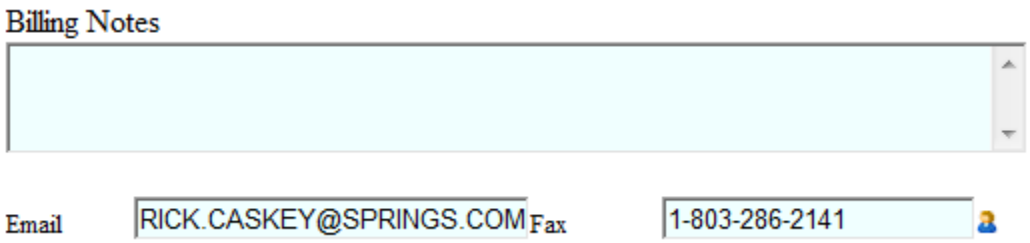


**The comments you enter under the "Billing Notes" will not be seen by the customer (unlike the resolve text which is seen by the customer). These comments will be transferred to the Audit Queue so that the team leader auditing the call can view them with ease (*Note: Only the first 93 characters will be visible in the Audit Queue, to view the rest one must look into the call).**

**A copy of this service ticket will be sent to the email address/fax number listed in the boxes above. If Astea has an email and/or fax number stored for this customer, then these boxes will automatically be populated. You can type over the information in these boxes if it is wrong, and in the case of the email address you can add other addresses who will then receive a copy as well. The service ticket can be sent to several email addresses but can only be sent to 1 fax number (*Note: DO NOT enter a "1" before the area code). If you would like a copy of the service ticket emailed to you as well, simply click on the icon next to the fax number box "" and your email address will be added to the email box.**

**You are now ready to finish the call closing process and will find the following at the bottom of the page……..**

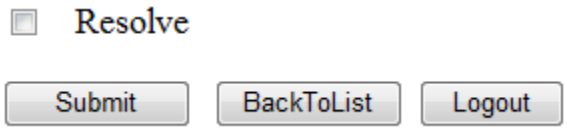


**You must check the "Resolve" box and then click on the "Submit" button to finish. If the program accepts everything without error you will return to the "Assigned Orders" page and be able to choose another call to close. If you have made an error, an error code will show up at the bottom of the page beneath the "Submit", "Back to List", "Logout" buttons. This error code will inform you where the problem is so that you can go back and correct it.**

**Miscellaneous Notes:**

- **For questions, please contact a member of the Web Call Closing Team:**

**Steve Hagen 630-259-7317 / Stefanie Caminiti 630-259-7332**

**Mike Winn 630-259-7314 / Randy Hurless 630-259-7312**

- **You can exit a call in the middle of it by clicking the "Back to List" or "Logout" button; anything you have already updated will remain updated.**
- **If you have any overtime that will be billable to the customer, you must open a management activity to record it. In the drop down box there is a listing for "OT", select it and put the number of overtime hours in the comment box. This is the only way OT will get invoiced.**
- **If you experience a problem call someone listed above, if it is after hours and you can't reach anyone, try logging out and then back in. Or possibly closing the browser and then re-launching the program.**