
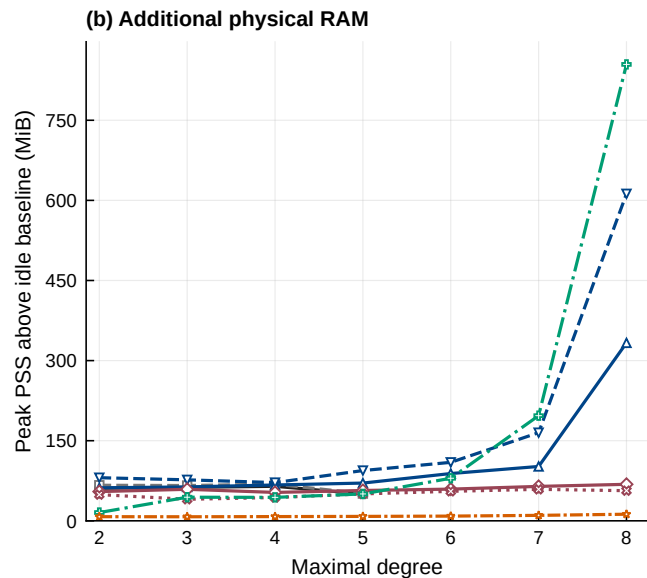


Fomin–Kirillov case: 15 generators, 100 relations over $\mathbb{Q}$

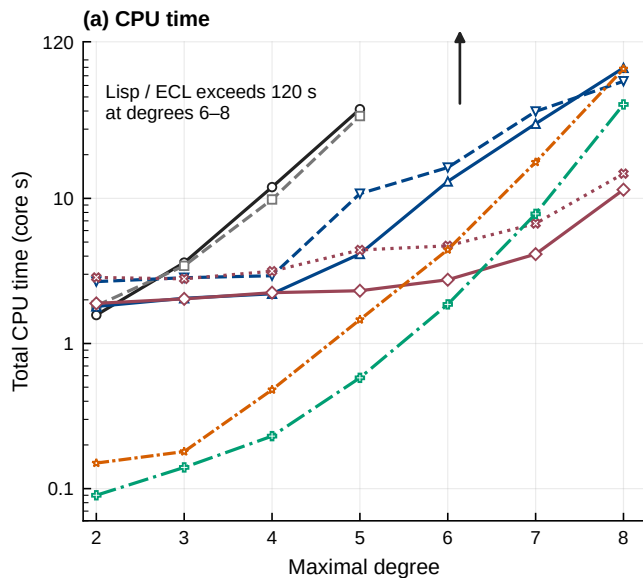

- Lisp / ECL O2
- Lisp / ECL O3 + LTO
- △— C / ECL O3 + LTO
- ▽— C / ECL O3 + LTO (memory64)
- ◇— fomkyr 0.3 (memory64, Chromium, 4 workers)
- ⋄— fomkyr 0.3 (memory64, Firefox, 4 workers)
- +— Bergman / SBCL (native)
- *— Singular / Letterplace (native)

Serial cold jobs; 120 s cap. Browser budgets: 2 GiB. Bergman pruning enabled.

CPU includes engine startup, computation and export. PSS subtracts each run's pre-engine baseline.

RAM sampling: browsers 0.25 s, native CLI 0.02 s. Unfinished Lisp points are omitted; ↑ indicates the limit.

One cold run per point. Browser curves use Chromium except the labelled Firefox curve.

Bergman/CLI curves: earlier same-day runs; fomkyr 0.3 curves: new serial runs on the same host.