


$\tau = 0.6$

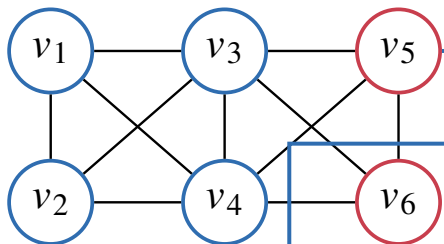

Pivoted structural BK
enumerates maximal cliques, independent of τ

$M_1 = \{v_1, v_2, v_3, v_4\}$
 $\text{avgSim}(M_1) = 0.693$
keep $C_1 = M_1$

$M_2 = \{v_3, v_4, v_5, v_6\}, \text{avgSim}(M_2) = 0.427$
bounds retain the size-3 layer
 $C_2 = \{v_3, v_5, v_6\}, \text{avgSim}(C_2) = 0.693$

$\{v_3, v_5\}$ and $\{v_5, v_6\}$ are skipped as subsets of C_2

Candidate pool $\mathcal{F} = \{C_1, C_2\}$
exact deduplication and global strict-containment filtering

Output $\mathcal{R} = \{C_1, C_2\}$