




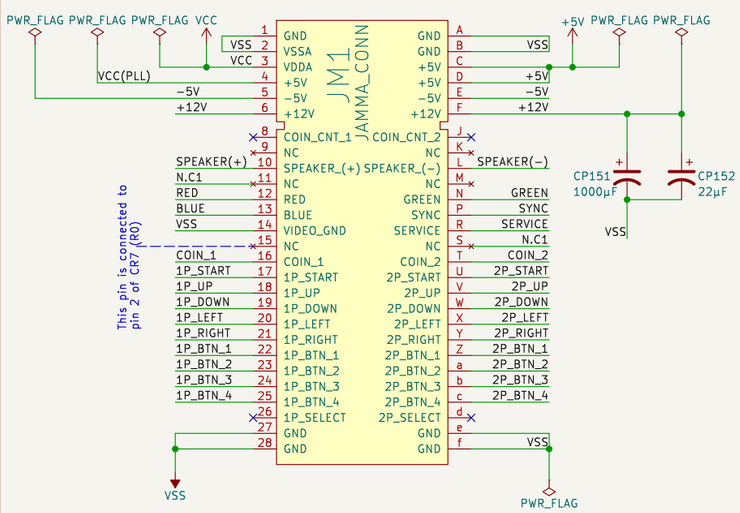


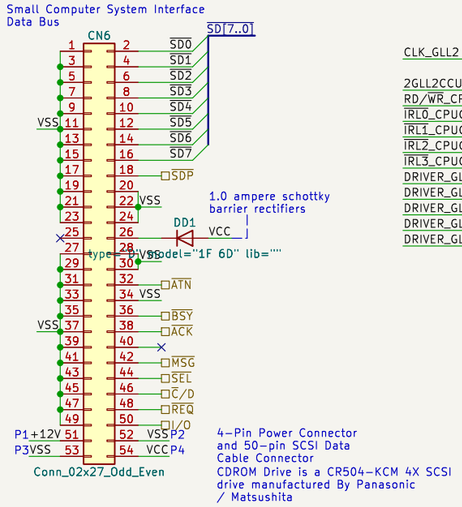


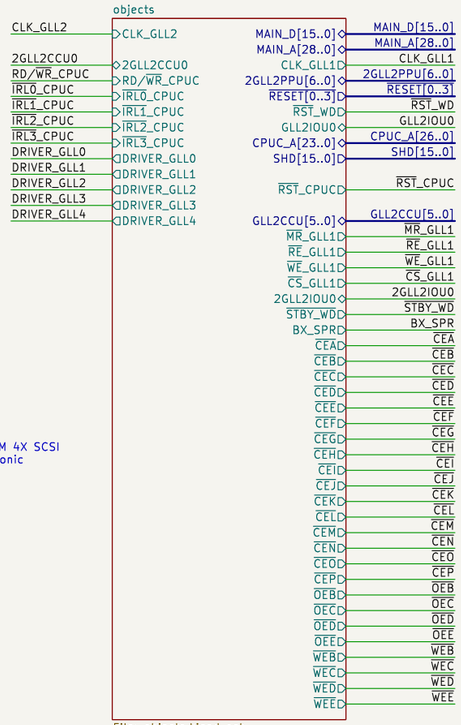


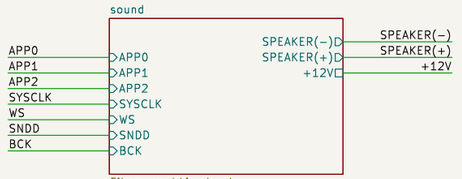


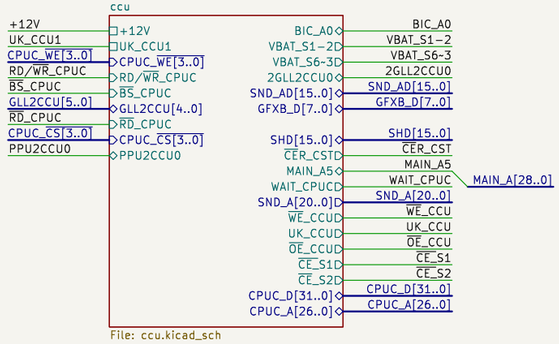


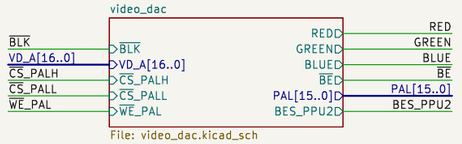


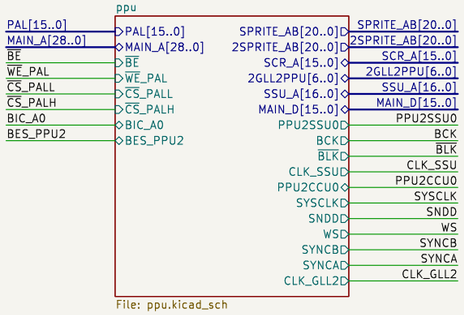


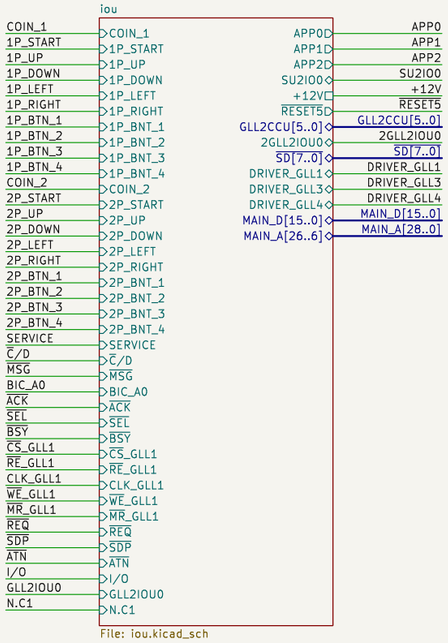


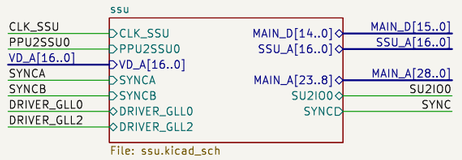


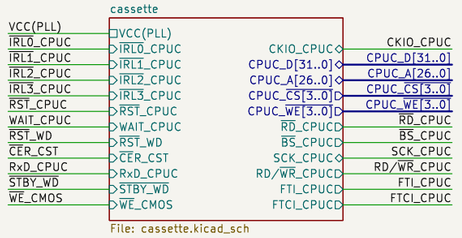

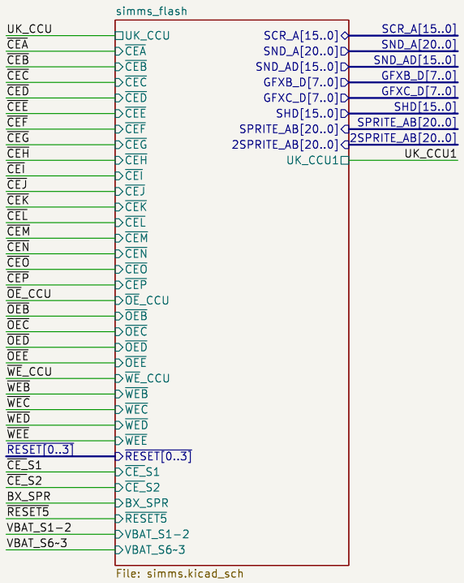

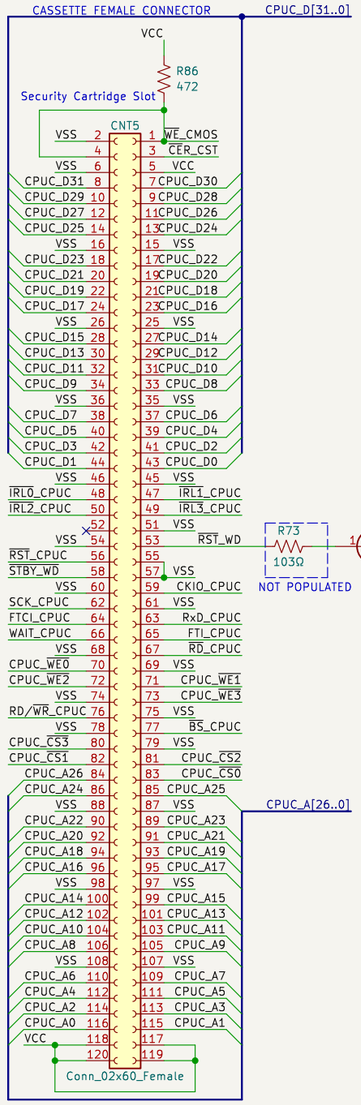










14/10/22−30/01/23
JOTEGO
JOTEGO
Sheet: /
File: cps3.kicad_sch

Title: CP SYSTEM III

Size: A3	Date: 14/10/22	**Rev: José Tejada G.**
KiCad E.D.A. 8.0.5		Id: 1/23

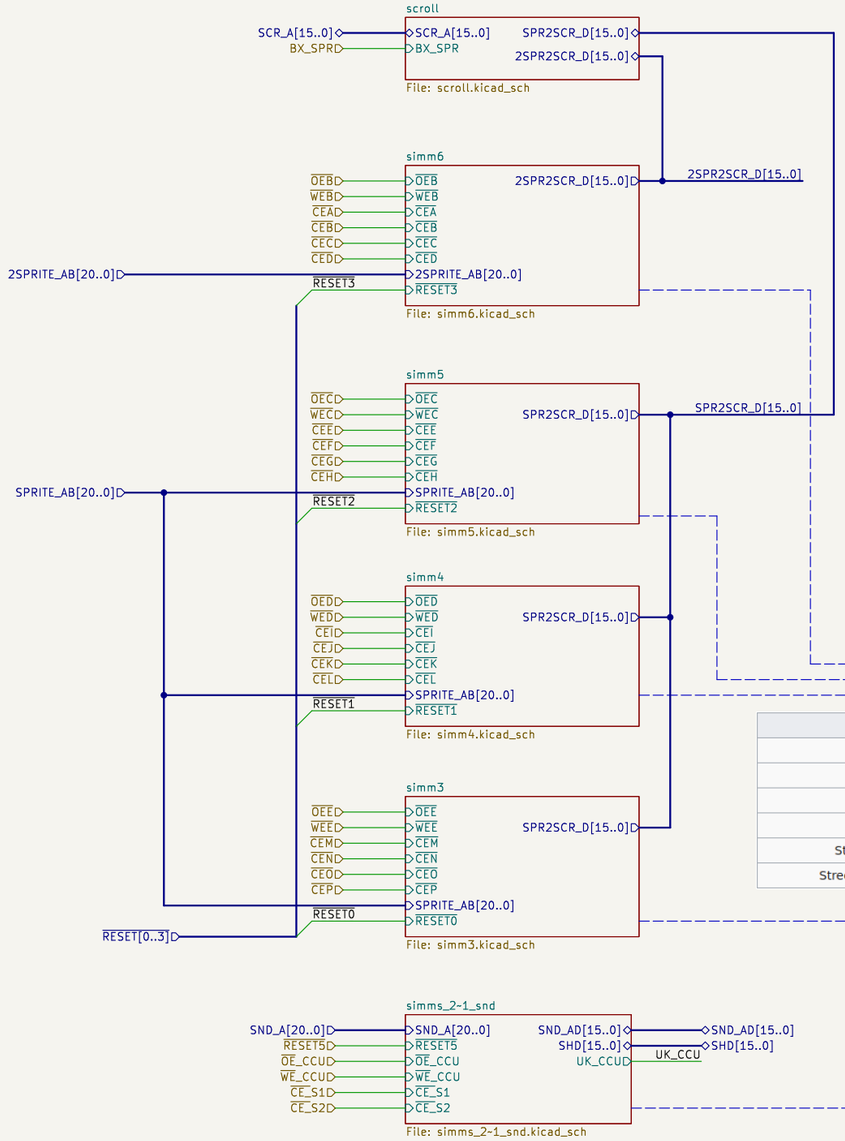

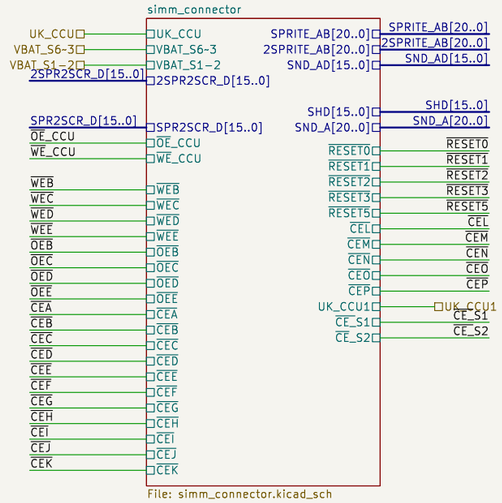

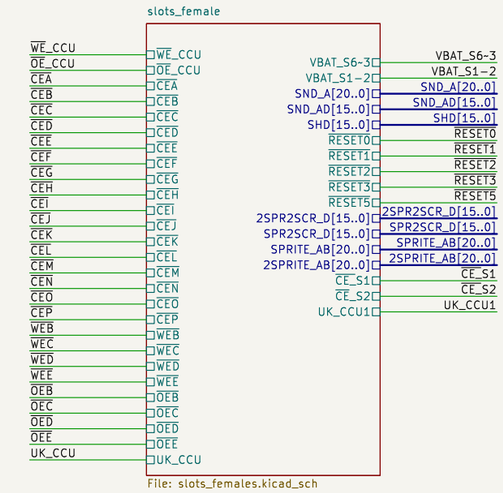

Juego	Ranura 1	Ranura 2	Ranura 3	Ranura 4	Ranura 5	Ranura 6
Warzard / Red Earth	64MBit		128MBit	128MBit	32MBit o 128MBit	
Street Fighter III: New Generation	64MBit		128MBit	128MBit	32MBit o 128MBit	
JoJo's Venture	64MBit	64MBit	128MBit	128MBit	32MBit o 128MBit	
JoJo's Bizarre Adventure	64MBit	64MBit	128MBit	128MBit	128MBit	
Street Fighter III: 2nd Impact Giant Attack	64MBit	64MBit	128MBit	128MBit	128MBit	
Street Fighter III: 3rd Strike Fight for the Future	64MBit	64MBit	128MBit	128MBit	128MBit	128MBit

14/10/22-30/01/23
JOTEGO
JOTEGO

Sheet: /simms_flash/
File: simms.kicad_sch

Title: CP SYSTEM III

Size: A3	Date: 14/10/22	**Rev: José Tejada G.**
KiCad E.D.A. 8.0.5		Id: 2/23

F11
DL-2929-IOU
INPUT OUTPUT UNITAT
I/O controller.

BUS INTERFACE CONTROLLER

Capcom Kick Button Harness Connector

4CH HIGH-CURRENT DARLINGTON SINK DRIVER

This pin is connected to pin 15 of the jamma (N.C)

64/128/256 words of 16 bits each. According to programming

3 WIRE SERIAL

PHOTOCOUPLER

1. Anode
2. Cathode
15. Emitter
16. Collector

14/10/22-30/01/23
JOTEGO
JOTEGO
Sheet: /iou/
File: iou.kicad_sch

Title: CP SYSTEM III

Size: A3 | Date: 14/10/22 | **Rev: José Tejada G.**
KiCad E.D.A. 8.0.5 | Id: 3/23

PWR_FLAG

VCC

R43
101

BE

Philips TDA1306T Noise Shaping Filter DAC (SOIC24).
The clock (on pin 12) measures
14.3181667MHz (42.9545/3)

VD3
VD-BAV99

R42
472

Q8
ZR

VSS

CP153
22µF

CP154
22µF

CP155
22µF

VSS

CU383-69K
D6

BCK
SNDD
APP0
APP2
WS
SYSCLK
APP1
VSS
BE

Bus-exchange switch
10 BIT

VCC
VSS

RN3
620

RN2
620

TDA1306T
C5

CLKS2
CLKS1
BCK
WS
DATA
SYSCLK
APPL
APP0
APP1
APP2
APP3
TEST1
TEST2

VDDA
VDDD
VDDO
VSSA
VSSD
VSSO

Noise shaping filter and DAC

FILTCR
VOR
FILTCL
VOL
VREF

C143
102J

C144
102J

CP123
10µF

VSS

14.3181667MHz

VCC

R38
7.3kΩ

R37
4.7kΩ

R35
4.7kΩ

R34
7.3kΩ

LM833N
A4B

Opamp_Dual

CP131
22µF

CP135
22µF

CP132
22µF

R_POT_5PINS
RV1

CP134
22µF

Opamp_Dual
A4A

R20
1.8kΩ

R19
1kΩ

R3
100Ω

CP138
22µF

CP133
22µF

0.003Ω
EXC2
R_Shunt_US

J2
AudioJack2

RS2
100kΩ

R27
9kΩ

CP137
22µF

VSS

A5B
LM833N

Opamp_Dual

R17
2.3kΩ

R18
2.3kΩ

CP143
3.3µF

TA8201AK B3

IN
NF
R.F
OUT1
OUT2

FB6
F_Small

SPEAKER(+) Speaker

LS1

FB5
F_Small

SPEAKER(-)

R4
5.6kΩ

R9
0.3Ω

R8
0.3Ω

CP139
33µF

CP140
220µF

CP145
154J

CP146
154J

HS1
Heatsink_Pad_2Pin

Opamp_Dual
A5A

R22
1.8kΩ

R21
1kΩ

R11
100Ω

CP130
22µF

CP136
22µF

0.003Ω
EXC1
R_Shunt_US

J1
AudioJack2

Optional RCA Left/Right Audio Out Connectors

R1
100kΩ

+12V

FB1
F_Small

FB2
F_Small

R12
24Ω

R28
9kΩ

QB6
Q_NPN_CBE

CP148
22µF

QA6
Q_NPN_CBE

CP149
22µF

CP150
22µF

CP147
22µF

VSS

14/10/22-30/01/23
JOTEGO
JOTEGO
Sheet: /sound/
File: sound.kicad_sch

Title: CP SYSTEM III

Size: A3	Date: 14/10/22	**Rev: José Tejada G.**
KiCad E.D.A. 8.0.5		Id: 4/23

G2

DL-2729_PPU

Picture Processing Unit

SD10-505

Main graphics chip.

Synchronization Supply Unit*?

Color Palette

Bus Exchange Switch

Row address strobe

SPRITE ADDRESS BUS
*Buffer Line Driver

SCROLL ADDRESS BUS

Output enable

Write enable

Upper column address strobe

Lower column address strobe

Buffer Frame Memory Data Bus

There is no certainty that it is Data Bus

Buffer Frame Memory Address Bus

There is no certainty that it is Address Bus

14/10/22-30/01/23
JOTEGO
JOTEGO
Sheet: /ppu/
File: ppu.kicad_sch
Title: CP SYSTEM III
Size: A3 | Date: 14/10/22 | **Rev: José Tejada G.**
KiCad E.D.A. 8.0.5 | Id: 5/23




14/10/22-30/01/23
JOTEGO
JOTEGO

Sheet: /capacitors_uu/
File: capacitors_uu.kicad_sch


Title: CP SYSTEM III


Size: A3	Date: 14/10/22	**Rev: José Tejada G.**
KiCad E.D.A. 8.0.5		Id: 6/23

GRAPHIC LAYER LAYOUT 1

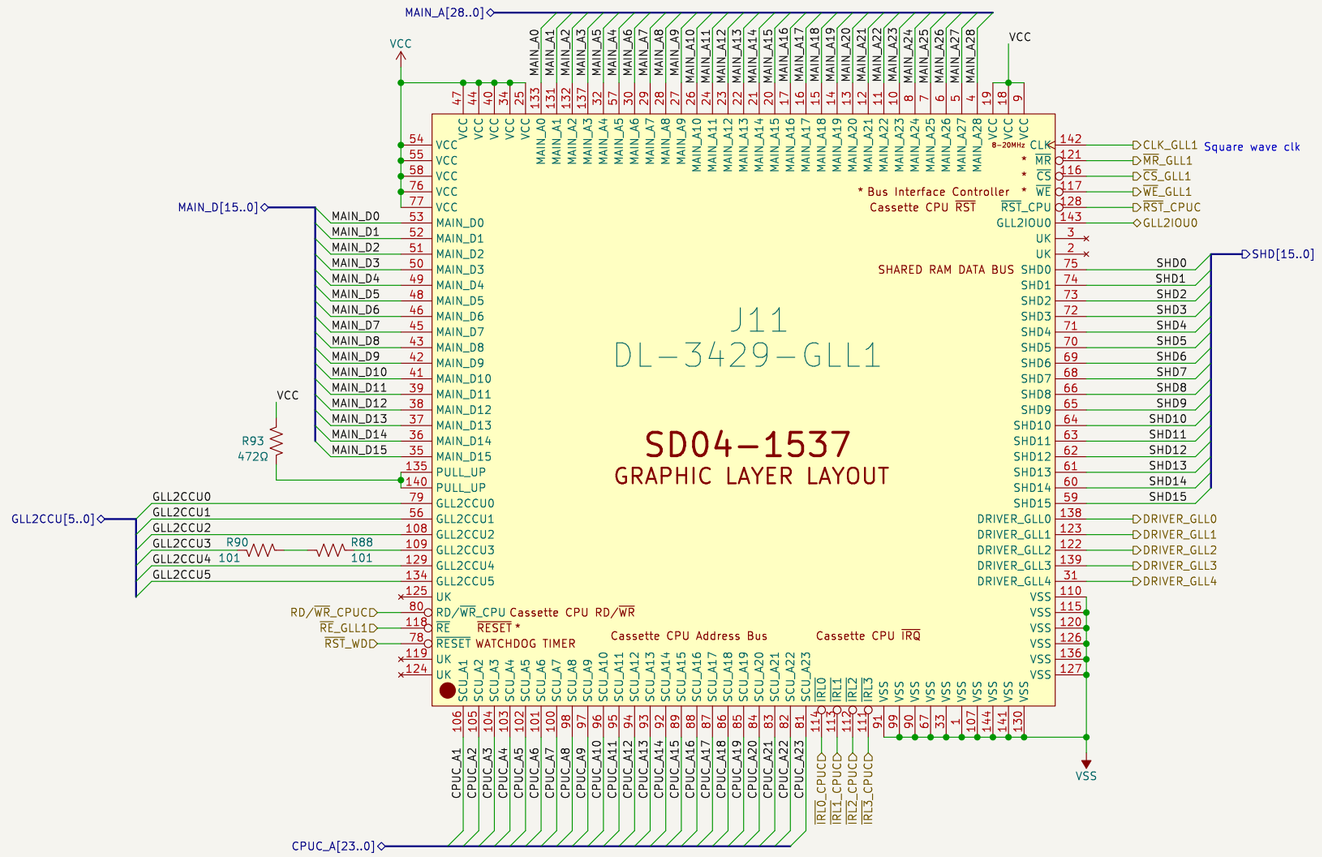

GRAPHIC LAYER LAYOUT 2

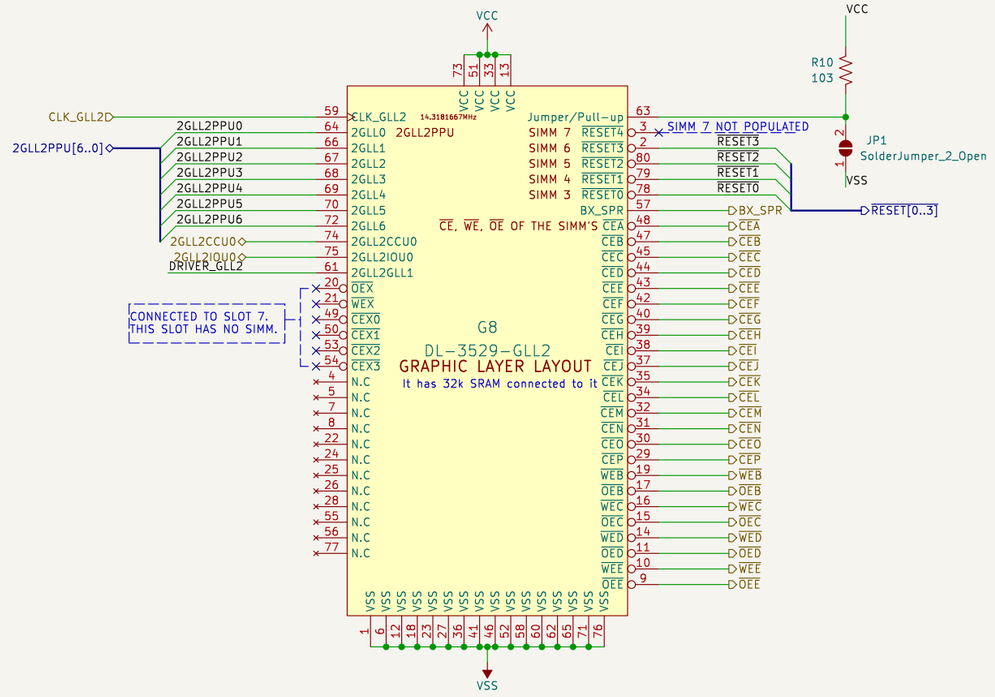

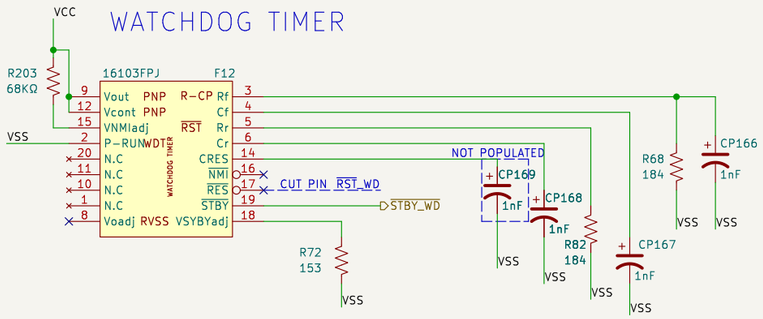


14/10/22-30/01/23
JOTEGO
JOTEGO

Sheet: /objects/
File: objects.kicad_sch

Title: CP SYSTEM III

Size: A3	Date: 14/10/22	**Rev: José Tejada G.**
KiCad E.D.A. 8.0.5		Id: 7/23

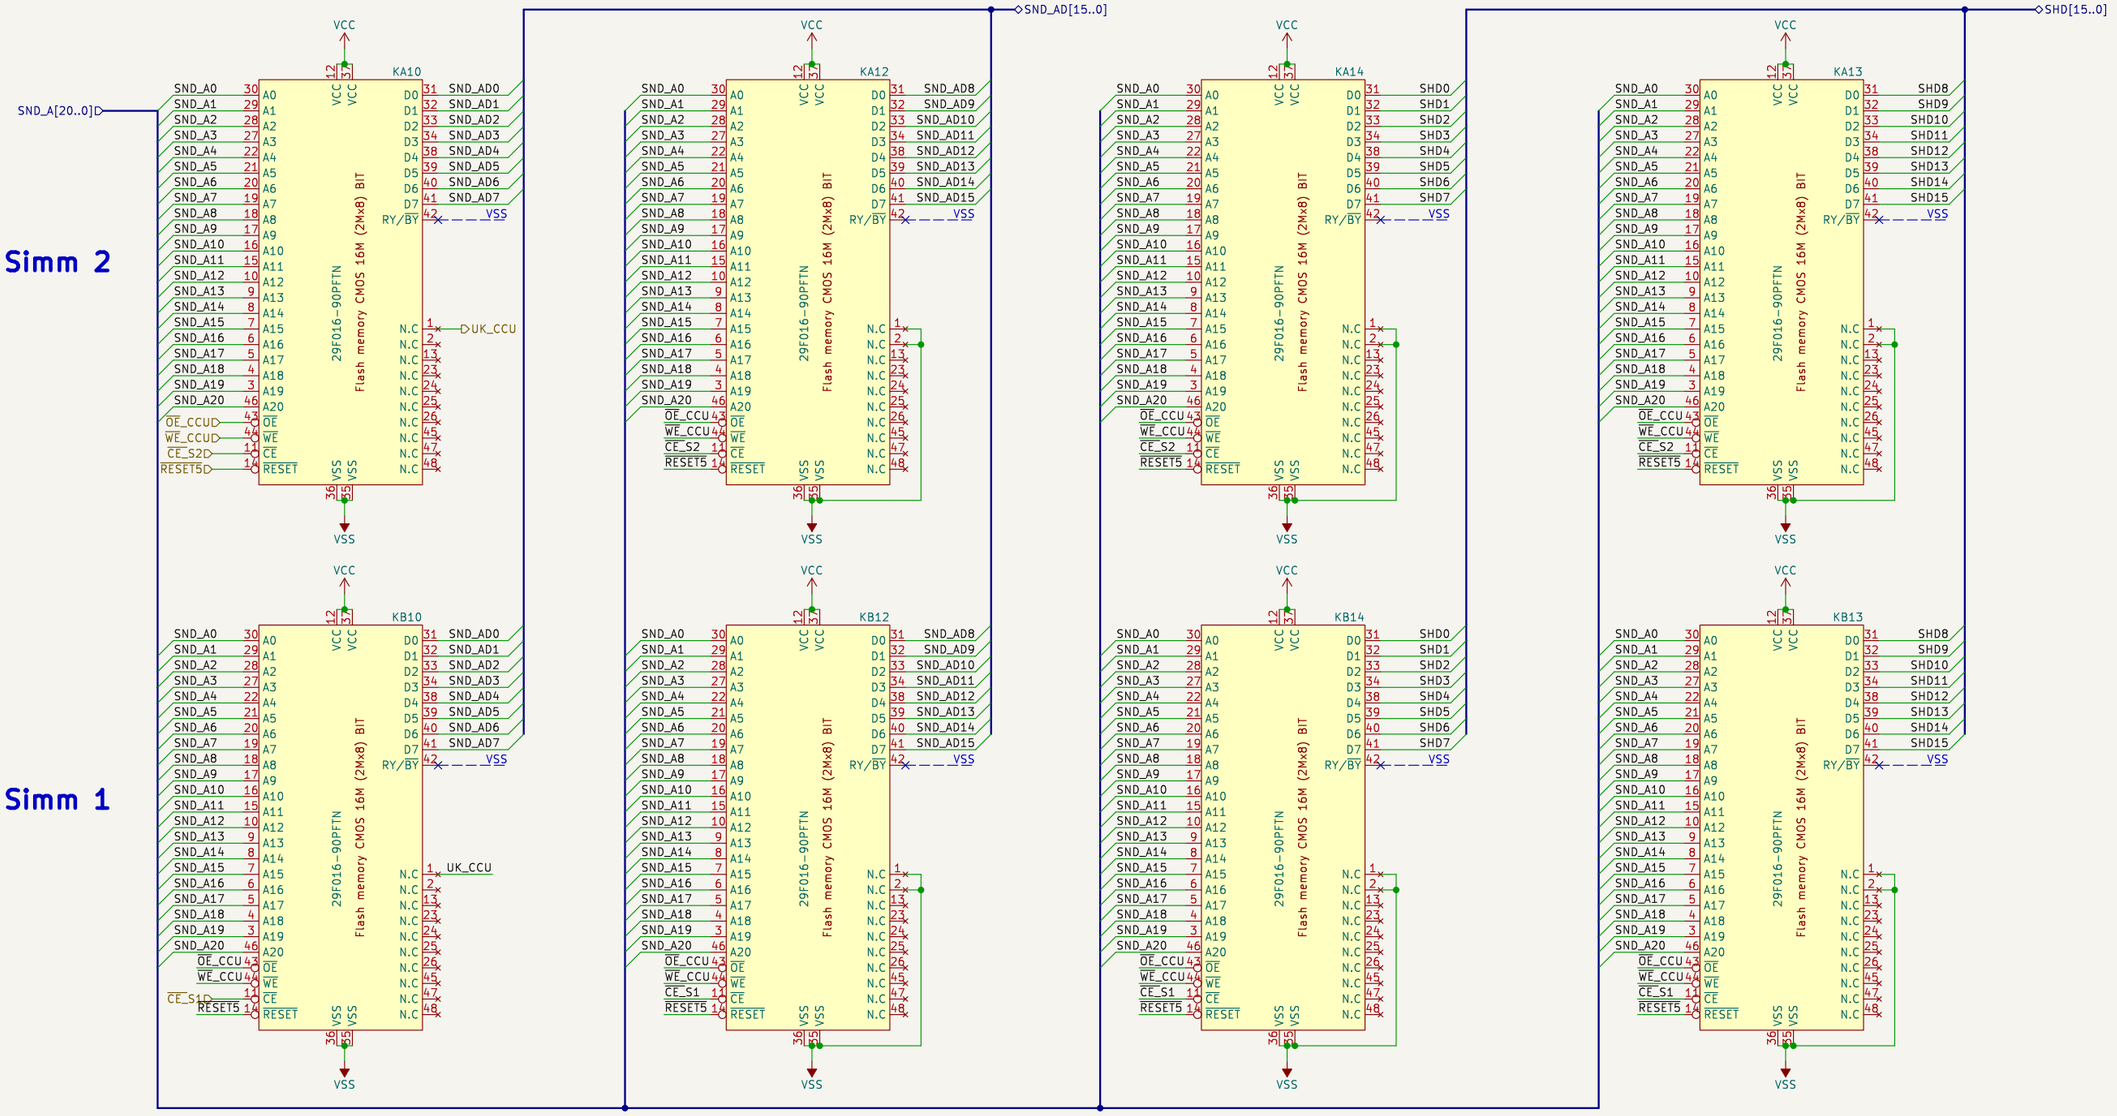


14/10/22-30/01/23
JOTEGO
JOTEGO

Sheet: /simms_flash/simms_2-1_snd/
File: simms_2-1_snd.kicad_sch


Title: CP SYSTEM III

Size: A3	Date: 14/10/22	**Rev: José Tejada G.**
KiCad E.D.A. 8.0.5		Id: 8/23


Simm 3

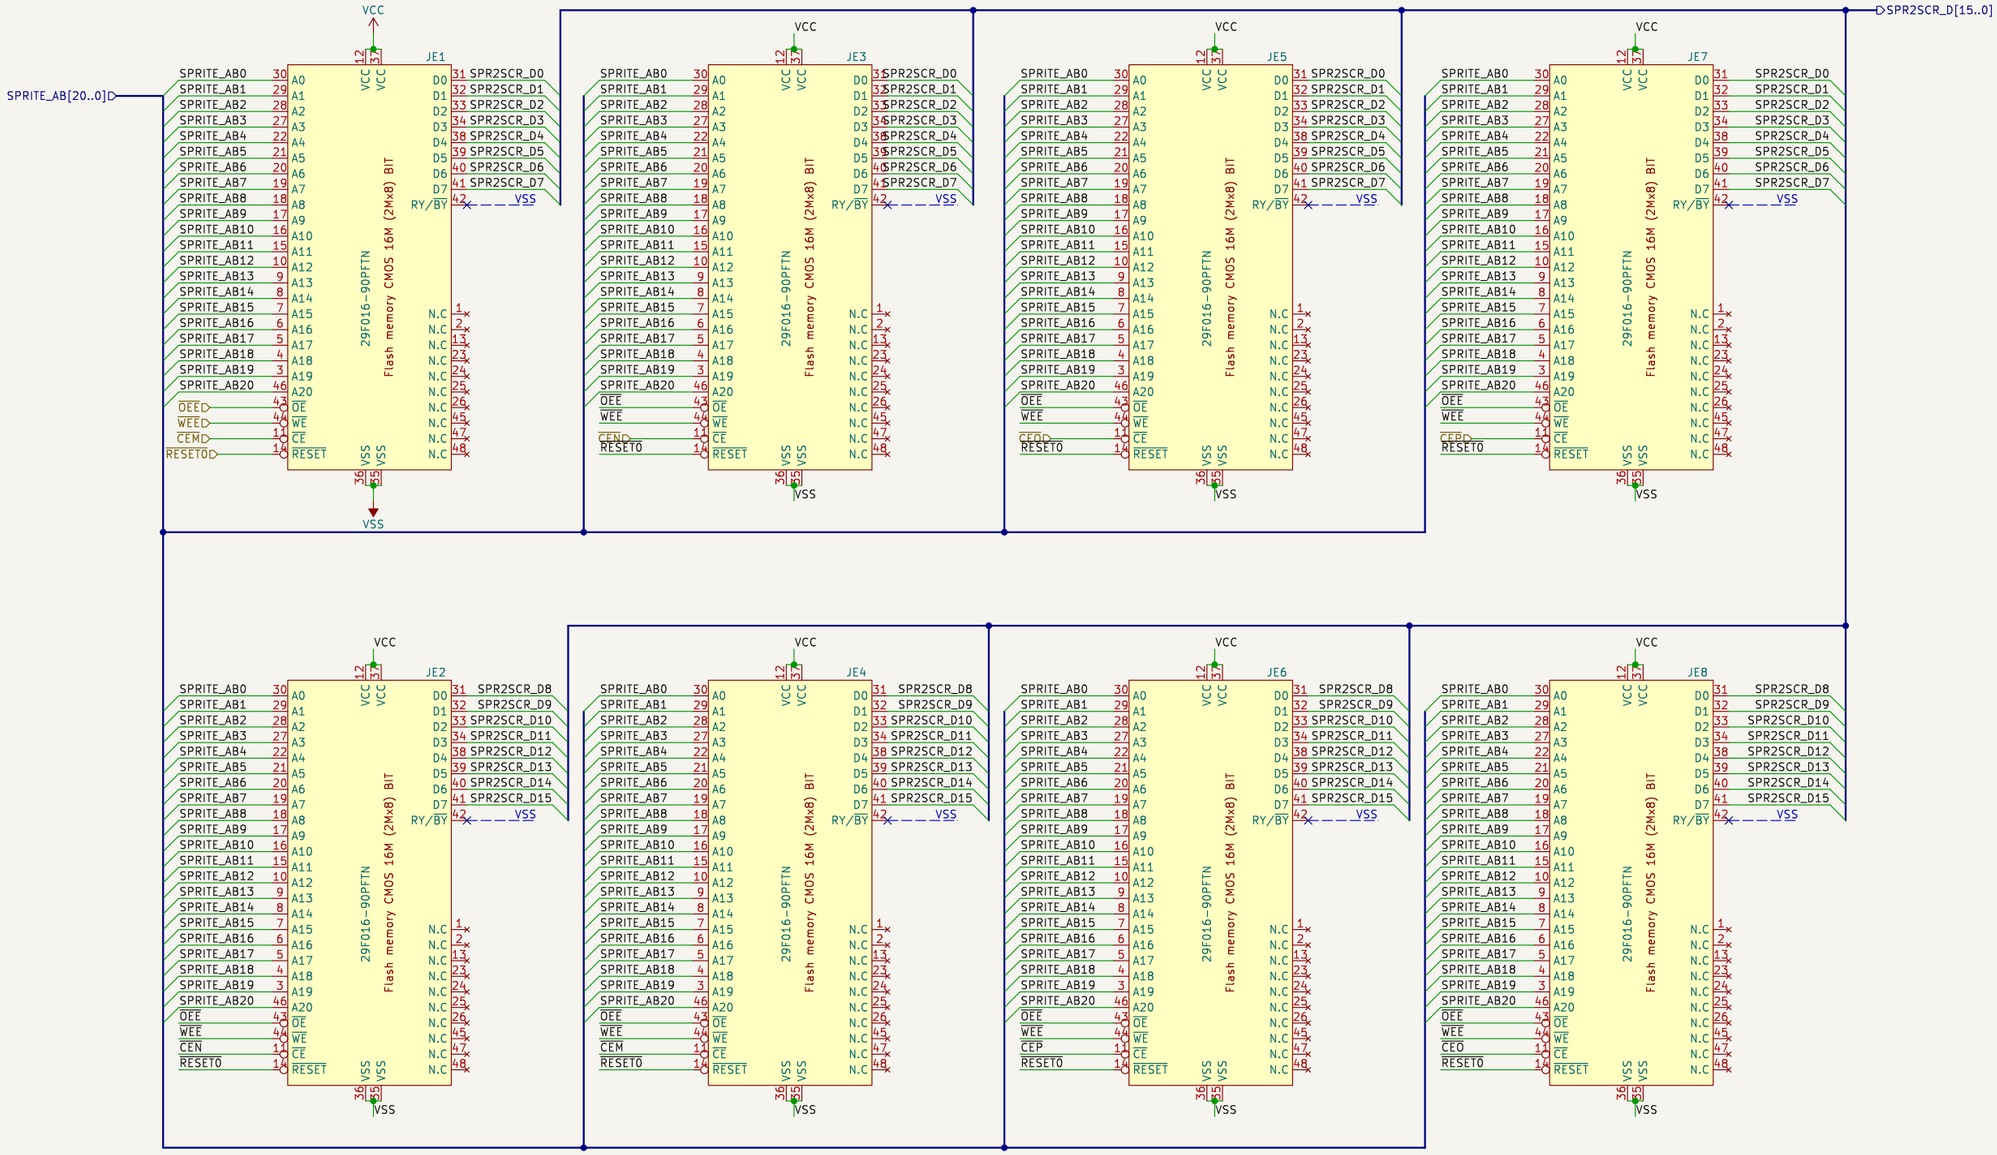

14/10/22–30/01/23		
JOTEGO		
JOTEGO		
Sheet: /simms_flash/simm3/		
File: simm3.kicad_sch		
Title: CP SYSTEM III		
Size: A3	Date: 14/10/22	**Rev: José Tejada G.**
KiCad E.D.A. 8.0.5		Id: 9/23

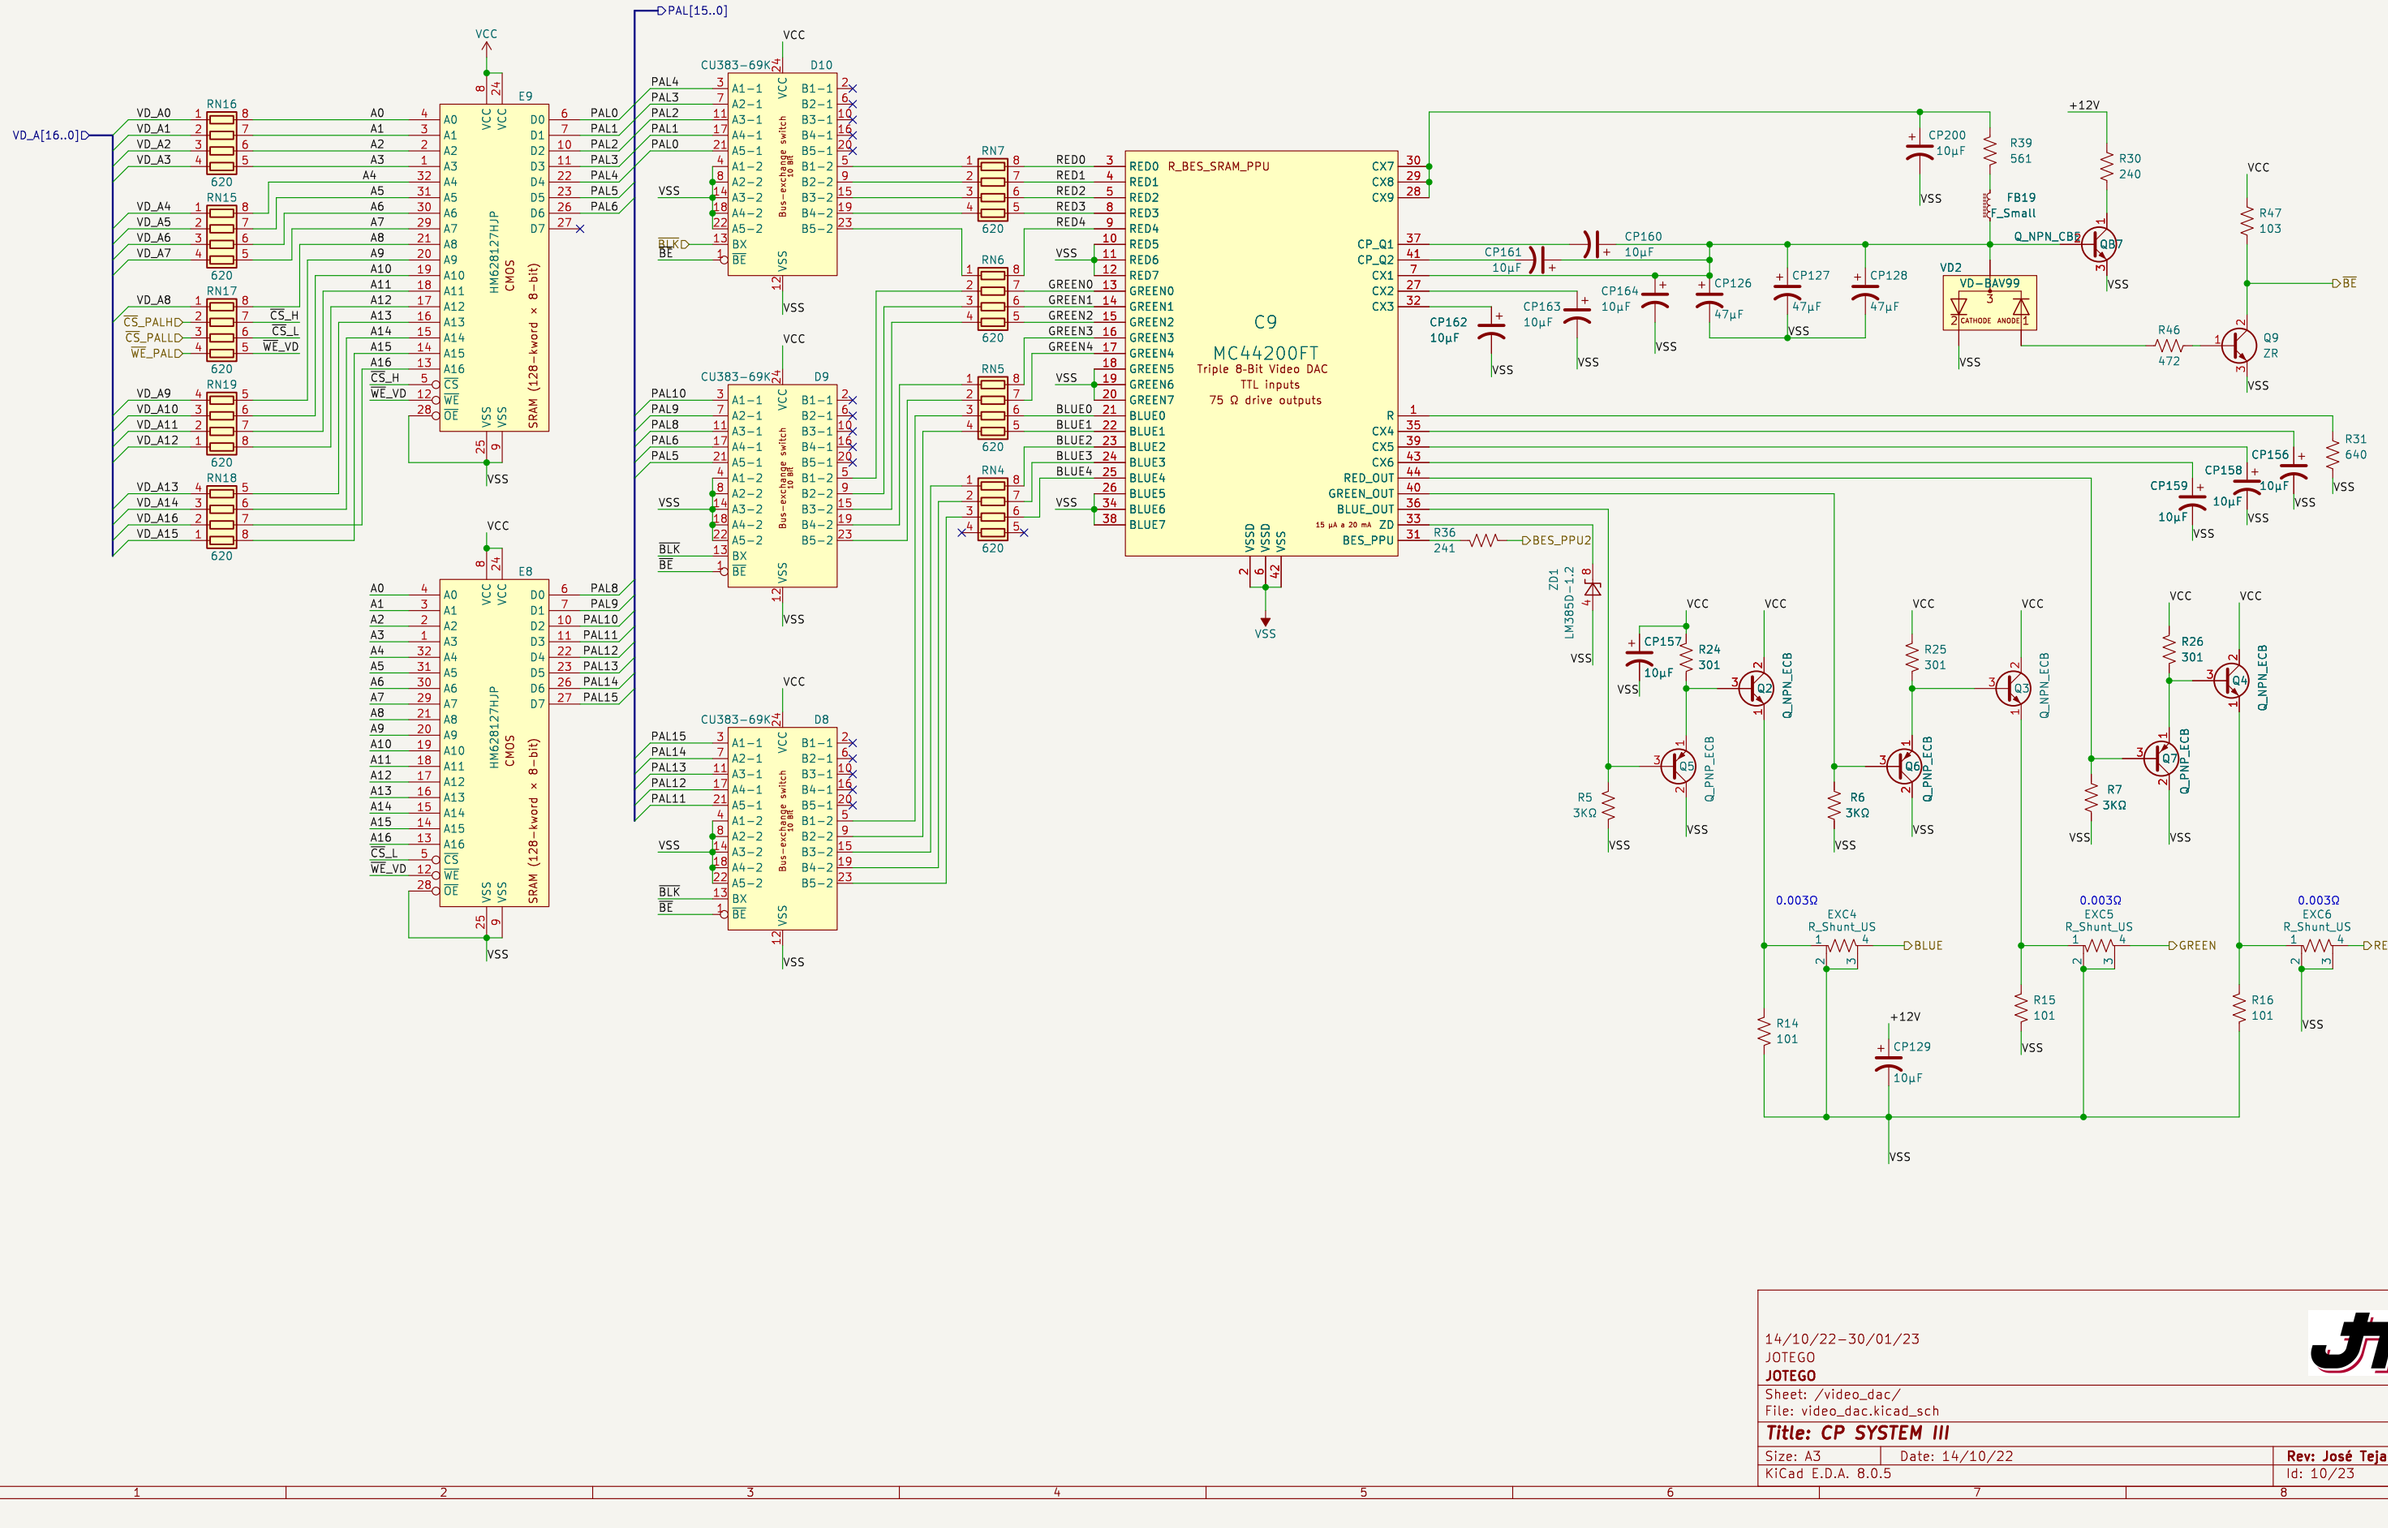
VD_A[16..0]
PAL[15..0]
HM628127HJP
CMOS
SRAM (128-kword x 8-bit)
CU383-69K
Bus-exchange switch 10 bit
C9
MC44200FT
Triple 8-Bit Video DAC
TTL inputs
75 Ω drive outputs
R_BES_SRAM_PPU
BES_PPU
VCC
VSS
+12V
Q_NPN_CBE
Q_PNP_ECB
VD-BAV99
FB19
F_Small
ZD1
LM385D-1.2
R_Shunt_US
0.003Ω
EXC4
EXC5
EXC6
BLUE
GREEN
RED
14/10/22-30/01/23
JOTEGO
JOTEGO
Sheet: /video_dac/
File: video_dac.kicad_sch
Title: CP SYSTEM III
Size: A3
Date: 14/10/22
KiCad E.D.A. 8.0.5
Rev: José Tejada G.
Id: 10/23

MEMORIES FRAME BUFFER

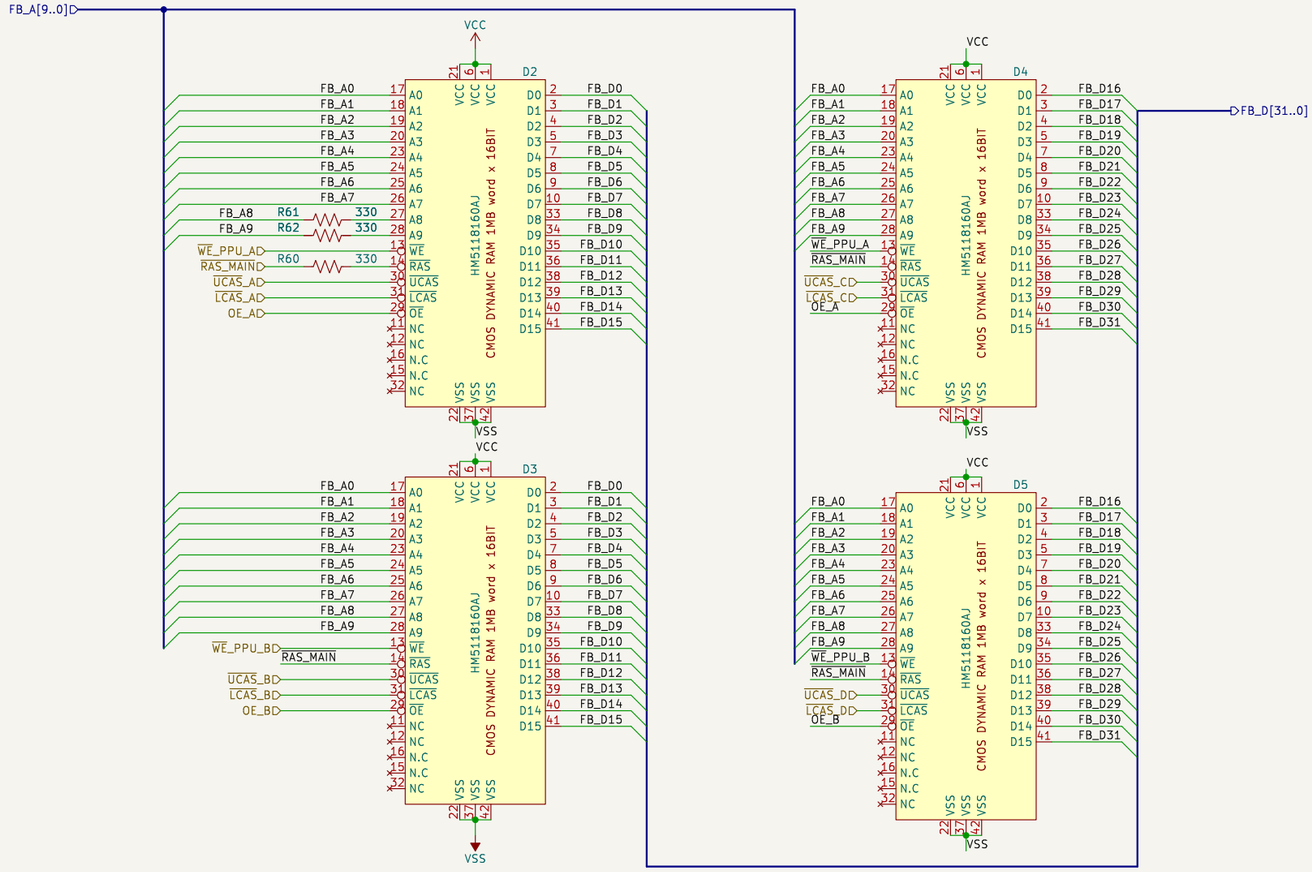

14/10/22-30/01/23
JOTEGO
JOTEGO

Sheet: /ppu/memories_fb/
File: memories_fb.kicad_sch

Title: CP SYSTEM III

Size: A3	Date: 14/10/22	**Rev: José Tejada G.**
KiCad E.D.A. 8.0.5		Id: 11/23

G6

DL-3329-SSU

SD04-1536

SYNCHRONIZATION SUPPLY UNIT?

This is might be the main CPU.
It appears to be a SH2
variant with built-in encryption.
It is clocked at 21.47725MHz (42.9545/2)

MAIN_D[14..0]
Possibly this is the address bus.

MAIN_A[23..8]
Possibly this is the data bus.

SSU_A[16..0]

D[7..0]

A[14..0]

VD_A[16..0]

F9
N341256SJ_20
CMOS SRAM
256K-BIT

R85 472

R29 100

R13 47Ω

R23 47Ω

Q1 ZR

74LS08 U1A


14/10/22-30/01/23
JOTEGO
JOTEGO

Sheet: /ssu/
File: ssu.kicad_sch

Title: CP SYSTEM III

Size: A3	Date: 14/10/22	**Rev: José Tejada G.**
KiCad E.D.A. 8.0.5		Id: 12/23

Simm 6

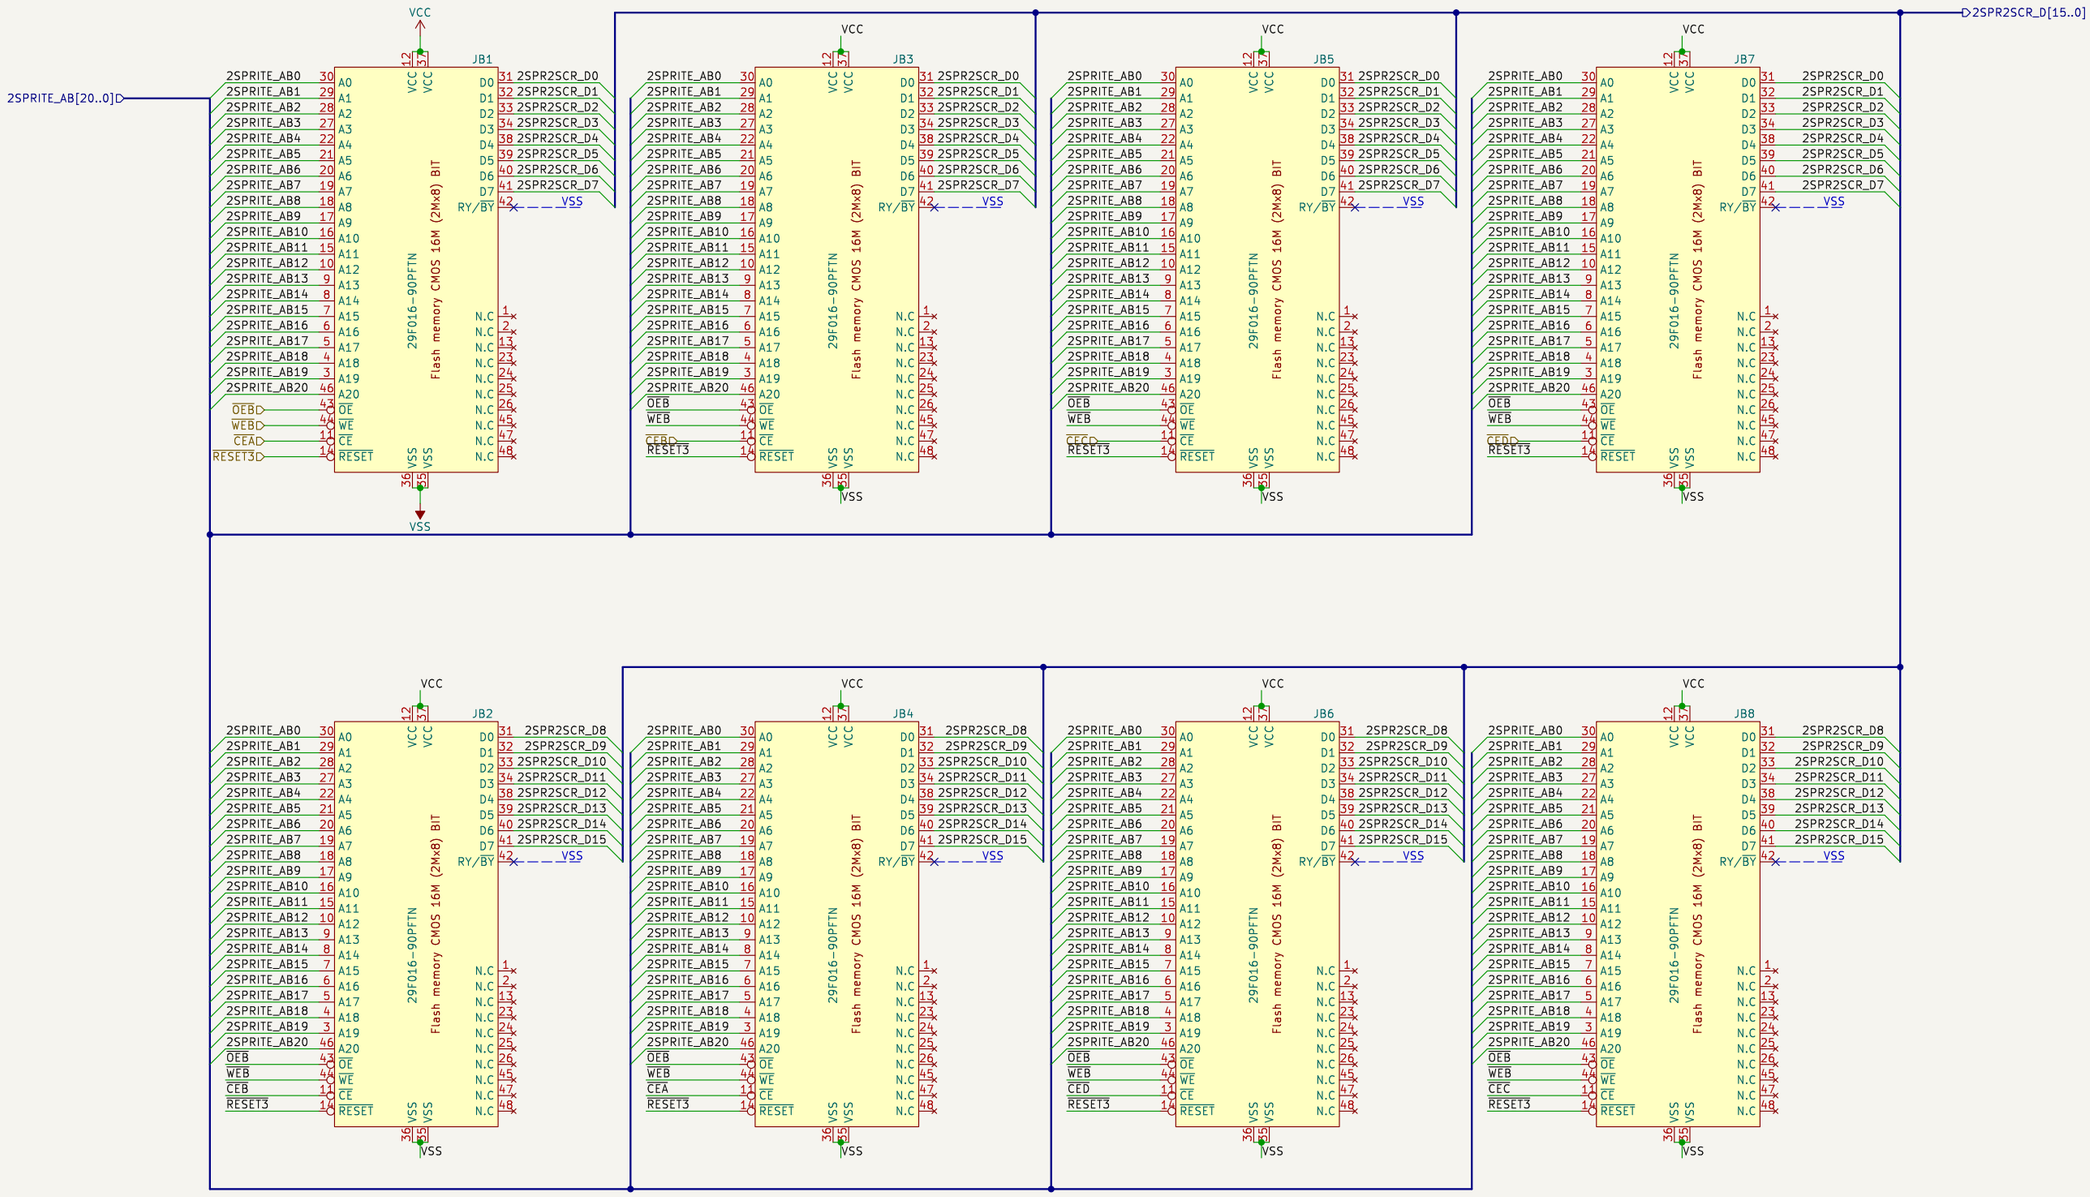

14/10/22-30/01/23		
JOTEGO		
JOTEGO		
Sheet: /simms_flash/simm6/		
File: simm6.kicad_sch		
Title: CP SYSTEM III		
Size: A3	Date: 14/10/22	**Rev: José Tejada G.**
KiCad E.D.A. 8.0.5		Id: 13/23

J13
DL-2829-CCU
COMMUNICATION CONTROL UNIT?

Cassette CPU RD
Cassette CPU CS
Cassette CPU Address Bus
*ENABLING SIMMS MEMORIES - S1 Y 2
*SOUND RAM SIMMS ADDRESS BUS
CASSETTE RAM CE
* VOLTAGE MONITOR
* SOUND RAM SIMMS DATA BUS
SHARED RAM DATA BUS
Cassette CPU Data Bus
ONLY CONNECTED TO PIN52 OF THE FEMALE SLOT

Shared RAM
MB8114260-70PJ
FAST PAGE MODE DYNAMIC RAM CMOS 256K X 16 BIT

VMON_XXN VOLTAGE DETECTOR
INCIERTO

14/10/22-30/01/23
JOTEGO
JOTEGO
Sheet: /ccu/
File: ccu.kicad_sch
Title: CP SYSTEM III
Size: A3 | Date: 14/10/22 | **Rev: José Tejada G.**
KiCad E.D.A. 8.0.5 | Id: 15/23

HARDWARE DESCRIPTION

Main CPU : Main CPU: Hitachi HD6417099 (SH-2) at 25 MHz
Storage : SCSI CD Rom, RAM and Flash ROM.
RAM : SIMMs on the left will physically hold 16M of data each (each has 8x 16M Flash ROMs, there's 4 SIMMs plugged in on this board). The SIMMs on the right will physically hold 8M each (there's 4 Flash ROMs on each board and there are 2 SIMMs plugged in)
OSC : 60MHz. 42.9545MHz, XTAL :3.6864MHz

**Sound chip: 16-channel 8-bit sample player, stereo*
**Maximum color palette: 16 million shades[5]*
**Maximum number of colors on screen: 32,768[6] (15-bit colour, 555 RGB)*
**Palette size: 131,072 pens*
**Colors per tile (backgrounds / sprites): 64 (6 bits per pixel) or 256 (8 bits per pixel), selectable*
**Colors per tile (text overlay): 16 (4 bits per pixel)*
**Maximum number of objects: 1024, with hardware scaling[6]*
**Scroll faces: 4 regular + 1 text overlay 'score screen' layer*
**Scroll features: Horizontal & vertical scrolling, linescroll, linezoom[6]*
**Framebuffer zooming*
**Color blending effects*
**Hardware RLE decompression of 6 bpp and 8 bpp graphics through DMA*
**Resolution, pixels: 384×224 (standard mode) / 496×224 (widescreen mode)*

KNOWN CP SYSTEM III (CPS3) GAME LIST


All six games are developed by Capcom and are all head-to-head fighting games in a list of games that appears to be as small as the CP System Dash library.

English title	Release date	Japanese title
Red Earth	1996-11-21	*War-Zard* (ウォーザード)
Street Fighter III: New Generation	1997-02-04	*Street Fighter III* (ストリートファイターIII)
Street Fighter III 2nd Impact: Giant Attack	1997-09-30	*Street Fighter III 2nd Impact* (ストリートファイターIII 2nd Impact)
JoJo's Bizarre Adventure	1998-12-02	*JoJo no Kimyō na Bōken* (ジョジョの奇妙な冒険)
Street Fighter III 3rd Strike: Fight for the Future	1999-05-12	*Street Fighter III 3rd Strike* (ストリートファイターIII 3rd Strike)
JoJo's Bizarre Adventure: Heritage for the Future	1999-09-13	*JoJo no Kimyō na Bōken Mirai e no Isan* (ジョジョの奇妙な冒険 未来への遺産)

Font:
The Museum Arcade System 16

14/10/22-30/01/23
JOTEGO
JOTEGO
Sheet: /h_description/
File: h_description.kicad_sch
Title: CP SYSTEM III
Size: A3 | Date: 14/10/22 | **Rev: José Tejada G.**
KiCad E.D.A. 8.0.5 | Id: 16/23

Slot Female

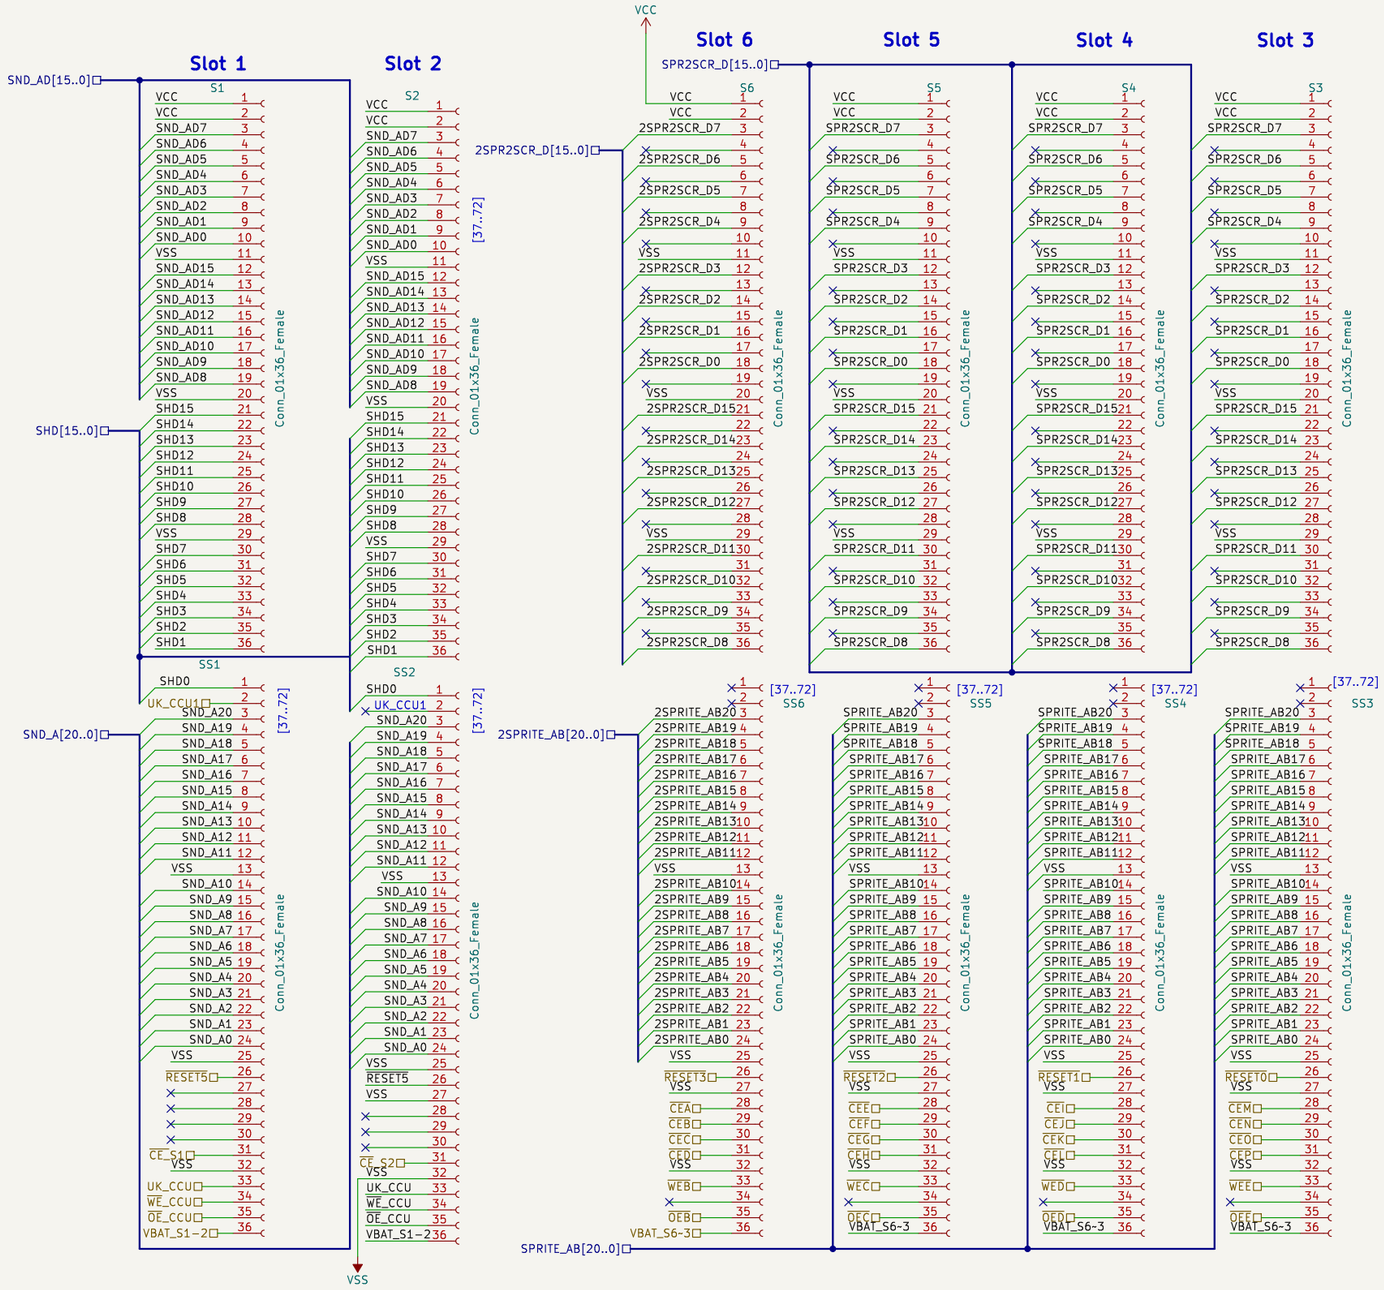

14/10/22-30/01/23
JOTEGO
JOTEGO
Sheet: /simms_flash/slots_female/
File: slots_females.kicad_sch

Title: CP SYSTEM III

Size: A3	Date: 14/10/22	**Rev: José Tejada G.**
KiCad E.D.A. 8.0.5		Id: 17/23

No device mounted
there is only the footprint

CP189 X
BT1 Battery
CP190 X
V.D2 N.C CT VD-BD53xExx VCC RESET VOUT VSS
STANDBY
CP187 1µF
CP188 1µF
V.D1 N.C CT VD-BD53xExx VCC RESET VOUT VSS
BD53E42
CP185 47µF
CP186 1µF
CP205 101
RST_WD
TRIP POINT 4,2V
Capacitor connection terminal for output delay time
RR19 X
NOT POPULATED
RST_CPUC
RR3 103
T4D 7400
T4C 7400
CP177 X
NOT POPULATED
VCC
VSS
RR6 103
DA1 B3 61t
Small Signal Zener Diode?
regulador de voltaje?
CP194 1µF
pending review here
CP176 1µF
pending review here

REDUCED INSTRUCTION SET COMPUTER

RR24 RR23 RR22 RR21 RR20 103
IRL0_CPUC IRL1_CPUC IRL2_CPUC IRL3_CPUC
CKIO_CPUC
X1 Crystal 6.25SC6L
RR2 105
CP175 1µF
CP174 1µF
CP195 1µF
CP196 1µF

CPUC_D[31..0]
VCC(PLL)
VCC
+5V
pending review here

HD6417604F28_SH2

Phase Locked Loop(PLL)
*External interrupt source input
***Nonmaskable interrupt request
**Interrupt vector fetch cycle
Clock pause request input CKPREQ/CKM
Clock pause acknowledge output CKPACK
Operating mode pin
External capacitance pin for PLL
Serial clock input/output
Serial data output
Serial data input
Free-running timer clock input
Free-running timer input
Free-running timer output
(SCU) System Control Unit?
SLAVE?
SCU3
CPU
Watchdog timer output WDTOVF
Bus request in slave mode, bus grant in master mode BREQ/BGR
Bus acknowledge in slave mode, bus request in master mode BACK/BRLS
Hardware wait request WAIT
Synchronous DRAM clock enable control CKE
Read pulse RD
Least significant byte selection signal for memory CASLL/DQMLL/WE0
Third byte selection signal for memory CASHH/DQMUU/WE1
Second byte selection signal for memory CASHH/DQMUU/WE2
Most significant byte selection signal for memory CASHH/DQMUU/WE3
CAS for synchronous DRAM, OE for pseudo-SRAM CAS/OE
RAS for DRAM and synchronous DRAM, CE for pseudo-SRAM RAS/CE
Read/write RD/WR
BS
Chip select CS3 CS2 CS1
* DMAC request
** DMAC acknowledge

MD5 MD4 MD3 MD2 CAP2 CAP1 MD1 MD0 SCK TxD RxD FTCI FTI FTOA FTOB NC
EXTAL CKPREQ/CKM CKPACK
MD
VSS
RR16 302
RR17 302
SCK_CPUC
RxD_CPUC
FTCI_CPUC
FTI_CPUC
RR11 472
RR12 472
RR13 472
RR14 472
CP191 1µF
CP192 1µF

CPUC_A[26..0]
CPUC_WE[3..0]
CPUC_CS[3..0]
RD_CPUC
RD/WR_CPUC
BS_CPUC
RR9 472
RR10 472
WAIT
WAIT_CPUC
CE_FRAM
RR15 472
T1B 7400


CASSETTE MALE CONNECTOR
CNN5
Conn_02x60_Male
OE_CMOS WE_CMOS Vpp CER_CST BYTE RST_CMOS
CPUC_D31 CPUC_D30 CPUC_D29 CPUC_D28 CPUC_D27 CPUC_D26 CPUC_D25 CPUC_D24
CPUC_D23 CPUC_D22 CPUC_D21 CPUC_D20 CPUC_D19 CPUC_D18 CPUC_D17 CPUC_D16
CPUC_D15 CPUC_D14 CPUC_D13 CPUC_D12 CPUC_D11 CPUC_D10 CPUC_D9 CPUC_D8
CPUC_D7 CPUC_D6 CPUC_D5 CPUC_D4 CPUC_D3 CPUC_D2 CPUC_D1 CPUC_D0
IRL0_CPUC IRL1_CPUC IRL2_CPUC IRL3_CPUC RST_CPUC RST_WD STBY_WD CKIO_CPUC
SCK_CPUC RxD_CPUC FTCI_CPUC FTI_CPUC WAIT_CPUC RD_CPUC RD/WR_CPUC BS_CPUC
CPUC_WE0 CPUC_WE1 CPUC_WE2 CPUC_WE3 CPUC_CS3 CPUC_CS2 CPUC_CS1 CPUC_CS0
CPUC_A26 CPUC_A25 CPUC_A24 CPUC_A23 CPUC_A22 CPUC_A21 CPUC_A20 CPUC_A19
CPUC_A18 CPUC_A17 CPUC_A16 CPUC_A15 CPUC_A14 CPUC_A13 CPUC_A12 CPUC_A11
CPUC_A10 CPUC_A9 CPUC_A8 CPUC_A7 CPUC_A6 CPUC_A5 CPUC_A4 CPUC_A3
CPUC_A2 CPUC_A1 CPUC_A0 VCC

pending review here
T4B 7400
STBY_WD
MD
RR5 473
RR4 103
CP178 1µF
RR7 104
CP206 1µF
RR18 301
CP193 1µF
RR8 102
QQ2 AEY
QQ1 BR39
BREAKDOWN?

memories_scu
CPUC_A[26..0] CER_CSTD WAIT_CPUC CPUC_CS1 CPUC_WE0 Vpp WE_CMOS RST_CMOS BYTE OE_CMOS
WAIT_CPUC CE_FRAM CPUC_D[31..0]

14/10/22-30/01/23
JOTEGO
JOTEGO
Sheet: /cassette/
File: cassette.kicad_sch
Title: CP SYSTEM III
Size: A3 | Date: 14/10/22 | Rev: José Tejada G.
KiCad E.D.A. 8.0.5 | Id: 19/23

Simm 5

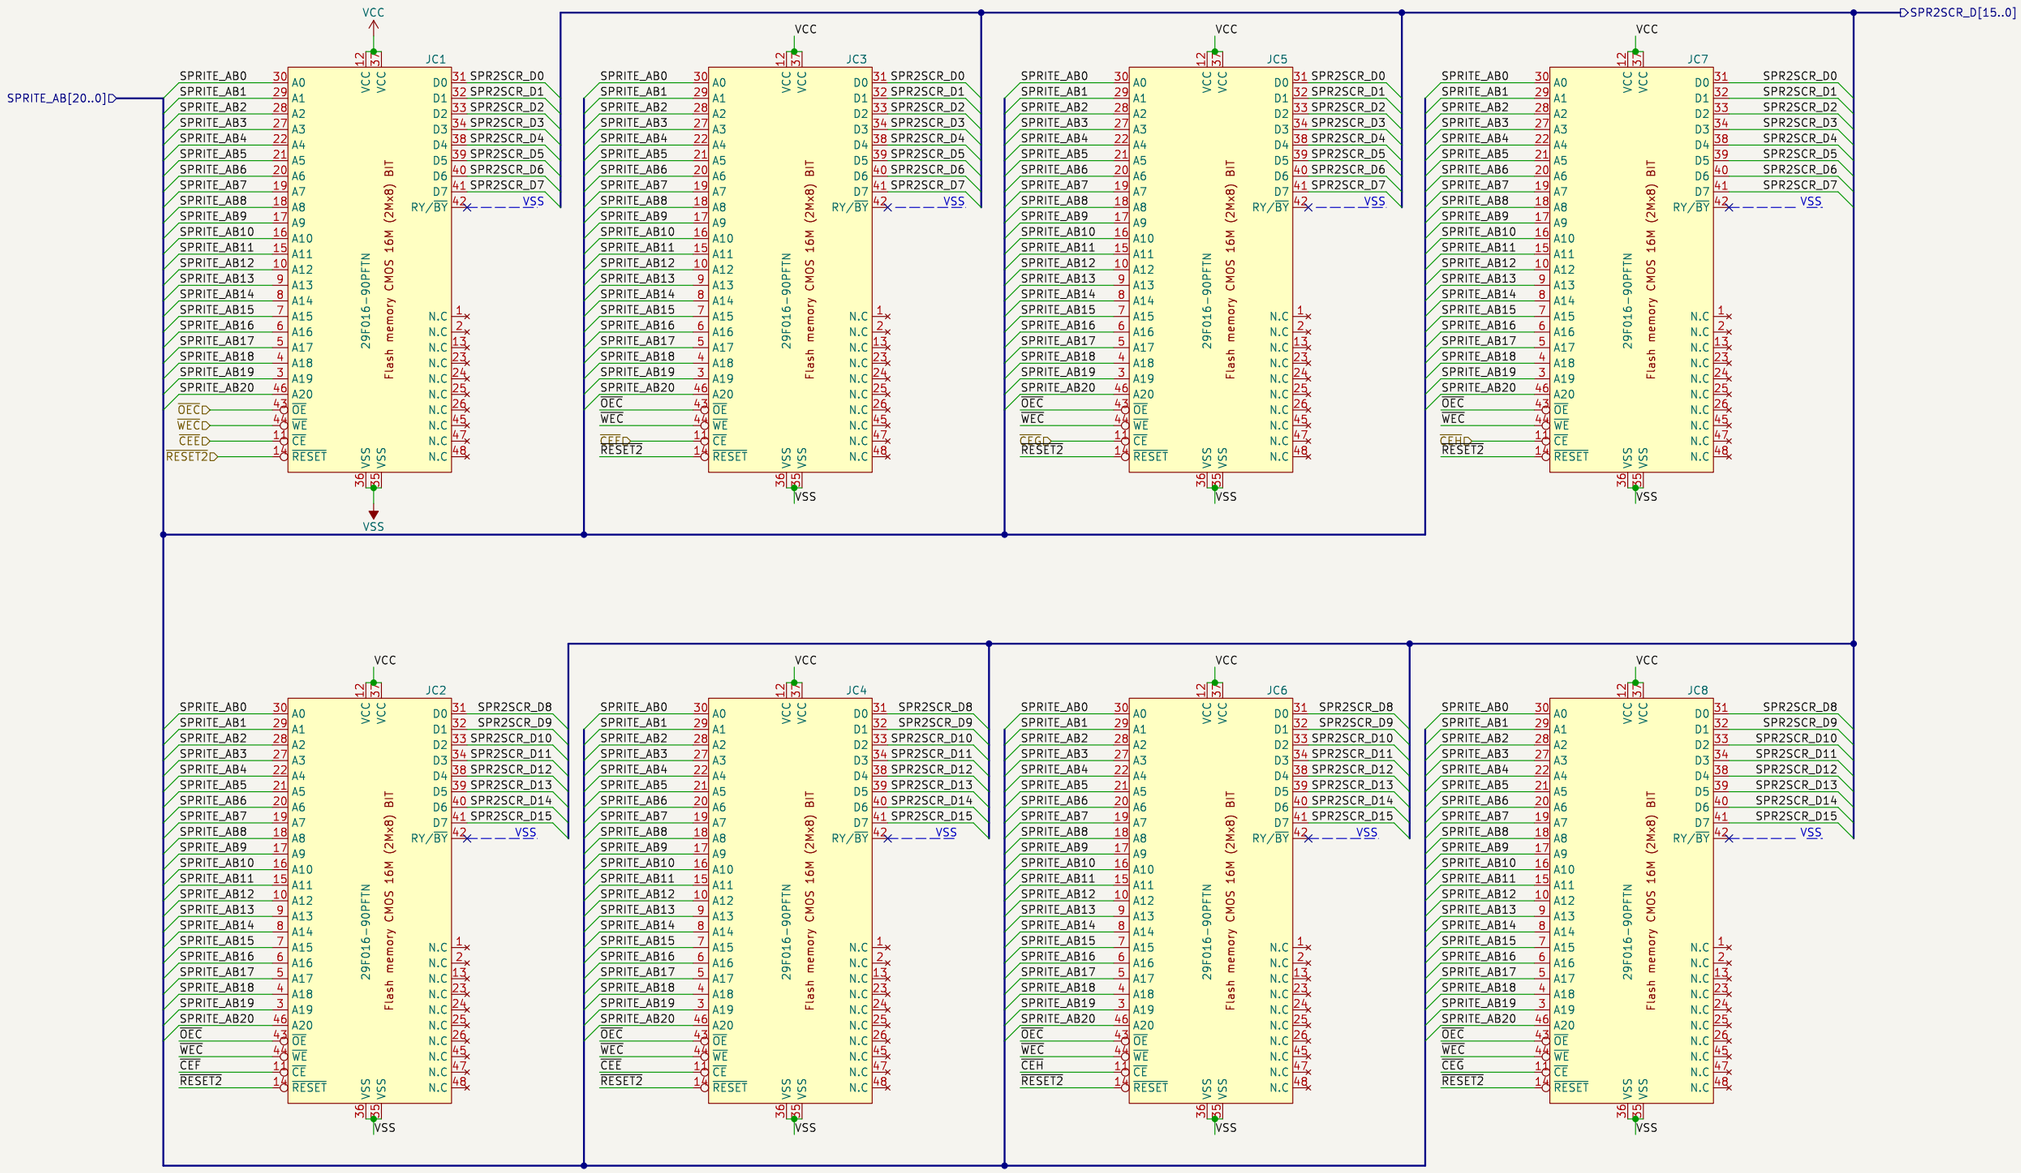


14/10/22-30/01/23
JOTEGO
JOTEGO

Sheet: /simms_flash/simm5/
File: simm5.kicad_sch


Title: CP SYSTEM III

Size: A3	Date: 14/10/22	**Rev: José Tejada G.**
KiCad E.D.A. 8.0.5		Id: 20/23

SIMM CONNECTOR

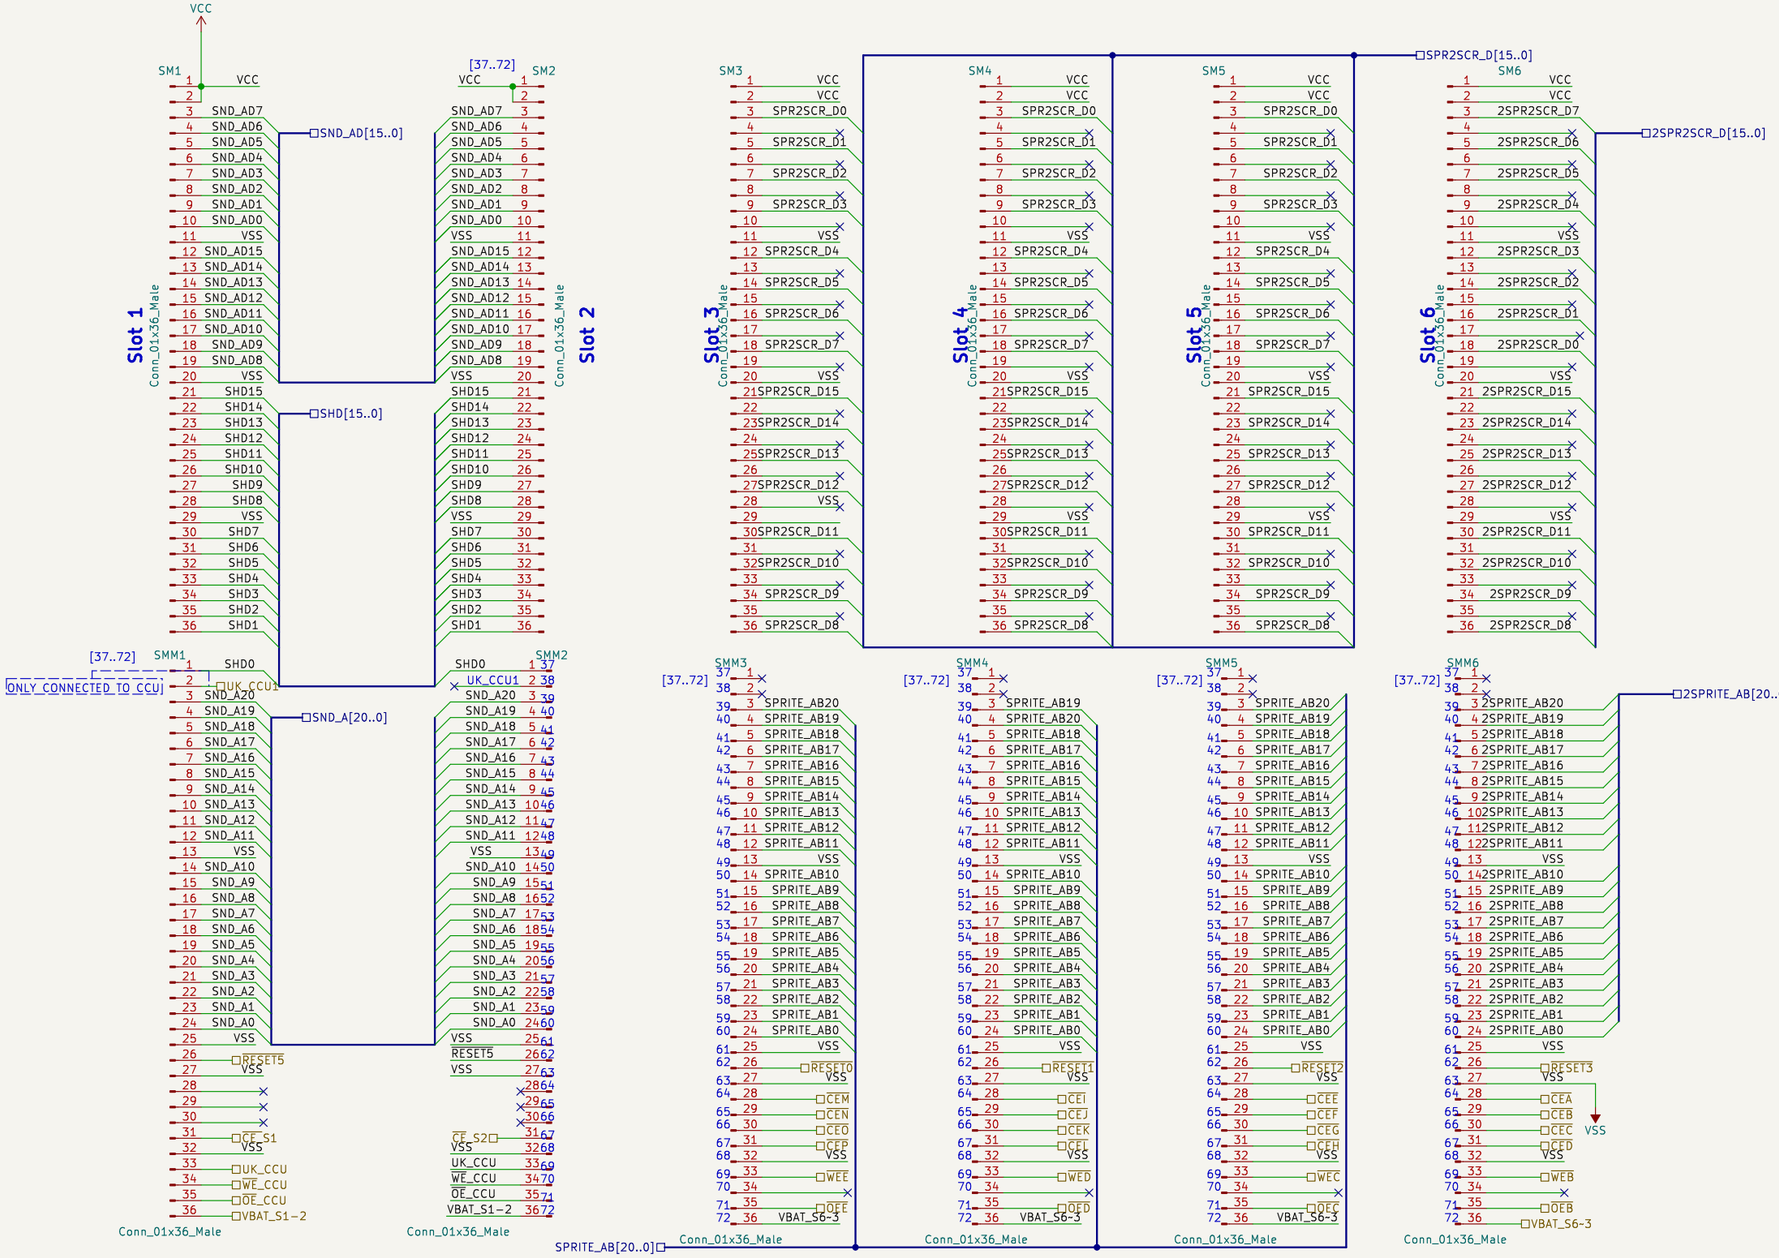

14/10/22-30/01/23		
JOTEGO		
JOTEGO		
Sheet: /simms_flash/simm_connector/		
File: simm_connector.kicad_sch		
Title: CP SYSTEM III		
Size: A3	Date: 14/10/22	**Rev: José Tejada G.**
KiCad E.D.A. 8.0.5		Id: 20/23

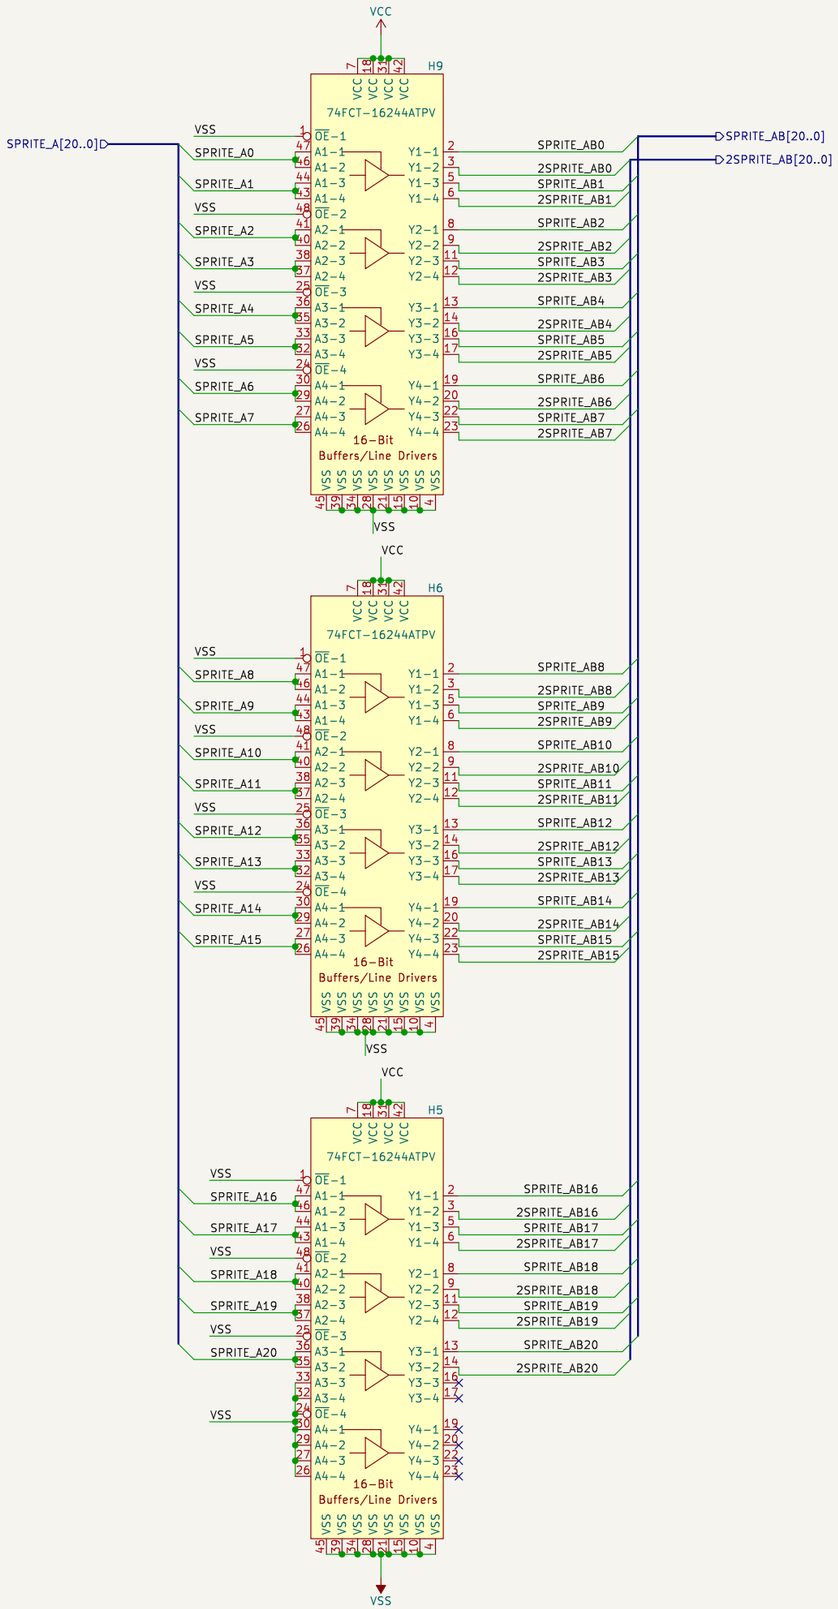


14/10/22-30/01/23
JOTEGO
JOTEGO

Sheet: /ppu/buffer_line_driver/
File: buffer_line_driver.kicad_sch

Title: CP SYSTEM III

Size: A3	Date: 14/10/22	**Rev: José Tejada G.**
KiCad E.D.A. 8.0.5		Id: 21/23


Simm 4

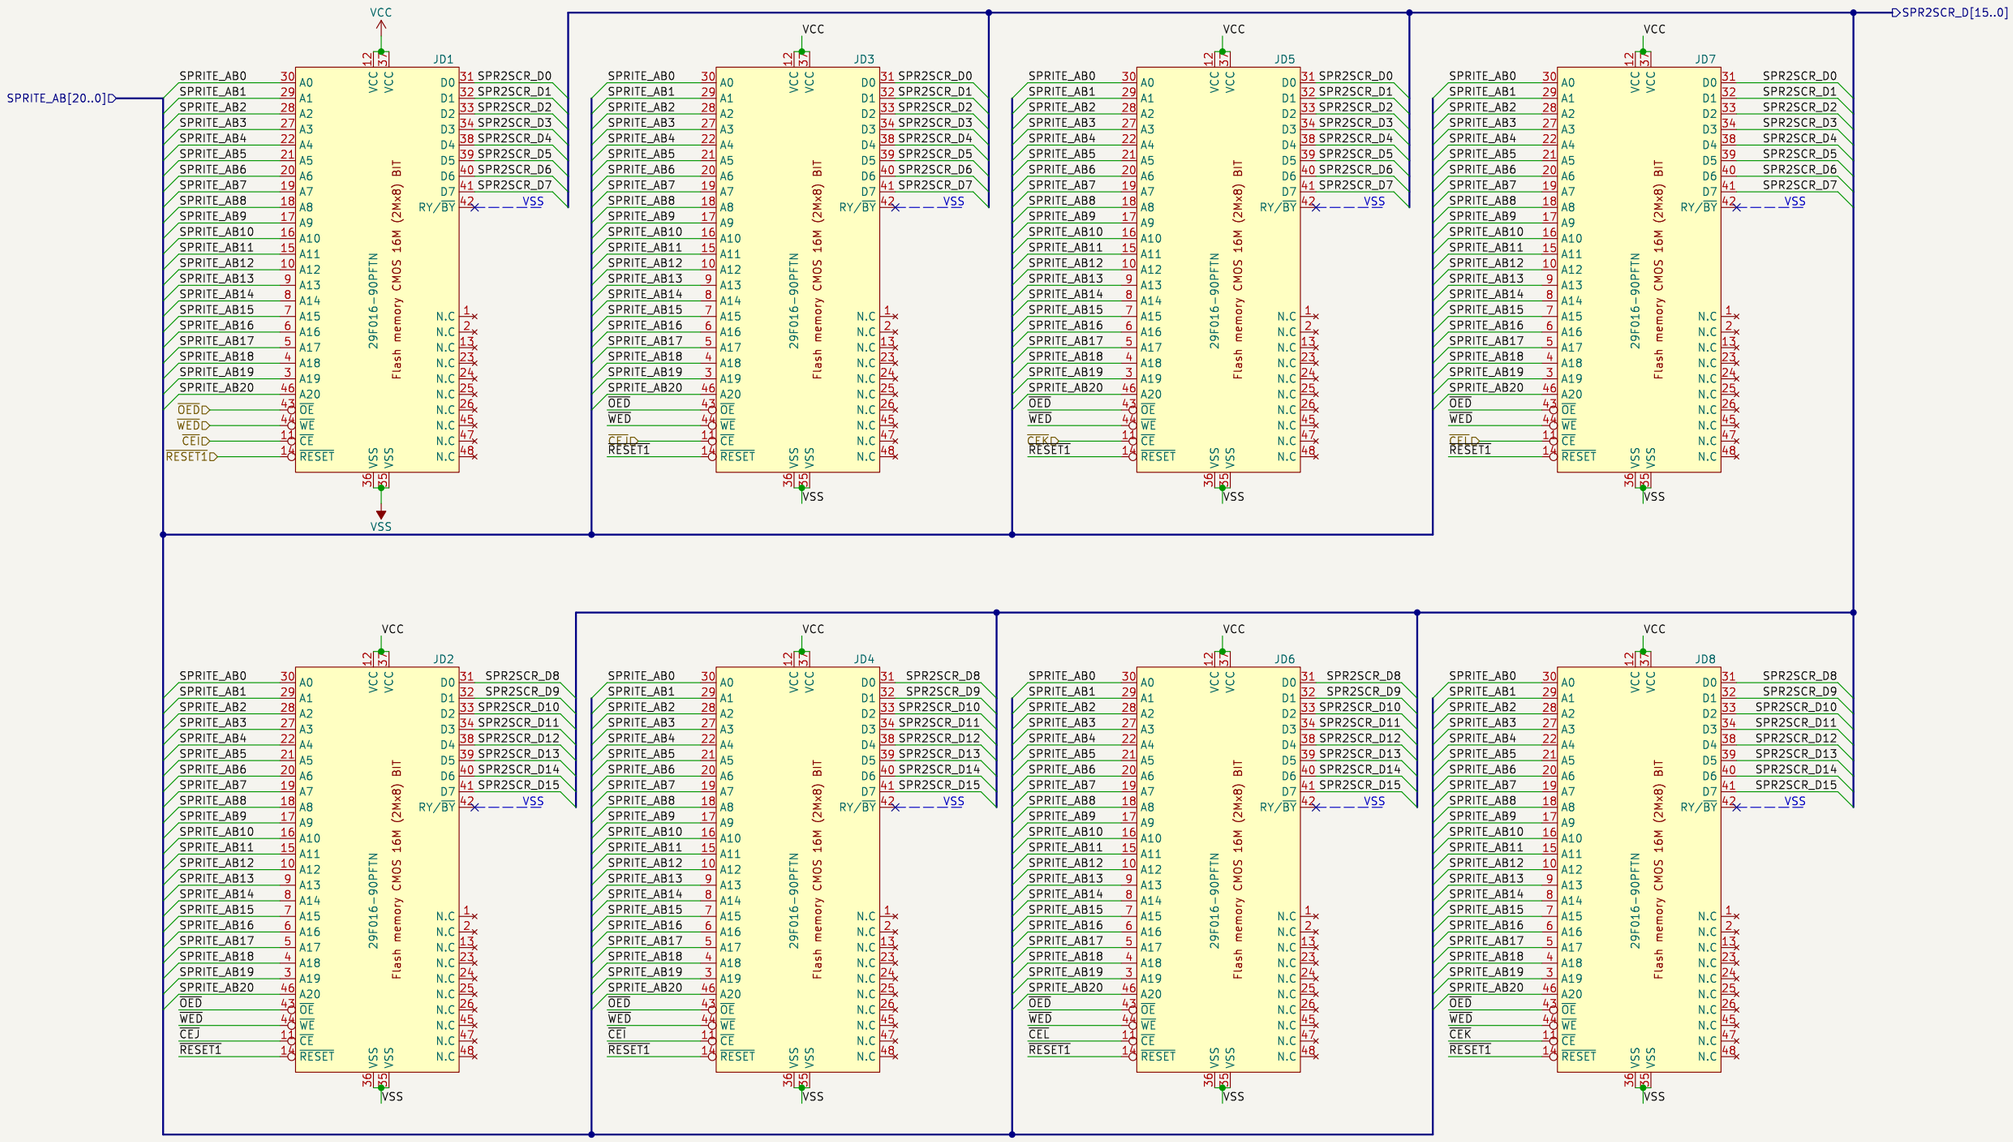

14/10/22-30/01/23
JOTEGO
JOTEGO
Sheet: /simms_flash/simm4/
File: simm4.kicad_sch

Title: CP SYSTEM III


Size: A3	Date: 14/10/22	**Rev: José Tejada G.**
KiCad E.D.A. 8.0.5		Id: 21/23

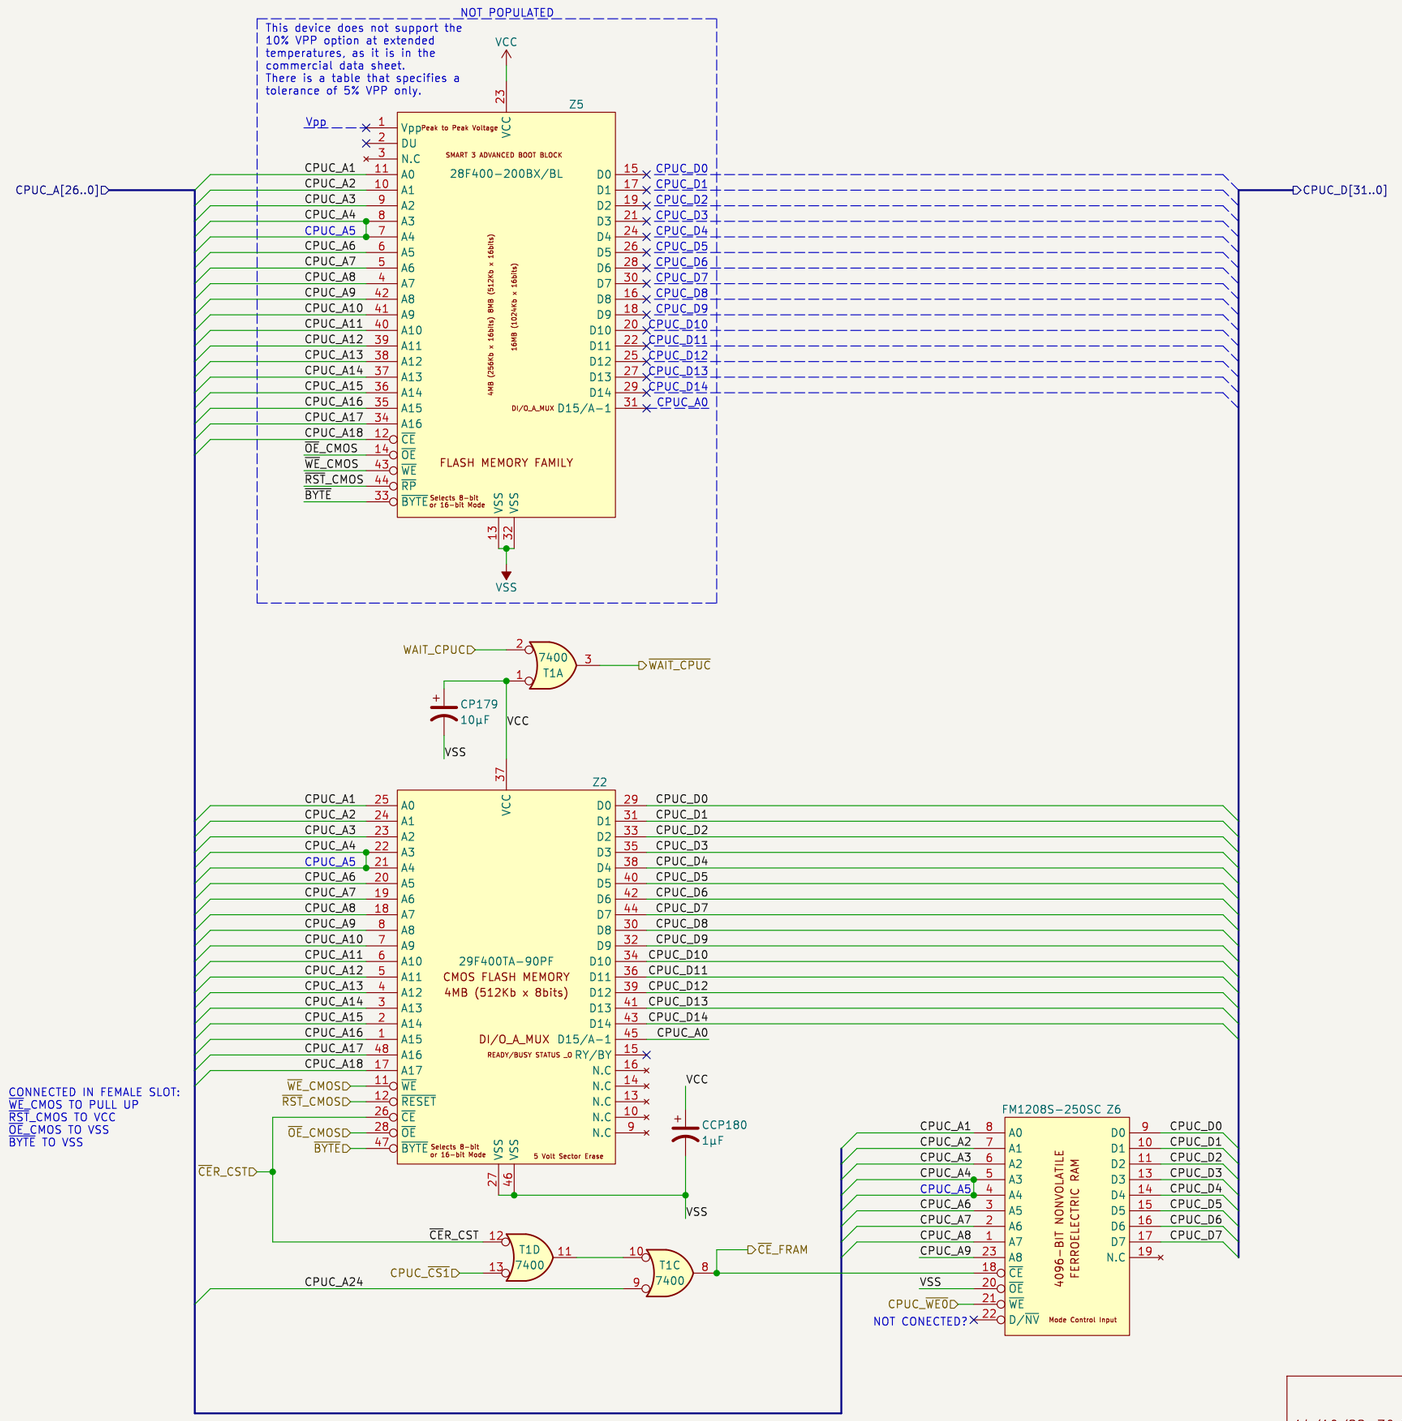

14/10/22-30/01/23
JOTEGO
JOTEGO
Sheet: /cassette/memories_scu/
File: memories_scu.kicad_sch

Title: CP SYSTEM III

Size: A3	Date: 14/10/22	**Rev: José Tejada G.**
KiCad E.D.A. 8.0.5		Id: 22/23

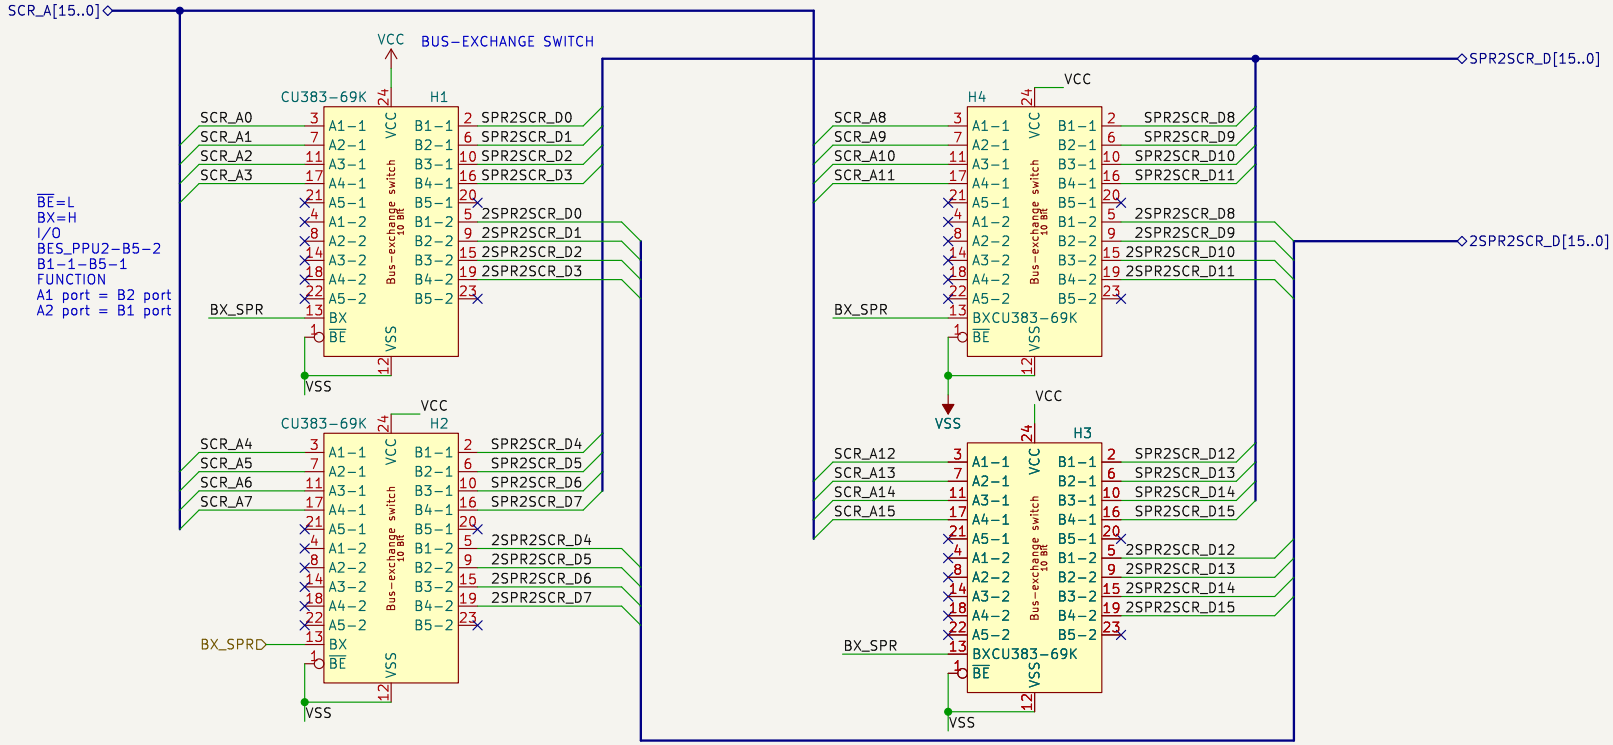

14/10/22-30/01/23
JOTEGO
JOTEGO

Sheet: /simms_flash/scroll/
File: scroll.kicad_sch

Title: CP SYSTEM III

Size: A4	Date: 14/10/22	**Rev: José Tejada G.**
KiCad E.D.A. 8.0.5		Id: 23/23