


Secciones:

[illegible]



Gabriel Castul

Estudiante de ingeniería de software

Edit Profile

POSTS

ABOUT

EXPERIENCE

Gabriel Nayib

Castul Lazo

Mood

Add Mood

Mobile

+52-(999)- 367-8924 Edit

Home

Add Number

Office

Add Number

About Me

Actualmente estoy estudiando la licenciatura en ingeniería de software y he tomado los siguientes cursos:

- APIs
- Django Web Framework
- Coding Interview Preparation
- Introduction to Databases for Back-End Development
- Python Essentials 1
- Python Essentials 2
- Version Control
- Introduction to Back-End Development
- Programming in Python

Country/Region

México

City

Mérida

State


Add State

Website

Add Webpage

Gender

Male

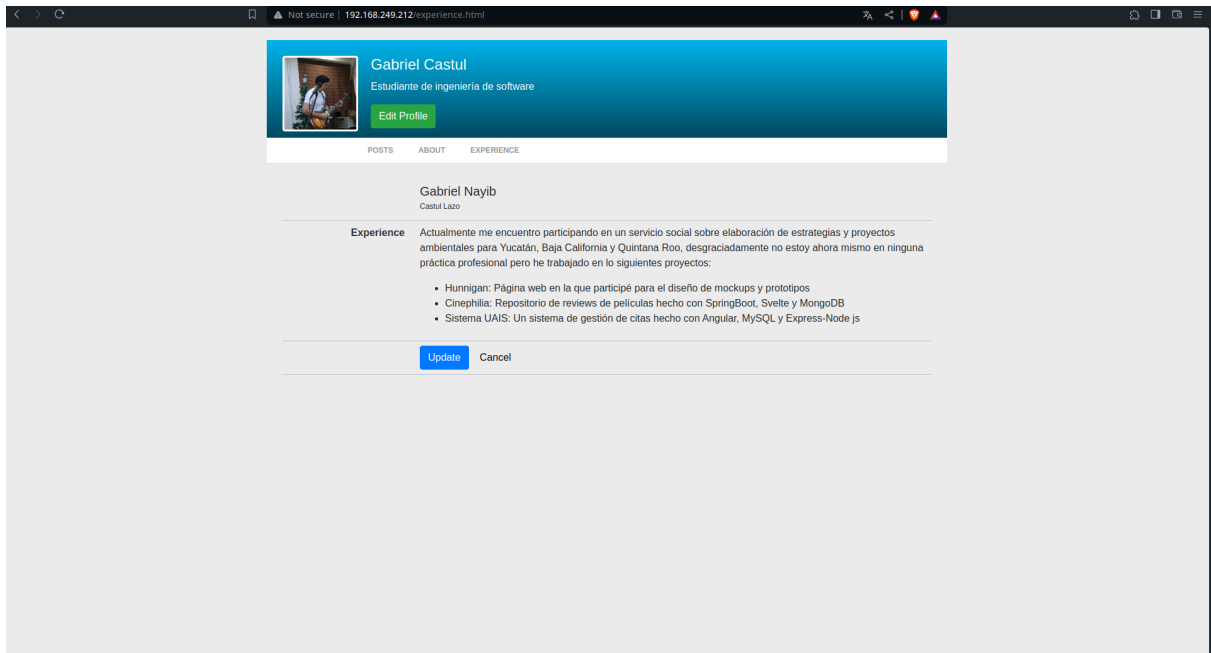

Corriendo

```
[nayib@SexOS ~]$ sudo systemctl restart nginx.service
[sudo] password for nayib:
[nayib@SexOS ~]$ sudo systemctl status nginx.service
● nginx.service - A high performance web server and a reverse proxy server
   Loaded: loaded (/usr/lib/systemd/system/nginx.service; disabled; preset: disabled)
   Active: active (running) since Wed 2024-02-21 18:17:38 CST; 12s ago
     Process: 14879 ExecStart=/usr/bin/nginx (code=exited, status=0/SUCCESS)
    Main PID: 14880 (nginx)
       Tasks: 2 (limit: 9179)
      Memory: 2.2M (peak: 2.3M)
         CPU: 11ms
    CGroup: /system.slice/nginx.service
            └─14880 "nginx: master process /usr/bin/nginx"
              └─14881 "nginx: worker process"

Feb 21 18:17:38 SexOS systemd[1]: Starting A high performance web server and a reverse proxy server...
Feb 21 18:17:38 SexOS nginx[14879]: 2024/02/21 18:17:38 [warn] 14879#14879: cannot not build optimal types_hash, you should increase either types_hash_max_size: 1024 or types_hash_bucket_size: 64
Feb 21 18:17:38 SexOS systemd[1]: Started A high performance web server and a reverse proxy server.
lines 1-15/15 (END)
```

ip a

```
[nayib@SexOS ~]$ ip a
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000
   link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
   inet 127.0.0.1/8 scope host lo
       valid_lft forever preferred_lft forever
   inet6 ::1/128 scope host noprefixroute
       valid_lft forever preferred_lft forever
2: wlan0: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc noqueue state UP group default qlen 1000
   link/ether 20:c1:9b:8b:00:7e brd ff:ff:ff:ff:ff:ff
   inet 192.168.249.212/21 brd 192.168.255.255 scope global dynamic noprefixroute wlan0
       valid_lft 26168sec preferred_lft 26168sec
   inet6 fe80::7435:6531:aa95:3dd/64 scope link noprefixroute
       valid_lft forever preferred_lft forever
```