

CLAM Documentation

Maarten van Gompel

April 27, 2010

Chapter 1

Introduction

The Computational Linguistics Application Mediator (CLAM) allows you to quickly and transparently transform your Natural Language Processing application into a webservice, with which both human end-users as well as automated clients can interact. CLAM takes a description of your system and wraps itself around it, allowing end-users to upload input files to your application, start your application with specific parameters of their choice, and download and view the output of the application. Whilst the application runs, users can monitor its status.

CLAM is set up in a universal fashion, making it flexible enough to be wrapped around a wide range of computational linguistic applications. These applications are treated as a black box, of which only the parameters, input formats and output formats need to be described. The applications themselves need not be network aware in any way, and the handling and validation of input take can be taken care of by CLAM.

The kind of applications that CLAM is intended for are NLP applications, usually of a kind that do some processing on a text corpus. This corpus or smaller text can be uploaded by the user, or may be pre-installed for the webservice. The NLP application is usually expected to produce a certain output, which is subsequently made available through the webservice for viewing and downloading.

The CLAM webservice is a RESTful webservice, meaning it uses the HTTP verbs GET, POST, PUT and DELETE to manipulate resources. The principal resource in CLAM is called a project. Users can maintain various projects, each representing one specific run of the system, with specific input, output and parameters.

The webservice provides its responses in the CLAM XML format, an associated XSL stylesheet can directly transform this to xhtml in the user's browser, thus allowing both machines and people to directly communicate

with the webservice.

This documentation is split into two parts: a section for service providers/developers and a section for service clients, users those wanting to communicate with an existing service in an automated fashion.

Chapter 2

Documentation for Service Providers

2.1 Technical details

CLAM is written in Python 2.5, and is built on the webpy framework. It can run stand-alone thanks to the built-in cherrypy webserver. So no additional webserver is needed. Note that the software is designed for UNIX systems only, but any serious work in the field of NLP is UNIX based anyhow.

2.1.1 Installation

The following software is required to run CLAM. These will be available in any modern Linux or BSD distribution:

- python 2.5 (or a higher 2.x version)
- python-webpy, version 0.3
- python-lxml, version 2 or higher

Python will run on any TCP port of your choice. It is recommended not to use HTTP port 80. Also make sure the port is open in the firewall, at least for the machines you want to allow access.

To install CLAM, simply uncompress the clam software archive in any desired target location. The following files may be of particular interest to service providers:

- `clamservice.py` – This is the webservice itself, the command to be invoked to start it.

- `config/` – This directory contains service configuration files. Place your service configuration here.
- `config/defaults.py` – This is a default configuration template which you can copy to make your own service configuration.
- `common/` – Common Python modules for CLAM
- `common/parameters.py` – Parameter-type definitions
- `common/format.py` – Format-type definitions
- `static/style.css` – The styling for visualisation

Starting the service is done by launching `clamservice.py` with the name of your service configuration and optionally a port number (the default is 8080).

```
$ clamservice.py config.ucto 8080
```

2.2 Architecture

CLAM has a layered architecture, with at the core the NLP application(s) you want to turn into a webservice. The scheme in Figure 2.1 illustrates the various layers:

A CLAM webservice needs the following three components from the service developer:

1. A service configuration file
2. A wrapper script for your NLP application
3. An NLP application

The wrapper script is not strictly mandatory if the NLP application can be directly invoked by CLAM. However, for more complex applications, writing a wrapper script is strongly recommended, as it offers more flexibility and better integration.

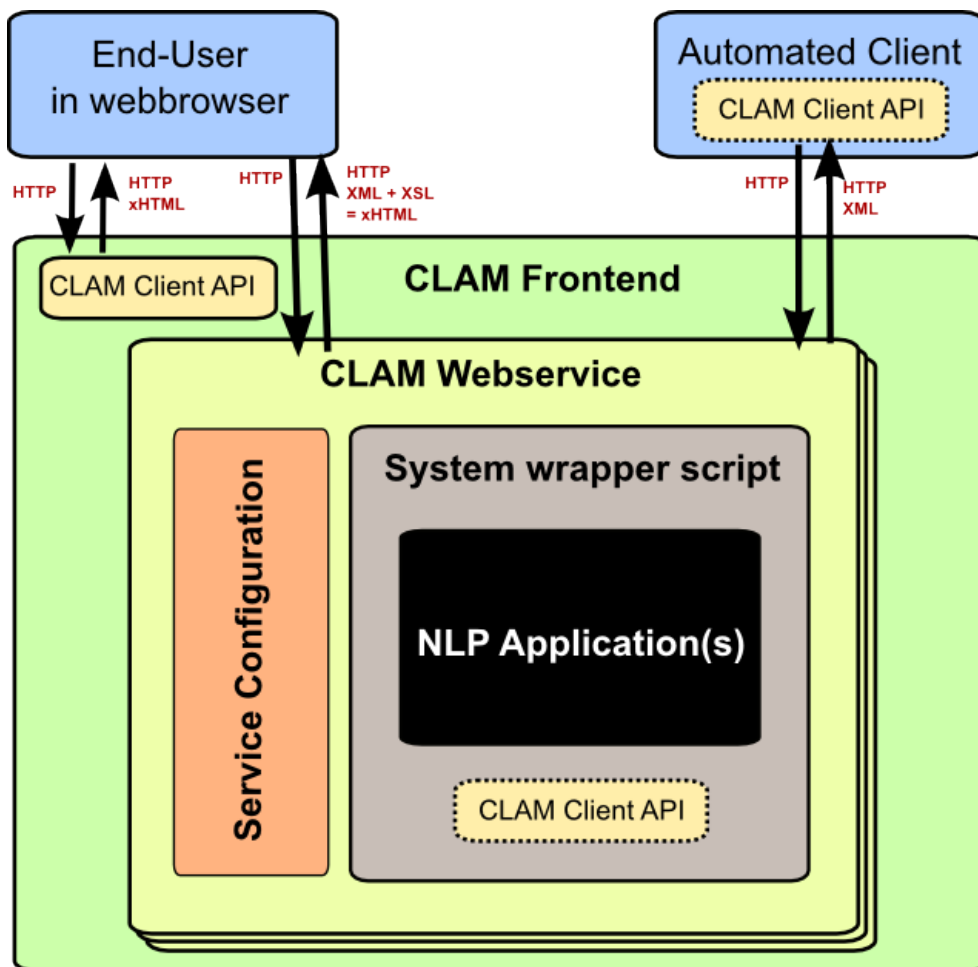


Figure 2.1: The CLAM Architecture

2.3 Service configuration

The service configuration consists out of a description of your NLP application, or rather, the wrapper script that surrounds it. It specifies what parameters the system can take, and what input and output formats are expected. The service configuration is itself a Python script. But due to its straightforward nature, knowledge of Python is not required to make your own.

The server configuration files reside in the `config/` directory. Making a new webservice starts with copying the sample `defaults.py` and editing your copy.

One of the first things to configure is the root path. All projects will be

confined to the `projects/` directory under this root path, each project having its own subdirectory. Pre-installed corpora should be put in the `corpora/` directory.

2.3.1 Command

Central in the configuration file is the command that CLAM will execute. This command should start the actual NLP application, or preferably a script wrapped around it. Full shell syntax is supported and there are some special variables that will be automatically set by CLAM:

- `$INPUTDIRECTORY` - The absolute path to the input directory where all the input files from the user will be stored (possible in subdirectories).
- `$OUTPUTDIRECTORY` - The absolute path to the output directory. Your system should output all of its files here, as otherwise they are not accessible through CLAM.
- `$STATUSFILE` - The absolute path to a status file. Your system may write a short message to this status file, indicating the current status. This message will be displayed to the user in CLAM's interface. The status file consists only of the latest message.
- `$PARAMETERS` - This variable will contain all parameter flags and the parameter values that have been selected by the user.
- `$DATAFILE` - This is the absolute path to the data file that CLAM outputs in the project directory. This data file, in CLAM XML format, contains all parameters along with their selected values. Furthermore it contains the inputformats and outputformats, and a listing of uploaded input files and/or pre-installed corpora. System wrapper scripts can read this file to obtain all necessary information. If the system wrapper script is written in Python, the CLAM Client API can be used to read this file, required little effort on the part of the developer.
- `$USERNAME` - The username of the logged in user.

Make sure the actual command is an absolute path or the executable is in the user's `$PATH`. Upon launch, the current working directory will be automatically set to the specific project directory. Within this directory, there will be an `input/` and `output/` directory, but use the full path as stored in `$INPUTDIRECTORY` and `$OUTPUTDIRECTORY/`. All uploaded user input will be in this input directory, and all output that users should be able to view or download, should be in this output directory.

2.3.2 Parameters

The parameters which an NLP application, or rather the wrapper script, can take, are defined in the service configuration. First of all parameters can be subdivided into parameter groups, but these serve only presentational purposes.

Parameters of six types are predefined, though other types can be added to `common/parameters.py`. Each is a Python class taking the following mandatory arguments:

1. `id` – An id for internal use only.
2. `paramflag` – The parameter flag, this flag will be added to `$PARAMETERS` when the parameter is set. It is customary for parameter flags to consist of a hyphen and a letter or two hyphens and a string. Parameter flags could be for example be formed like: `-p`, `--pages`, `--pages=`. There will be a space between the parameter flag and its value, unless it ends in a `=` sign or `nospace=True` is set. Multi-word string values will automatically be enclosed in quotation marks, for the shell to correctly parse them.
3. `name` – The name of this parameter, this will be shown to the user in the interface.
4. `description` – A description of this parameter, meant for the end-user.

The six parameter types are:

- `BooleanParameter` - A parameter that can only be turned on or off, represented in the interface by a checkbox. If it is turned on, the parameter flag is included in `$PARAMETERS`, if it is turned off, it is not. If `reverse=True` is set, it will do the inverse.
- `IntegerParameter` - A parameter expecting an integer number. Use `minrange=`, and `maxrange=` to restrict the range.
- `FloatParameter` - A parameter expecting a float number. Use `minrange=`, and `maxrange=` to restrict the range.
- `StringParameter` - A parameter taking a string value. Use `maxlength=` if you want to restrict the maximum length.
- `TextParameter` - A parameter taking a multiple lines of text.

- **ChoiceParameter** - A multiple-choice parameter. The choices must be specified as a list of (**ID**, **label**) tuples, in which **ID** is the internal value, and **label** the text the user sees. For example, suppose a parameter with flag **-c** is defined. **choices=[('r','red'),('g','green'),('b','blue')]**, and the user selects “green”, then **-c g** will be added to **\$PARAMETERS**. The default choice can be set with **default=**, and then the **ID** of the choice. If you want the user to be able to select multiple parameters, then you can set the option **multi=True**. The **IDs** will be concatenated together in the parameter value, a delimiter (a comma by default) can be specified with **delimiter=**. If you do not use **multi=True**, but you do want all options to be visible in one view, then you can set the option **showall=True**.

All parameters can take the following extra named arguments:

- **default** - Set a default value.
- **required** - Set to **True** to make this parameter required rather than optional.
- **require** - Set this to a list of parameter **IDs**. If this parameter is set, so must all others in this list.
- **forbid** - Set this to a list of parameter **IDs**. If this parameter is set, none of the others in the list may be set.

2.3.3 Inputformats & Outputformats

CLAM takes care of the handling of input and output formats. When a user uploads a file, he chooses from a list of options to select the desired input format. Each inputformat is associated with a particular extension. CLAM automatically renames the uploaded files so they get the desired extension, relieving the end-user of this burdain. If multiple extensions are defined the first is used. An extension is also associated with each outputformat, the system output files are recognised on the basis of this extension. Your system wrapper can recognise file formats also on the basis of their extension, or by explicitly getting their format from the **clam.xml** datafile. Moreover, input formats and output formats can also have associated validators, which can check if the file really is in the desired format. And for each inputformat and outputformat, a character encoding needs to be explicitly set.

The inputformats are defined in the service configuration file as a list of classes, where each class corresponds to a particular input format. The outputformats are defined in a similar way. The classes themselves are defined

in `common/formats.py`, where you can add any new types (subclassed from `Format`).

Defining a format goes as follows, let's take `PlainTextFormat` as example:

```
INPUTFORMATS = [ PlainTextFormat('utf-8' ['.txt'], subdirectory='texts' ) ]
```

The first argument of the class constructor is the encoding, the second is a list of acceptable extensions, of which the first will be used in the rename procedure. Some extra arguments can be provided:

- **subdirectory=** – Store all files of this format in the specific subdirectory of the input directory. This allows you to separate files of a certain format into distinct directories.
- **archivesubdirs=** – Set this to `False` if you want to extract archives in a flattened fashion, with disregard for any subdirectories therein.

Note that users can upload either single files in the specified format, or an archive (`zip`, `tar.gz` or `tar.bz2`) containing multiple files in the specified format.

2.3.4 Users

Yet to be written...

2.4 Wrapper script

Service providers are encouraged to write a wrapper script that acts as the glue between CLAM and the NLP Application(s). CLAM will execute the wrapper script and the wrapper script will invoke the actual NLP Application(s). Using a wrapper script offers more flexibility than letting CLAM directly invoke the NLP Application, and allows the NLP Application itself to be totally independent of CLAM.

The wrapper script takes the arguments as selected for **COMMAND** in the service configuration file. There are some important things to take into account:

- All user-controllable input has to be read from the specified input directory. If you do not use the `clam.xml` data file, then you have to determine the file's format based on its extension. See Section 2.3.3.

- All user-viewable output must be put in the specified output directory. Make sure it has an extension CLAM will recognise. See Section 2.3.3.
- The wrapper should periodically output a small status message to `$STATUSFILE`.
- The wrapper script is always started with the current working directory set to the selected project directory.

The wrapper script can be written in any language. Python developers will have the big advantage that they can directly tie in to the CLAM Client API, which handles things such as reading the `clam.xml` data file.

Chapter 3

Documentation for Service Clients

Yet to be written...