
01 Buttons & basic controls

Exterior views: no disassembly needed

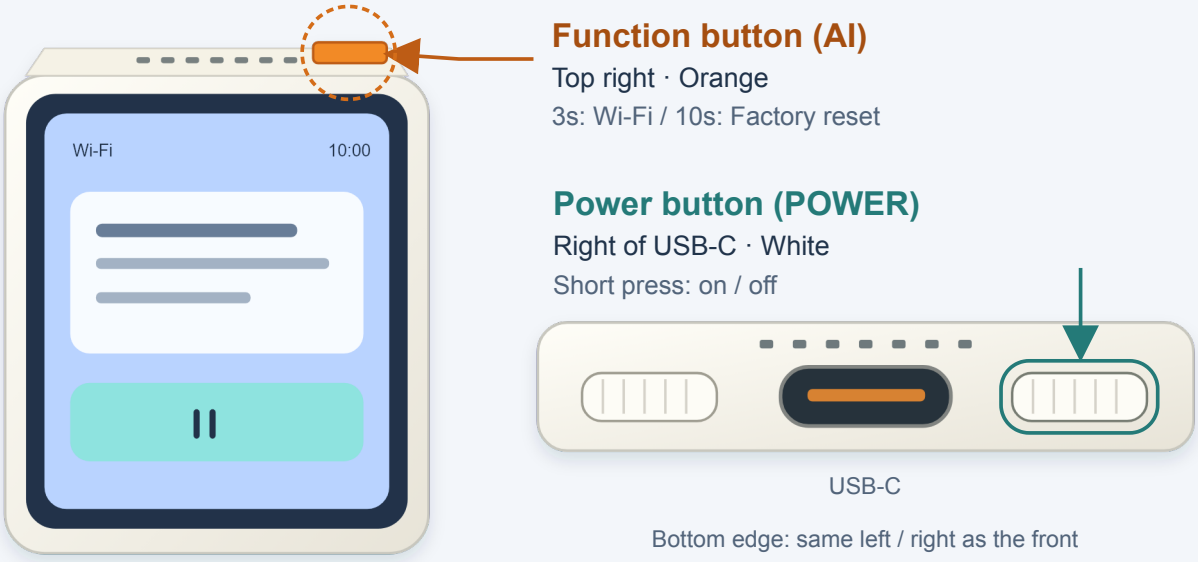

Front: facing the display

End translation on the screen before using a physical button. Start and stop translation with the touchscreen; a short press of AI does not control translation.

Function button (AI): long-press actions

How to press	Action	What happens next
Hold about 3 seconds, then release	Wi-Fi setup	Wait for Wi-Fi setup, then join the hotspot shown on the device. See page 2.
Keep holding for about 10 seconds total	Factory reset	The device restarts, clears local settings and binding, and requires Wi-Fi setup and pairing again.

Both times start when you first press the button. For Wi-Fi setup only, release after about 3 seconds; do not continue to 10 seconds.

> **Factory reset clears** Wi-Fi settings, local pairing credentials, languages, volume and session recovery records. **Firmware is kept. Device binding is removed; set up Wi-Fi and pair again in the web console.**

02 First-time setup

Connect Wi-Fi → Pair the device → Choose a scene

1 Power on and join the device hotspot

Power on the device. When **Wi-Fi setup** appears, use a phone or computer to join the **mybot-xxxx** hotspot shown on its screen.

2 Connect the device to Wi-Fi

Open http://192.168.4.1, select your Wi-Fi network, enter its password and connect. Then reconnect your phone or computer to a network with internet access.

3 Pair in the web console

Sign in at https://mybot.sh3t.agoralab.co/. Enter the **pairing code** shown on the device and bind a translation Bot.

4 Open translation

Once the home screen shows **Wi-Fi connected**, tap **Start translation >** and choose Listen, In person or Meeting.



1. Join the hotspot shown on the screen



2. Enter this code in the web console

> Already connected and paired? Start from the home screen. All UI images are rendered from the current device interface; hotspot names, pairing codes, time and captions are examples.

03 Listen

Translate speech picked up by the device microphone

Original speech → Device microphone → Translated speech → Device speaker

1 Choose the scene

From the home screen, tap **Start translation >** → **Listen**.

2 Select the languages


Set **Input language** to the language you hear and **Translate to** to the language you want. Example: Chinese → English. Tap the middle **<>** to swap them. Wait for the controls to re-enable after each change.

3 Start, then speak or play audio

Tap **Start translation**. Wait for the live screen, then speak or play the original audio near the device.

4 Listen and read

The device speaker plays the translation. The screen shows the original and translated text. Tap a caption to open the full sentence; scroll to read longer text.

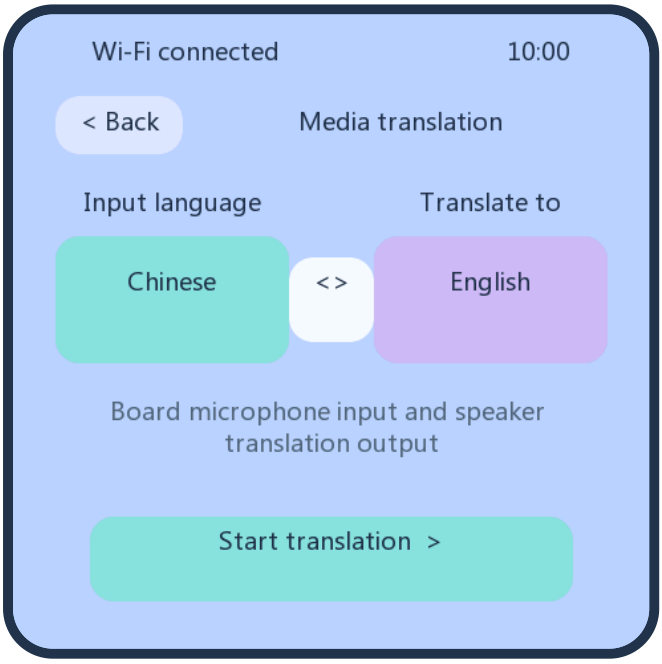

1. Choose languages; tap <> to swap them



2. Listen to the translation and tap a caption

> Listen uses the built-in microphone; a USB audio connection is not needed. Saved language choices are reused, so check them before starting.

04 In person

Share one device and take turns speaking

1 Choose the scene and languages

Select **In person**. Set **My language** and **Other language**, for example Chinese and English. Tap the middle **<>** to swap them; wait for the controls to re-enable before starting.

2 Connect, then select who is speaking


Tap **Start translation**. When **Choose the speaking language** appears, tap the current speaker's language at the bottom before speaking.

3 Speak Chinese

Tap **Chinese**, then speak Chinese toward the device. The other person hears English from the device speaker.

4 Switch to the other person

Tap **English** before the other person speaks English. You hear Chinese from the device speaker. Continue switching the language button as you take turns.

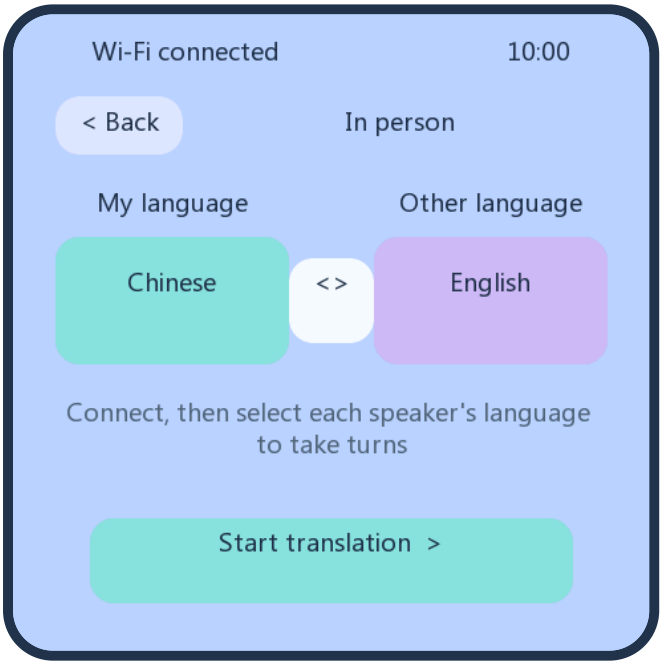

1. Set both languages; tap <> to swap them



2. Select a language button, then speak

> **The device does not automatically identify the speaker.** The bottom buttons show the language names. Live captions follow the selected direction.

05 Meeting

Connect to a computer for two-way translated audio

1 Connect USB and keep Wi-Fi connected

Connect the device to your computer with a **USB-C data cable**. USB carries audio; the device still needs Wi-Fi internet access.

2 Select the computer's microphone and speaker


On macOS, open **System Settings** → **Sound**. Select **MyBot Mosaico Audio** for both input and output. Select the same device in your meeting app if it has separate audio settings.

3 Play computer audio before starting

Play speech on the computer. Open **Meeting** and set **My language / Other language**. Tap the middle **<>** to swap languages. Wait for the controls to re-enable, then tap **Start translation**. End an active session before swapping.

4 Check both directions

With Chinese / English selected: computer English becomes Chinese on the device speaker. Speak Chinese into the device microphone; its English translation becomes the computer's microphone input. Both sides can speak without switching buttons.

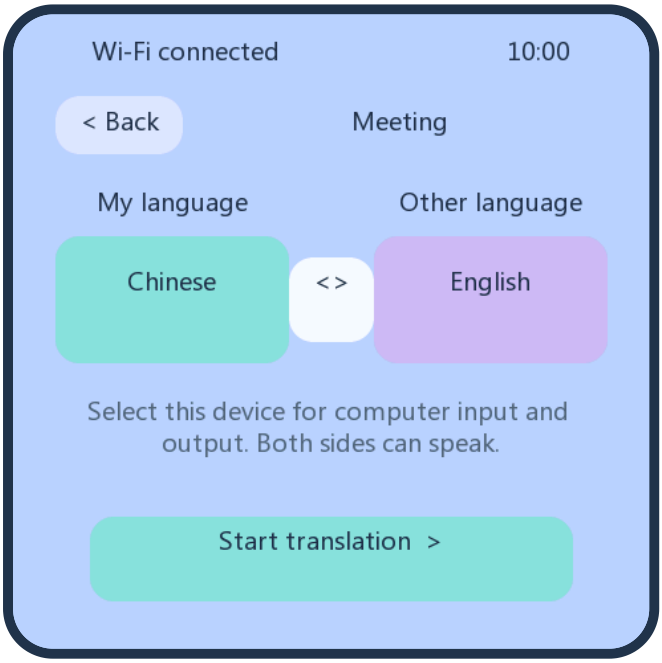

1. Tap <> to swap My language / Other language



2. Both directions work in the same session

Computer audio is not ready? Select the device as the computer's output, keep speech playing, then retry. For recording tests, turn off live monitoring to avoid feeding the returned translation back into the device.

06 Pause, finish & help

Common controls for all three scenes

Pause / Resume


Tap Pause or Resume on the live screen. Pausing keeps the current session open. End it before changing languages.

Volume and captions

Drag the volume slider and release to apply. In person: More → Output volume. Use More → Captions and full text to browse history.

To finish More → End this translation → End translation

Wait for “Translation ended”. Choose Translate again or Change scene to continue.

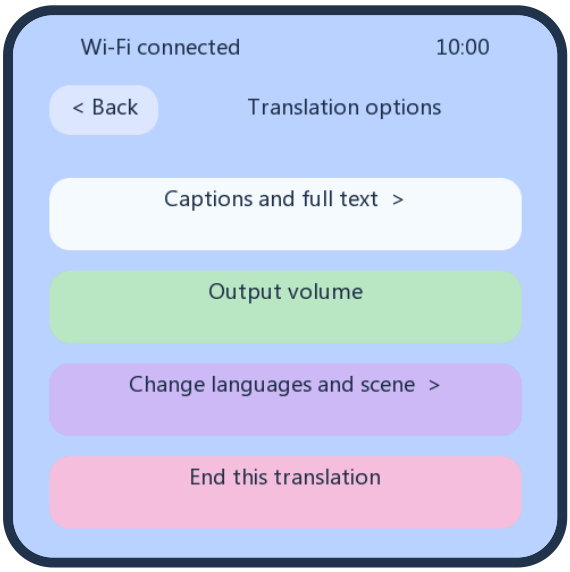

1. Open More and choose End this translation



2. Confirm End translation and wait

When a message appears

Message	What to do
Time is not synchronized	Stay online, wait, then retry.
Cleanup pending	Stay online and tap Retry stop.
Start outcome unknown	End every device session in the web console. Tap Console sessions ended → Confirm recovery.
USB unavailable	Restart the device. Contact support if it persists.

Three things to remember

Caption fonts currently support only Chinese, Japanese, Korean and English. Other translation languages may have missing subtitle characters.

A caption marked Final does not end translation. The latest 64 sentences are kept until a new session or restart.

Device volume adjusts its speaker, not the translated microphone audio sent to the computer.