



Block

Building a Complete Software B Project


Presentation

This exercise is an example of how B can be used to develop a piece of software. It is based on a real example, although it has been simplified to fit the size of an exercise. This software controls a railroad line, divided into fixed blocks. The purpose of the functionality developed here is to manage safely block occupancy by trains.

- This guide first briefly presents the system.
- Then it presents the software general architecture and gives the detailed requirements.
- In the practical part, we focus on how B is used to formalize those requirements into abstract software specification and especially how set notations turn B into a high level programming language. We also focus on how abstract properties may strengthen the formal model.
- Eventually, starting from the abstract formal level, we shall present the principle of producing the detailed design level to build step by step implementable code. We shall also explain how the whole B software part is integrated into the whole software.

System Description

A railroad line is supposed to be divided into fixed blocks. The line has two directions 'up' and 'down'. Each block may only be connected to an upward block and to a downward block. So the line is quite simple, since it has no switch. Figure 1 gives an example of such a line with 5

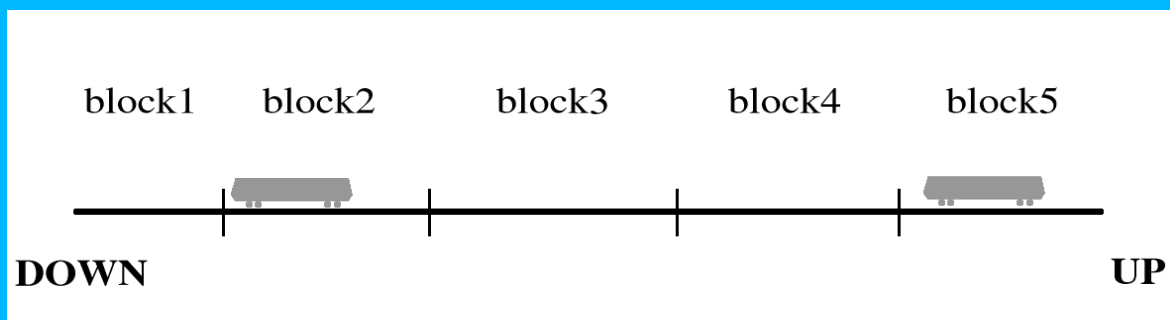

blocks. Actually, this system is the simplification of a more realistic one handling switches.

Figure 1: A Railroad Line of 5 Blocks

Trains may drive upbound or downbound on the railroad line and they may change direction at any time.

The purpose of the functionality developed in this exercise is to establish safely, from the software point of view, which blocks are occupied by a train, and which are free. Here is the basic principle given by the system analyses. For each block a detector located along the track called "Trackside Detector" is used to detect trains. A train is equipped with an antenna

located below the car. When the antenna is above a trackside detector, a signal inside the detector is produced, so the train presence may be detected. Now building the software appears to be easy, since we just need to read for each block the state of its trackside detector. However, this solution raises two issues, both related with safety:

1. The information given by a trackside detector is not accurate enough on the border of detectors.
2. Trackside detectors (or antennas) may be faulty.

To overcome those issues, the following elements are added to the system specification.

- A border detector is used at each borderline between two blocks to achieve accurate block occupancy detection. When a block trackside detector or border detector is occupied then the block is considered occupied.
- Exit detectors located after a block border (in the upward block or in the downward block) are used to detect trains leaving the block. A block is considered to be released on the falling edge of one of its exit detectors.
- The Trackside Detector Loss (TDL) alarm is set on a block when a trackside detector inconsistency happens. When a block trackside detector read value is "free" although it should be "occupied". When a TDL alarm is set, the procedure to release it requires that an operator at the command center should send back an alarm acknowledgement.
- To avoid unjustified TDL alarm due to the lack of accuracy of trackside detectors, blocks may be masked for TDL alarm when trains are located at the block border.

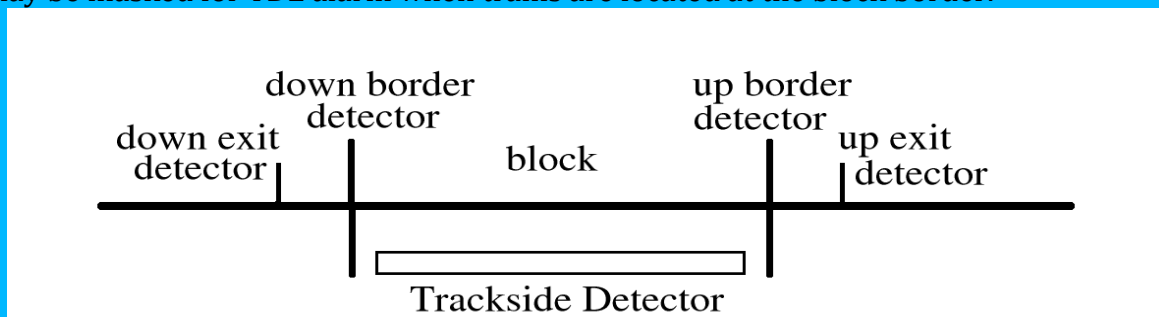


Figure 2: Different Types of Detectors Related to a Block

This system description is not complete, but it gives the basic principles of the system. The main input of the exercise is the software requirements.

Software Requirements

Architecture

The software developed in B is a subpart of the whole software, containing the safe high-level part. Its entry point should be an operation called `execute_cycle`, which is launched at a regular pace. The B software can be described by a top-down functional decomposition. In this example, the entry module, called `main`, calls in order from the left to the right its submodules: `inputs`, `blocks_occupancy`, `other_module` and `outputs` (for simplification purpose, the last modules are not described here).

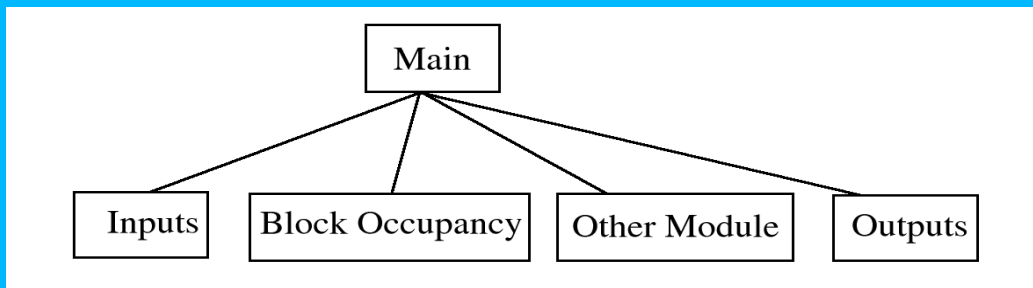


Figure 3: Functional Architecture

Types and configuration data

(see appendix)

Inputs

(see appendix)

Blocks Occupancy Sequence

(see appendix)

Blocks Occupancy

(see appendix)

Completing the Abstract Formal Level (Practical Part)

The abstract formal level of a B software project is the part where the requirements are formalized in B. In this example the abstract formal level is in part already written. Actually, as this B architecture follows the functional decomposition described in the software requirements and as the static data are mostly already defined by the software requirements, this part is quite straightforward. To complete the abstract formal model, you have to formalize operation bodies.

Launch Atelier B and open the "block" project (the skeleton is available at <https://github.com/CLEARSY/hackathon-2024>).

The following components are part of the abstract formal level. Let's have a look at each of them and especially let's read their description in natural language given inside comments.

- **configuration:**
This abstract machine specifies the types and the line configuration data used by the rest of the project. See clauses 'SETS', 'CONCRETE_CONSTANTS' and 'ABSTRACT_CONSTANTS'.
- **inputs:**
This abstract machine specifies data extracted from messages coming from other equipments. See clause 'ABSTRACT_VARIABLES'. The values of those variables are set at the beginning of each execute cycle, by calling operation 'read_inputs'.
- **main:**
Entry point of project 'block'. It contains one operation, `execute_cycle`. *Complete the specification by adding the property indicated in natural language.*
- **main_i:**
Implementation of main.
- **block_occupancy:**
This abstract machine specifies block occupancy with 3 variables ('occupied_blocks', 'tdla', 'masked_blocks') and 6 operations.

Complete the operation bodies, according to their specification in natural language. Start by specifying the bodies of operations: 'release_tdl_alarm', 'set_tdl_alarm' and 'occupy_blocks'. Some definitions are given in the 'DEFINITIONS' clause that you may find helpful. After writing an operation type check it.

- **block_occupancy_seq:**

This abstract machine is the top level specification of the block occupancy functionality.

The two variables 'occupied_blocks' and 'tdl_alarm' are repeated and one operation 'set_block_occupancy' is defined to sequence all the treatments specified in block_occupancy.

Complete the body of operation 'set_block_occupancy' by specifying that the two variables are transformed so that their invariant is true and safety property 1 is true.

- **block_occupancy_seq_i:**

This is the implementation of the abstract machine 'block_occupancy_seq'. That implementation imports abstract machine 'block_occupancy'. Complete the operation body of operation 'set_block_occupancy' according to its specification in natural language. This operation is part of the abstract formal level, although it is an implementation, since the software specification of the block occupancy functionality specifies the 6 operations and their sequencing in the top-level operation.

Properties formalized in sequencing abstract machines are of high importance, since they strengthen the whole model. Usually, those properties come from system analyses. When a property is formalized at the model highest level, we are sure that the whole software complies with this property. In our example, operation 'occupy_blocks' is built to comply with property 1, but it is not sure that operation 'set_block_occupancy', that calls 'occupy_blocks', also comply with property 1, since it also calls other operations that modify occupied blocks. We can be sure of this by specifying operation 'set_block_occupancy', so that it respects property 1. Then if all the proof obligation of its implementation are demonstrated, it means that property 1 is indeed respected.

When the abstract formal level is complete and is successfully type checked, launch automatic proof in Force 0 and in Force 1, then use User Pass (they are several pmm files on the github directory). If some proof obligation still remain not proved, try automatic User Pass.

Appendix: Software Requirements

Types and configuration data

Constant Name:

`t_block`

Typing:

`t_block <: t_block_i`

Description:

Set of all blocks of the line

Constant Name:

`t_border`

Typing:

`t_border <: t_border_i`

Description:

Set of all borders of the line

Constant Name:

`t_exit`

Typing:

`t_exit <: t_exit_i`

Description:

Set of all exit detectors of the line

Constant Name:

`cfg_block_to_block_up`

Typing:

`cfg_block_to_block_up : t_block +-> t_block`

Description:

Function giving for a block the next upward block. An upward terminal block does not have any next upward block.

Constant Name:

`cfg_block_to_block_down`

Typing:

`cfg_block_to_block_down : t_block +-> t_block`

Description:

Function giving for a block the next downward block. A downward terminal block does not have any next downward block.

Constant Name:

`cfg_block_to_border_detector_up`

Typing:

`cfg_block_to_border_detector_up : t_block +-> t_border`

Description:

Function giving for a block its upward border. An upward terminal block does not have any upward border.

Constant Name:

`cfg_block_to_border_detector_down`

Typing:

`cfg_block_to_border_detector_down : t_block +-> t_border`

Description:

Function giving for a block its downward border. A downward terminal block does not have any downward border.

Constant Name:

`cfg_block_to_exit_detector_up`

Typing:

`cfg_block_to_exit_detector_up : t_block +-> t_exit`

Description:

Function giving for a block its upward exit detector. An upward terminal block does not have any upward exit detector.

Constant Name:

`cfg_block_to_exit_detector_down`

Typing:

`cfg_block_to_exit_detector_down : t_block +-> t_exit`

Description:

Function giving for a block its downward exit detector. A downward terminal block does not have any downward exit detector.

Inputs

Description:

Management of input messages

- 1 message from trackside equipments (trackside detectors, border detectors, exit detectors)
- 1 message from the Control Center (initialized blocks, TDC alarm acknowledgement)

Variable Name:

`occupied_trackside_detectors`

Typing:

`occupied_trackside_detectors <: t_block`

Description:

Set of blocks having an occupied trackside detector

Initialization:

`occupied_trackside_detectors := t_block`

Variable Name:

`occupied_border_detectors`

Typing:

`occupied_border_detectors <: t_border`

Description:

Set of occupied trackside detector

Initialization:

`occupied_border_detectors := t_border`

Variable Name:

`occupied_exit_detectors`

Typing:

`occupied_exit_detectors <: t_exit`

Description:

Set of occupied exit detector

Initialization:

occupied_exit_detectors := t_exit

Variable Name:

occupied_exit_detectors_prev

Typing:

occupied_exit_detectors_prev <: t_exit

Description:

Set of occupied exit detector during the previous execute cycle

Initialization:

occupied_exit_detectors_prev := t_exit

Variable Name:

cc_init

Typing:

cc_init <: t_block

Description:

Set of blocks beeing initialized by the Control Center

Initialization:

cc_init := {}

Variable Name:

cc_tdl_acknowledge

Typing:

cc_tdl_acknowledge : BOOL

Description:

Acknowledgement of TDL alarm for all blocks, send by the Control Center

Initialization:

cc_tdl_acknowledge := FALSE

Operation Name:

read_inputs

Input parameters:

none

Output parameters:

none

Functionality:

This function reads the inputs messages.

Operation Name:

save_inputs_prev

Input parameters:

none

Output parameters:

none

Functionality:

This function saves the actual value of occupied exit detectors for the next execute cycle.

Blocks Occupancy Sequence

Description:

Management of block occupancy at sequencing level

Variable Name:

occupied_blocks

See:

block_occupancy

Variable Name:

tdl_alarm

See:

block_occupancy

Operation Name :

set_block_occupancy

Input parameters:

none

Output parameters:

none

Functionality:

This function manages block occupancy, by calling operations in the following order:

- unmask_blocks
- release_tdl_alarm
- set_tdl_alarm
- mask_blocks
- release_blocks
- occupy_blocks

Properties:

- Property 1:

A block having one of its border detector occupied or having its trackside detector occupied has to be occupied.

Blocks Occupancy

Description:

Management of block occupancy and Trackside Detector Loss (TDL) alarm

Variable Name:

occupied_blocks

Typing:

occupied_blocks <: t_block

Description:

Set of blocks considered as occupied

Initialization:

occupied_blocks := t_block

Variable Name:

masked_blocks

Typing:

masked_blocks <: t_block

Description:

Set of masked blocks for TDL alarm

Initialization:

masked_blocks := {}

Variable Name:

tddl_alarm

Typing:

tddl_alarm <: t_block

Description:

Set of blocks in Trackside Detector Loss (TDL) alarm

Initialization:

tddl_alarm := t_block

Operation Name :

mask_blocks

Input parameters:

none

Output parameters:

none

Functionality:

This function unmask some blocks (for TDL alarm). Blocks which do not become unmasked remain unchanged.

A block is unmasked when the block is free or when all of the following conditions are true:

- 1) The upward block has a free trackside detector or the upward block is free.
- 2) The downward block has a free trackside detector or the downward block is free.

Operation Name:

release_tddl_alarm

Input parameters:

none

Output parameters:

none

Functionality :

This function releases Trackside Detector Loss (TDL) alarm.

When a TDL alarm acknowledgment is received from the Control Center, then TDL alarm is released for all blocks.

If no TDL alarm acknowledgment is received then TDL alarm remains unchanged.

Operation Name:

set_tddl_alarm

Input parameters:

none

Output parameters:

none

Functionality :

This function sets Trackside Detector Loss (TDL) alarm. When a block does not become in TDL alarm, then the alarm remains unchanged.

A block becomes in TDL alarm, when the following conditions are true:

- 1) The block is occupied.

- 2) The block is not masked.
- 3) The block trackside detector is free.

Operation Name:

mask_blocks

Input parameters:

none

Output parameters:

none

Functionality:

This function mask some blocks (for TDL alarm).

A block is masked when the following conditions are true:

- 1) The block is not in TDL alarm.
- 2) One of the block borders is occupied.

Blocks which do not become unmasked remain unchanged.

Operation Name:

release_blocks

Input parameters:

none

Output parameters:

none

Functionality:

This function manages released blocks. Blocks which are not released remain unchanged.

A block is considered to be released when the following conditions are true:

- 1) The block is not in TDL alarm or the block is being initialized by the Control Center.
- 2) A block exit detector, which was occupied during the previous cycle, is now released.

Operation Name:

occupy_blocks

Input parameters:

none

Output parameters:

none

Functionality:

This function manages occupied blocks. Blocks which do not become occupied remain unchanged.

A block is considered to be occupied when one of its border detector is occupied or when its trackside detector is occupied.