

## AVR072: Accessing 16-bit I/O Registers

### Features

- Routines for Accessing 16-bits I/O Registers
- Macros Included for AVR- and IAR Assembler


### Description

All mid- and high-range AVR devices include a 16-bit Timer and some also include a 10-bit A/D Converter. These I/O modules have 16-bit registers that can be accessed from the AVR core using the *in* and *out* instructions. Since the AVR microcontroller has an 8-bit I/O bus the access to the I/O Register must be performed in two instruction cycles. An interrupt can occur between the instructions. If the interrupt function accesses the same resources (16-bit Timer or ADC) the 16-bit I/O Register access must be made an atomic operation, i.e., an operation that cannot be interrupted.

I/O modules with 16-bit Registers include a temporary register for the high byte (bit 15 to 8). Note that the 16-bit Timer (Timer1) has only one temporary register that is shared between all it's 16-bit register pairs. A 16-bit I/O read is normally done like this:

```
Cycle 1: in r16, TCNT1L ;Reading low byte into r16,this triggers the high  
                ; byte to be latched in the temporary shadow  
                ; register.  
Cycle 2: in r17, TCNT1H ;Reading high byte from the temporary register.
```

**Figure 1.** 16-bit I/O Register Read<sup>(1)</sup>

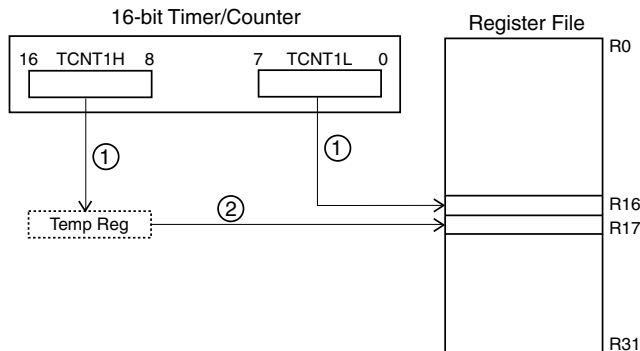

Note: 1. Circled numbers indicate cycle number.

If an interrupt occurs between the two instructions for any of the operations, and the interrupt handler access any of the Timer1's low bytes, the temporary register might change it's value. Returning from the interrupt the AVR core now reads the corrupted value into register r17.



8-bit **AVR**<sup>®</sup>  
Microcontroller

Application  
Note




A 16-bit I/O write is done as follow:

```

; r17 contains the high byte while r16 contains
; the low byte that is to be written.
Cycle 1: out    TCNT1H, r17    ; Writing the high byte to the temporary register.
Cycle 2: out    TCNT1L, r16    ; Writing both the low byte and the temporary
                                ; register into the I/O Register.

```

**Figure 2. 16-bit I/O Register Write<sup>(1)</sup>**

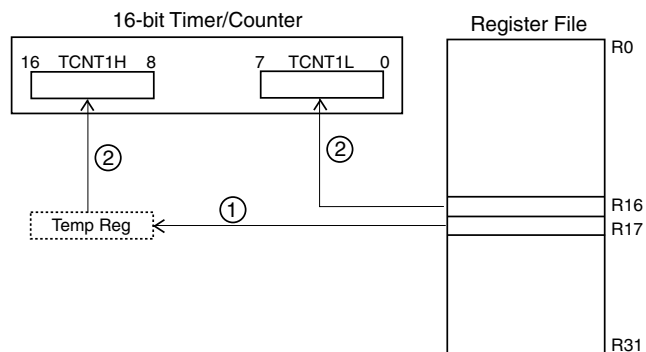

Note: 1. Circled numbers indicate cycle number.

Note that the read and the write operation differ in the order the high and low I/O Register is accessed. If the order is reversed, the high value will be incorrectly read or written.

## Solution

To avoid the situations described above, the following macros for the AVR assembler and the IAR C compiler can be used

### AVR Assembler Macros

```
.macro outw
    cli
    out    @0, @1
    out    @0-1, @2
    sei
.endmacro
```

```
.macro inw
    cli
    in     @1, @2-1
    in     @0, @2
    sei
.endmacro
```

### Usage

```
.include "8515def.inc"
inw      r17, r16, TCNT1H      ; Reads the counter value (high, low, adr)
outw      TCNT1H, r17, r16      ; Writes the counter value (adr, high, low)
```

IAR C MACROS

```
#include <ina90.h>
```

```
#define outw( ADDRESS, VAL )\
{\
    _CLI();\
    ADDRESS = VAL;\
    _SEI();\
}
```

```
#define inw( ADDRESS, VAL )\
{\
    _CLI();\
    VAL = ADDRESS;\
    _SEI();\
}
```

### Usage

```
#include <io8515.h>
```

```
inw( TCNT1, i )      /* Reads the counter value */
outw( TCNT1, i )      /* Writes the counter value */
```

## Notes

- Notes:
1. The outw and the inw macros uses four instruction cycles which is the same amount of cycles as the ret instruction uses. Doing so the macros will not increase the worst case interrupt response time.
  2. The macros will not work for setting the EEPROM address since the address can not be changed during write operation. This will lead to corruption of the data written.



## **Atmel Headquarters**

### ***Corporate Headquarters***

2325 Orchard Parkway  
San Jose, CA 95131  
TEL 1(408) 441-0311  
FAX 1(408) 487-2600

### ***Europe***

Atmel Sarl  
Route des Arsenaux 41  
Case Postale 80  
CH-1705 Fribourg  
Switzerland  
TEL (41) 26-426-5555  
FAX (41) 26-426-5500

### ***Asia***

Room 1219  
Chinachem Golden Plaza  
77 Mody Road Tsimhatsui  
East Kowloon  
Hong Kong  
TEL (852) 2721-9778  
FAX (852) 2722-1369

### ***Japan***

9F, Tonetsu Shinkawa Bldg.  
1-24-8 Shinkawa  
Chuo-ku, Tokyo 104-0033  
Japan  
TEL (81) 3-3523-3551  
FAX (81) 3-3523-7581

## **Atmel Operations**

### ***Memory***

2325 Orchard Parkway  
San Jose, CA 95131  
TEL 1(408) 441-0311  
FAX 1(408) 436-4314

### ***Microcontrollers***

2325 Orchard Parkway  
San Jose, CA 95131  
TEL 1(408) 441-0311  
FAX 1(408) 436-4314

La Chantreterie  
BP 70602  
44306 Nantes Cedex 3, France  
TEL (33) 2-40-18-18-18  
FAX (33) 2-40-18-19-60

### ***ASIC/ASSP/Smart Cards***

Zone Industrielle  
13106 Rousset Cedex, France  
TEL (33) 4-42-53-60-00  
FAX (33) 4-42-53-60-01

1150 East Cheyenne Mtn. Blvd.  
Colorado Springs, CO 80906  
TEL 1(719) 576-3300  
FAX 1(719) 540-1759

Scottish Enterprise Technology Park  
Maxwell Building  
East Kilbride G75 0QR, Scotland  
TEL (44) 1355-803-000  
FAX (44) 1355-242-743

### ***RF/Automotive***

Theresienstrasse 2  
Postfach 3535  
74025 Heilbronn, Germany  
TEL (49) 71-31-67-0  
FAX (49) 71-31-67-2340

1150 East Cheyenne Mtn. Blvd.  
Colorado Springs, CO 80906  
TEL 1(719) 576-3300  
FAX 1(719) 540-1759

### ***Biometrics/Imaging/Hi-Rel MPU/ High Speed Converters/RF Datacom***

Avenue de Rochepleine  
BP 123  
38521 Saint-Egreve Cedex, France  
TEL (33) 4-76-58-30-00  
FAX (33) 4-76-58-34-80

---

### ***e-mail***

literature@atmel.com

### ***Web Site***

<http://www.atmel.com>

## **© Atmel Corporation 2002.**

Atmel Corporation makes no warranty for the use of its products, other than those expressly contained in the Company's standard warranty which is detailed in Atmel's Terms and Conditions located on the Company's web site. The Company assumes no responsibility for any errors which may appear in this document, reserves the right to change devices or specifications detailed herein at any time without notice, and does not make any commitment to update the information contained herein. No licenses to patents or other intellectual property of Atmel are granted by the Company in connection with the sale of Atmel products, expressly or by implication. Atmel's products are not authorized for use as critical components in life support devices or systems.

ATMEL® and AVR® are the registered trademarks of Atmel.

Other terms and product names may be the trademarks of others.



Printed on recycled paper.