

Problem D	Bar Codes
Time Limit	1 Second

A bar-code symbol consists of alternating dark and light bars, starting with a dark bar on the left. Each bar is a number of units wide. Figure 1 shows a bar-code symbol consisting of 4 bars that extend over $1+2+3+1=7$ units.

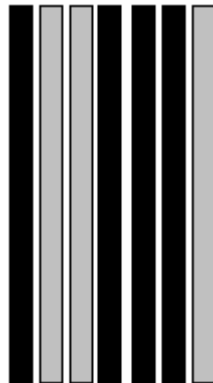


Figure 1: Bar-code over 7 units with 4 bars

In general, the bar code $\mathbf{BC(n,k,m)}$ is the set of all symbols with \mathbf{k} bars that together extend over exactly \mathbf{n} units, each bar being at most \mathbf{m} units wide. For instance, the symbol in Figure 1 belongs to $\mathbf{BC(7,4,3)}$ but not to $\mathbf{BC(7,4,2)}$. Figure 2 shows all 16 symbols in $\mathbf{BC(7,4,3)}$. Each '1' represents a dark unit, each '0' a light unit.

0: 1000100	4: 1001110	8: 1100100	12: 1101110
1: 1000110	5: 1011000	9: 1100110	13: 1110010
2: 1001000	6: 1011100	10: 1101000	14: 1110100
3: 1001100	7: 1100010	11: 1101100	15: 1110110

Figure 2: All symbols of $\mathbf{BC(7,4,3)}$

Input

Each input will contain three positive integers \mathbf{n} , \mathbf{k} , and \mathbf{m} ($1 \leq \mathbf{n}, \mathbf{k}, \mathbf{m} \leq 50$).

Output

For each input print the total number of symbols in $\mathbf{BC(n,k,m)}$. Output will fit in 64-bit signed integer.

Sample Input	Output for Sample Input
7 4 3	16
7 4 2	4

Collected (Slightly Modified by Md. Kamruzzaman)