



LCD Case Front Drawing (15 mm bezel, M3 inserts)

Front part of the case for a 5-inch LCD. The bezel border, from the window edge to the outline as seen from the front, is 15 on all four sides. The four corner bosses take M3 threaded inserts, and the back cover screws into them. All dimensions in mm.

5_in_lcd_case_front_bezel15.scad 2026-10-07

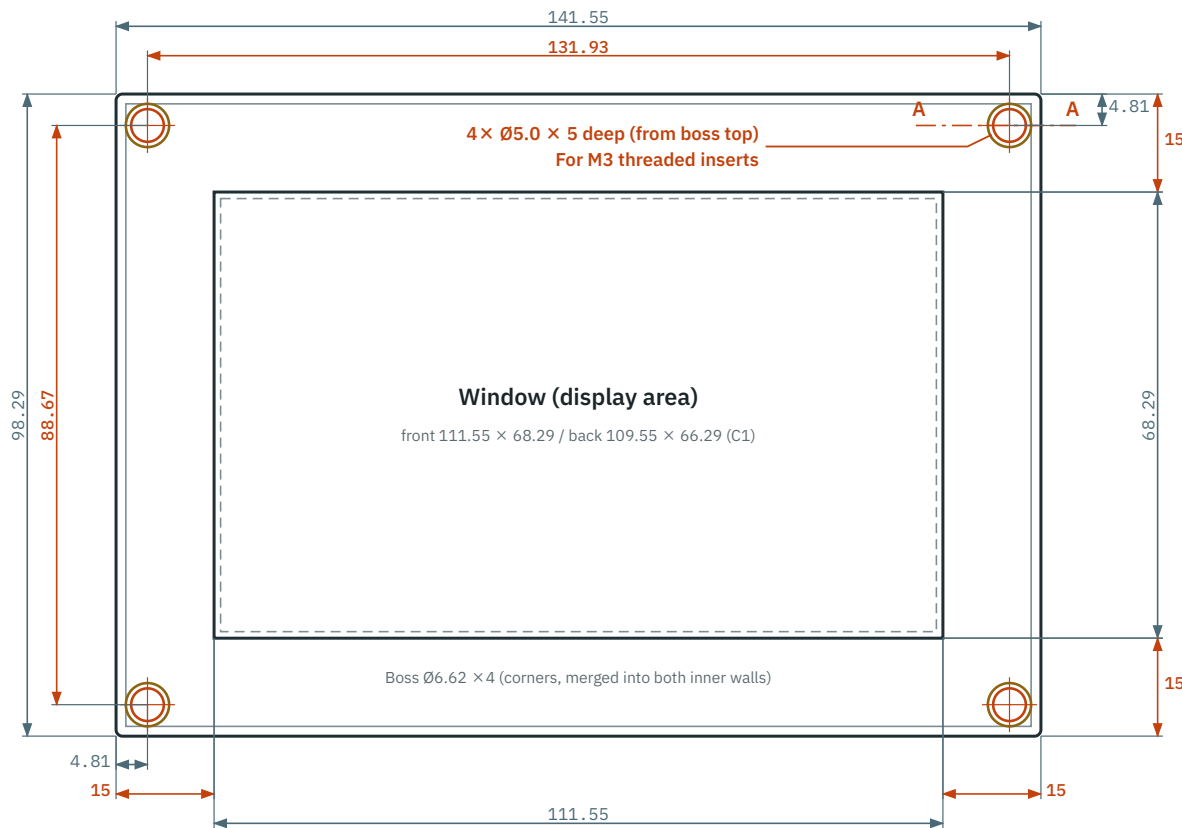

Section A-A (top-right boss)

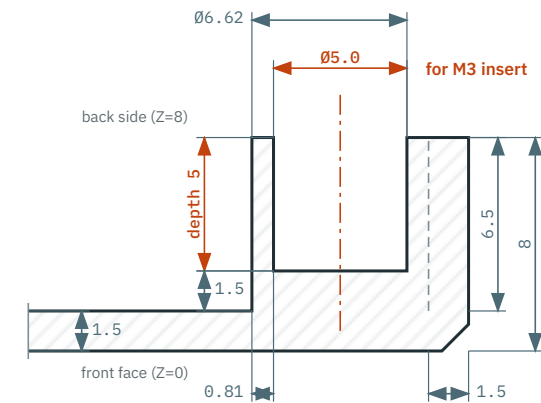

Ø5.0 × 5 deep holes are for M3 threaded inserts. All four bosses are the same.

The plan view is seen from the back (boss side, +Z). The dashed line in the section marks the inner wall. Coordinates match the STL / OpenSCAD model; the origin is offset from the outline center by X −1.365, Y −1.49.

Bosses and insert holes

Item	Dimension	Notes
Insert hole	4× Ø5.0 × 5 deep	For M3 threaded inserts. From boss top (Z=8) down to Z=3
Boss	Ø6.62 × 6.5 high	From plate top (Z=1.5) to Z=8. Corner side filled square and merged into the walls
Hole pitch	131.93 × 88.67	4.81 from each outer edge to the boss center
Boss centers (STL)	(67.331, 45.824) (−64.601, 45.824) (67.331, −42.844) (−64.601, −42.844)	Top right, top left, bottom right, bottom left
Material under hole	1.5	Hole bottom Z=3 to plate top Z=1.5 (3.0 to the front face)
Boss wall	0.81	On the window side. The corner side is joined to the walls

Outline

Item	Dimension	Notes
Outline	141.55 × 98.29 × 8	Corners R1, front outer edge C1
Inner wall	138.55 × 95.29	Wall 1.5 thick
Front plate	1.5 thick	
Window	back 109.55 × 66.29 front 111.55 × 68.29	C1 chamfer. From outer edges: 15 on all sides (front), 16 (back). Window center (1.365, 1.49)