

PyGPLA: A Python Toolbox for Generalized Phase Locking Analysis

Amir Khani^{1,2}, Christian Beste^{3,4}, and Shervin Safavi^{5,6}

¹ Donders Institute for Brain, Cognition, and Behaviour, Radboud University, Nijmegen, Netherlands ² Department of Computer Science, Amirkabir University of Technology, Tehran, Iran ³ Cognitive Neurophysiology, Department of Child and Adolescent Psychiatry, Faculty of Medicine, Technische Universität Dresden, Dresden, Germany ⁴ German Center for Child and Adolescent Health (DZKJ), partner site Leipzig/Dresden, Dresden, Germany ⁵ Computational Neuroscience, Department of Child and Adolescent Psychiatry, Faculty of Medicine, Technische Universität Dresden, Dresden 01307, Germany ⁶ Department of Computational Neuroscience, Max Planck Institute for Biological Cybernetics, Tübingen 72076, Germany ¶ Corresponding author

DOI: 10.xxxxxx/draft

Software

- Review
- Repository
- Archive

Editor: Open Journals

Reviewers:

- @openjournals

Submitted: 01 January 1970

Published: unpublished

License

Authors of papers retain copyright and release the work under a Creative Commons Attribution 4.0 International License (CC BY 4.0).

Summary

PyGPLA is a Python implementation of Generalized Phase Locking Analysis (GPLA) for multivariate analysis of coupling between spikes and local field potentials (LFPs) (Safavi et al., 2023). For a given frequency, GPLA constructs a complex coupling matrix $\hat{C}(f) \in \mathbb{C}^{N_c \times N_u}$ between LFP channels (N_c) and spike units (N_u), then applies singular value decomposition (SVD) to reduce the dimensionality of data. The leading singular value summarizes population-level coupling strength, while the corresponding singular vectors describe dominant LFP and spike coupling modes. PyGPLA accepts a user-provided frequency-specific analytic LFP signal or phase representation and provides data selection, optional whitening and normalization, coupling-matrix construction, SVD-based decomposition, and statistical significance testing (Safavi et al., 2021).

Statement of need

Neural recordings are becoming increasingly high-dimensional and multimodal, demanding more sophisticated analysis tools. Simultaneous analysis of spiking activity and LFPs is among the most informative multimodal approaches in systems neuroscience, providing insight into the multiscale mechanisms underlying cognitive functions such as attention and memory (Buzsaki et al., 2012; Einevoll et al., 2013; Herreras, 2016). LFP oscillatory activity partly reflects subthreshold processes shared by neuronal ensembles, and the synchronization between this activity and spiking is hypothesized to coordinate neural populations during cognitive processes (Buzsaki et al., 2012; Hagen et al., 2016).

However, commonly used spike-LFP coupling measures are pairwise, making them suboptimal for modern multichannel recordings (Jiang et al., 2015; Li et al., 2016; Vinck et al., 2010, 2012; Zarei et al., 2018; Zeitler et al., 2006). As modern electrophysiological techniques allow simultaneous recordings from hundreds or even thousands of sites, pairwise analyses generate high-dimensional covariance matrices whose size grows rapidly with the number of channels, limiting interpretable extraction of large-scale collective dynamics (Buzsaki, 2004; Dickey et al., 2009; Juavinett et al., 2019; Jun et al., 2017).

GPLA was developed to address these challenges by providing an efficient multivariate framework together with statistical routines (Safavi et al., 2021) for characterizing spike-LFP coupling at the population level (Safavi et al., 2023). However, the original algorithm was implemented in MATLAB, limiting its accessibility. PyGPLA bridges this gap as an open-source Python implementation, aligning with the extensive use of Python in neuroscience (Akam et al., 2022;

Behrad et al., 2025; Freeman, 2015; Goodman & Brette, 2008; Gramfort et al., 2013; Ince et al., 2009; Krause & Lindemann, 2014; Makowski et al., 2021; Muller et al., 2015; Nouri et al., 2025; Peirce, 2009; Tennøe et al., 2018; Viejo et al., 2023; Zeraati et al., 2022).

Existing spike-field coupling methods—including the phase-locking value (PLV), pairwise phase consistency (PPC) (Vinck et al., 2010), and spike-field coherence—operate on individual spike-LFP channel pairs. While informative for small-scale recordings, these pairwise approaches do not directly capture the population-level structure of coupling, which is of paramount importance for recordings with modern high-density probes. GPLA addresses this gap by providing a multivariate method that summarizes all spike-field interactions simultaneously, analogous to how multivariate statistical methods such as principal component analysis (PCA) summarize covariance structure. To our knowledge, no other Python package implements this multivariate approach to spike-field coupling analysis.

State of the field

Common spike-field coupling measures, including the phase-locking value, pairwise phase consistency, and spike-field coherence, quantify relationships between individual spike units and LFP channels (Vinck et al., 2010, 2012). General-purpose Python packages such as MNE-Python provide extensive signal-processing and electrophysiology infrastructure (Gramfort et al., 2013), but do not implement GPLA's joint decomposition of the complete spike-field coupling matrix. The only directly comparable implementation is the MATLAB research code accompanying the original GPLA study (Safavi et al., 2023). PyGPLA was developed as a separate package because GPLA requires a method-specific pipeline comprising coupling-matrix construction, normalization, optional reduced-rank whitening, SVD-based extraction of population coupling modes, and analytical or surrogate-based statistical inference. These operations do not extend an existing pairwise measure or general preprocessing function in a natural way. PyGPLA's scholarly contribution is therefore a dedicated, open-source Python implementation of the complete GPLA methodology.

Functionality

Core analysis pipeline

PyGPLA provides a comprehensive solution for multivariate spike-field coupling analysis, including:

- **LFP input and data preparation:** PyGPLA accepts a user-provided complex analytic LFP signal or a real phase representation in radians. Raw LFP voltage must first be converted upstream to the desired frequency-specific analytic signal, for example through band-pass filtering followed by a Hilbert transform (Chavez et al., 2006). PyGPLA then supports temporal and unit selection, optional channel-wise normalization, and optional reduced-rank whitening to decorrelate channels while avoiding noise amplification (Safavi et al., 2023).
- **Coupling-matrix construction:** Assembly of the complex-valued coupling matrix $\widehat{\mathbf{C}}(f) \in \mathbb{C}^{N_c \times N_u}$, where each entry sums the analytic LFP evaluated at all spike times of a given unit.
- **SVD-based decomposition:** Extraction of the generalized phase-locking value (gPLV; the leading singular value) and the associated LFP and spike spatial vectors, with rotational phase alignment, unwhitening of the LFP vectors, and spike-vector rescaling.
- **Statistical testing:** Significance assessment via two complementary approaches: (1) surrogate-based testing using multiple spike-jittering schemes, and (2) an analytical test based on Marchenko–Pastur Random Matrix Theory (RMT) (Anderson et al., 2010; Safavi et al., 2021).
- **Simulation tools:** Synthetic data generators for phase-locked and transient-coupling scenarios, supporting reproducibility and method validation.

93 Normalization options

94 The package supports two normalization modes for the coupling matrix, expressed in terms
95 of the total spike count N_m^{tot} for unit m : PLV-type normalization ($1/N_m^{\text{tot}}$) for phase-only
96 analysis, and unit-variance normalization ($1/\sqrt{N_m^{\text{tot}}}$) required for the theoretical RMT-based
97 significance test.

98 Example

99 We illustrate PyGPLA on synthetic transient-coupling simulations generated with the script
100 paper/figures/figure2.py. As shown in Figure 1, the figure compares four coupling models
101 and reports their recovered gPLV values, together with representative LFP and spike-train
102 windows and the associated spike-vector structure.

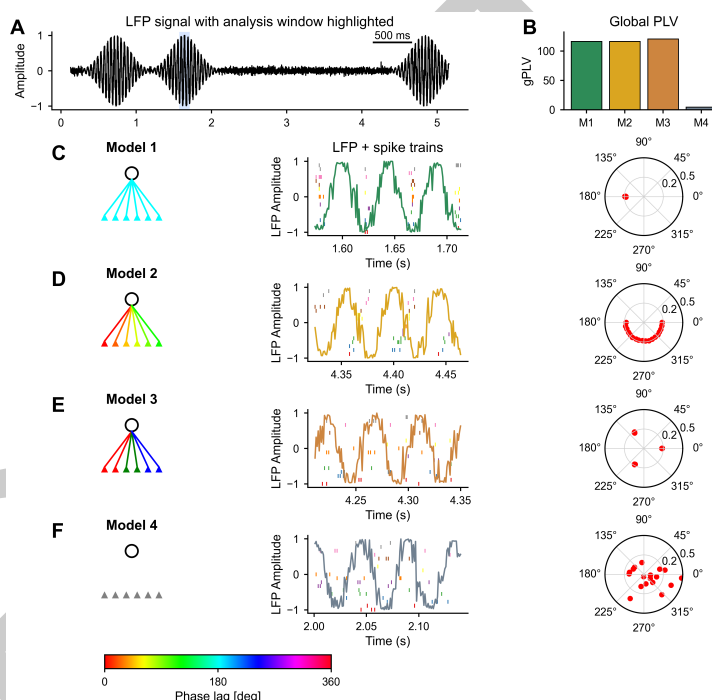


Figure 1: Illustrative PyGPLA simulation. (A) LFP analysis window. (B) gPLV across Models 1–4. (C–F) Model schematics, LFP and spikes, and recovered spike vectors.

103 Code snippets and detailed instructions for reproducing these results are available in the
104 package documentation and example scripts in the repository.

105 Software design

106 PyGPLA uses a function-oriented, layered design that separates the main stages of the analysis
107 while providing a unified high-level workflow. The high-level `gpla()` function coordinates data
108 preparation, GPLA decomposition, and optional statistical testing, returning the results and
109 relevant bookkeeping in a single `GPLAResult` object. The underlying operations—coupling-
110 matrix construction, SVD factorization, whitening, jitter generation, and simulation—remain
111 independently accessible. This design provides a concise default workflow while allowing
112 researchers to inspect, test, or replace individual methodological stages. Automated tests
113 validate these independently accessible numerical components.

114 PyGPLA accepts standard NumPy arrays rather than requiring a package-specific data container,
115 facilitating integration with existing electrophysiology workflows. Frequency selection and

conversion of raw LFP voltage to an analytic signal are intentionally left upstream because these operations require experiment-specific filtering choices. PyGPLA therefore operates on a frequency-specific complex analytic signal or phase representation and warns when real-valued input is supplied.

Several numerical and interface conventions preserve continuity with the original MATLAB implementation, facilitating validation against the reference implementation and migration of existing GPLA analyses. These include its normalization alternatives, phase convention, reduced-rank whitening methods, and selected legacy parameter names. Optional PCA-based whitening reduces correlations among LFP channels, while an unwhitening operator maps the resulting coupling modes back to the original channel coordinates. Statistical inference is separated from the deterministic decomposition, allowing users to choose between a computationally inexpensive analytical RMT-based decision and more expensive spike-jitter surrogate tests. The core package depends only on NumPy. SciPy is available through the optional `sim extra` for documented signal-processing workflows, including band-pass filtering and Hilbert-transform construction of analytic LFP signals.

Research impact statement

The GPLA methodology has been evaluated in published simulations, biophysical network models, and multielectrode recordings, where it revealed population-level spike-field coupling patterns related to properties of the underlying neural circuits (Safavi et al., 2023). PyGPLA transfers this established methodology from MATLAB research code into an installable, open-source Python package. The reproducible simulation included with this paper applies PyGPLA to four coupling models and demonstrates recovery of their population-level coupling structure. To our knowledge, PyGPLA is the first Python implementation that jointly decomposes the complete spike-field coupling matrix. Its immediate research contribution is therefore to make population-level GPLA available within Python-based electrophysiology workflows. Because PyGPLA is newly released, broader external adoption and independent applications remain to be established.

AI usage disclosure

Over the course of PyGPLA's development, the authors used OpenAI GPT-family models through ChatGPT and OpenAI Codex, including models from the GPT-5 family. This assistance occurred over an extended period during which the available models were updated; consequently, exact model snapshots and version identifiers were not recorded for every interaction.

The models were used to assist with porting selected MATLAB scripts to Python, refactoring code, drafting and restructuring documentation, and conducting language editing and grammatical review of the manuscript. AI-generated outputs were treated as preliminary suggestions rather than authoritative implementations.

All AI-assisted code and text were reviewed and edited by the authors. Translated code was reviewed against the original MATLAB implementation and the published mathematical description of GPLA. Its behavior was evaluated through tests, reproducible simulations, and manual inspection. As an additional human-led validation step, the authors reproduced Figure 2 from the original GPLA publication using PyGPLA and compared the resulting coupling patterns with the published results, providing a further check of the ported implementation. The authors made the scientific, architectural, and methodological decisions and take full responsibility for the accuracy, originality, licensing, and integrity of the software, documentation, and paper.

Acknowledgments

We acknowledge contributions from collaborators who provided feedback during the development of PyGPLA. S.S. acknowledges support from the Max Planck Society and an add-on fellowship from the Joachim Herz Foundation. C.B. acknowledges support from the

164 Federal Ministry of Research, Technology and Space (Bundesministerium für Forschung,
165 Technologie und Raumfahrt; BMFTR) as part of the German Center for Child and Adolescent
166 Health (DZKJ) under funding code 01GL2405B.

167 References

- 168 Akam, T., Lustig, A., Rowland, J. M., Kapaniaiah, S. K. T., Esteve-Agraz, J., Panniello, M.,
169 Márquez, C., Kohl, M. M., Kätzel, D., Costa, R. M., & Walton, M. E. (2022). Open-source,
170 python-based, hardware and software for controlling behavioural neuroscience experiments.
171 *eLife*, 11, e67846. <https://doi.org/10.7554/eLife.67846>
- 172 Anderson, G. W., Guionnet, A., & Zeitouni, O. (2010). *An introduction to random*
173 *matrices* (Vol. 118, p. xiv+492). Cambridge University Press. [https://doi.org/10.1017/](https://doi.org/10.1017/CBO9780511801334)
174 [CBO9780511801334](https://doi.org/10.1017/CBO9780511801334)
- 175 Behrad, A., Ostrow, M., Fakharian, M. T., Fiete, I., Beste, C., & Safavi, S. (2025). Fast
176 dynamical similarity analysis. *arXiv*, 2511.22828, 1–31. [https://doi.org/10.48550/arXiv.](https://doi.org/10.48550/arXiv.2511.22828)
177 [2511.22828](https://doi.org/10.48550/arXiv.2511.22828)
- 178 Buzsaki, G. (2004). Large-scale recording of neuronal ensembles. *Nature Neuroscience*, 7(5),
179 446–451. <https://doi.org/10.1038/nn1233>
- 180 Buzsaki, G., Anastassiou, C. A., & Koch, C. (2012). The origin of extracellular fields and
181 currents—EEG, ECoG, LFP and spikes. *Nature Reviews Neuroscience*, 13(6), 407–420.
182 <https://doi.org/10.1038/nrn3241>
- 183 Chavez, M., Besserve, M., Adam, C., & Martinerie, J. (2006). Towards a proper estimation
184 of phase synchronization from time series. *Journal of Neuroscience Methods*, 154(1-2),
185 149–160. <https://doi.org/10.1016/j.jneumeth.2005.12.009>
- 186 Dickey, A. S., Suminski, A. J., Amit, Y., & Hatsopoulos, N. G. (2009). Single-unit stability
187 using chronically implanted multielectrode arrays. *Journal of Neurophysiology*, 102(2),
188 1331–1339. <https://doi.org/10.1152/jn.90920.2008>
- 189 Einevoll, G. T., Kayser, C., Logothetis, N. K., & Panzeri, S. (2013). Modelling and analysis
190 of local field potentials for studying the function of cortical circuits. *Nature Reviews*
191 *Neuroscience*, 14(11), 770–785. <https://doi.org/10.1038/nrn3599>
- 192 Freeman, J. (2015). Open source tools for large-scale neuroscience. *Current Opinion in*
193 *Neurobiology*, 32, 156–163. <https://doi.org/10.1016/j.conb.2015.04.002>
- 194 Goodman, D. F. M., & Brette, R. (2008). Brian: A simulator for spiking neural networks in
195 python. *Frontiers in Neuroinformatics*, 2, 5. <https://doi.org/10.3389/neuro.11.005.2008>
- 196 Gramfort, A., Luessi, M., Larson, E., Engemann, D. A., Strohmeier, D., Brodbeck, C.,
197 Goj, R., Jas, M., Brooks, T., Parkkonen, L., & Hämäläinen, M. S. (2013). MEG and
198 EEG data analysis with MNE-Python. *Frontiers in Neuroscience*, 7(267), 1–13. <https://doi.org/10.3389/fnins.2013.00267>
- 199 Hagen, E., Dahmen, D., Stavrinou, M. L., Linden, H., Tetzlaff, T., Albada, S. J. van, &
200 Diesmann, M. (2016). Hybrid scheme for modeling local field potentials from point-neuron
201 networks. *Cerebral Cortex*, 26(12), 4461–4496. <https://doi.org/10.1093/cercor/bhw237>
- 202 Herreras, O. (2016). Local field potentials: Myths and misunderstandings. *Frontiers in Neural*
203 *Circuits*, 10, 101. <https://doi.org/10.3389/fncir.2016.00101>
- 204 Ince, R. A. A., Petersen, R. S., Swan, D. C., & Panzeri, S. (2009). Python for information
205 theoretic analysis of neural data. *Frontiers in Neuroinformatics*, 3, 4. [https://doi.org/10.](https://doi.org/10.3389/neuro.11.004.2009)
206 [3389/neuro.11.004.2009](https://doi.org/10.3389/neuro.11.004.2009)
- 207 Jiang, H., Bahramisharif, A., Gerven, M. A. J. van, & Jensen, O. (2015). Measuring
208 directionality between neuronal oscillations of different frequencies. *NeuroImage*, 118,
209

- 359–367. <https://doi.org/10.1016/j.neuroimage.2015.05.044>
- Juavinett, A. L., Bekheet, G., & Churchland, A. K. (2019). Chronically implanted neuropixels probes enable high-yield recordings in freely moving mice. *eLife*, 8, e47188. <https://doi.org/10.7554/eLife.47188>
- Jun, J. J., Steinmetz, N. A., Siegle, J. H., Denman, D. J., Bauza, M., Barbarits, B., & others. (2017). Fully integrated silicon probes for high-density recording of neural activity. *Nature*, 551, 232–236. <https://doi.org/10.1038/nature24636>
- Krause, F., & Lindemann, O. (2014). Expyriment: A python library for cognitive and neuroscientific experiments. *Behavior Research Methods*, 46, 416–428. <https://doi.org/10.3758/s13428-013-0390-6>
- Li, Z., Cui, D., & Li, X. (2016). Unbiased and robust quantification of synchronization between spikes and local field potential. *Journal of Neuroscience Methods*, 269, 33–38. <https://doi.org/10.1016/j.jneumeth.2016.05.004>
- Makowski, D., Pham, T., Lau, Z. J., Brammer, J. C., Lespinasse, F., Pham, H., Schölzel, C., & Chen, S. H. A. (2021). NeuroKit2: A python toolbox for neurophysiological signal processing. *Behavior Research Methods*, 53, 1689–1696. <https://doi.org/10.3758/s13428-020-01516-y>
- Muller, E., Bednar, J. A., Diesmann, M., Gewaltig, M.-O., Hines, M., & Davison, A. P. (2015). Python in neuroscience. *Frontiers in Neuroinformatics*, 9, 11. <https://doi.org/10.3389/fninf.2015.00011>
- Nouri, S., Shao, K., & Safavi, S. (2025). TranCIT: Transient causal interaction toolbox. *Journal of Open Source Software*, 10(116), 9302. <https://doi.org/10.21105/joss.09302>
- Peirce, J. W. (2009). Generating stimuli for neuroscience using PsychoPy. *Frontiers in Neuroinformatics*, 2, 10. <https://doi.org/10.3389/neuro.11.010.2008>
- Safavi, S., Logothetis, N. K., & Besserve, M. (2021). From univariate to multivariate coupling between continuous signals and point processes: A mathematical framework. *Neural Computation*, 33(7), 1751–1817. https://doi.org/10.1162/neco_a_01389
- Safavi, S., Panagiotaropoulos, T. I., Kapoor, V., Ramirez-Villegas, J. F., Logothetis, N. K., & Besserve, M. (2023). Uncovering the organization of neural circuits with generalized phase locking analysis. *PLoS Computational Biology*, 19(4), e1010983. <https://doi.org/10.1371/journal.pcbi.1010983>
- Tennøe, S., Haldnes, G., & Einevoll, G. T. (2018). Uncertainty: A python toolbox for uncertainty quantification and sensitivity analysis in computational neuroscience. *Frontiers in Neuroinformatics*, 12, 49. <https://doi.org/10.3389/fninf.2018.00049>
- Viejo, G., Levenstein, D., Skromne Carrasco, S., Mehrotra, D., Mahallati, S., Vite, G. R., Denny, H., Sjulson, L., Battaglia, F. P., & Peyrache, A. (2023). Pynapple, a toolbox for data analysis in neuroscience. *eLife*, 12, RP85786. <https://doi.org/10.7554/eLife.85786.3>
- Vinck, M., Battaglia, F. P., Womelsdorf, T., & Pennartz, C. M. A. (2012). Improved measures of phase-coupling between spikes and the local field potential. *Journal of Computational Neuroscience*, 33(1), 53–75. <https://doi.org/10.1007/s10827-011-0374-4>
- Vinck, M., Wingerden, M. van, Womelsdorf, T., Fries, P., & Pennartz, C. M. A. (2010). The pairwise phase consistency: A bias-free measure of rhythmic neuronal synchronization. *NeuroImage*, 51(1), 112–122. <https://doi.org/10.1016/j.neuroimage.2010.01.073>
- Zarei, M., Jahed, M., & Daliri, M. R. (2018). Introducing a comprehensive framework to measure spike-LFP coupling. *Frontiers in Computational Neuroscience*, 12, 78. <https://doi.org/10.3389/fncom.2018.00078>
- Zeitler, M., Fries, P., & Gielen, S. (2006). Assessing neuronal coherence with single-unit, multi-unit, and local field potentials. *Neural Computation*, 18, 2256–2281. <https://doi.org/10.1162/089976606778744111>

257 [org/10.1162/neco.2006.18.9.2256](https://doi.org/10.1162/neco.2006.18.9.2256)

258 Zeraati, R., Engel, T. A., & Levina, A. (2022). A flexible bayesian framework for unbiased
259 estimation of timescales. *Nature Computational Science*, 2, 193–204. [https://doi.org/10.](https://doi.org/10.1038/s43588-022-00214-3)
260 [1038/s43588-022-00214-3](https://doi.org/10.1038/s43588-022-00214-3)

DRAFT