


<<in
Obs

+notifyObs

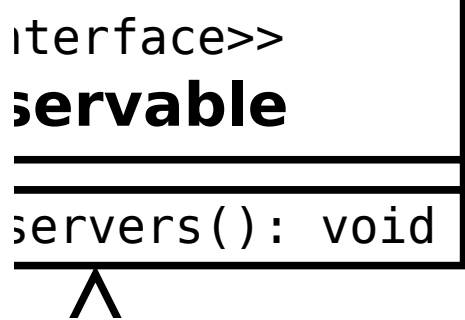

<<interface>>

Observer

+update(): void



DataProvider has a Configuration to determine if caching is enabled, if so then it will attempt to get JsonElements from file in the case of a network failure. I figure we will likely have another configuration just for performing UPDATE, POST, PUT, and DELETE as these all potentially modify data on the server.

DataProvider	
-httpClient:	HttpClient
-configuration:	Configuration
+get(queryString:String):	JsonElement
-getfromCache(queryString:String):	JsonElement

line if
pt to read
twork
class
and DELETE
lasticSea ch

