



Model Description of Amass Products

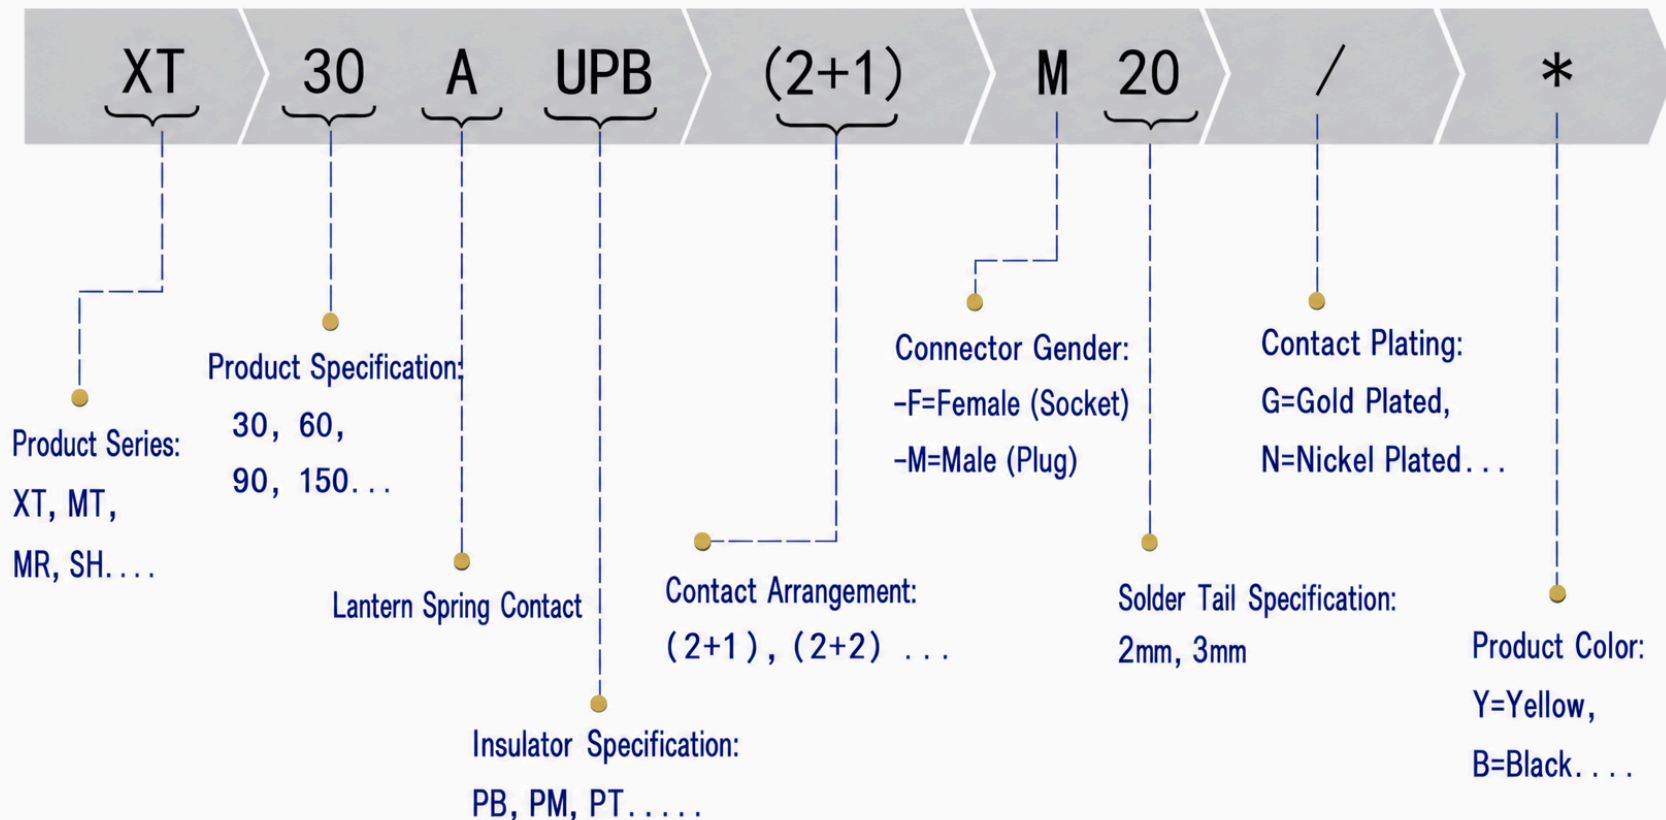


XT30U(2+2) Product Specification

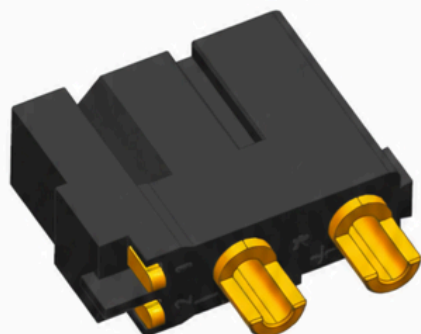

XT30U(2+2)-F Product

1. This series of products is 180° right-angle surface-mount 2+2PIN connectors, which are currently the standard power connectors for lithium battery power plugs, and can be mated with XT30(2+2)PB-M, panel-mount XT30(2+2)PW-M.
2. Can be used for connection scenarios such as lithium batteries and controller power leads to the board.

XT30U (2+2) -F.G.B

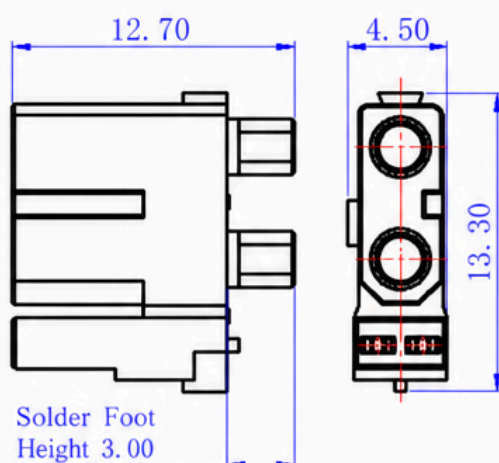

Electrical Characteristics	
Rated Current	20A MAX (16AWG/ $\Delta < 85^{\circ}\text{C}$); Signal Pin: 1A
Rated Voltage	600V DC
Insulation Resistance	$\geq 2000\text{M}\Omega$
Contact Resistance	$\leq 1.2\text{m}\Omega$
Mechanical Characteristics	
Durability	≥ 100 Cycles
Salt Spray	48h
Pull-out Force	≥ 1.2
Environmental Characteristics	
IP Rating	IP40
Operating Temperature	-20°C to 120°C
Flammability Rating	UL94 V-0 (Wall Thickness 0.8mm)
Materials	
Housing	PA, Color: Black
Contact	Copper Alloy, Plated: Gold
 In use, do not exceed the specified current and voltage.	● Overcurrent and overvoltage may cause malfunction or accidents. ● In the event of a short circuit, the connector may generate high heat, leading to malfunction or accidents. Therefore, do not insert or remove connectors when the circuit is live.
 Do not use if the connector is subjected to external force.	● Do not use the connector if an external force beyond the permissible limit is applied to the connector or lead. Doing so may cause damage resulting in malfunction or accidents. ● Connectors are designed for connection in accordance with electrical connection principles. Therefore, do not use them as structural components of the housing.
 Do not use in harsh environments.	● Do not use in harsh environments such as corrosive gases, high temperatures, or high humidity. ● Do not use outdoors or in environments not specified in the specification, as this may cause malfunction. Please use within the specified environmental conditions.
 Handle with care.	● Connectors are precision components, please handle with care. ● When unpacking, be careful not to drop or apply strong impact to the packaged product. Dropping or applying strong impact may cause terminal deformation, bending, detachment, and other abnormalities.