
Solar ESS Co. Ltd.
53 Moo 2 Tambon Nanglae, Amphoe Muang
Chiang Rai 57100, Thailand
Tel 063 151 6694, 089 632 5829
www.solaress.org · LINE: solaress1

Home H5, Chiang Mai

Upgrade opportunity

Exports 62% – battery or load shift

5 kWp*	430 kWh	3.59	386 kWh	224 kWh	269 kWh
PV · 5 kW inverter	PV, 1–24 Oct	kWh/kWp/day	Consumption	Bought from grid	Exported

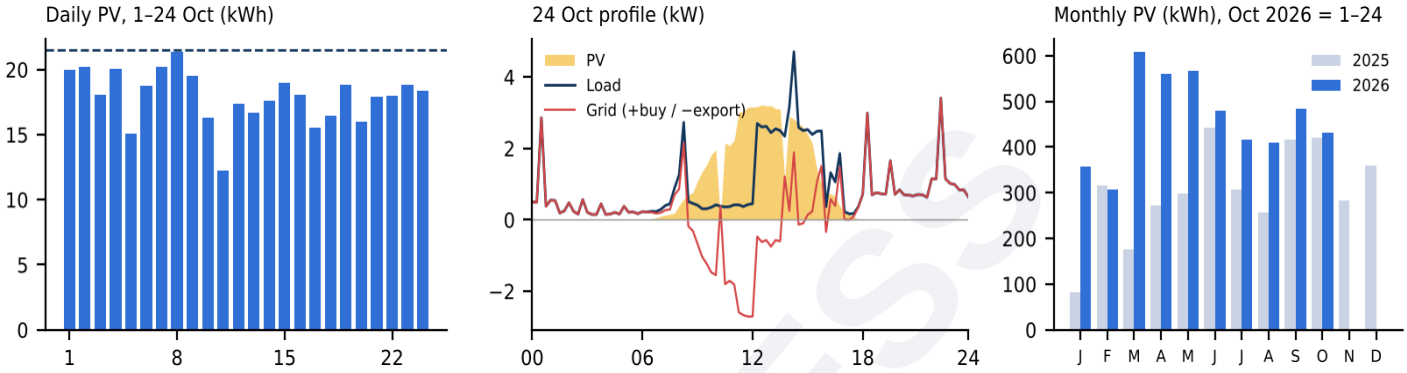

What we found

- It made 430 kWh in 24 days, or 17.9 kWh a day: 3.6 kWh/kWp if the array is 5 kWp. The capacity is not set in FusionSolar.
- It exported 269 kWh (62% of PV) at midday and bought 224 kWh in the evening and at night. Only 162 kWh of PV was used directly in the home.
- There were 46 short grid overvoltage trips in October; output impact was small.

What to do

1. Enter the real PV capacity (kWp) in FusionSolar.
2. Suggest moving water heating, laundry and air-con pre-cooling to 10:00–15:00.
3. Offer a 5–10 kWh battery if export is credited at 2.20 THB/kWh or less. It would cut evening grid purchase by about 200 kWh a month.

* kWp not set in FusionSolar; 5 kWp assumed.

How this plant compares (kWh/kWp per day, 1–24 Oct)



Rank 3 of 10 Huawei plants. Dashed line = expected 4.3 kWh/kWp per day.

SOLAR ESS www.solaress.org